Readers: one per format, four data models

Past its reader, a format is like any other: the viewers, cohorts and the privacy gate know only the data models.

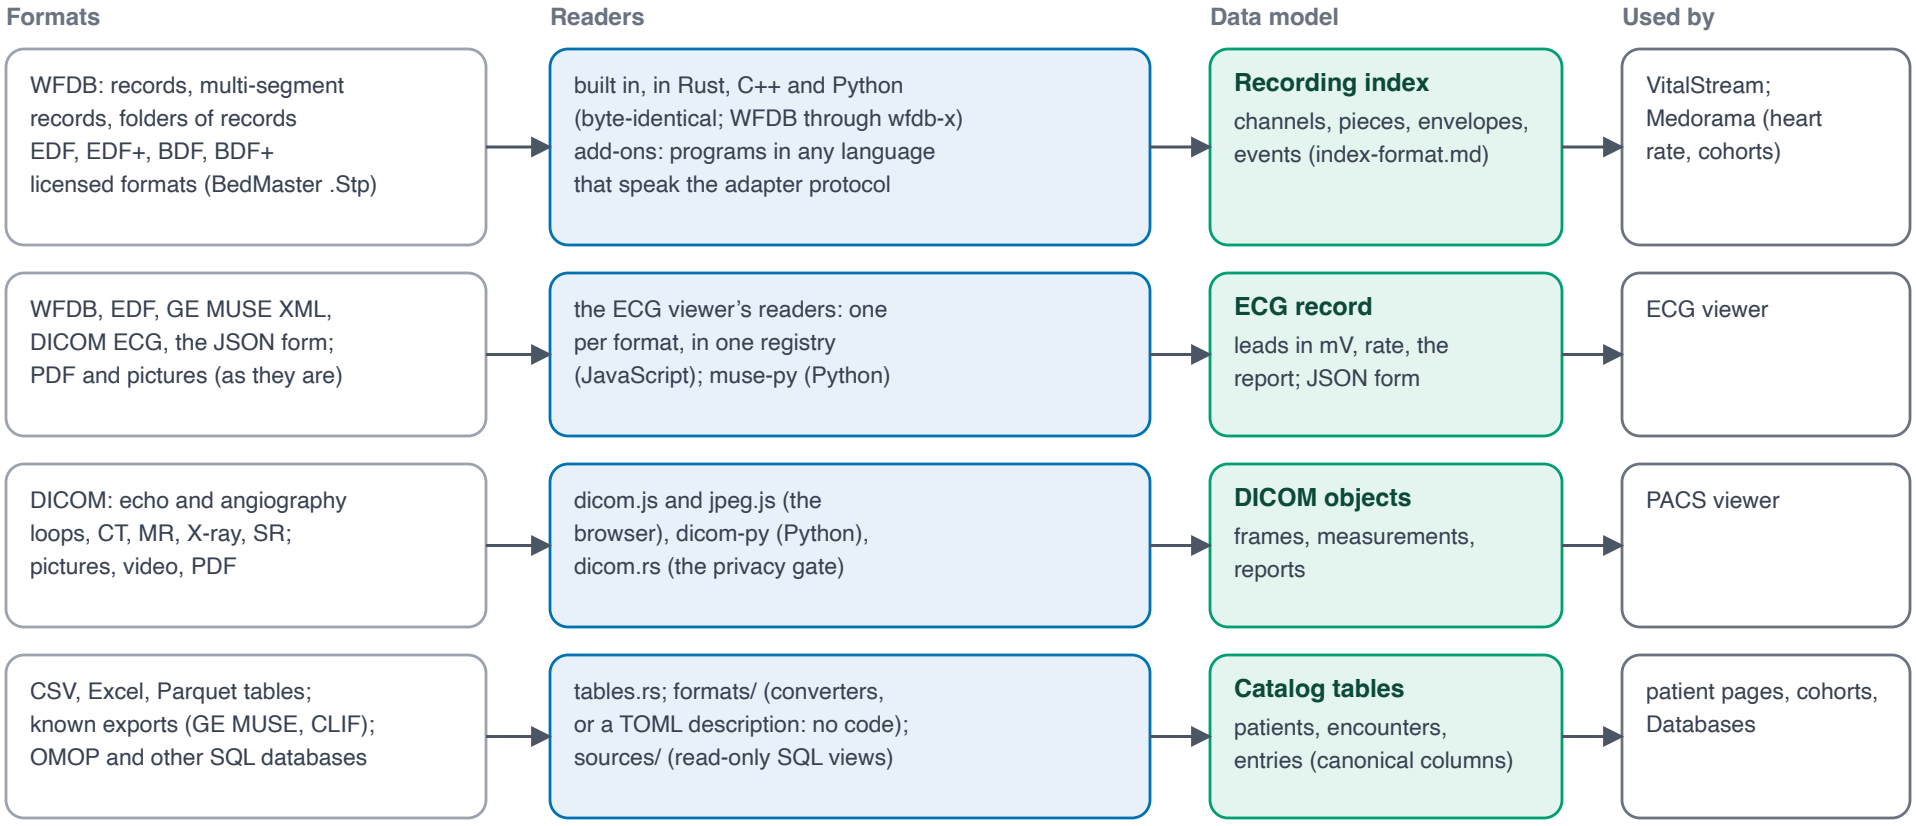

A new format is one new reader. A reader written in another language plugs in through the adapter protocol (recordings), the ECG JSON form, DICOM, or a table with the canonical columns (docs/readers.md).