Sign-in: one seam

How a user signs in is decided in one module; who may see what is decided by Medorama, the same for every method.

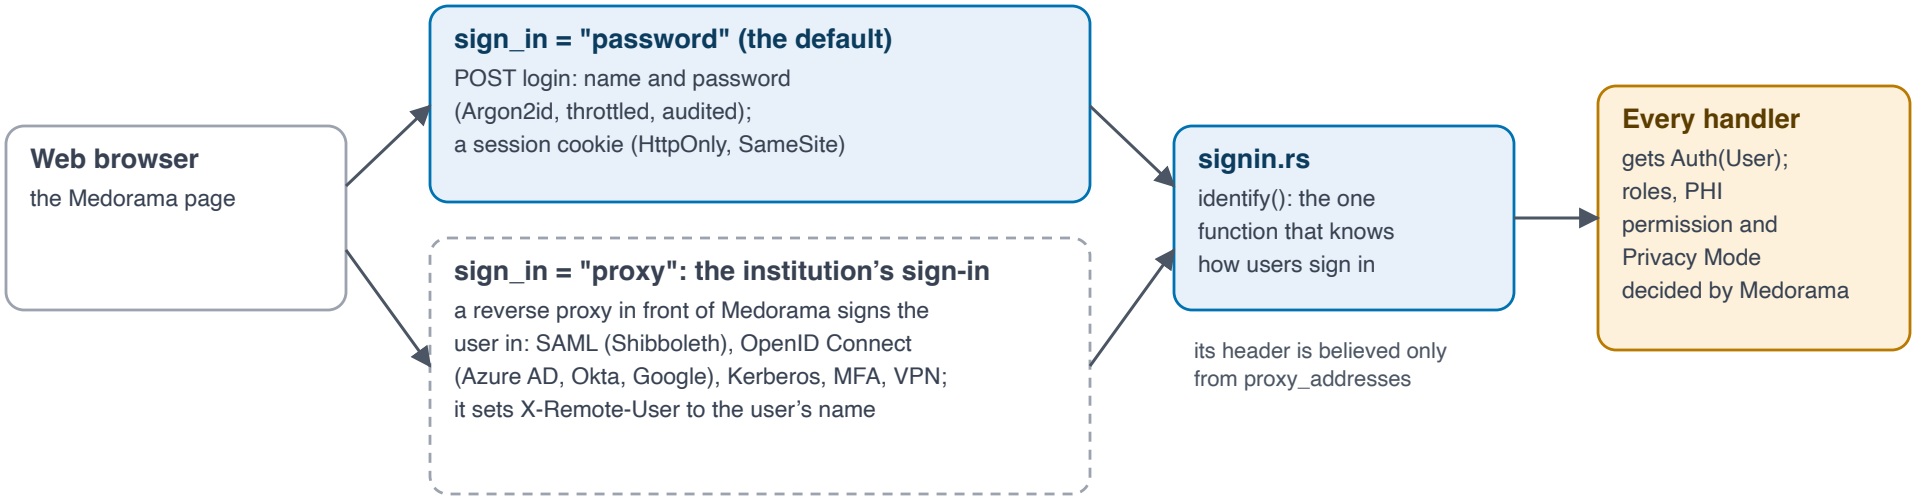

Adapting it

Most institutions need no code: put their sign-in proxy in front and set sign_in = "proxy" (docs/sign-in.md). Another method is a new variant of signin.rs Method and its arm in identify(); no other file changes. Accounts, roles and the PHI permission stay in Medorama.