
System context and trust boundaries

Every request crosses one boundary into the server, where sign-in, roles and the privacy gate decide what leaves.

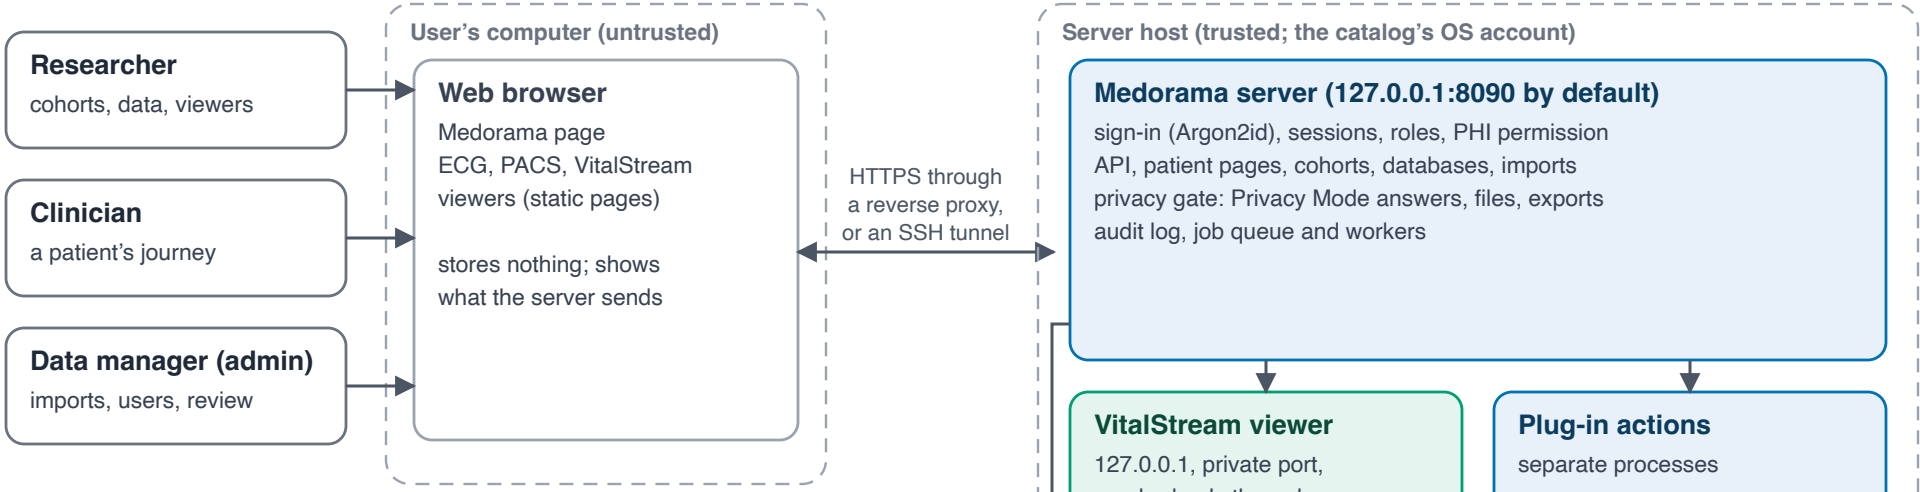

The server, the viewer and the plug-ins read the data sources; nothing writes to them.

Inputs

Databases (CSV, Excel) imported by an admin, or connected and read in place (OMOP, SQL). Files enter only with the rows that name their patient, read where they are; never written.

Outputs to people

Identified: users with the PHI permission, Privacy Mode off. Privacy Mode (default for everyone but admins): pseudonyms, placeholders, dates moved back; files de-identified or marked.