

Digitap – DIGILOCKER SDK Integration Guide

(Version 2.5, 27th January, 2026)

A jumpstart guide to boost your Business

Save Time, Save Cost

Versions

Version	Changes	Date
1.0	new API get-digilocker-details added	12-10-2021
1.1	Android sdk integration changes	24-11-2021
1.2	generate-url api added	24-02-2022
1.3	Error codes updated	04-05-2022
1.4	kycUrl updated in generate-url api	09-12-2022
1.5	Added skipping Digitap explanation screen config	07-06-2023
1.6	Redirection URL updated.	24-07-2024
1.7	Webhooks updated	19-08-2024
1.8	Android 14 changes	18-09-2024
1.9	Mandatory/Optional information added to request keys	26-03-2025
2.0	Added "url" key in the generate url response	09-04-2025
2.1	Added a new docType that contains digilocker details in pdf format in the get-digilocker-details response	05-05-2025
2.2	Added a config based feature that will give the entire set of customer data through webhooks Added validation check for firstName and lastName	23-07-2025
2.3	Added max and min length for request parameters	14-08-2025
2.4	Added error mapping with UI	02-09-2025
2.5	Enhancements in generate-url API and Configs	27-01-2026

Table of Contents

1. Introduction	4
2. Combined UI Flow (Sign-Up & Sign-In)	4
3. Digilocker API Documentation	6
3.1 Authentication	6
3.2 URLs	6
3.3 To Generate DigiLocker Link	6
3.4 Fetching DigiLocker Details Using Transaction ID	9
3.5 List DigiLocker Documents Using Transaction ID	15
4. Webhooks	18
5. Android SDK Integration	19
5.1 Requirements	20
5.2 Integrate the DigiLocker SDK	20
5.3 DigiLocker Initialization	20
5.4 Environment	21
5.5 Event Callback	21
6. Web SDK Integration	22
6.3 Success Response	26
6.4 Failure Response	26
7. Additional Notes	26

1. Introduction

This document is intended for our enterprise partners who can easily integrate for the services they have chosen with Digitap.ai. Using this document they can jumpstart their business processes and start using the Digitap.ai services as early as possible and also align their own business processes seamlessly by integrating and making changes to their backend.

Digitap.ai DigiLocker Service enables seamless retrieval of user documents through authorized DigiLocker consent. It securely fetches the requested document and its associated XML data for verification and processing. This document provides details of the DigiLocker Service and its integration flow.

Note: *Digitap.ai reserves the right to modify this SDK integration guide from time-to-time. If you are a business using this SDK integration guide, you will be notified well in advance, prior to any change being made.*

2. Combined UI Flow (Sign-Up & Sign-In)

Step 1: Launch URL

- When the user initiates the generated URL, they see the instruction screen and tap Continue.

Step 2: Enter Aadhaar Number

- The user enters their 12-digit Aadhaar number and taps Proceed.

Step 3: Authentication Step







- *For first-time DigiLocker users:*
The user receives a 6-digit OTP → enters OTP → taps Submit → sets a new 6-digit security PIN.
- *For returning DigiLocker users:*
The user receives a 6-digit OTP → enters OTP → taps Submit → enters their existing 6-digit security PIN → taps Continue.

Step 4: Document Consent

- The user selects the documents to share (Aadhaar / PAN / Driving License) and taps Allow.

Step 5: Completion

- Documents are fetched, and the user is automatically redirected to the redirectionUrl, where the KYC process is marked complete.

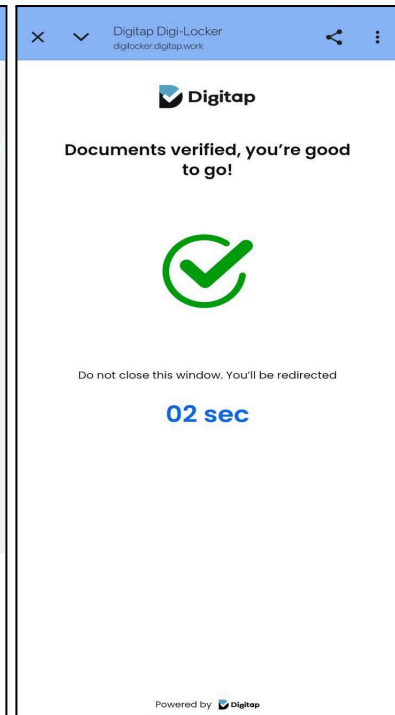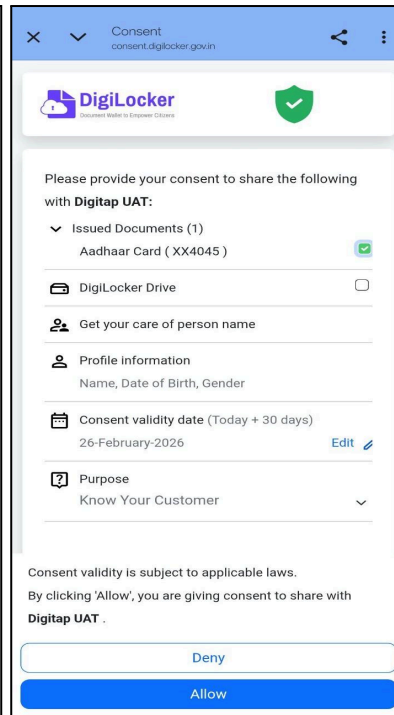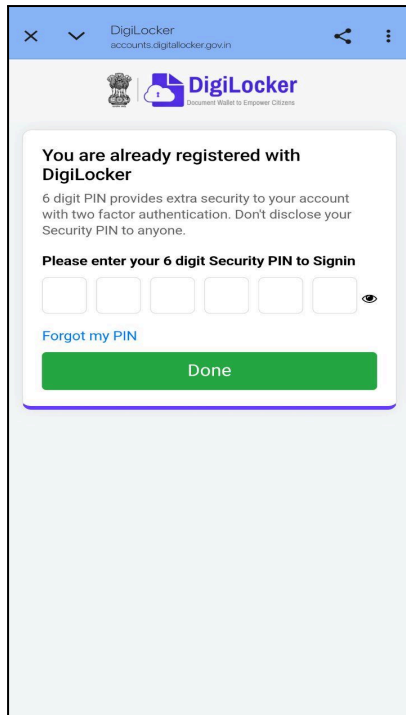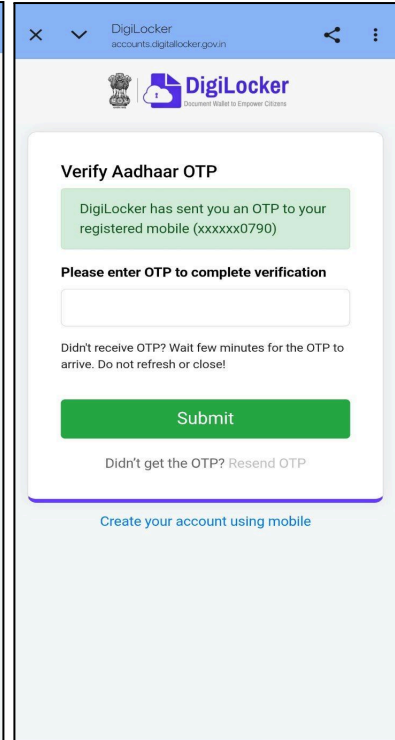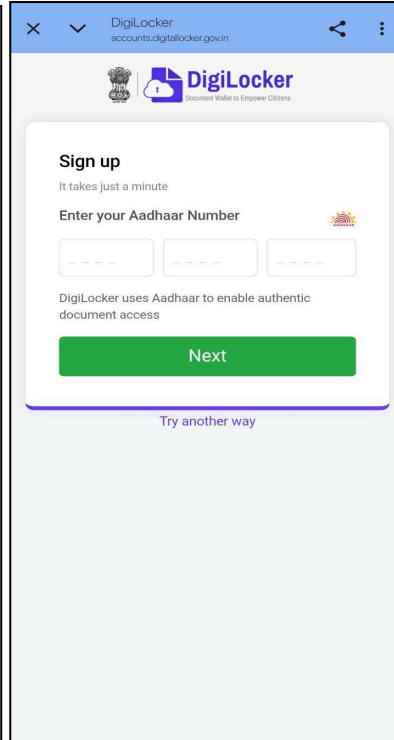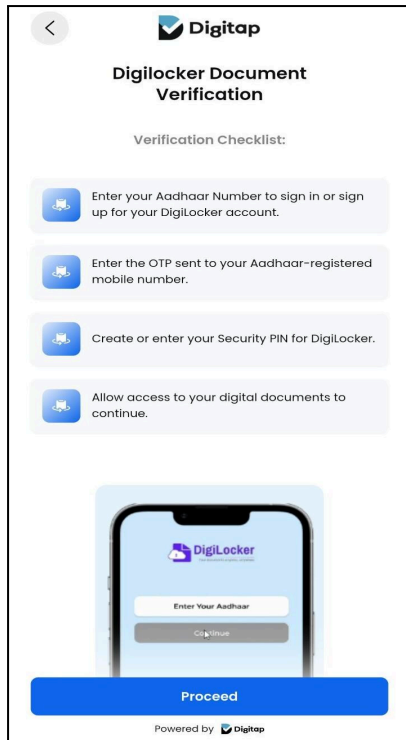

3. DigiLocker API Documentation

3.1 Authentication

To access the DigiLocker Service, registration with Digitap is required to obtain a client ID and client secret key. Separate credentials are issued for the UAT and production environments.

3.2 URLs

Following is the **base URL** for UAT & production Environment.

Production Env	https://api.digitap.ai
UAT/DEMO Env	https://apidemo.digitap.work

3.3 To Generate DigiLocker Link

To initiate the DigiLocker process, you can generate a link using the customer details. The generated link can then be shared with the user to complete the DigiLocker flow.

- **Endpoint:** */ent/v1/kyc/generate-url*
- **Method:** POST
- **Headers:**

Key	Mandatory/Optional (M/O)	Value
content-type	M	application/json
Authorization	M	Basic Base64encodedValueOf (client_id:client_secret) Note: client_id and client_secret are separated by ":" (Colon) and the entire string with the colon needs to be Base64 encoded.

- **Request Body:**

Attribute	Type	M/O	Min Length	Max Length	Description
uid	String	M	1	60	Unique ID for the request from the client side. Used for tracing and debugging.

redirectionUrl	String	O	N/A	512	URL where the user will be redirected after completing the DigiLocker flow.
isHideExplanation Screen	Boolean	O	N/A	N/A	If true, hides the initial instruction/explanation screen before the DigiLocker process starts.
firstName	String	O	0	45	Customer's first name. Used for prefilling or identification.
lastName	String	O	0	45	Customer's last name. Used for prefilling or identification.
mobile	String	O	10	10	Customer's mobile number. Must be exactly 10 digits and typically starts with 6–9.
emailId	String	O	N/A	N/A	Customer's email address in valid email format.
isSendOtp	Boolean	O	N/A	N/A	If true, the generated DigiLocker URL will be sent via SMS to the provided mobile number.
requiredDocs	String	O	1	100	Comma-separated list of documents to fetch. AADHAAR is mandatory. By default, all documents configured for the enterprise will be fetched. If this parameter is passed with valid values, it will override the default documents for that transaction. Remaining documents must be a subset of: [PANCR, DRVLC, ABCID, SSCER, HSCER, VACER].
expiry	Number (ms)	O	N/A	N/A	Validity of the generated URL in milliseconds, not exceeding 7 days. Can override enterprise-level expiry. Default : 3 days

failOnDocNotFound	Boolean	O	N/A	N/A	Controls whether a transaction should be marked as failed when a required document (including Aadhaar) cannot be fetched. Note: Digitap must enable this behavior at the enterprise level and the client must explicitly pass this parameter as true in the request. Enabling it at the Digitap level alone will not fail the transaction. If set to false or not passed, the transaction will continue even if a document cannot be fetched.
webhookUrl	String	O	1	512	Callback URL for DigiLocker document fetch response. Overrides global webhook if provided.

- **Sample Request:**

```
{
  "serviceld": 4,
  "firstName": "Suxxxhan",
  "lastName": "cxxxxtu",
  "uid": "67fa7b34-c596-4462-b54b-79xxxd",
  "mobile": "7989818821",
  "emailId": "sudxxxu@gmail.com",
  "isSendOtp": true,
  "isHideExplanationScreen": true,
  "redirectionUrl": "https://www.google.com",
  "requiredDocs": "ABCID,ADHAR,DRVLC,HSCER,PANCR,PSPT,SSCER,UNCRD,VACER",
  "webhookUrl": "https://apistage.digitap.work/digilocker/v1/webhook",
  "expiry": "345600000",
  "failOnDocNotFound": true
}
```

- **Sample Response:**

```
{
  "code": "200",
  "model": {
    "url": "https://klr.bz/DIGTAP/UOFMxb",
    "transactionId": "11156317232062xxxx",
    "kycUrl": "SDK redirection url"
  }
}
```


- **Response attributes :**

Attribute	Type	Description
transactionId	String	transaction id for the Digilocker from Digitap
url	String	SDK redirection url (It will be maximum 13 character length)
kycUrl	String	SDK redirection url (It will be 300+ character length)

- **Error messages**

- **Field Validation Error**
- **HTTP Status Code : 400**

```
{
  "code": "401",
  "msg": "Error while validating fields"
}
```

- **Unique ID Already Exists**
- **HTTP Status Code : 400**

```
{
  "code": "401",
  "msg": "The given unique ID already exists. Please provide valid unique ID"
}
```

- **Internal Server Error**
- **HTTP Status Code : 500**

```
{
  "code": "500",
  "msg": "Internal server error"
}
```

3.4 Fetching DigiLocker Details Using Transaction ID

Once the DigiLocker KYC process is completed, a transactionId is generated. This transactionId can be used at any time to retrieve the corresponding KYC details.

We currently support the retrieval of AADHAAR, PAN, Driving License, Passport, 10th Class Marksheet, 12th Class Marksheet, APAAR ID, Vaccination Certificate, Udhya Certificate and UAN Card.

For any additional document requirements, a separate request must be raised with Digitap as per the use case.

- **Endpoint:** /ent/v1/kyc/get-digilocker-details
- **Method:** POST
- **Headers:**

Key	Mandatory/Optional (M/O)	Value
content-type	M	application/json
Authorization	M	Basic Base64encodedValueOf (client_id:client_secret) Note: client_id and client_secret are separated by ":"(Colon) and the entire string with the colon needs to be Base64 encoded.

Note: Previously, ent_authorization was used for Authorization which will continue to work but it is preferred to move to Basic Authorization as per API standards

- **Request Body:**

Attribute	Type	Mandatory (M/O)	Description
transactionId	String	M	The unique transaction ID received after completing the DigiLocker KYC process. Used to fetch the corresponding KYC details.

- **Sample Request:**

```
{  
  "transactionId": "8322446957991xxxxx"  
}
```

- **Sample Response:**

```
{  
  "code": "200",  
  "model": {  
    "status": "S",  
    "uniqueId": "testt",  
    "maskedAdharNumber": "xxxxxxxx4005",  
    "name": "Pinky Yadav",  
    "gender": "F",  
    "dob": "08-11-2001",  
    "careOf": "D/O: Pxxxx",  
    "address": {  
      "house": "#xxxxxx3 C-5 Unit-1",  
      "street": "",  
    },  
  },  
}
```

```

    "landmark": "",
    "loc": "Boxxxxl Area",
    "po": "Bomxxstate",
    "dist": "Banxxlore",
    "subdist": "Banxxxth",
    "vtc": "Bangxxxuth",
    "pc": "560xxx9",
    "state": "Karxxka",
    "country": "Inxxia"
  },
  "image": "Base 64 encoded customer's image",
  "xmlResponse": "<xml response as is received from digilocker post signature verification",
  "digilockerFiles": [
    {
      "docLink": "presigned_url of the document",
      "docType": "AADHAAR",
      "docExtension": "xml"
    },
    {
      "docLink": "presigned_url of the document",
      "docType": "DIGILOCKER_PDF",
      "docExtension": "pdf"
    }
  ]
}
}

```

- **Response attributes :**

Attribute	Type	Description
code	String	API response code. 200 indicates a successful request.
model.status	String	Status of the DigiLocker KYC process. (s = success)
model.uniqueId	String	Unique ID provided by the client during request generation.
model.maskedAdharNumber	String	Masked Aadhaar number of the customer.
model.name	String	Customer's full name as per Aadhaar.
model.gender	String	Customer's gender.
model.dob	String	Customer's date of birth in DD-MM-YYYY format.
model.careOf	String	Care-of (C/O, S/O, D/O, W/O) details of the customer.
model.address	Object	Address details extracted from the Aadhaar XML.

model.address.house	String	House/Building/Apartment information.
model.address.street	String	Street information (if available).
model.address.landmark	String	Landmark (if available).
model.address.loc	String	Locality/Area details.
model.address.po	String	Post Office name.
model.address.dist	String	District name.
model.address.subdist	String	Sub-district/Tehsil information.
model.address.vtc	String	Village/Town/City information.
model.address.pc	String	Postal Code / PIN code.
model.address.state	String	State name.
model.address.country	String	Country name.
model.image	String	Base64-encoded image of the customer extracted from Aadhaar.
model.xmlResponse	String	Raw Aadhaar XML response as received from DigiLocker after signature verification.
model.digilockerFiles	Array	List of files retrieved from DigiLocker.
model.digilockerFiles[].docLink	String	Pre-signed URL to download the document. Validity: 4 hours
model.digilockerFiles[].docType	String	Any additional document types apart from AADHAR that need to be fetched can be enabled through configuration at Digitap level. Once configured, and if the user provides consent and the document is available in their DigiLocker wallet, it will additionally appear in the response under this field.
model.digilockerFiles[].docExtension	String	File extension (xml, pdf, etc.).

- **Error messages**

- **transactionId cannot be empty**
 - Occurs when the request is sent without the transactionId field or the value is empty.

```
{
  "code": "400",
  "msg": "transactionId cannot be empty."
}
```

- **Access Denied By User**

- Occurs when the user denies consent on the DigiLocker consent screen.

```
{
  "code": "400",
  "msg": "Access Denied By User",
  "errorCode": "DG1001"
}
```

- **eAadhaar data unavailable**

- Occurs when eAadhaar data is not available in the user's DigiLocker account.

```
{
  "code": "400",
  "msg": "eAadhaar data is unavailable for this account.",
  "errorCode": "DG1002"
}
```

- **Source down or Aadhaar not selected**

- Occurs when the DigiLocker source is down or the user has not selected the Aadhaar document during the consent flow.

```
{
  "code": "400",
  "msg": "Either source is down or the user has not selected the Aadhaar document.",
  "errorCode": "DG1003"
}
```

- **Document fetch timeout**

- Occurs when the document fetch request times out due to DigiLocker service delay.

```
{
  "code": "400",
  "msg": "The document could not be fetched due to service timeout.",
  "errorCode": "DG1006"
}
```

- **Incomplete Transaction**

- When the provided transaction ID exists but the DigiLocker process is not completed successfully.

```
{
  "code": "400",
  "msg": "The given transaction id for digilocker is not success",
}
```

```
"errorCode": "DG1007"
}
```

- **Invalid or tampered transaction link**
 - Occurs when the DigiLocker transaction link has been tampered with.

```
{
  "code": "400",
  "msg": "Invalid or tampered transaction link.",
  "errorCode": "DG1008"
}
```

- **Technical issue**
 - Occurs when a technical issue occurs while processing the DigiLocker request.
 - The same error is also thrown on transactions being purged currently.

```
{
  "code": "400",
  "msg": "A technical issue occurred. Please try again later.",
  "errorCode": "DG1011"
}
```

- **Internal Server Error**

```
{
  "code": "500",
  "msg": "Internal Server Error"
}
```

- **Response Attributes**

Attribute	Type	Description
code	String	API response code basis the error.
msg	String	Description for the error.
errorCode	String	Digitap assigned API error code for the error faced.

3.5 List DigiLocker Documents Using Transaction ID

This API allows you to retrieve the list of documents available in the user's DigiLocker account for a given transactionId. The response includes all documents that were consented to by the user and are available for the specified transaction.

- **Endpoint:** */ent/v1/digilocker/list-docs*

- **Method:** POST
- **Headers:**

Key	Mandatory/Optional (M/O)	Value
content-type	M	application/json
Authorization	M	Basic Base64encodedValueOf (client_id:client_secret) Note: client_id and client_secret are separated by ":" (Colon) and the entire string with the colon needs to be Base64 encoded.

Note: Previously, ent_authorization was used for Authorization which will continue to work but it is preferred to move to Basic Authorization as per API standards

- **Request Body:**

Attribute	Type	Mandatory (M/O)	Description
transaction Id	String	M	The unique transaction ID received after completing the DigiLocker KYC process. Used to fetch the corresponding KYC details.

- **Sample Request:**

```
{
  "transactionId": "8322446957991xxxxx"
}
```

- **Sample Response:**

```
{
  "code": "200",
  "model": [
    {
      "docLink": "presigned_url",
      "docType": "AADHAAR",
      "docExtension": "xml"
    },
    {
      "docLink": "presigned_url",
      "docType": "DIGILOCKER_PDF",
      "docExtension": "pdf"
    },
    {
      "docLink": "presigned_url",
```

```
{
  "docType": "PANCR",
  "docExtension": "pdf"
},
{
  "docLink": "presigned_url",
  "docType": "PANCR",
  "docExtension": "xml"
}
]
"msg": "success"
}
```

- **Response attributes :**

Attribute	Type	Description
code	String	API response code. 200 indicates the request was successful.
msg	String	Response status message.
model	Array	List of documents available in the DigiLocker account for the given transaction ID.
model[].docLink	String	Pre-signed URL to download the document from DigiLocker. Validity: 4 hours
model[].docType	String	Type of document (e.g., AADHAAR, DIGILOCKER_PDF, PANCR, etc.).
model[].docExtension	String	File format of the document (e.g., xml, pdf).

- **Error messages**

- **transactionId cannot be empty**
 - Occurs when the request is sent without the transactionId field or the value is empty.

```
{
  "code": "400",
  "msg": "transactionId cannot be empty."
}
```

- **Internal Server Error**

```
{
  "code": "500",
  "msg": "Internal Server Error"
}
```



```
}
```

- **Document fetch timeout**

- Occurs when the document fetch request times out due to DigiLocker service delay.

```
{  
  "code": "400",  
  "msg": "The document could not be fetched due to service timeout.",  
  "errorCode": "DG1006"  
}
```

- **Incomplete Transaction**

- When the provided transaction ID exists but the DigiLocker process is not completed successfully.

```
{  
  "code": "400",  
  "msg": "The given transaction id for digilocker is not success",  
  "errorCode": "DG1007"  
}
```

- **Response Attributes**

Attribute	Type	Description
code	String	API response code basis the error.
msg	String	Description for the error.
errorCode	String	Digitap assigned API error code for the error faced.

Webhooks

The enterprise should provide a webhook URL at the time of integration with DIGITAP.AI. Once a webhook is subscribed, Digitap will trigger events based on the transaction status – Success or Failure.

From our side, we try to send the webhook up to a maximum of three times. We expect a 200 HTTP status code to be returned by the client's endpoint to consider the delivery successful.

- If we receive a 200 on the first attempt, we do not retry.
- If we don't receive a 200, we retry until a 200 is received or until three attempts are exhausted.

Success:

```
{
  "transactionId": "390722154708298831",
  "status": "Success"
}
```

Failure:

```
{
  "transactionId": "390722154708298831",
  "status": "failure"
  "code": "400",
  "model": null,
  "msg": "eAadhaar data is unavailable for this account.",
  "errorCode": "DG1002"
}
```

We also provide transaction details, including customer data, within the callback event itself. This can be enabled through a configuration, eliminating the need for you to hit a separate endpoint.

Detailed Webhook - Success:

```
{
  "transactionId": "132386294577681989",
  "status": "Success",
  "data": {
    "status": "S",
    "uniqueId": "testt",
    "maskedAdharNumber": "xxxxxxxx4005",
    "name": "Pinky Yadav",
    "gender": "F",
    "dob": "08-11-2001",
    "careOf": "D/O: Pxxxx",
    "address": {
      "house": "#xxxxxx3 C-5 Unit-1",
      "street": "",
      "landmark": "",
      "loc": "BoxxxxI Area",
      "po": "Bomxxstate",
      "dist": "Banxxlore",
      "subdist": "Banxxxth",
      "vtc": "Bangxxxuth",
      "pc": "560xxx9",
      "state": "Karxxka",
      "country": "Inxxia"
    },
    "image": "Base 64 encoded customer's image",
    "xmlResponse": "<xml response as is received from digilocker post signature verification",
  }
}
```

```
"digilockerFiles": [  
  {  
    "docLink": "presigned_url of the document",  
    "docType": "AADHAAR",  
    "docExtension": "xml"  
  },  
  {  
    "docLink": "presigned_url of the document",  
    "docType": "DIGILOCKER_PDF",  
    "docExtension": "pdf"  
  }  
]  
}  
}
```

Failure:

```
{  
  "transactionId": "390722154708298831",  
  "status": "failure"  
  "code": "400",  
  "model": null,  
  "msg": "eAadhaar data is unavailable for this account.",  
  "errorCode": "DG1002"  
}
```

Android SDK Integration

To integrate the DigiLocker Android SDK into your application, follow the steps outlined below.

Requirements

Ensure your project meets the following requirements:

- **Gradle Version:** 8.5-all (Recommended)
- **Gradle Plugin Version:** 8.1.0
- **compileSdkVersion:** 34
- **minSdkVersion:** 19
- **targetSdkVersion:** 34

Integrate the DigiLocker SDK

Add the following lines to the Project (top-level) build.gradle file to include the DigiLocker SDK as a remote dependency.

```
allprojects {
    repositories { maven {
        url "s3://digitap-digilocker-sdk.s3.amazonaws.com" credentials(AwsCredentials) {
            accessKey aws_access_key secretKey aws_secret_pass
        }
    }
}
```

In the app/build.gradle file, add the SDK dependency.

```
dependencies {
    implementation 'com.digitap.sdk:digilocker:{version}'
}
```

DigiLocker Initialization

Initialize the DigiTapDigilocker class by providing the required environment type, and then invoke the init method using the DigiTapDigilocker class to complete the setup.

```
DTDigilockerConfig config = new DTDigilockerConfig();
config.setDigiTapEnvironment(DTEnvironment.UAT);
config.setLogo("https://sdk.digitap.ai/img/company_logo.jpg"); try {
    DigiTapDigilocker.init(this,config, clientId, clientSecret);
} catch (Exception e) { e.printStackTrace();
}
```

To trigger the DigiLocker flow, pass the clientId and clientSecret, and then invoke the start method.

```
DTDigilockerActivity.start(MainActivity.this, uniqueId, new DigilockerCompletionHandler() {

    @Override
    public void onResult(DTException var1, String res, String txnId)
    {
        }
    }
}
```

Environment

The Digitap environment can be configured as follows:

- **UAT** – Used for the sandbox/testing environment.

- **PRODUCTION** – Used for the live production environment.

Event Callback

The SDK provides a single event callback.

```
void onResult(DTException dtException, String response, String txnId)
```

DTException:

DTException is the error object returned in case of any failure. It will be null when the operation is successful.

The object contains the following variables:

- errorCode
- errorMessage

These can be accessed using the respective getter methods.

```
int code = dtException.getErrorCode();  
String message = dtException.getErrorMessage();
```

The response parameter returned as a string is in JSON format.

The structure of the returned JSON string is as follows:

```
{  
  "status": "s",  
  "referenceId": "",  
  "maskedAdharNumber": "XXXXXXXX2600",  
  "name": "xyz",  
  "gender": "M",  
  "dob": "06-07-1900",  
  "careOf": "S/O  
Gxxxm",  
  "address": {  
    "house": "1x0",  
    "street": "rxxam  
vexxhi",  
    "landmark": "",  
    "loc": "",  
    "po": "",  
    "dist": "East  
Gxxxxri",  
    "subdist": "",  
    "vtc": "Sanxxxalli",  
    "pc": "53xx22",  
    "state": "Anxxra  
Pradesh",  
    "country": "India"  
  },  
  "image": "base64 customer's image"  
}
```

Web SDK Integration

To initiate the Web SDK, call the Generate URL API and use the URL received in the response to load it within your web application.

Upon completion of the journey, you will receive the configured callbacks/responses as outlined below.

Success Response

```
<redirect_url>?txnId=<transactionId>&success=true
```

Failure Response

```
<error_url>?error_code=<error_code>&txnId=<transactionId>&errorMsg=<Val id error message>
```

Additional Notes

The DigiLocker URL will be marked as **INACTIVE** in the scenarios listed below.

Case	failOnDocNotFound	Additional Files	Aadhaar File	Transaction Status
1	TRUE	All succeed	Success	status=SUCCESS, urlStatus=INACTIVE
2	TRUE	Some additional fail	Success	status=FAILED, urlStatus=INACTIVE
3	TRUE	All additional succeed	Aadhaar fail	status=FAILED, urlStatus=INACTIVE
4	TRUE	Some additional fail	Aadhaar fail	status=FAILED, urlStatus=INACTIVE
5	FALSE	Some additional fail	Success	status=SUCCESS, urlStatus=INACTIVE
6	FALSE	Some additional fail	Aadhaar fail	status=FAILED, urlStatus=INACTIVE
7	FALSE	All additional succeed	Aadhaar fail	status=FAILED, urlStatus=INACTIVE
8	FALSE	All additional succeed	Success	status=SUCCESS, urlStatus=INACTIVE

- ***Charges will be applied only for cases where the event status is SUCCESS.***

-----END OF DOCUMENT-----