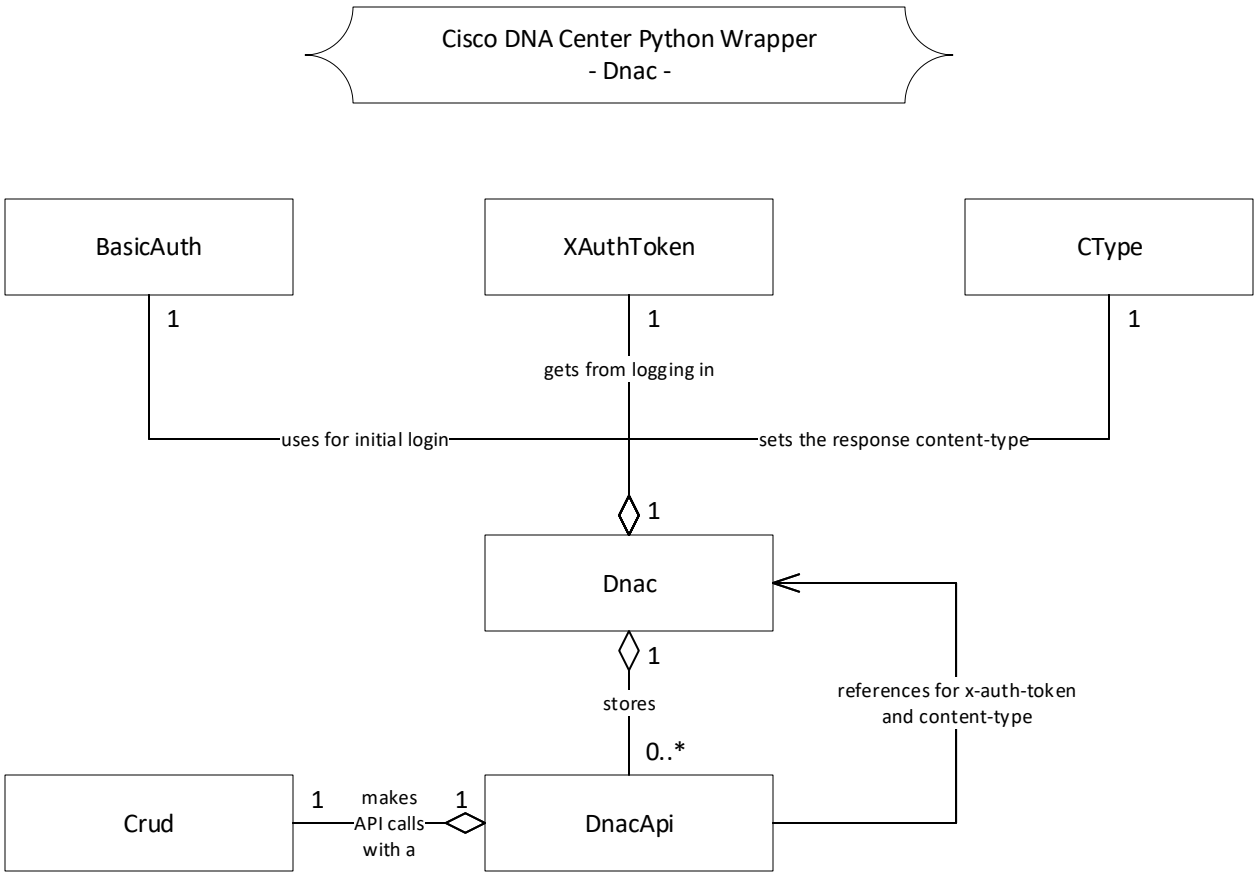
Cisco DNA Center Python Wrapper
- Dnac -
BasicAuth
XAuthToken
CType
1
1
1
gets from logging in
uses for initial login
sets the response content-type
1
Dnac
1
stores
references for x-auth-token
and content-type
0..*
Crud
1
makes
API calls
with a
1
DnacApi

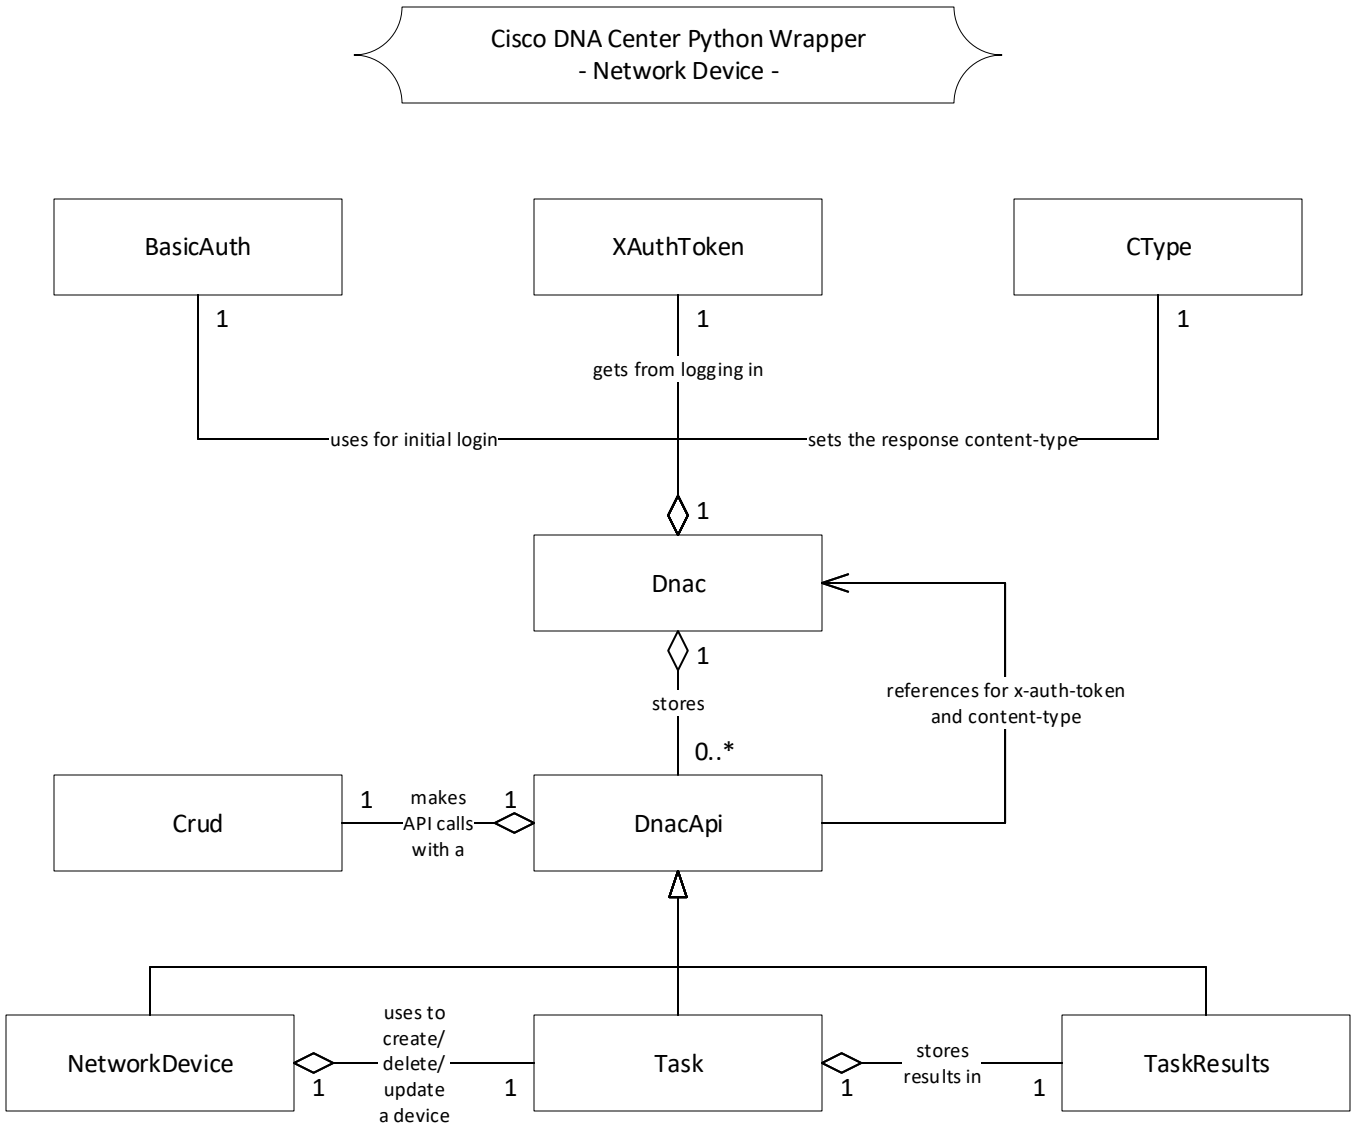
Cisco DNA Center Python Wrapper
- Network Device -
BasicAuth
XAuthToken
CType
1
1
1
gets from logging in
uses for initial login
sets the response content-type
1
Dnac
1
stores
0..*
references for x-auth-token
and content-type
Crud
1
makes
API calls
with a
1
DnacApi
NetworkDevice
1
uses to
create/
delete/
update
a device
1
Task
1
stores
results in
1
TaskResults

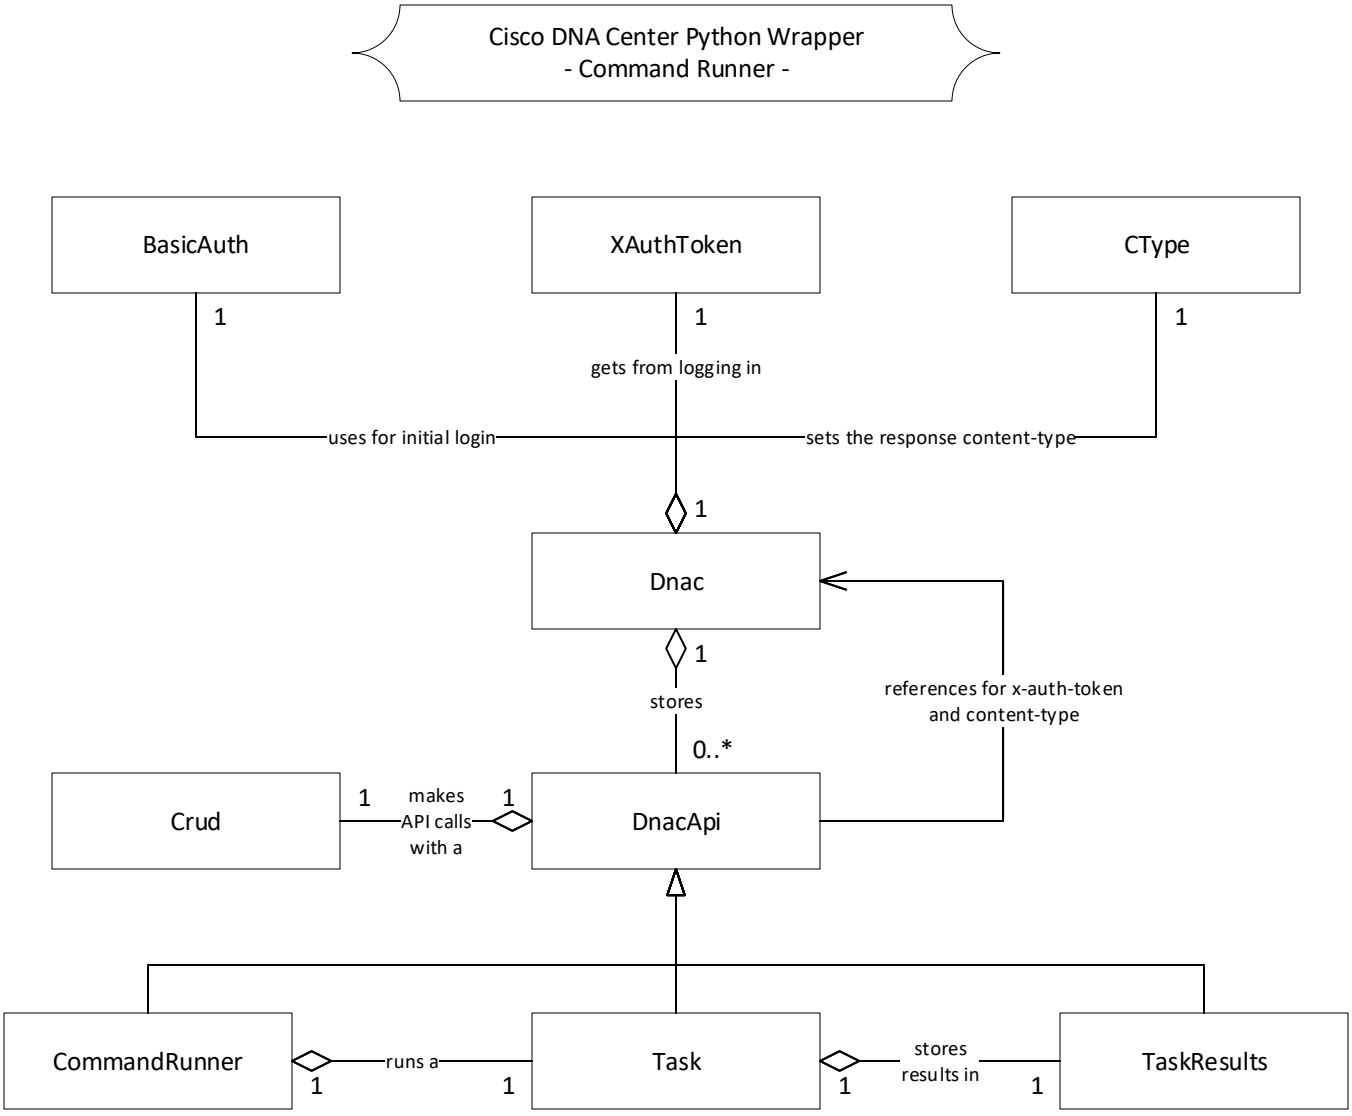
Cisco DNA Center Python Wrapper
- Command Runner -
BasicAuth
XAuthToken
CType
1
1
1
gets from logging in
uses for initial login
sets the response content-type
1
Dnac
1
stores
0..*
references for x-auth-token
and content-type
Crud
1
makes
API calls
with a
1
DnacApi
CommandRunner
1
runs a
1
Task
1
stores
results in
1
TaskResults

Cisco DNA Center Python Wrapper
- CLI Templates -

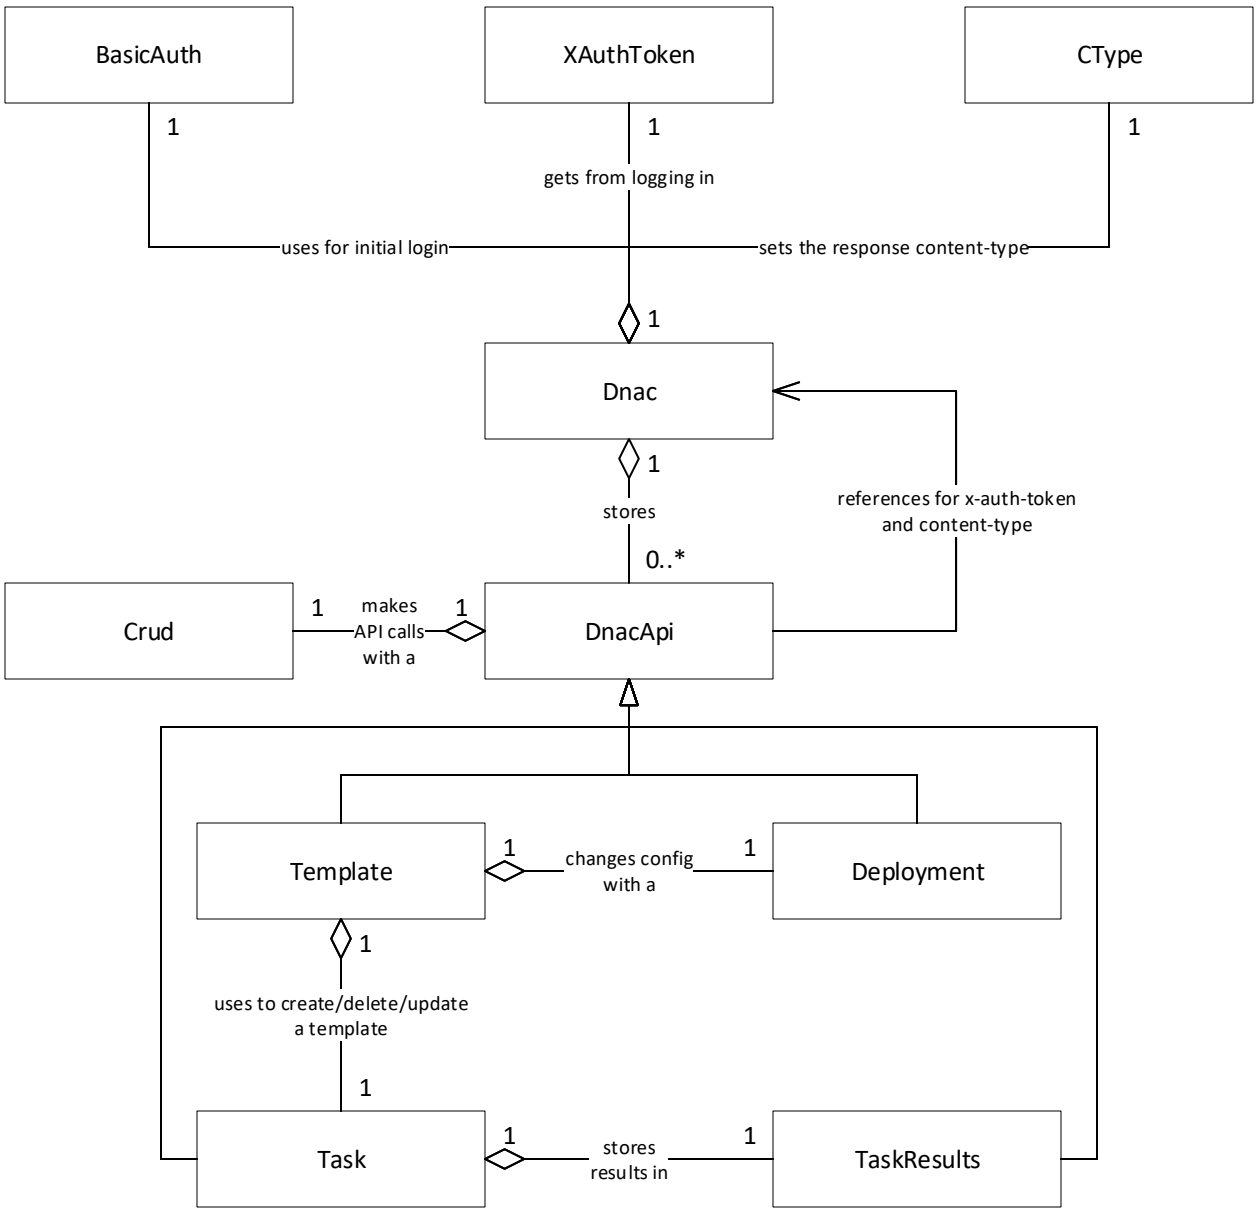

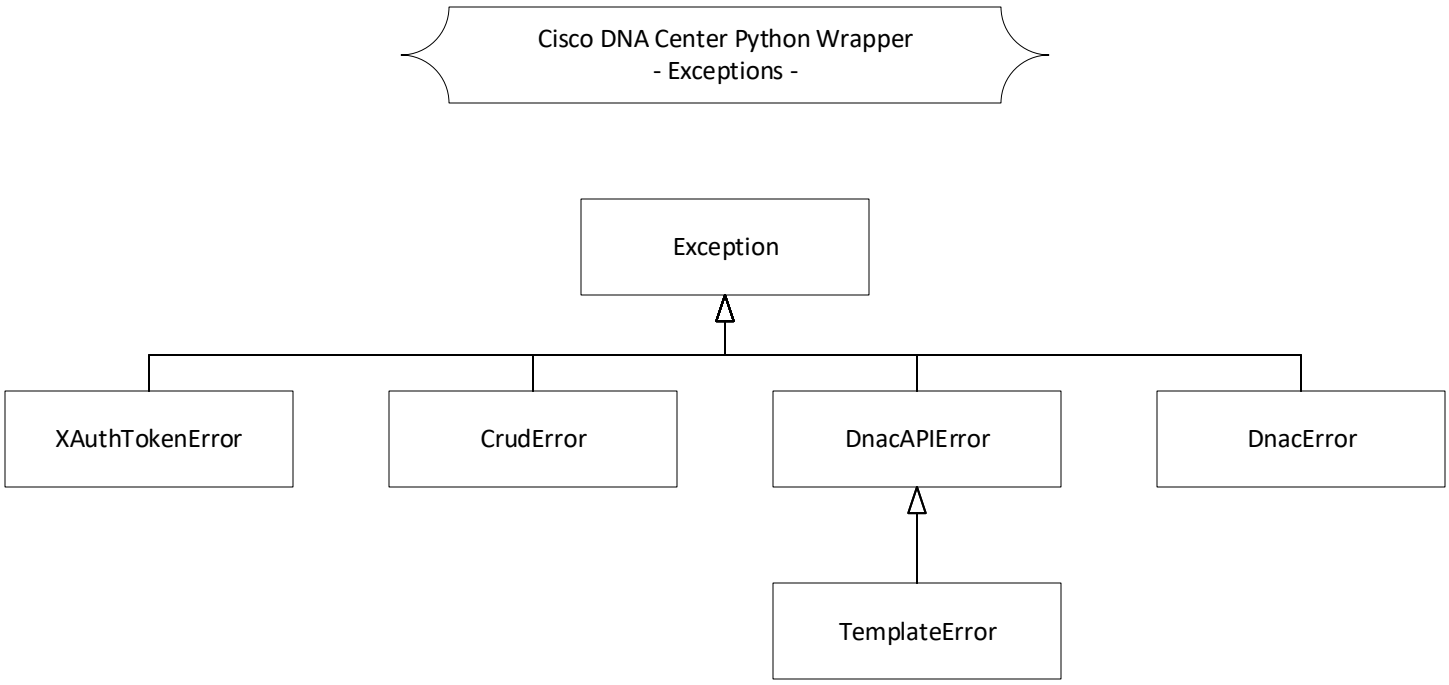
Cisco DNA Center Python Wrapper
- Exceptions -
Exception
XAuthTokenError
CrudError
DnacAPIError
DnacError
TemplateError