

# 04R: Prediction for SLR

Stat 230 – Spring 2026

## Note

You can access the .qmd for this activity by clicking the “code” button above and then opening in maize/Rstudio. If you prefer to follow the tutorial version in the browser, you can use <https://aluby.github.io/stat230/activities/04-prediction-tutorial>

## 1 Loading packages

The code chunk below loads the R packages that contain functions we’ll use. Make sure to run it before the rest of the code!

```
library(tidyverse)
library(ggformula)
```

## 2 Loading data

The data set is loaded by running the following code chunk:


```
city <- readr::read_csv(url("https://raw.githubusercontent.com/zief0002/modeling/main/maize/maize.csv"))
```

The columns of interest are education and income.

## 3 Making plots

**Q1.** Make a plot of income against education and overlay the linear regression equation. Does it look like what you expected? (I’ve started the code for you; you will need to overlay the linear regression equation)

```
gf_point(income ~ education, data = city)
```

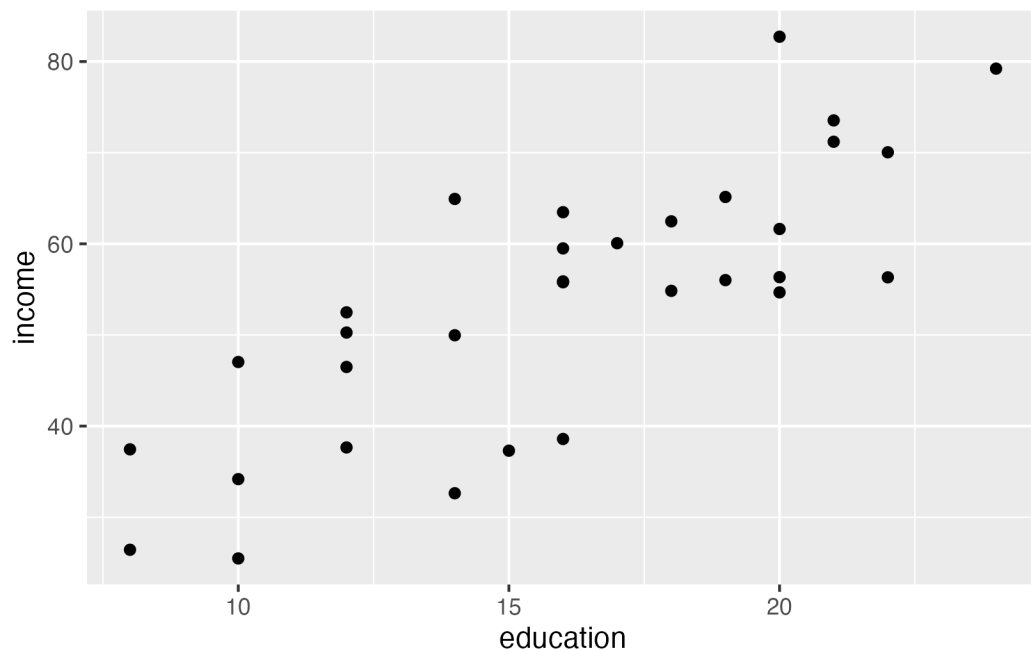

**Q2.** Make a plot of income against `scale(education)` and overlay the linear regression equation. Does it look like what you expected?

```
# Write your graph code here
```

## 4 Fitting a simple linear regression model

**Q3.** Use the `lm()` command to fit the simple linear regression model where `education` is used to predict `income`. Make sure your output matches the output on the worksheet.

```
# Write your lm() command here
```

## 5 Making predictions

The first person in this dataset has `education = 8`.

**Q4.** Calculate the expected income of this person using the first regression equation. (You may use R or do this by hand. There's a code chunk below for your convenience)

```
# Write your code here
```

**Q5.** If we want to predict the income of **this** person, should we use a confidence interval or a prediction interval?

**Q6.** Use R to construct the appropriate 89% interval for this person's income.


```
# Write your code here
```

**Q7.** Interpret the interval in context.

## 6 Plotting our intervals

It can be useful to plot your confidence/prediction intervals to communicate your findings to a broader audience. The code below creates a scatterplot of the data, adds the fitted regression line, and then adds 89% prediction intervals.

```
gf_point(income ~ education, data = city) |>  
  gf_lm(interval = "prediction", level = .89) |>  
  gf_lm(interval = "confidence", alpha = 0.6, level = .89)
```

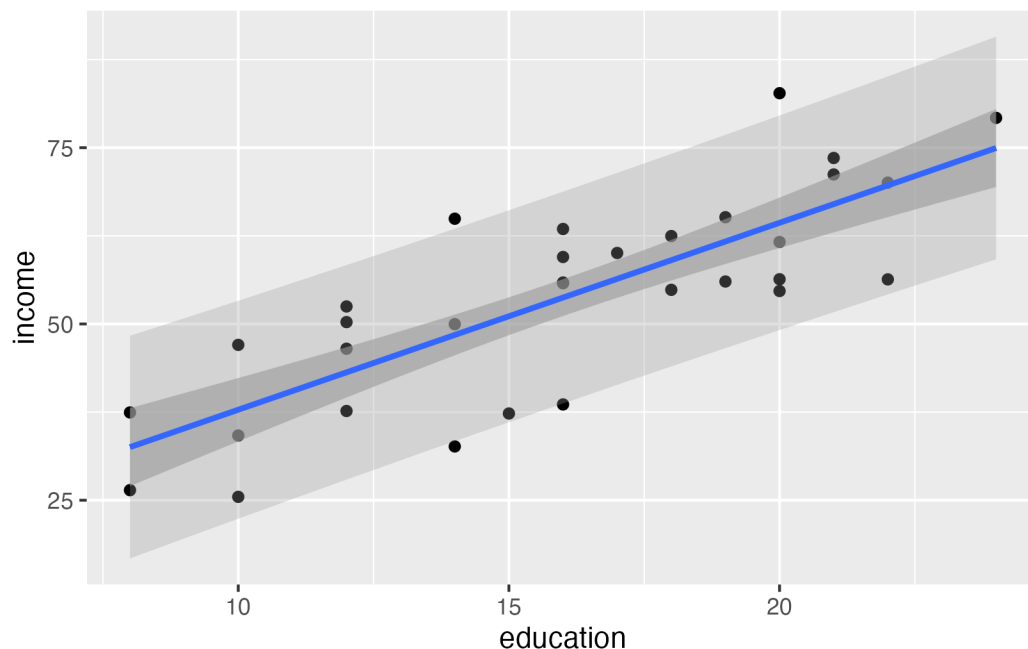

**Q8.** Run the code to produce a scatterplot, regression line, and both types of intervals. Which is the prediction interval and which is the confidence interval? How can you tell?

---

## 7 Function quick reference

---

The following table summarizes the functions we learned today:

| Function                                                                  | Purpose                                                      |
|---------------------------------------------------------------------------|--------------------------------------------------------------|
| <code>lm(formula, data)</code>                                            | Fit a linear model                                           |
| <code>predict(model, newdata, interval, level, se.fit)</code>             | Make predictions and calculate intervals                     |
| <code>gf_point(formula, data)  &gt; gf_lm(interval = "confidence")</code> | Plot data and add confidence intervals for the mean response |
| <code>gf_point(formula, data)  &gt; gf_lm(interval = "prediction")</code> | Plot data and add prediction intervals for the mean response |

---