


SETUP DRIZZLE

```
//COMANDOS
```

```
npm i drizzle-orm drizzle-seed pg dotenv  
npm i -D drizzle-kit tsx @types/pg
```


1 - CRIO A ESTRUTURA DE PASTAS DA IMAGEM ABAIXO



2 - CRIO UM .env NA RAIZ

3 - CONFIGURO O NEON DB(SERVIÇO CLOUD 0800 PARA POSTGRES)

<https://console.neon.tech/app/org-little-sky-03363490/projects>

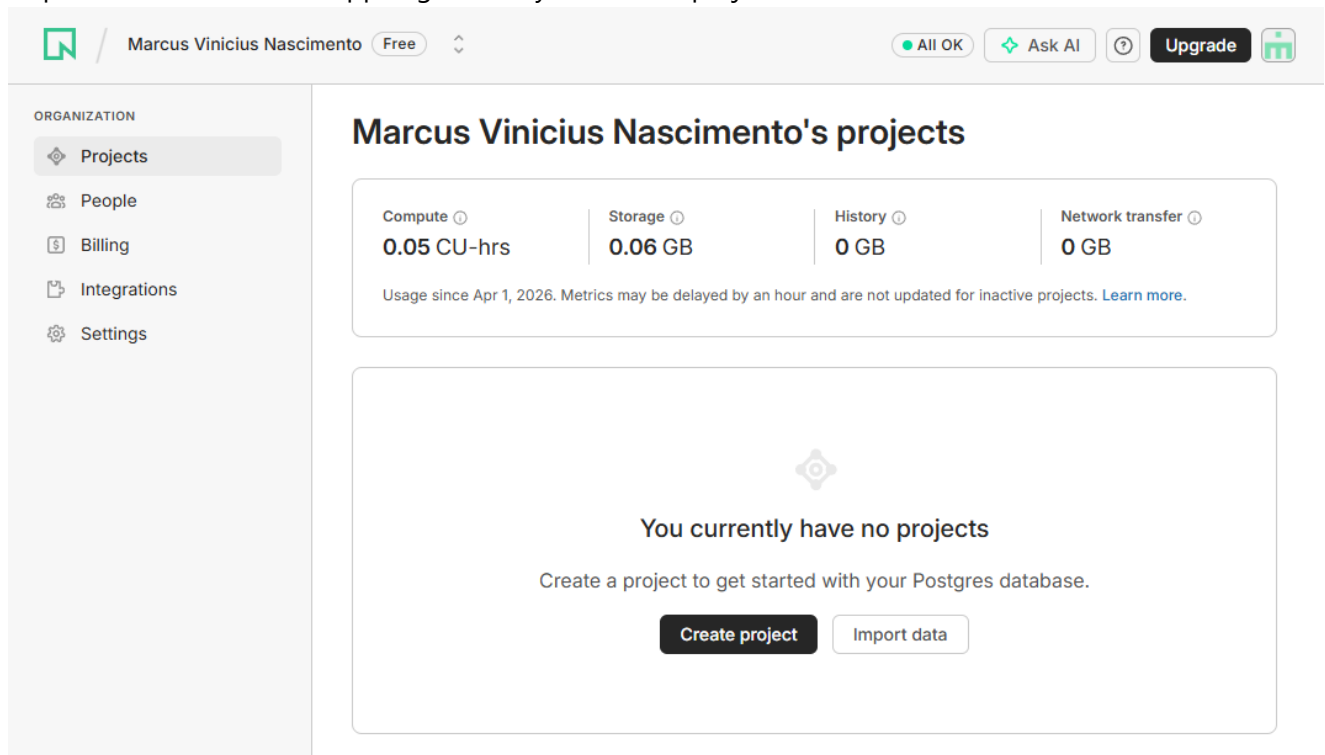A screenshot of the Neon.tech console interface. The top bar shows the user 'Marcus Vinicius Nascimento' with a 'Free' tier and an 'Upgrade' button. The left sidebar lists 'ORGANIZATION' options: Projects, People, Billing, Integrations, and Settings. The main content area is titled 'Marcus Vinicius Nascimento's projects' and displays usage metrics: Compute (0.05 CU-hrs), Storage (0.06 GB), History (0 GB), and Network transfer (0 GB). Below these metrics, a message states 'You currently have no projects' and 'Create a project to get started with your Postgres database.' There are two buttons: 'Create project' and 'Import data'.

Create project



Project name

BEWEAR

Postgres version

17

Cloud service provider

☒ AWS ☐ Azure

Region


AWS US East 2 (Ohio)

Select the region closest to your application.

Enable Neon Auth



Neon Auth is a managed authentication service that stores users and sessions directly in your database.

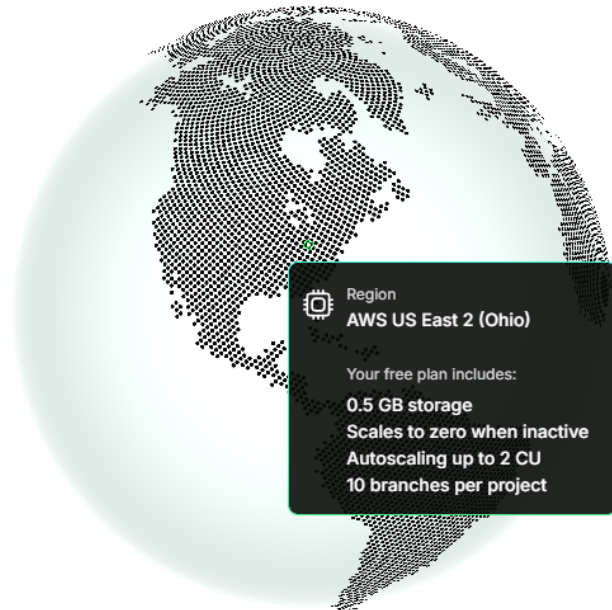

 Region
AWS US East 2 (Ohio)

Your free plan includes:
0.5 GB storage
Scales to zero when inactive
Autoscaling up to 2 CU
10 branches per project

Cancel

Create

 / Marcus Vinicius Nascimento Free

BEWEAR

All OK

Ask AI

?

Upgrade



PROJECT

Dashboard

Branches

Integrations

Settings

BRANCH

production

Overview

Monitoring

SQL Editor

Tables

Backup & Restore

Data Masking BETA

APP BACKEND

Data API

Auth

Project dashboard

Connect

Import data

Share

Get connected to your new database

Connection string

Copy your project's connection string and add it to your app config.

> Neon init

Set up your local dev environment with a single command.

IDE extension

Set up your app with the extension in VS Code or

Dismiss

Branches 1 / 10

Compute 0 / 100 CU-hrs

Storage 0 / 0.5 GB

Network transfer 0 / 5 GB

Usage since Apr 1, 2026. Metrics may be delayed by an hour and are not updated for inactive projects. [Learn more.](#)

Monitoring

View all metrics

Branch

Default

Compute

F

Refresh

There is no data to display at the moment.

1 Branch

View all

Name

Primary compute

production

Default

.25 ↔ 2 CU

P

Project settings

Manage

Region

AWS US East 2 (Ohio)

Default compute size

.25 ↔ 2 CU

History retention

6 hours

Postgres version

17

To extend the compute size limit, [upgrade your plan](#)

Connect to your database

Branch

production
Default

Database

neondb

Compute

Primary
Active

Role

neondb_owner

psql

Connection pooling

connection string
passwordless auth

```
psql 'postgresql://neondb_owner:*****@ep-wispy-boat-aj2aqdz1-pooler.c-3.us-east-2.aws.neon.tech/neondb?sslmode=require&channel_binding=require'
```

Copy snippet
Show password

Your password is saved in a secure storage vault. [Learn more about connecting](#)

4 - ADICIONO A URL NO .env

5 - CRIO O drizzle.config.ts NA RAIZ DO PROJETO e CONFIGURO O index.ts

```
import 'dotenv/config';
import { defineConfig } from 'drizzle-kit';

export default defineConfig({
  out: './drizzle',
  schema: './app/db/schema.ts',
  dialect: 'postgresql',
  dbCredentials: {
    url: process.env.DATABASE_URL!,
  },
});
```

index.ts

```
import 'dotenv/config';
import { drizzle } from 'drizzle-orm/node-postgres';
const db = drizzle(process.env.DATABASE_URL!);
```

6 - CRIO O MEU schema.ts, arquivo que cria as tables

```
import { relations } from 'drizzle-orm'
import { integer, pgTable, text, timestamp, uuid } from 'drizzle-orm/pg-core'

export const userTable = pgTable('users', {
  id: uuid().primaryKey().defaultRandom(),
  name: text().notNull(),
})

export const categoryTable = pgTable('categories', {
  id: uuid().primaryKey().defaultRandom(),
  name: text().notNull(),
  slug: text().notNull().unique(),
  createdAt: timestamp().notNull().defaultNow(),
})

export const categoryRelations = relations(categoryTable, ({ many }) => ({
  products: many(productTable),
}))

export const productTable = pgTable('products', {
  id: uuid().primaryKey().defaultRandom(),
  categoryId: uuid('category_id')
    .notNull()
    .references(() => categoryTable.id),
  name: text().notNull(),
  slug: text().notNull().unique(),
  description: text().notNull(),
  createdAt: timestamp('created_at').notNull().defaultNow(),
})

export const productRelations = relations(productTable, ({ one, many }) => ({
  category: one(categoryTable, {
    fields: [productTable.categoryId],
    references: [categoryTable.id],
  }),
  variants: many(productVariantTable),
}))

export const productVariantTable = pgTable('product_variant', {
  id: uuid().primaryKey().defaultRandom(),
  productId: uuid('product_id')
    .notNull()
    .references(() => productTable.id),
  name: text().notNull(),
  slug: text().notNull().unique(),
  color: text().notNull(),
  priceInCents: integer('price_in_cents').notNull(),
})
```

```

    imageUrl: text('image_url').notNull(),
    createdAt: timestamp('created_at').notNull().defaultNow(),
  })

export const productVariantRelations = relations(
  productVariantTable,
  ({ one }) => ({
    product: one(productTable, {
      fields: [productVariantTable.productId],
      references: [productTable.id],
    }),
  }),
)

```

7 - CRIO AS MINHAS SEEDS seed.ts

8 - RODO O COMANDO PARA PEGAR O SCHEMA E CRIAR AS TABELAS

```
npx drizzle-kit push
```

9 - RODO O COMANDO O COMANDO, ESSE COMANDO PERMITI VERIFICAR AS TABELAS

```

npx drizzle-kit studio
...

10 - CASO QUEIRA REALIZAR ALGUMA MUDANÇA NO SCHEMA E NECESSÁRIO RODAR O
COMANDO

...
npx drizzle-kit push
...

11 - AGORA VAMOS SUBIR AS NOSSAS SEEDS PARA O BANCO

...
npx tsx --env-file=.env app/db/seed.ts
...

```