




ds
id int _id int l (varchar 225) ? (varchar225) a (boolean) lo (boolean) varchar 225 (varchar 225) har 225)

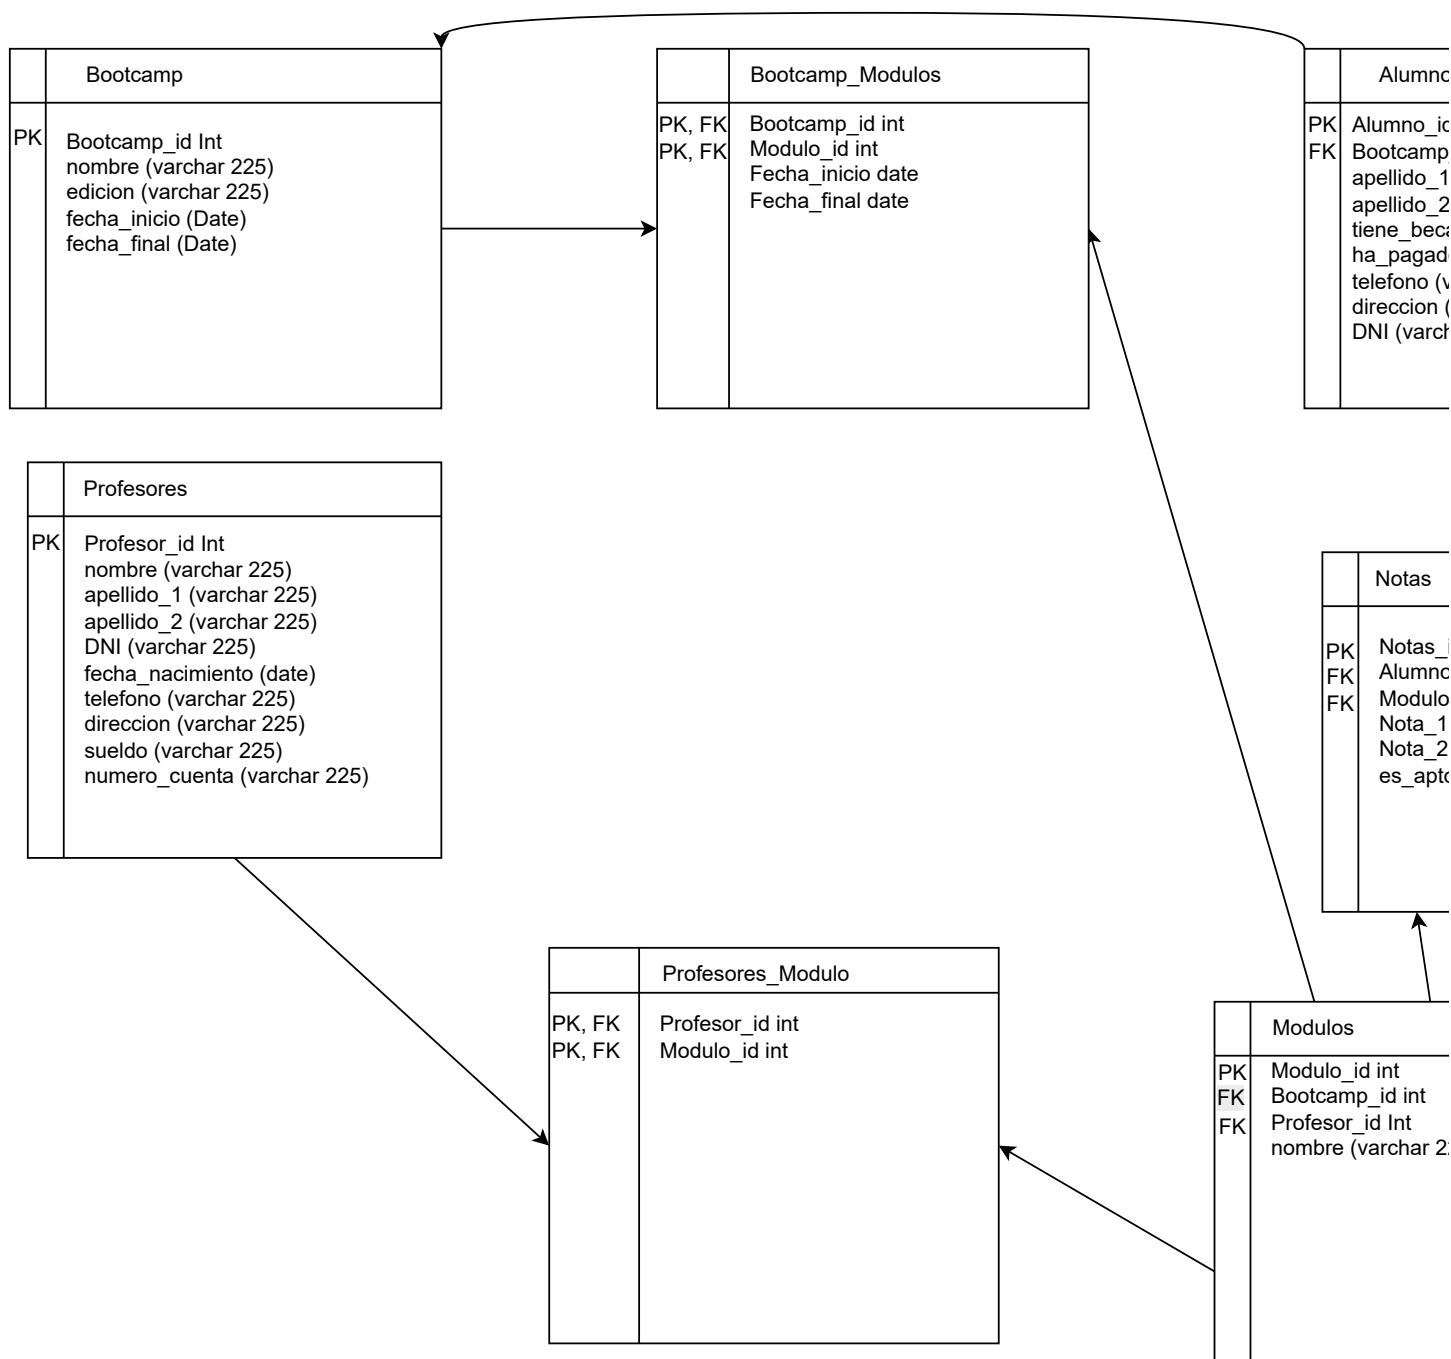

id (int NOT NULL) _id (int NOT NULL) _id (int NOT NULL) er_intento (int) 'o_intento (int) o (boolean)

25)