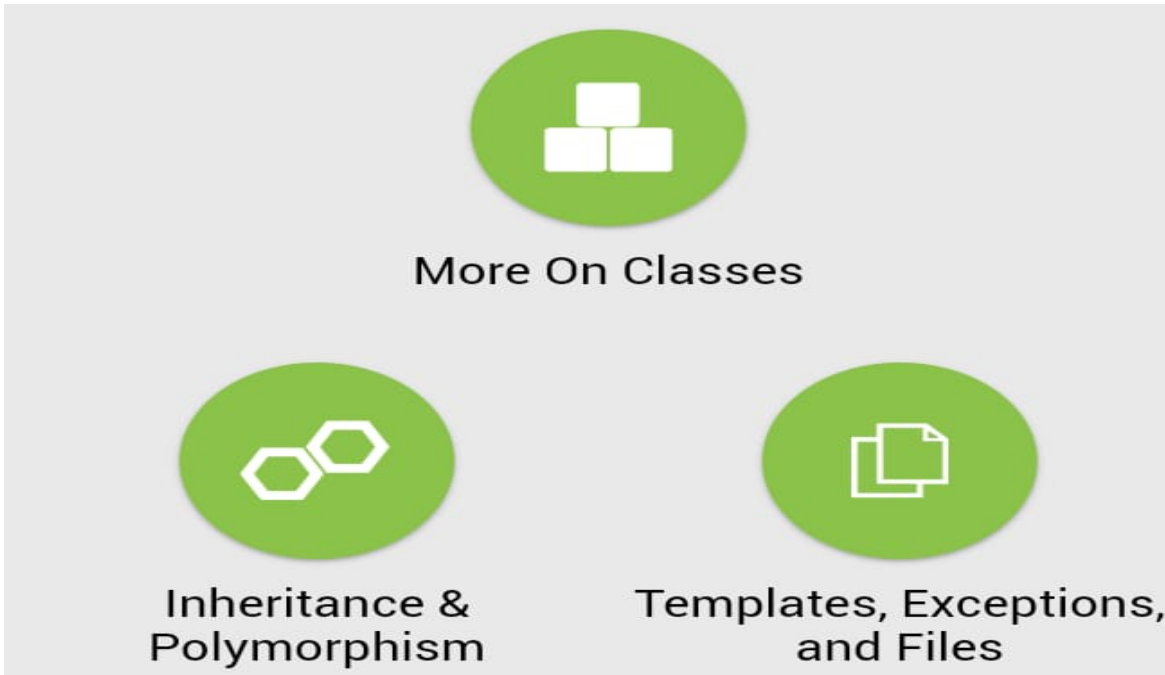


DAILY ASSESSMENT FORMAT

Date:	25/06/2020	Name:	Akshatha M Deshpande
Course:	Programming in C++	USN:	4AL17EC006
Topic:	1:Inheritance and Polymorphism 2:Templates, Files & Exceptions	Semester & Section:	6th Sem A Sec
Github Repository:	AkshathaDeshpande		

SESSION
<p>Image of the session</p> <div style="text-align: center;"><p>The diagram features a central green oval at the top containing three stacked white squares, with the text "More On Classes" below it. Two arrows point downwards from this central oval to two separate green ovals at the bottom. The left oval contains two interlocking white hexagons and is labeled "Inheritance & Polymorphism". The right oval contains two overlapping white document icons and is labeled "Templates, Exceptions, and Files".</p></div> <p>Report – Report can be typed or hand written for up to two pages.</p> <p>MODULE 7:</p> <p>Inheritance and Polymorphism:</p> <p>Inheritance:</p> <p>Inheritance is one in which a new class is created that inherits the properties of the already exist class. It supports the concept of code reusability and reduces the length of the code in object-oriented programming.</p> <p>Types of Inheritance are:</p> <ol style="list-style-type: none">1. Single inheritance2. Multi-level inheritance

3. Multiple inheritance
4. Hybrid inheritance
5. Hierarchical inheritance

Polymorphism:

- * Polymorphism as the ability of a message to be displayed in more than one form.
- * Real life example of polymorphism, a person at the same time can have different characteristic.
- * Like a man at the same time is a father, a husband, an employee. So the same person posses different behavior in different situations. This is called polymorphism.
- * Polymorphism is considered as one of the important features of Object Oriented Programming.

In C++ polymorphism is mainly divided into two types:

- Compile time Polymorphism
- Runtime Polymorphism

In C++, inheritance is a process in which one object acquires all the properties and behaviors of its parent object automatically. ... In C++, the class which inherits the members of another class is called derived class and the class whose members are inherited is called base class.

Inheritance in C++:

The capability of a class to derive properties and characteristics from another class is called Inheritance. Inheritance is one of the most important feature of Object Oriented Programming.

Sub Class: The class that inherits properties from another class is called Sub class or Derived Class.

Super Class: The class whose properties are inherited by sub class is called Base Class or Super class.

Templates in C++:

- Templates are the foundation of generic programming, which involves writing code in a way that is independent of any particular type.
- A template is a blueprint or formula for creating a generic class or a function. The library containers like iterators and algorithms are examples of generic programming and have been developed using template concept.
- There is a single definition of each container, such as vector, but we can define many different kinds of vectors for example, vector <int> or vector.
- <string>.
- A template is a simple and yet very powerful tool in C++. The simple idea is to pass data type as a parameter so that we don't need to write the same code for different data types. For example, a software company may need sort() for different data types.
- Rather than writing and maintaining the multiple codes, we can write

one sort() and pass data type as a parameter. C++ adds two new keywords to support templates: 'template' and 'typename'. The second keyword can always be replaced by keyword 'class'.

- How templates work? Templates are expanded at compiler time. This is like macros. The difference is, compiler does type checking before template expansion.

MODULE-8:

Files:

++ provides the following classes to perform output and input of characters to/from files:

- ofstream: Stream class to write on files
- ifstream: Stream class to read from files
- fstream: Stream class to both read and write from/to files.
- * These classes are derived directly or indirectly from the classes istream and ostream.
- * We have already used objects whose types were these classes:
 1. cin is an object of class istream and
 2. cout is an object of class ostream.
- * Therefore, we have already been using classes that are related to our file streams.
- * And in fact, we can use our file streams the same way we are already used to use cin and cout, with the only difference that we have to associate these streams with physical files.

Exceptions:

An exception is a problem that arises during the execution of a program. A C++ exception is a response to an exceptional circumstance that arises while a program is running, such as an attempt to divide by zero.

Exceptions provide a way to transfer control from one part of a program to another. C++ exception handling is built upon three keywords: try, catch, and throw.

- throw – A program throws an exception when a problem shows up. This is done using a throw keyword.
- catch – A program catches an exception with an exception handler at the place in a program where you want to handle the problem. The catch keyword indicates the catching of an exception.
- try – A try block identifies a block of code for which particular exceptions will be activated. It's followed by one or more catch blocks.

Assuming a block will raise an exception, a method catches an exception using a combination of the try and catch keywords. A try/catch block is placed around the code that might generate an exception.

"Attended Webinar on **VLSI Scope in INDIA** conducted by Alva's Education Foundation"

