


ISE CERTIFICATION COURSE DETAILS

NAME:	SHETTY ASHIKA C	USN:	4AL16IS050
SEMESTER:	8	MENTOR:	Mr. SHARAN PAIS
COURSE NAME:	MODERN JAVA PROGRAMMING COURSE	DATE:	6/6/2020

SCREENSHOT:

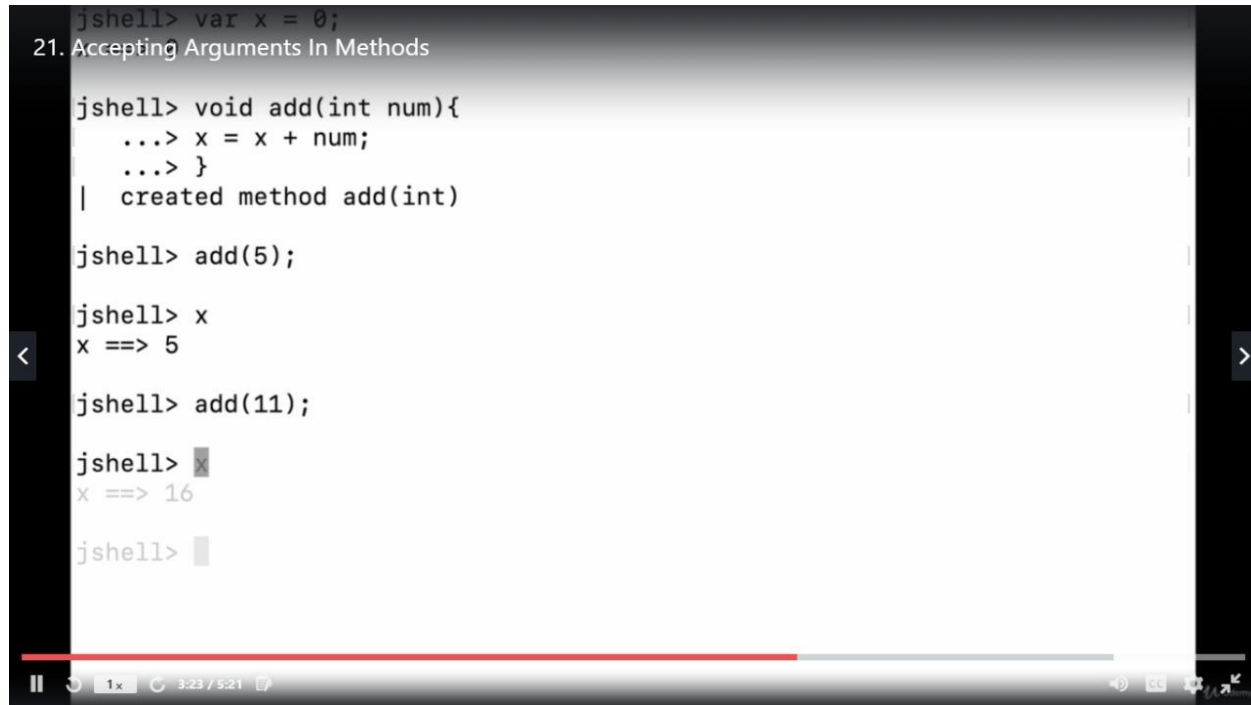

```
jshell> var x = 0;
21. Accepting Arguments In Methods

jshell> void add(int num){
...> x = x + num;
...> }
| created method add(int)

jshell> add(5);

jshell> x
x ==> 5

jshell> add(11);

jshell> x
x ==> 16

jshell>
```

BRIEF REPORT: (POINT-WISE)

- 1). JShell commands control the environment and display information within a session. Commands are distinguished from snippets by a leading forward slash (/).
- 2). For information about the current variables, methods, and types, use the /vars, /methods, and /types commands. For a list of entered snippets, use the /list command.
- 3). Shell has a default startup script that is silently and automatically executed before JShell starts, so that you can get to work quickly. Entries from the startup script aren't listed unless you request them with the /list -start or /list -all command