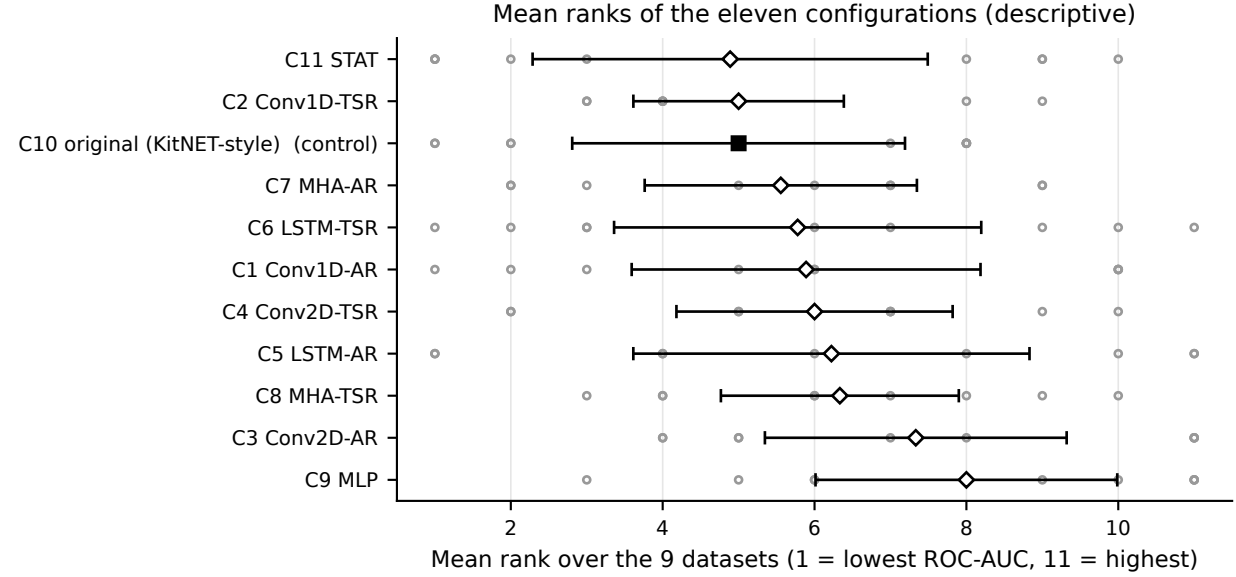
Mean ranks of the eleven configurations (descriptive)
C11 STAT
C2 Conv1D-TSR
C10 original (KitNET-style) (control)
C7 MHA-AR
C6 LSTM-TSR
C1 Conv1D-AR
C4 Conv2D-TSR
C5 LSTM-AR
C8 MHA-TSR
C3 Conv2D-AR
C9 MLP
2
4
6
8
10
Mean rank over the 9 datasets (1 = lowest ROC-AUC, 11 = highest)

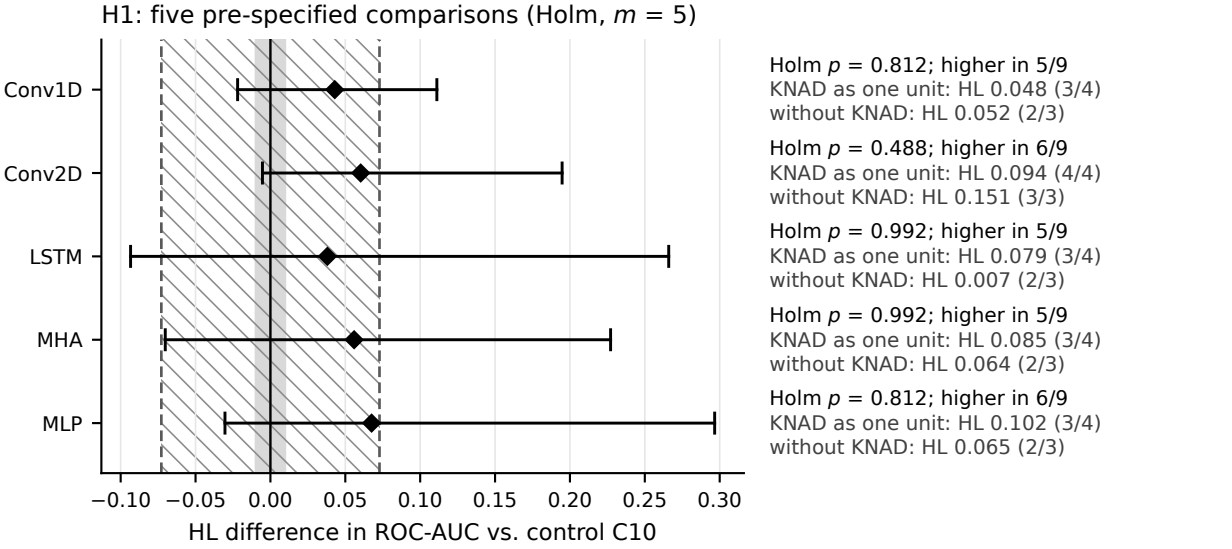
H1: five pre-specified comparisons (Holm, m = 5)
Conv1D
Conv2D
LSTM
MHA
MLP
−0.10
−0.05
0.00
0.05
0.10
0.15
0.20
0.25
0.30
HL difference in ROC-AUC vs. control C10
Holm p = 0.812; higher in 5/9
KNAD as one unit: HL 0.048 (3/4)
without KNAD: HL 0.052 (2/3)
Holm p = 0.488; higher in 6/9
KNAD as one unit: HL 0.094 (4/4)
without KNAD: HL 0.151 (3/3)
Holm p = 0.992; higher in 5/9
KNAD as one unit: HL 0.079 (3/4)
without KNAD: HL 0.007 (2/3)
Holm p = 0.992; higher in 5/9
KNAD as one unit: HL 0.085 (3/4)
without KNAD: HL 0.064 (2/3)
Holm p = 0.812; higher in 6/9
KNAD as one unit: HL 0.102 (3/4)
without KNAD: HL 0.065 (2/3)