


NAMA : ALYA NADILLA AROSMA

KELAS : A

TUGAS : PWEB MODUL 6 ACTIVITY MANDIRI 3 DAN 4


ACTIVITY MANDIRI 3

1. Buat layout master: resources/views/layouts/app.blade.php dengan navbar, main content area (@yield('content')), dan footer

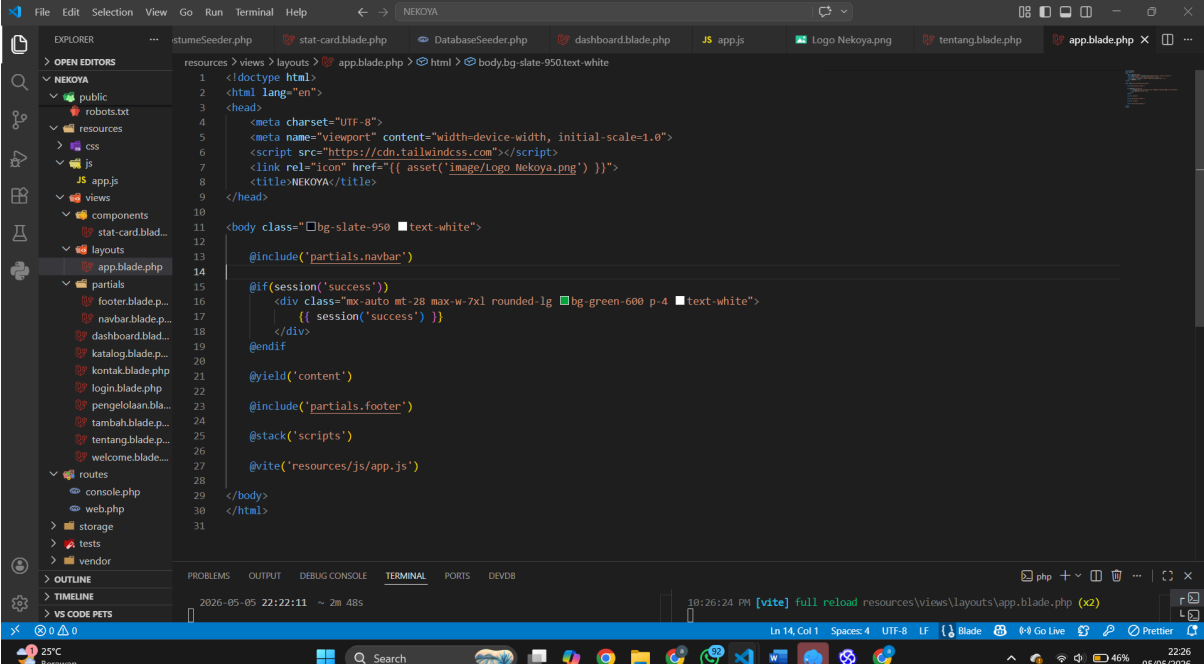


```
resources > views > layouts > app.blade.php > html > body.bg-slate-950.text-white
1 <!doctype html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <script src="https://cdn.tailwindcss.com"></script>
7 <link rel="icon" href="{{ asset('image/Logo Nekoya.png') }}">
8 <title>NEKOYA</title>
9 </head>
10
11 <body class="bg-slate-950 text-white">
12
13     @include('partials.navbar')
14
15     @if(session('success'))
16     <div class="mx-auto mt-28 max-w-7xl rounded-lg bg-green-600 p-4 text-white">
17         {{ session('success') }}
18     </div>
19     @endif
20
21     @yield('content')
22
23     @include('partials.footer')
24
25     @stack('scripts')
26
27     @vite('resources/js/app.js')
28
29 </body>
30 </html>
31
```

2. Buat partial: resources/views/partials/navbar.blade.php dan sisipkan dengan @include di layout

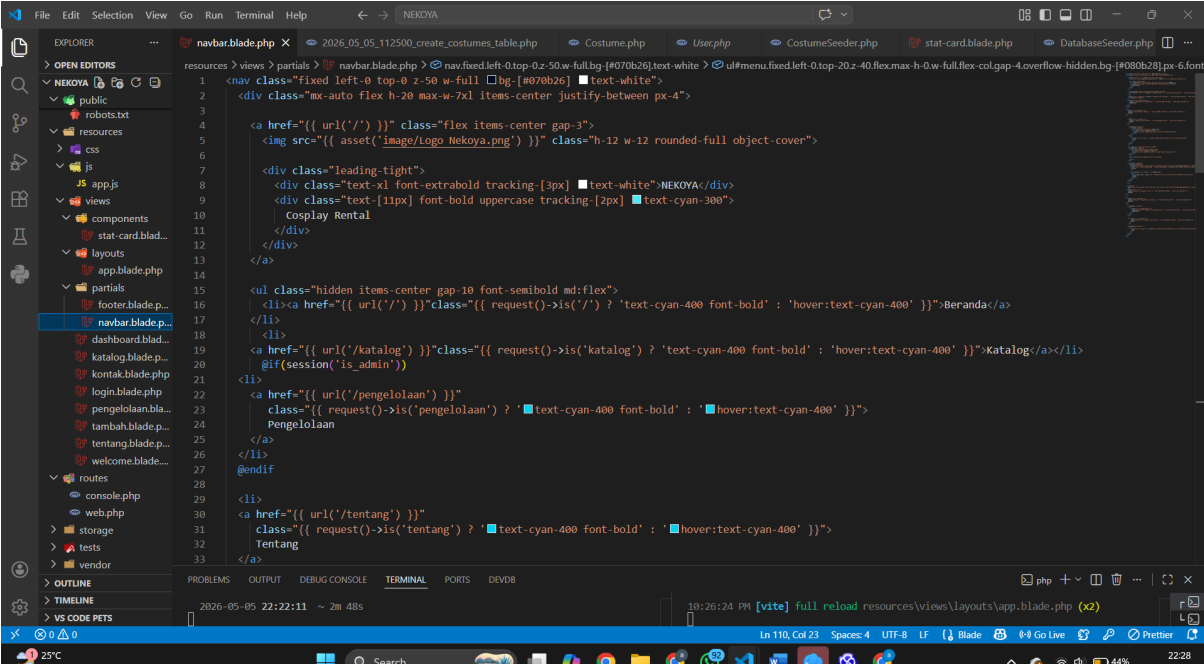


```
resources > views > partials > navbar.blade.php > nav.fixed.left-0.top-0.z-50.w-full.bg-[#070b26].text-white > ul#menu.fixed.left-0.top-20.z-40.flex.max-h-0.w-full.flex-col.gap-4.overflow-hidden.bg-[#080b28].px-6.font
1 <nav class="fixed left-0 top-0 z-50 w-full bg-[#070b26] text-white">
2 <div class="mx-auto flex h-20 max-w-7xl items-center justify-between px-4">
3
4     <a href="{{ url('/') }}" class="flex items-center gap-3">
5         
6
7         <div class="leading-tight">
8             <div class="text-xl font-extrabold tracking-[3px] text-white">NEKOYA</div>
9             <div class="text-[11px] font-bold uppercase tracking-[2px] text-cyan-300">
10                 Cosplay Rental
11             </div>
12         </div>
13     </a>
14
15     <ul class="hidden items-center gap-10 font-semibold md:flex">
16         <li><a href="{{ url('/') }}" class="{{ request()->is('/') ? 'text-cyan-400 font-bold' : 'hover:text-cyan-400' }}">Beranda</a>
17         </li>
18         <li>
19             <a href="{{ url('/katalog') }}" class="{{ request()->is('katalog') ? 'text-cyan-400 font-bold' : 'hover:text-cyan-400' }}">Katalog</a>
20             @if(session('is_admin'))
21             <li>
22                 <a href="{{ url('/pengelolaan') }}"
23                     class="{{ request()->is('pengelolaan') ? 'text-cyan-400 font-bold' : 'hover:text-cyan-400' }}">
24                     Pengelolaan
25                 </a>
26             </li>
27             @endif
28         </li>
29         <li>
30             <a href="{{ url('/tentang') }}"
31                 class="{{ request()->is('tentang') ? 'text-cyan-400 font-bold' : 'hover:text-cyan-400' }}">
32                 Tentang
33             </a>
34         </li>
35     </ul>
36 </div>
37 </nav>
38
```

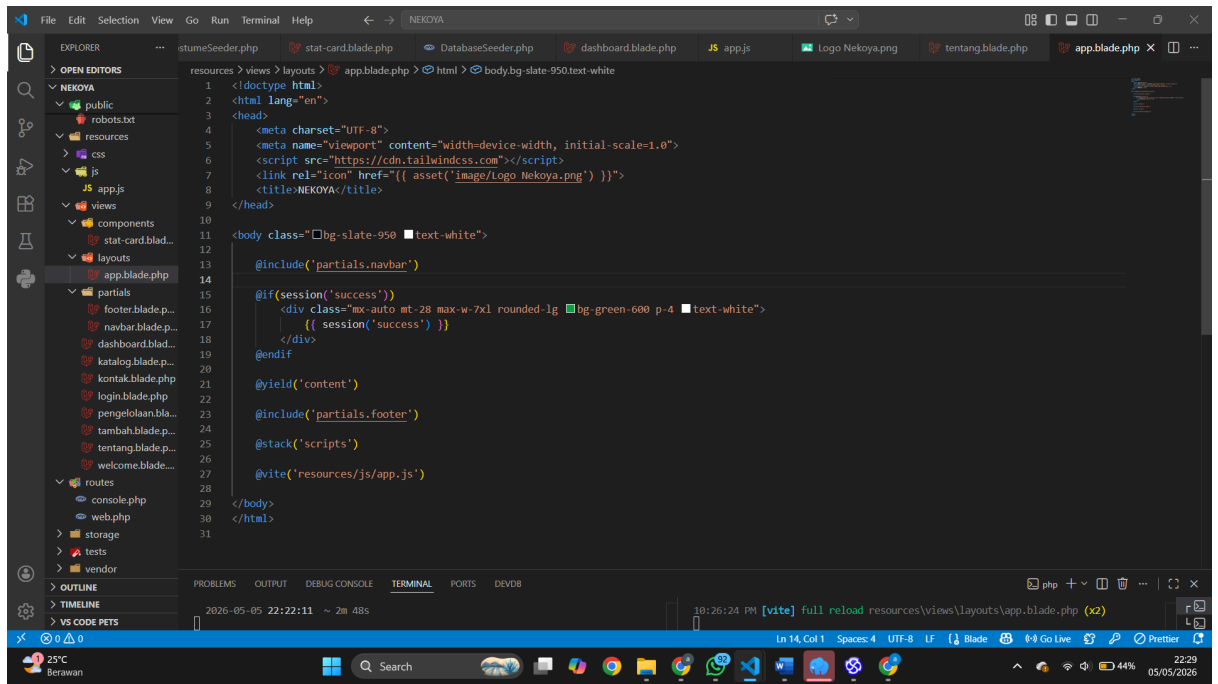


```
resources > views > layouts > app.blade.php > html > body.bg-slate-950.text-white
1 <doctype html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <script src="https://cdn.tailwindcss.com"></script>
7 <link rel="icon" href="{{ asset('image/Logo Nekoya.png') }}" >
8 <title>NEKOYA</title>
9 </head>
10
11 <body class="{{ bg-slate-950 text-white }}">
12
13     @include('partials.navbar')
14
15     @if(session('success'))
16         <div class="mx-auto mt-28 max-w-7xl rounded-lg bg-green-600 p-4 text-white">
17             {{ session('success') }}
18         </div>
19     @endif
20
21     @yield('content')
22
23     @include('partials.footer')
24
25     @stack('scripts')
26
27     @vite('resources/js/app.js')
28
29 </body>
30 </html>
31
```

3. Buat halaman dashboard: resources/views/dashboard.blade.php yang @extends('layouts.app')

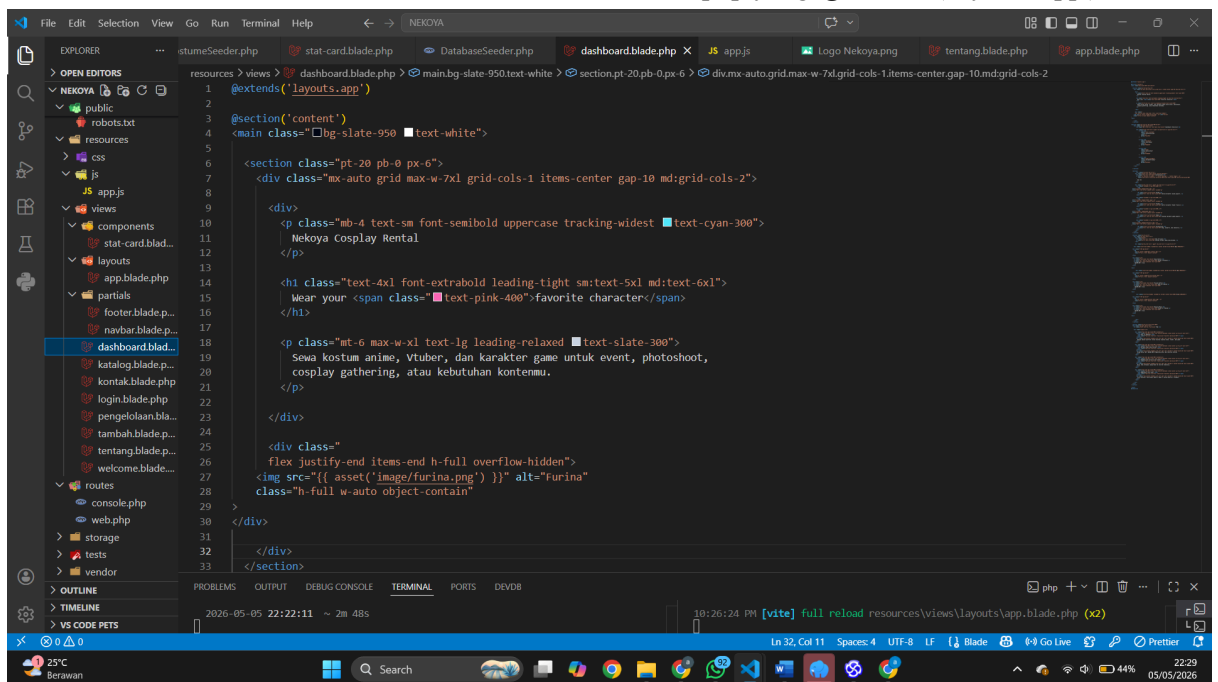


```
resources > views > dashboard.blade.php > main.bg-slate-950.text-white > section.pt-20.pb-0.px-6 > div.mx-auto.grid.max-w-7xl.grid-cols-1.items-center.gap-10.md:grid-cols-2
1 @extends('layouts.app')
2
3 @section('content')
4 <main class="{{ bg-slate-950 text-white }}">
5
6     <section class="pt-20 pb-0 px-6">
7         <div class="mx-auto grid max-w-7xl grid-cols-1 items-center gap-10 md:grid-cols-2">
8
9             <div>
10                 <p class="mb-4 text-sm font-semibold uppercase tracking-widest text-cyan-300">
11                     Nekoya Cosplay Rental
12                 </p>
13
14                 <h1 class="text-4xl font-extrabold leading-tight sm:text-5xl md:text-6xl">
15                     Wear your <span class="text-pink-400">favorite character</span>
16                 </h1>
17
18                 <p class="mt-6 max-w-xl text-lg leading-relaxed text-slate-300">
19                     Sewa kostum anime, Vtuber, dan karakter game untuk event, photoshoot,
20                     cosplay gathering, atau kebutuhan kontenmu.
21                 </p>
22
23                 <div class="
24                     flex justify-end items-end h-full overflow-hidden">
25                     
28                 </div>
29             </div>
30
31         </div>
32     </section>
33
```

4. Tampilkan flash session message di layout: @if(session('success')) ... @endif

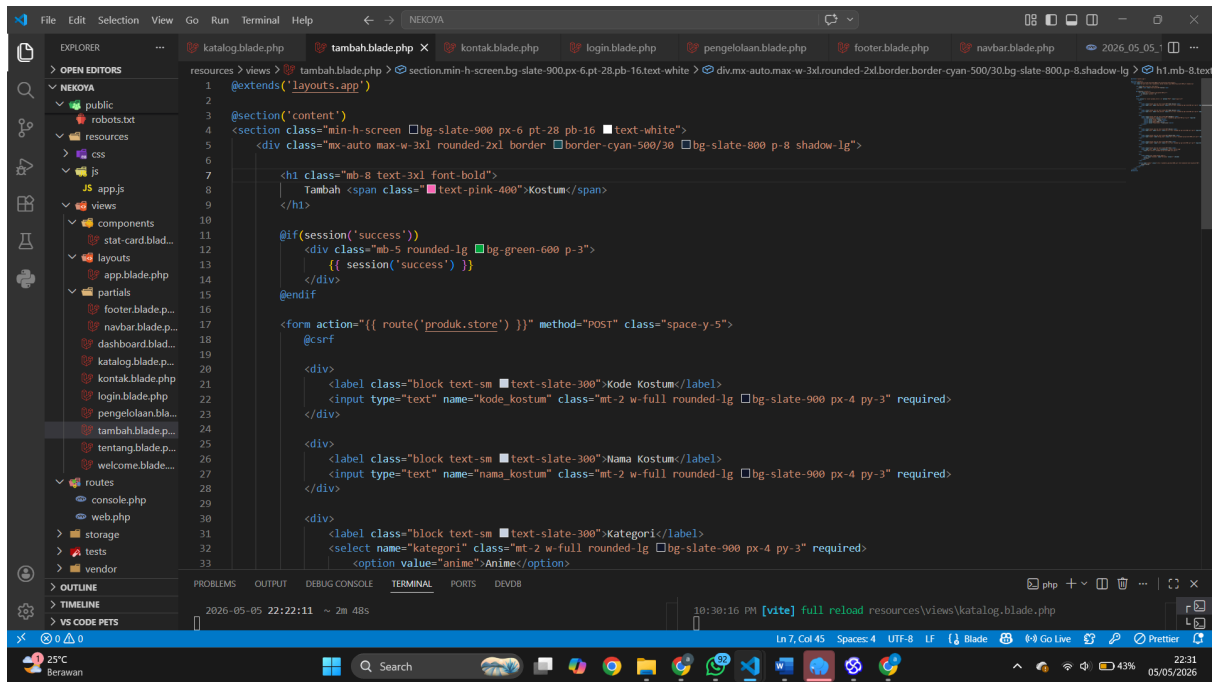


```
resources > views > tambah.blade.php > @extends('layouts.app')
1
2
3 @section('content')
4 <section class="min-h-screen bg-slate-900 px-6 pt-28 pb-16 text-white">
5 <div class="mx-auto max-w-3xl rounded-2xl border border-cyan-500/30 bg-slate-800 p-8 shadow-lg">
6
7 <h1 class="mb-8 text-3xl font-bold">
8   Tambah <span class="text-pink-400">Kostum</span>
9 </h1>
10
11 @if(session('success'))
12 <div class="mb-5 rounded-lg bg-green-600 p-3">
13   {{ session('success') }}
14 </div>
15 @endif
16
17 <form action="{{ route('produk.store') }}" method="POST" class="space-y-5">
18   @csrf
19   <div>
20     <label class="block text-sm text-slate-300">Kode Kostum</label>
21     <input type="text" name="kode_kostum" class="mt-2 w-full rounded-lg bg-slate-900 px-4 py-3" required>
22   </div>
23   <div>
24     <label class="block text-sm text-slate-300">Nama Kostum</label>
25     <input type="text" name="nama_kostum" class="mt-2 w-full rounded-lg bg-slate-900 px-4 py-3" required>
26   </div>
27   <div>
28     <label class="block text-sm text-slate-300">Kategori</label>
29     <select name="kategori" class="mt-2 w-full rounded-lg bg-slate-900 px-4 py-3" required>
30       <option value="anime">Anime</option>
31     </select>
32   </div>
33 </form>
```

5. Buat komponen: resources/views/components/stat-card.blade.php (kartu statistik dengan props: judul, nilai, ikon, warna)

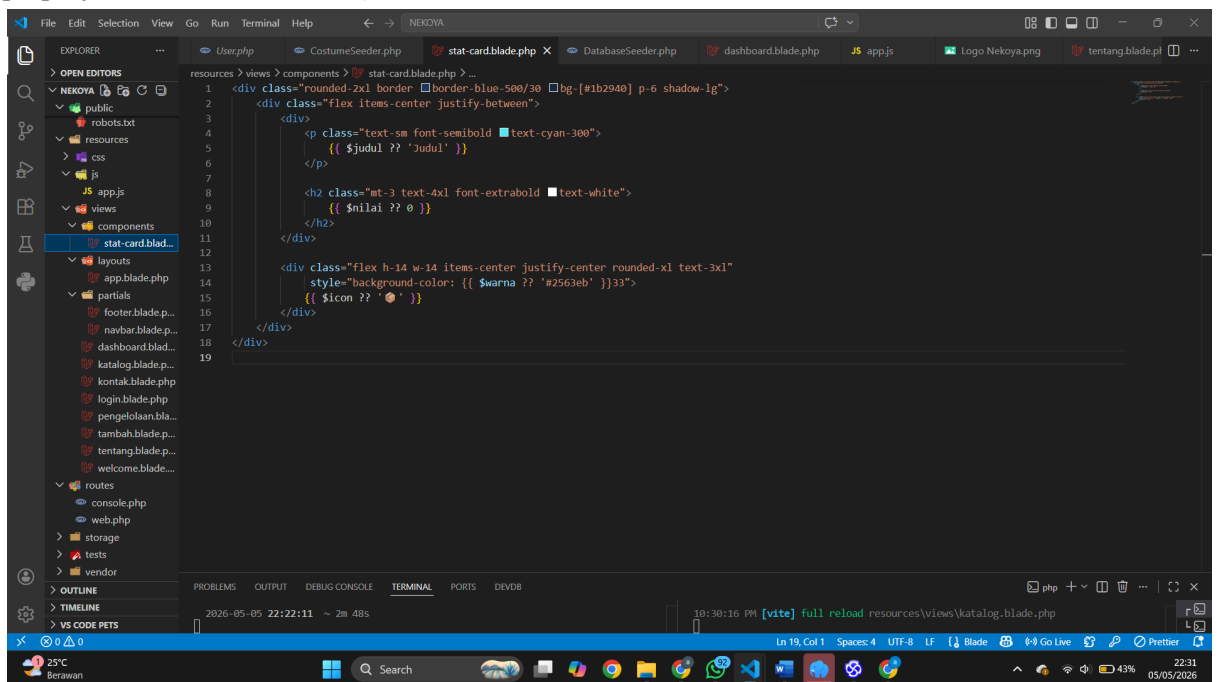



```
resources > views > components > stat-card.blade.php > ...
1 <div class="rounded-2xl border border-blue-500/30 bg-[#1b2940] p-6 shadow-lg">
2   <div class="flex items-center justify-between">
3     <div>
4       <p class="text-sm font-sembold text-cyan-300">
5         {{ $judul ?? 'Judul' }}
6       </p>
7       <h2 class="mt-3 text-4xl font-extrabold text-white">
8         {{ $nilai ?? 0 }}
9       </h2>
10     </div>
11   </div>
12   <div class="flex h-14 w-14 items-center justify-center rounded-xl text-3xl"
13     style="background-color: {{ $warna ?? '#2563eb' }} 33">
14     {{ $icon ?? '🎮' }}
15   </div>
16 </div>
```

6. Gunakan @forelse di dashboard untuk loop array data dummy (jumlah mahasiswa, mata kuliah, dll)

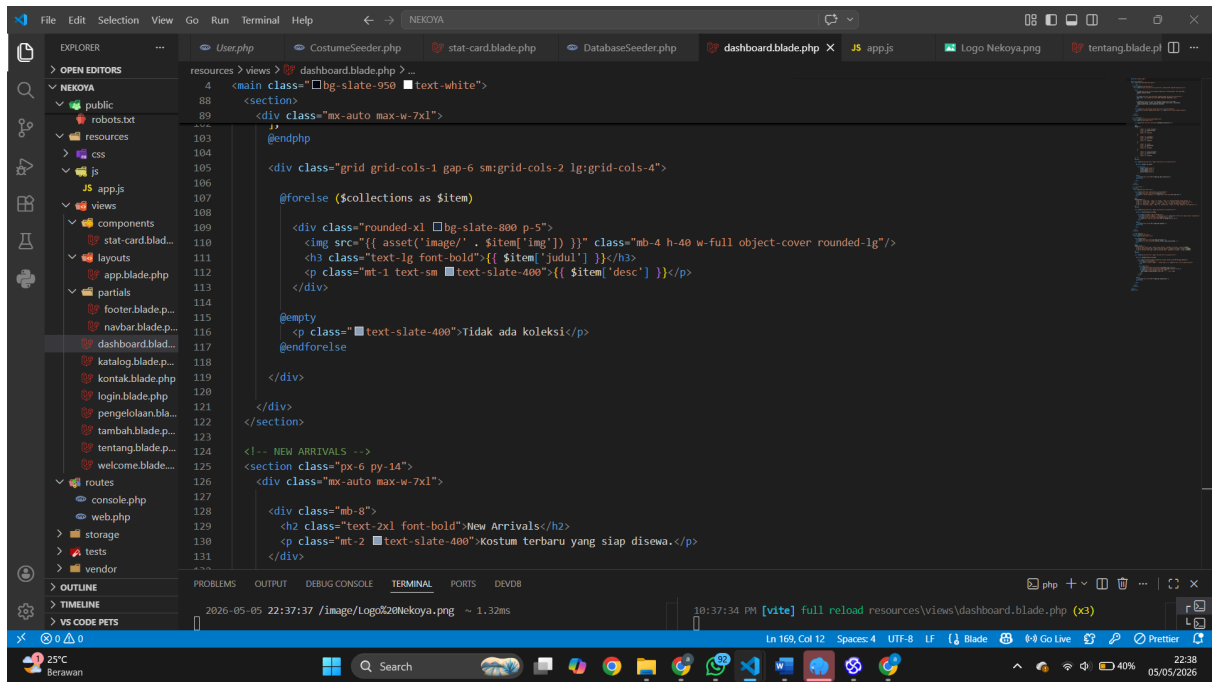



7. Buat halaman 'Tentang' dan 'Kontak' yang @extends layout yang sama

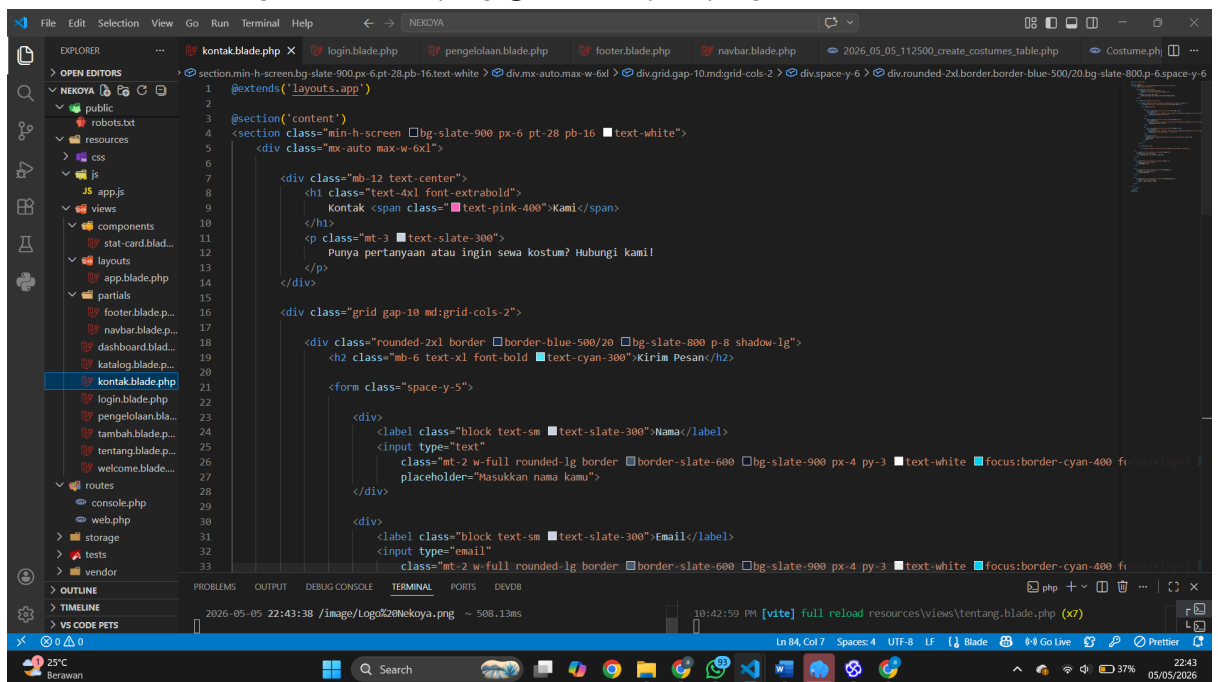

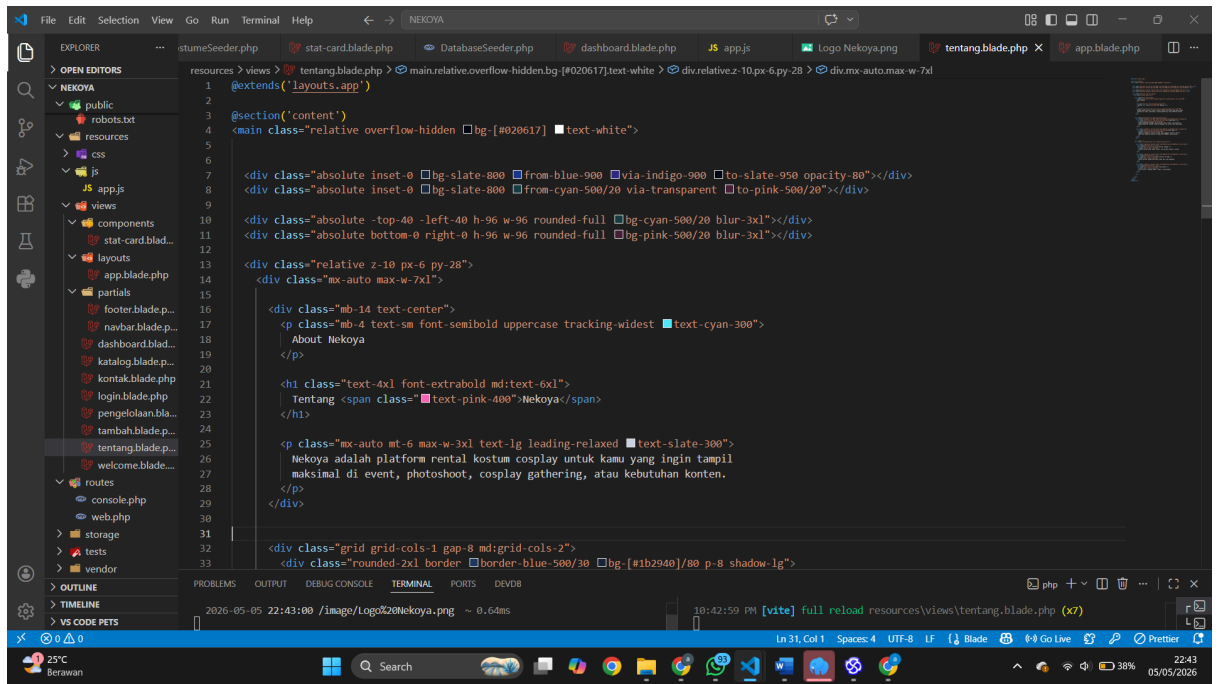

- Gunakan `@push('scripts')` dan `@stack('scripts')` untuk menambahkan JavaScript spesifik per halaman

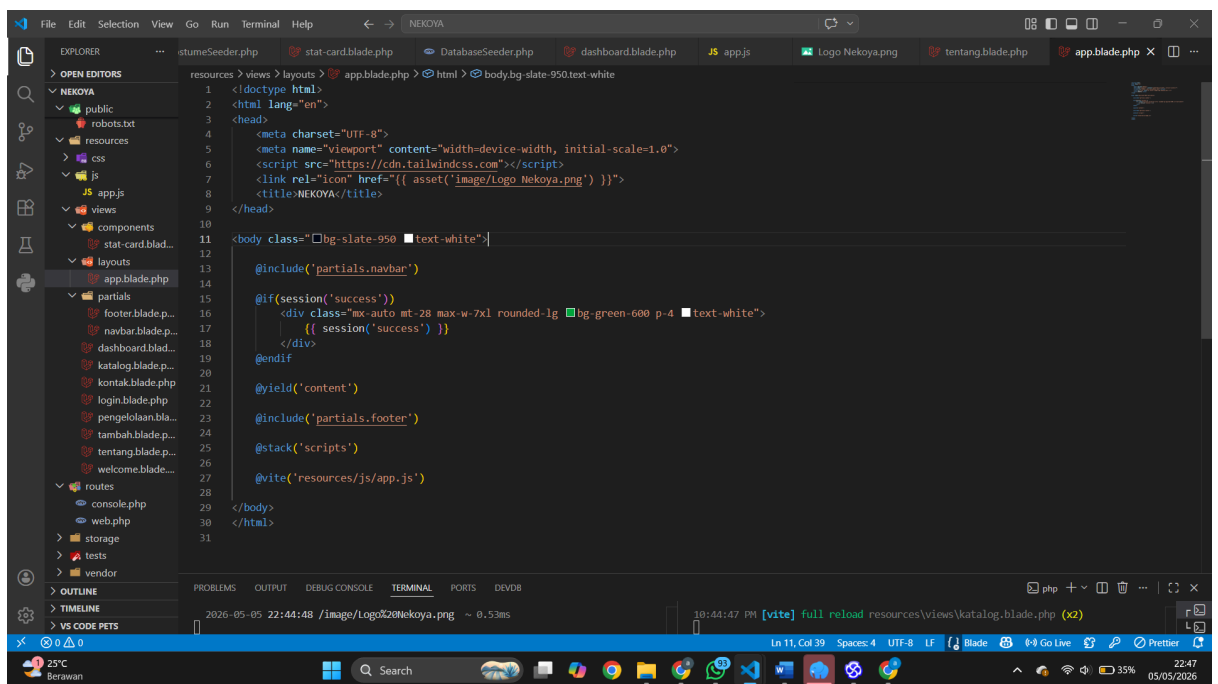

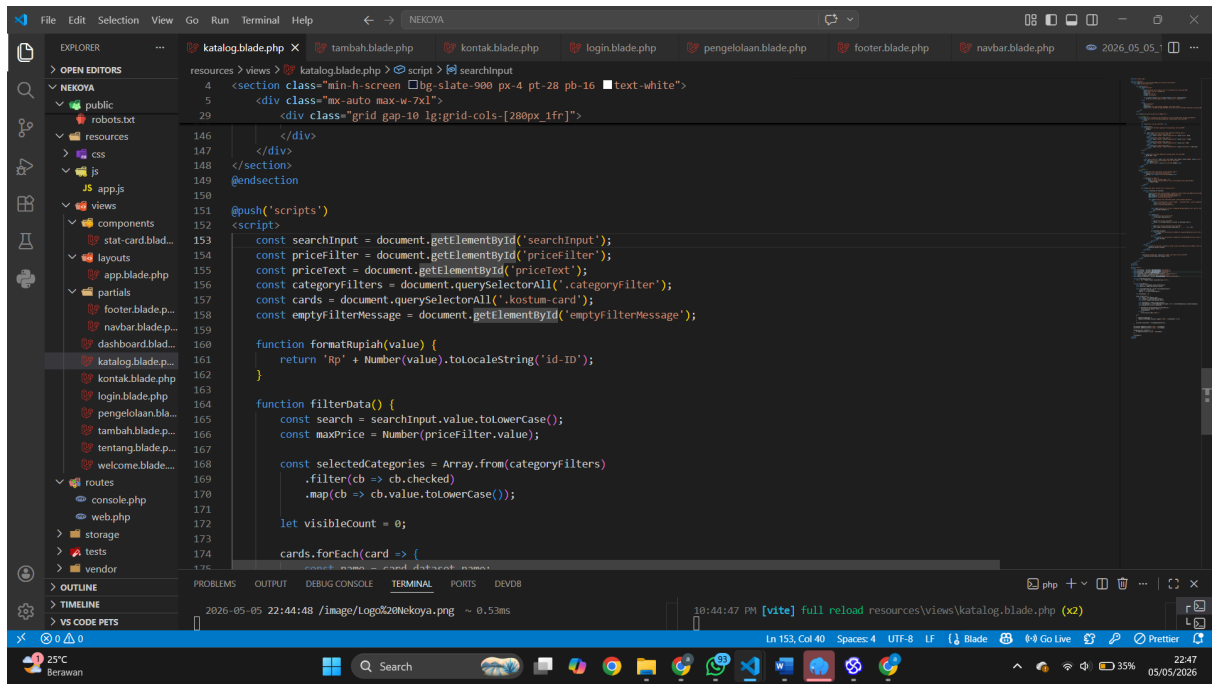

ACTIVITY MANDIRI 4

1. Buat Model dan Migration sekaligus: `php artisan make:model Mahasiswa -m`

The screenshot shows the Visual Studio Code interface with the Explorer, Search, and Run and Debug views. The Explorer view shows the project structure with folders like app, Http, Controllers, Models, Providers, bootstrap, config, database, factories, migrations, seeders, node_modules, public, image, .htaccess, and favicon.ico. The Search view shows the file 'Costume.php' in the 'app/Models' directory. The Run and Debug view shows the terminal output of the command `php artisan make:model Costume -m`. The output indicates that the model 'Costume' was created successfully and the migration '2026_05_155611_create_costumes_table.php' was also created successfully.

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Model;
6
7 class Costume extends Model
8 {
9     //
10 }
11
```

```
2026-05-05 22:44:45 /tentang ~ 512.11ms
2026-05-05 22:44:46 /image/Logo2Nekoya.png ~ 0.60ms
2026-05-05 22:44:46 /image/Logo2Nekoya.png ~ 0.63ms
2026-05-05 22:44:47 /tentang ~ 561.83ms
2026-05-05 22:44:48 /image/Logo2Nekoya.png ~ 0.25ms
2026-05-05 22:44:48 /image/Logo2Nekoya.png ~ 0.53ms
PS D:\laragon\www\NEKOYA> php artisan make:model Costume -m

[INFO] Model [D:\laragon\www\NEKOYA\app\Models\Costume.php] created successfully.

[INFO] Migration [D:\laragon\www\NEKOYA\database\Migrations\2026_05_155611_create_costumes_table.php] created successfully.

PS D:\laragon\www\NEKOYA>
```

2. Edit file migration: tambahkan kolom nim, nama, email, jurusan (enum), ipk (decimal), semester, aktif (boolean), foto (nullable)

The screenshot shows the Visual Studio Code interface with the Explorer, Search, and Run and Debug views. The Explorer view shows the project structure with folders like app, Http, Controllers, Models, Providers, bootstrap, config, database, factories, migrations, seeders, node_modules, public, image, .htaccess, and favicon.ico. The Search view shows the file 'Costume.php' in the 'app/Models' directory. The Run and Debug view shows the terminal output of the command `php artisan make:seeder CostumeSeeder`. The output indicates that the seeder 'CostumeSeeder' was created successfully.

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Model;
6
7 class Costume extends Model
8 {
9     //
10 }
11
```

```
[INFO] Migration [D:\laragon\www\NEKOYA\database\Migrations\2026_05_155611_create_costumes_table.php] created successfully.
php artisan make:seeder CostumeSeederD:\laragon\www\NEKOYA>


[ERROR] Seeder already exists.

PS D:\laragon\www\NEKOYA> php artisan make:seeder

What should the seeder be named?
>
PS D:\laragon\www\NEKOYA> php artisan make:seeder CostumeSeeder


[INFO] Seeder [D:\laragon\www\NEKOYA\database\seeders\CostumeSeeder.php] created successfully.

PS D:\laragon\www\NEKOYA>
```

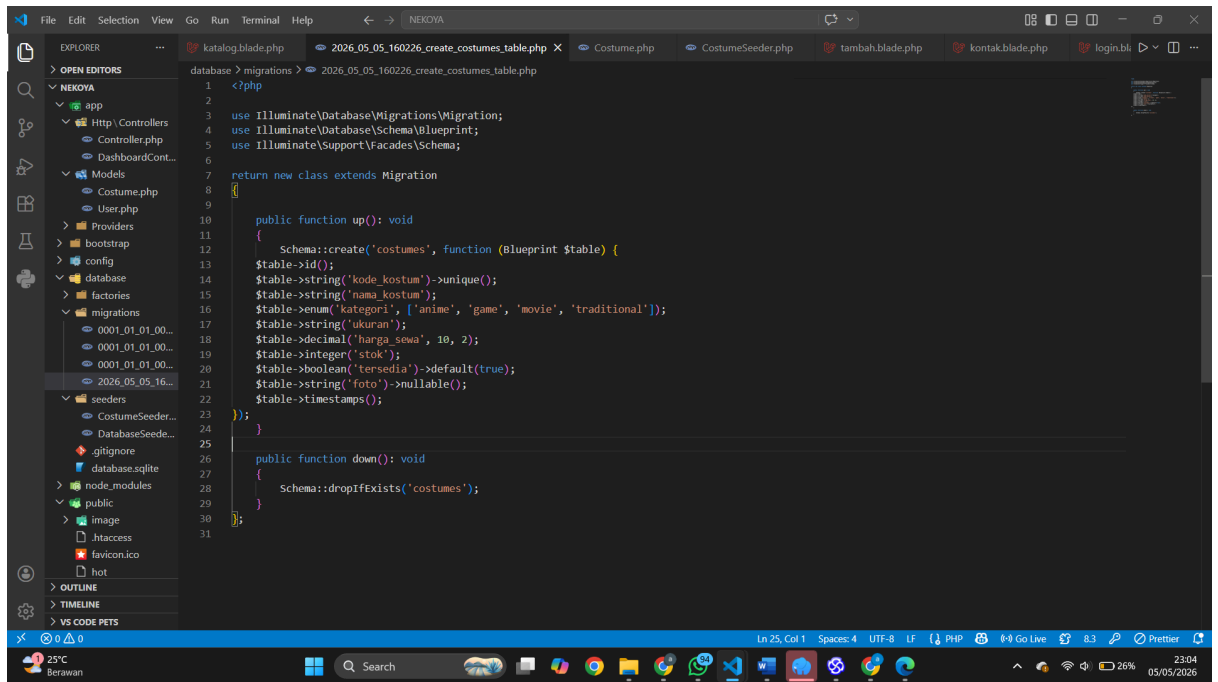

```
1 <?php
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 return new class extends Migration
8 {
9
10     public function up(): void
11     {
12         Schema::create('costumes', function (Blueprint $table) {
13             $table->id();
14             $table->string('kode_kostum')->unique();
15             $table->string('nama_kostum');
16             $table->enum('kategori', ['anime', 'game', 'movie', 'traditional']);
17             $table->string('ukuran');
18             $table->decimal('harga_sewa', 10, 2);
19             $table->integer('stok');
20             $table->boolean('tersedia')->default(true);
21             $table->string('foto')->nullable();
22             $table->timestamps();
23         });
24     }
25
26     public function down(): void
27     {
28         Schema::dropIfExists('costumes');
29     }
30
31 }
```

3. Jalankan migration: php artisan migrate — cek di phpMyAdmin bahwa tabel sudah terbuat

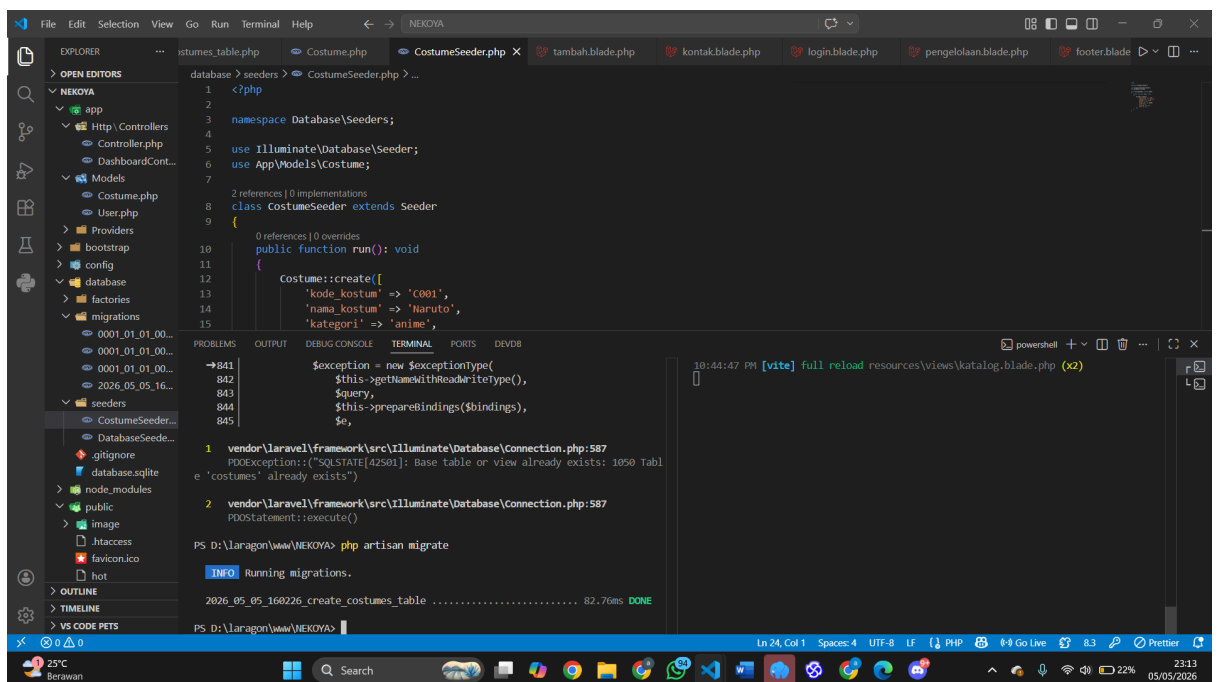

```
1 <?php
2
3 namespace Database\Seeders;
4
5 use Illuminate\Database\Seeder;
6 use App\Models\Costume;
7
8 class CostumSeeder extends Seeder
9 {
10     public function run(): void
11     {
12         Costume::create([
13             'kode_kostum' => 'C001',
14             'nama_kostum' => 'Naruto',
15             'kategori' => 'anime',
16         ]);
17     }
18 }
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS DEVD

→841 \$exception = new \$exceptionType(
842 \$this->getNameWithReadonlyType(),
843 \$query,
844 \$this->prepareBindings(\$bindings),
845 \$e,

1 vendor\laravel\framework\src\Illuminate\Database\Connection.php:587
PDOException: ("SQLSTATE[42501]: Base table or view already exists: 1050 Table 'costumes' already exists")


2 vendor\laravel\framework\src\Illuminate\Database\Connection.php:587
PDOStatement::execute()

PS D:\laragon\www\NEKOYA> php artisan migrate


INFO Running migrations.

2026_05_05_160226_create_costumes_table 82.76ms DONE


PS D:\laragon\www\NEKOYA>

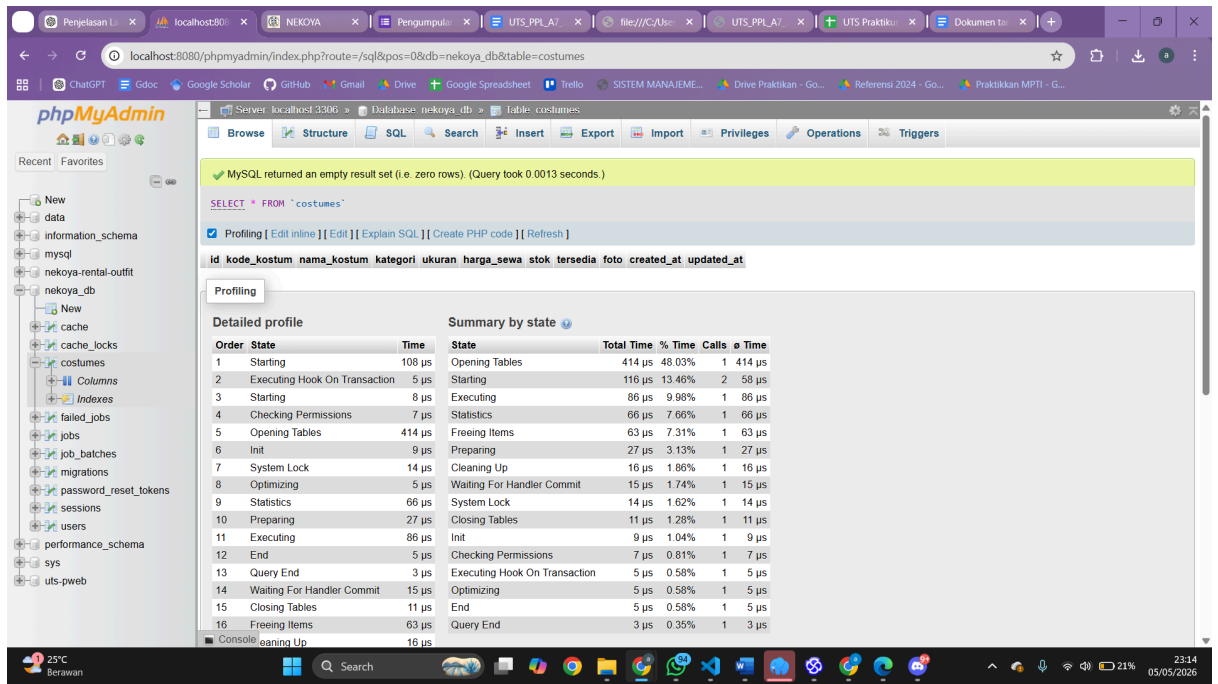

- Edit Model Mahasiswa: isi \$fillable, tambahkan \$casts, dan buat local scope scopeAktif()

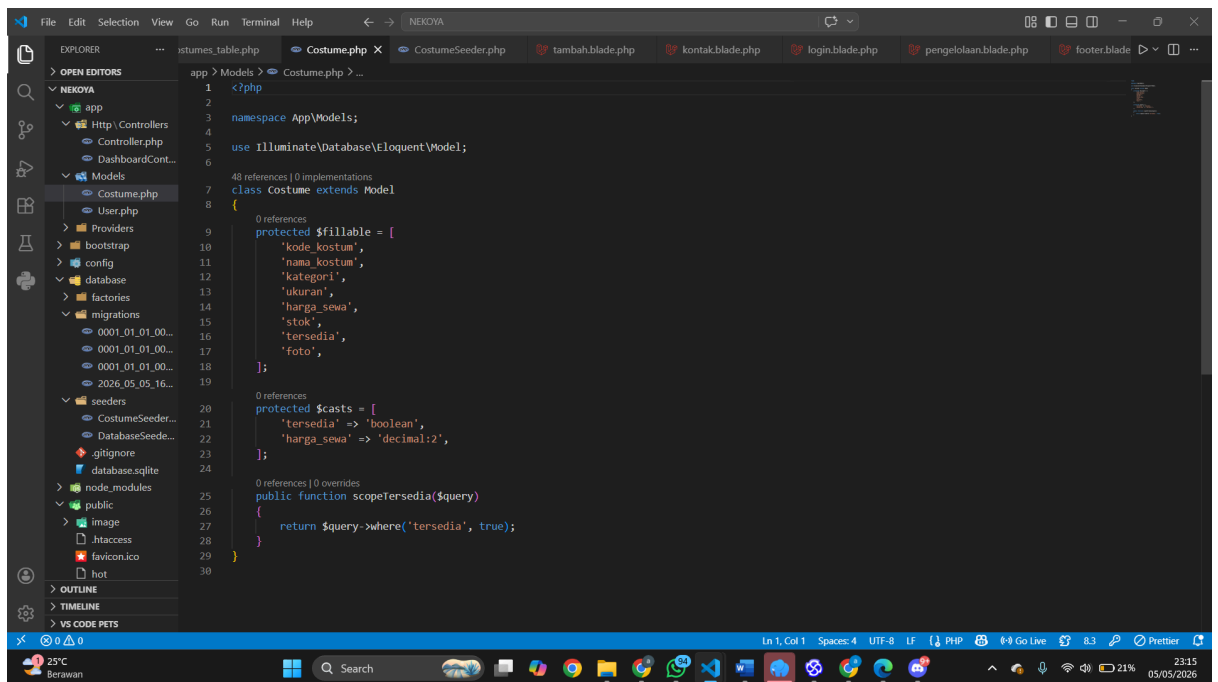


- Buat seeder: php artisan make:seeder MahasiswaSeeder — isi dengan 5-10 data dummy.

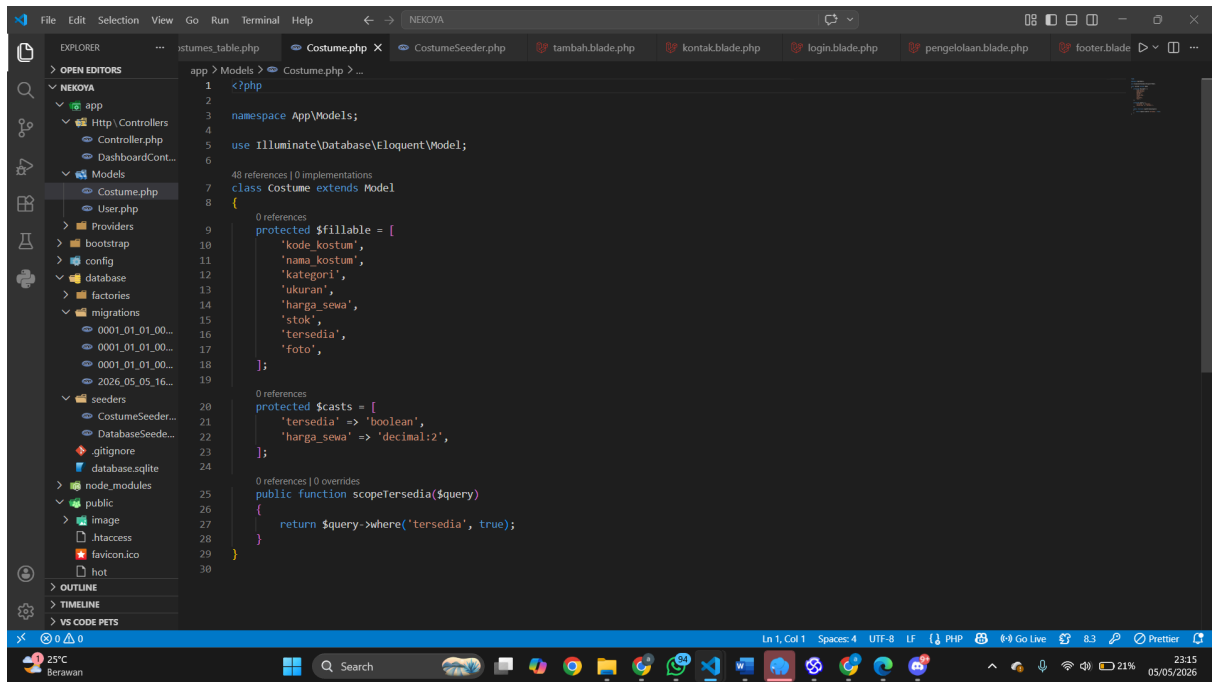

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Model;
6
7 class Costumseeder extends Model
8 {
9     0 references
10     protected $fillable = [
11         'kode_kostum',
12         'nama_kostum',
13         'kategori',
14         'ukuran',
15         'harga_sewa',
16         'stok',
17         'tersedia',
18         'foto',
19     ];
20
21     0 references
22     protected $casts = [
23         'tersedia' => 'boolean',
24         'harga_sewa' => 'decimal:2',
25     ];
26
27     0 references | 0 overrides
28     public function scopeTersedia($query)
29     {
30         return $query->where('tersedia', true);
31     }
32 }
```

6. Daftarkan seeder di DatabaseSeeder.php dan jalankan: php artisan db:seed

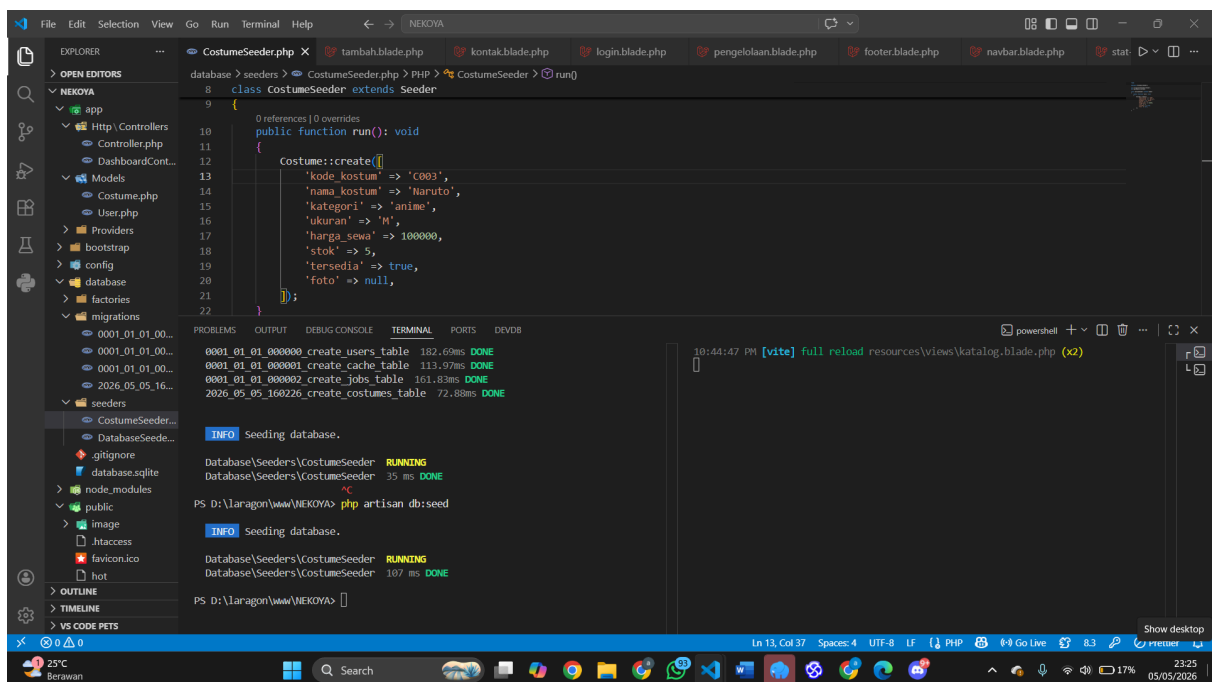

```
1 class Costumseeder extends Seeder
2 {
3     0 references | 0 overrides
4     public function run(): void
5     {
6         Costumseeder::create([
7             'kode_kostum' => 'C003',
8             'nama_kostum' => 'Naruto',
9             'kategori' => 'anime',
10            'ukuran' => 'M',
11            'harga_sewa' => 100000,
12            'stok' => 5,
13            'tersedia' => true,
14            'foto' => null,
15        ]);
16    }
17 }
```

10:44:47 PM [vite] full reload resources/views/katalog.blade.php (x2)

INFO Seeding database.

DatabaseSeeders\Costumseeder RUNNING

DatabaseSeeders\Costumseeder 35 ms DONE

PS D:\laragon\www\NEKOYA> php artisan db:seed

INFO Seeding database.

DatabaseSeeders\Costumseeder RUNNING

DatabaseSeeders\Costumseeder 107 ms DONE

PS D:\laragon\www\NEKOYA>

7. Buka php artisan tinker dan coba query: Mahasiswa::all(), Mahasiswa::where('jurusan','SI')->get(), Mahasiswa::avg('ipk')

```
File Edit Selection View Go Run Terminal Help
Costume.php X CostumaSeeder.php tambah.blade.php kontak.blade.php login.blade.php pengelolaan.blade.php footer.blade.php navbar.blade.php
EXPLORE OPEN EDITORS
NEKOYA
app
  Http\Controllers
    Controller.php
    DashboardCont...
  Models
    Costume.php
    User.php
  Providers
  bootstrap
  config
  database
  factories
  migrations
    0001_01_01_00...
    0001_01_01_00...
    0001_01_01_00...
    2026_05_05_16...
  seeders
    CostumaSeeder...
    DatabaseSeede...
  .gitignore
  database.sqlite
  node_modules
  public
  image
  .htaccess
  favicon.ico
  hot
OUTLINE
TIMELINE
VS CODE PETS
PS D:\laragon\www\NEKOYA> php artisan tink
Psy Shell v0.12.22 (PHP 8.3.30 - cli) by Justin Hileman
New PHP manual is available (latest: 3.0.5). Update with `doc --update-manual`
> use App\Models\Costuma;
> Costuma::all();
= Illuminate\Database\Eloquent\Collection {#8083
  all: [
    App\Models\Costuma {#8081
      id: 1,
      kode_kostum: "C001",
      nama_kostum: "Naruto",
      kategori: "anime",
      ukuran: "M",
      harga_sewa: "100000.00",
      stok: 5,
      tersedia: 1,
      foto: null,
      created_at: "2026-05-05 16:24:06",
      updated_at: "2026-05-05 16:24:06",
    },
    App\Models\Costuma {#8080
      id: 2,
      kode_kostum: "C003",
      nama_kostum: "Naruto",
      kategori: "anime",
      ukuran: "M",
      harga_sewa: "100000.00",
      stok: 5,
      tersedia: 1,
      foto: null,
      created_at: "2026-05-05 16:24:41",
      updated_at: "2026-05-05 16:24:41",
    },
  ],
}
```

```
File Edit Selection View Go Run Terminal Help
Costume.php X CostumaSeeder.php tambah.blade.php kontak.blade.php login.blade.php pengelolaan.blade.php footer.blade.php navbar.blade.php
EXPLORE OPEN EDITORS
NEKOYA
app
  Http\Controllers
    Controller.php
    DashboardCont...
  Models
    Costume.php
    User.php
  Providers
  bootstrap
  config
  database
  factories
  migrations
    0001_01_01_00...
    0001_01_01_00...
    0001_01_01_00...
    2026_05_05_16...
  seeders
    CostumaSeeder...
    DatabaseSeede...
  .gitignore
  database.sqlite
  node_modules
  public
  image
  .htaccess
  favicon.ico
  hot
OUTLINE
TIMELINE
VS CODE PETS
> Costuma::where('tersedia', true)->get();
= Illuminate\Database\Eloquent\Collection {#7395
  all: [
    App\Models\Costuma {#7399
      id: 1,
      kode_kostum: "C001",
      nama_kostum: "Naruto",
      kategori: "anime",
      ukuran: "M",
      harga_sewa: "100000.00",
      stok: 5,
      tersedia: 1,
      foto: null,
      created_at: "2026-05-05 16:24:06",
      updated_at: "2026-05-05 16:24:06",
    },
    App\Models\Costuma {#7398
      id: 2,
      kode_kostum: "C003",
      nama_kostum: "Naruto",
      kategori: "anime",
      ukuran: "M",
      harga_sewa: "100000.00",
      stok: 5,
      tersedia: 1,
      foto: null,
      created_at: "2026-05-05 16:24:41",
      updated_at: "2026-05-05 16:24:41",
    },
  ],
}
```

The screenshot shows the VS Code editor with the file explorer on the left displaying the project structure. The main editor window shows the `Costume.php` file in the `App\Models` directory. The code defines a `Costume` model that extends `Model`. It includes attributes like `id`, `kode_kostum`, `nama_kostum`, `kategori`, `ukuran`, `harga_sewa`, `stok`, `tersedia`, `foto`, `created_at`, and `updated_at`. A `costumeSeeder` method is also present, which creates a single costume record with specific data.

8. Coba buat relasi: buat tabel mata_kuliah dan tabel pivot krs, lalu definisikan relasi belongsToMany di Model

The screenshot shows the VS Code editor with the terminal window open. The terminal output shows the command `php artisan tinker` being executed, followed by the command `use App\Models\Penyewa;`. The output shows the creation of a new model `Penyewa` and the execution of the `costumeSeeder` method, which creates a new costume record. The output also shows the creation of a new model `Costume` and the execution of the `costumeSeeder` method, which creates a new costume record.

The screenshot shows the Visual Studio Code interface with the Explorer sidebar on the left. The Explorer sidebar shows the project structure for 'NEKOYA', including folders like 'app', 'database', 'migrations', 'seeder', and 'views'. The 'app' folder is expanded, showing 'Http\Controllers', 'Controller.php', and 'DashboardCont...'. The 'database' folder is also expanded, showing 'migrations', 'seeder', and 'views'. The 'migrations' folder is expanded, showing '0001_01_01_00...', '0001_01_01_00...', '0001_01_01_00...', '2026_05_05_16...', '2026_05_05_16...', and '2026_05_05_16...'. The 'seeder' folder is expanded, showing 'CostumeSeeder...', 'DatabaseSeede...', and '.gitignore'. The 'views' folder is expanded, showing 'database.sqlite', 'node_modules', 'public', 'image', and 'OUTLINE'. The 'OUTLINE' folder is expanded, showing 'TIMELINE' and 'VS CODE PETS'. The 'VS CODE PETS' folder is expanded, showing '001' and '05/06/2026'. The main editor area shows a PHP script in the terminal and a Blade template in the editor. The PHP script is as follows:

```
> $penyewa->costumes()->attach($costume->id, [
    'tanggal_sewa' => '2026-05-06',
    'tanggal_kembali' => '2026-05-08',
    'jumlah' => 1,
    'total_harga' => 200000,
]);

= null

> $penyewa->costumes;

= Illuminate\Database\Eloquent\Collection {#8648
    all: [
        App\Models\Costume {#8578
            id: 1,
            kode_kostum: "C003",
            nama_kostum: "Naruto",
            kategori: "anime",
            ukuran: "M",
            harga_sewa: "100000.00",
            stok: 5,
            tersedia: 1,
            foto: null,
            created_at: "2026-05-05 16:58:25",
            updated_at: "2026-05-05 16:58:25",
            pivot: Illuminate\Database\Eloquent\Relations\Pivot {#8581
                penyewa_id: 1,
                costume_id: 1,
                tanggal_sewa: "2026-05-06",
                tanggal_kembali: "2026-05-08",
                jumlah: 1,
                total_harga: "200000.00",
                created_at: "2026-05-05 17:00:13",
                updated_at: "2026-05-05 17:00:13",
            },
        },
    ],
}

> $penyewa->costumes->first()->pivot;
```

The Blade template in the editor is as follows:

```
<?php
<div>
</div>
```

The screenshot shows the Visual Studio Code interface with the Explorer sidebar on the left. The Explorer sidebar shows the project structure for 'NEKOYA', including folders like 'app', 'database', 'migrations', 'seeder', and 'views'. The 'app' folder is expanded, showing 'Http\Controllers', 'Controller.php', and 'DashboardCont...'. The 'database' folder is also expanded, showing 'migrations', 'seeder', and 'views'. The 'migrations' folder is expanded, showing '0001_01_01_00...', '0001_01_01_00...', '0001_01_01_00...', '2026_05_05_16...', '2026_05_05_16...', and '2026_05_05_16...'. The 'seeder' folder is expanded, showing 'CostumeSeeder...', 'DatabaseSeede...', and '.gitignore'. The 'views' folder is expanded, showing 'database.sqlite', 'node_modules', 'public', 'image', and 'OUTLINE'. The 'OUTLINE' folder is expanded, showing 'TIMELINE' and 'VS CODE PETS'. The 'VS CODE PETS' folder is expanded, showing '001' and '05/06/2026'. The main editor area shows a PHP script in the terminal and a Blade template in the editor. The PHP script is as follows:

```
tersedia: 1,
foto: null,
created_at: "2026-05-05 16:58:25",
updated_at: "2026-05-05 16:58:25",
pivot: Illuminate\Database\Eloquent\Relations\Pivot {#8581
    penyewa_id: 1,
    costume_id: 1,
    tanggal_sewa: "2026-05-06",
    tanggal_kembali: "2026-05-08",
    jumlah: 1,
    total_harga: "200000.00",
    created_at: "2026-05-05 17:00:13",
    updated_at: "2026-05-05 17:00:13",
},
},
}

> $penyewa->costumes->first()->pivot;

= Illuminate\Database\Eloquent\Relations\Pivot {#8581
    penyewa_id: 1,
    costume_id: 1,
    tanggal_sewa: "2026-05-06",
    tanggal_kembali: "2026-05-08",
    jumlah: 1,
    total_harga: "200000.00",
    created_at: "2026-05-05 17:00:13",
    updated_at: "2026-05-05 17:00:13",
}

>
```

The Blade template in the editor is as follows:

```
<?php
<div>
</div>
```