



NEOXAM DATAHUB - WHAT'S NEW 7.2.0.0

WHAT'S NEW

DISCLAIMER – NEOXAM SOFTWARE DOCUMENTATION

NeoXam Portfolio Management SAS, a 'société par actions simplifiée' with share capital €15,575,931, registered with the Paris Company's register under No. 349 467 449 ('NeoXam'), is the owner of this Software Documentation. NeoXam holds all the rights required for the publication, together with, but not limited to, all logos, trademarks, screenshots, any data used herein. The Client is granted a right to use this Software Documentation only as agreed in writing with NeoXam. This Software Documentation is confidential and the Client shall protect the confidentiality and NeoXam's intellectual property rights. Unless otherwise agreed in writing by NeoXam, this Software Documentation is provided 'as is' without warranty of any kind, either express or implied, including, but not limited to, that the Software Documentation will not include technical or other mistakes, inaccuracies or typographical errors. The Software Documentation may be changed, and NeoXam makes no commitment to update such materials, unless otherwise agreed in writing. Screenshots and examples provided in this Software Documentation are not contractual and may be changed, according to the Client's needs, operational and technical constraints. NeoXam assumes no responsibility for errors or omissions in the Software Documentation. In no event shall NeoXam be liable for any special, punitive, incidental, indirect or consequential damages of any kind, or any damages whatsoever, including, without limitation, those resulting from loss of use, data or profits, whether or not NeoXam has been advised of the possibility of such damages, and on any theory of liability, arising out of or in connection with the use of this Software Documentation.

©2025 NeoXam

TABLE OF CONTENTS

New Features	5
MxClassificationItem	6
MxClassificationItem Class	6
New Classification Lists	6
Mx Security and MxAgent Lists Impacts	6
New Business Rule	7
GICS Use Case	7
New Screens	7
GICS Classifications	8
DataHub Web Application	10
Homepage Enhancements	10
How to Configure Widget Navigation	10
Configuring Grids in Configuration Mode	10
Configuring Breaks	11
Configuring Sort	11
Configuring Views	12
Manual Override	14
Manual Override Set Up	14
Histo Table	14
Enter a Manual Override	14
Workflow and Apply Manual Override	16
Manual Override and Multi-Source Fields	16
Manual Override Strategies	16
Audit Trail for Multisource Overridden Fields	18
Cancelling Override	18
Federated Tenant	19
Introduction	19
Creating the Client Tenants and Setting Up the Environment	19
Create the Client Tenant Communication Channel	19
Create the Client Tenant	20

Configure the Environment File	20
Activate the Federated Tenant Feature	21
New Rest API Scope	21
API Invocation and Responses	22
Aggregated DataSet	22
Scope Views (Central)	23
Displaying Central or Client Tenants Environment	24
Service Cards	25
Configure the Data Dictionary	26
Create and Assign Components from the Central Environment	26
Business Services	28
Client Services	32
Activate/Deactivate of a Component	33
Override of a Component	35
Client Service Upgrade on the Client Tenant	39
Data Quality Level	41
Introduction	41
Time Series	41
Time Series Field Group Configuration	42
Data Quality Level Status Computation	42
Static Data Management of Multi-Listed Instruments	47
DQL Labels Enhancements	47
system.dql.label.MxClass	47
system.dql.label.MxClass.TABLE	49
DQL Publication	51
New system.dql.publication.rule_code Parameter	51

New Features

We are pleased to announce the availability of NeoXam DataHub **Version 7.2.0.0**.

This version introduces new features around:

- The Data model with the addition of the new **MxClassificationItem** class , that enables you to manage changes within the classification hierarchy and allows the bitemporalization of classification structure changes.
- **DataHub Web Application**, with:
 - **Grid Configuration** on breaks and sorts, pivot, transpose, ...
 - **Homepage Enhancements**
 - **Manual Override**, now being available within NeoXam DataHub Web Application.
- The **Federated Tenant** offer, that enables managing Client Tenants environments from one Central Tenant's environment.
The Central Tenant has the ability to:
 - **View** and **monitor** client tenants' data from an aggregated Dashboard
 - **Activate, deactivate or override** client tenants' components (parameters, fields, feed process, scheduled tasks ...).
- **Data Quality Level** now being available for **Time Series** data and improved on **Static Data** management. DQL now allows you to:
 - Configure and **Compute DQL for Time Series** data.
 - Manage **Static Data DQL for multi-listed instruments**.
 - Add more information in the **DQL labels**.
 - **Publish or export DQL results** to third party systems.

MxClassificationItem

On NeoXam DataHub, some lists are technical, meaning they are static and updated unfrequently, contrary to functional lists, such as hierarchical classifications, which evolve over the time.

Changes within the classification hierarchy can occur at various levels (adding or removing items or updating labels) and standard lists cannot keep track of changes.

To handle dynamic use cases for all clients and classifications that evolve over time, the new MxClassificationItem class has been added. It facilitates flexible classification management while enabling their bitemporalization.

MxClassificationItem Class

The new class **MxClassificationItem** models the structure of a classification and supports multiple hierarchical levels, enabling the management of parent-child relationships within the classification.

The main table CLASSIFICATION_ITEM is historical MxClassificationItem-DataModel.

PATH: HOMEPAGE > DATA DICTIONARY > EDIT DATA DICTIONARY MxClassificationItem

Edit Data Dictionary MxClassificationItem

10 Hidden columns 1 Groups 3 Sorts

Table	Key	Name	Short Name (S.N.)	Type	Size	Reference	List	Display	Comment (S.N.)
CLASSIFICATION_ITEM		ACTIVE	Active?	Integer / Reference		SMARTLIST_ITEM	Yes/No		
CLASSIFICATION_ITEM		END_DATE	End Date	Date					
CLASSIFICATION_ITEM		FIELD1	Field 1	String	255				
CLASSIFICATION_ITEM		FIELD2	Field 2	String	255				
CLASSIFICATION_ITEM		FIELD3	Field 3	String	255				
CLASSIFICATION_ITEM		FIELD4	Field 4	String	255				
CLASSIFICATION_ITEM		ITEM_LEVEL	Level	Integer / Reference		SMARTLIST_ITEM	Classification Level		
CLASSIFICATION_ITEM	Key Level 2	PARENT	Parent	Integer / Reference		CLASSIFICATION_ITEM			MxClientCustom MultiReferenceCustomCLASSIFICATION_ITEM_CUSTOMISE
CLASSIFICATION_ITEM	Key Level 2	START_DATE	Start Date	Date					
CLASSIFICATION_ITEM	Key Level 2	CODE	Code	String	50				
CLASSIFICATION_ITEM	Key Level 3	CLASSIFICATION	Classification	Integer / Reference		SMARTLIST_ITEM	Classification Type		
CLASSIFICATION_ITEM_HISTO		HISTO_DISPOSITION	Version	Integer / Reference					
CLASSIFICATION_ITEM_HISTO		HISTO_NOTIFICATION	De Notif	Date					
CLASSIFICATION_ITEM_HISTO		HISTO_CLASSIFICATION	Version	Integer / Reference					
CLASSIFICATION_ITEM_HISTO		HISTO_STATUS	Status	Integer / Reference					
CLASSIFICATION_ITEM_HISTO		HISTO_TEXT	Value Long	Text					
CLASSIFICATION_ITEM_HISTO		HISTO_LINKER	User	Integer / Reference		SMARTLIST_ITEM			
CLASSIFICATION_ITEM_HISTO		HISTO_VALID_USER	User Last	Integer / Reference		SMARTLIST_ITEM			
CLASSIFICATION_ITEM_HISTO		HISTO_VALIDATION	A-type	Integer / Reference		SMARTLIST_ITEM	Validation Validation		
CLASSIFICATION_ITEM_HISTO		HISTO_VALIDATION_ID	Validation	Integer / Reference					
CLASSIFICATION_ITEM_HISTO		HISTO_VALUES	Value Short	String	500				
CLASSIFICATION_ITEM_HISTO		HISTO_WORKFLOW	Workflow	String					
CLASSIFICATION_ITEM_HISTO	Key Level 4	HISTO_FIELD	Updated Field	String	40				
CLASSIFICATION_ITEM_HISTO	Key Level 5	HISTO_REF_ID	Revised/Updated	Integer / Reference					
CLASSIFICATION_ITEM_HISTO	Key Level 2	HISTO_DATE	De Date	Date	40				
CLASSIFICATION_ITEM_HISTO	Key Level 3	HISTO_TABLE	Updated Table	String					
CLASSIFICATION_ITEM_LINK		CLASSIFICATION_LINK_ITEM	Classification Link Item	Integer / Reference		CLASSIFICATION_ITEM			
CLASSIFICATION_ITEM_LINK	Key Level 1	CLASSIFICATION_LINK_TYPE	Classification Link Type	Integer / Reference		SMARTLIST_ITEM	Classification Item Link Type		MxClientCustom MultiReferenceCustomCLASSIFICATION_LINK_TYPE
CLASSIFICATION_ITEM_NAME		NAME	Name	String	500				
CLASSIFICATION_ITEM_NAME	Key Level 3	LANGUAGE	Language	Integer / Reference		SMARTLIST_ITEM	Language		
CLASSIFICATION_ITEM_STATUS		STATUS	Status	Integer / Reference		SMARTLIST_ITEM			
CLASSIFICATION_ITEM_STATUS	Key Level 3	STATUS_VALUE	Status Value	Integer / Reference		SMARTLIST_ITEM	Classification Type Status		MxClientCustom MultiListCustomMxClassificationItemSTATUS_TYPE
CLASSIFICATION_ITEM_STATUS	Key Level 3	STATUS_TYPE	Status Type	Integer / Reference		SMARTLIST_ITEM			Display the value of this concerned status (e.g Active, Cancelled, Inactive...) Classification Item Status Type

New Classification Lists

As shown in the data model, various fields of the new class refer to new lists:

- Classification Type
- Classification Level
- Classification Item Link Type
- Classification Type Status

Mx Security and MxAgent Lists Impacts

Also the lists used in MxSecurity (SECURITY_CLASS_TYPE) and MxAgent (ENTITY_CLASS_TYPE) have been improved, whereas before, all types of classifications referred to a sublist, it is now possible to choose the classification reference: either a list or an object in MxClassificationItem.

PATH: HOMEPAGE > LISTS > LIST: CLASSIFICATION TYPES SECURITY_CLASS_TYPE

List: Classification Types SECURITY_CLASS_TYPE

Actions

Code: SECURITY_CLASS_TYPE

Feed

Values

Hide columns Group 3 Sorts

Sort	Label - English	Label - French	Label - Chinese	Internal Code	Active	Reference	Sublist
	Financial Zone	Zone financière		FINZONE	Yes	SMARTLIST_ITEM	FINANCE_ZONE
	Fund Legal Nature	Nature réglementaire du fond		FLN	Yes	SMARTLIST_ITEM	FUND_LEGAL_NATURE
	FS Fund Type	FS Fund Type		FS Fund Type	Yes	SMARTLIST_ITEM	FACT_FUND_TYPE_CD
	FS Industry	FS Industry		FS Industry	Yes	SMARTLIST_ITEM	FACT_PEOPLE_JOB_INDUSTRY_CD
	FS Region	FS Region		FS Region	Yes	SMARTLIST_ITEM	FACT_PEOPLE_JOB_REGION_CD
	FS Sector	FS Sector		FS Sector	Yes	SMARTLIST_ITEM	SECTOR_IND_FACTSET
	FactSet Issue Type	Type valeur Factset		FS_ISSUE_TYPE	Yes	SMARTLIST_ITEM	
	FTSE Sector	secteur FTSE		FTSE	Yes	SMARTLIST_ITEM	
	BBG - Market Capital Fund Focus	BBG Market Cap Fond		FUND_MKT_CAP_FOCUS	Yes	SMARTLIST_ITEM	BBG_FUND_MKT_CAP_FOCUS
	BBG - Rating Class	Classe Rating BBG		FUND_RTG_CLASS_FOCUS	Yes	SMARTLIST_ITEM	BBG_RTG_CLASS
	GICS Sector	secteur GICS		GICS	Yes	CLASSIFICATION_ITEM	
	GICS Industry	Secteur GICS		GICS_INDUSTRY	Yes	CLASSIFICATION_ITEM	
	GICS Industry Group	Groupe secteur GICS		GICS_INDUSTRY_GROUP	Yes	CLASSIFICATION_ITEM	
	GICS Sector	Secteur GICS		GICS_SECTOR	Yes	CLASSIFICATION_ITEM	
	GICS Sub-Industry	Sous Secteur GICS		GICS_SUB_INDUSTRY	Yes	CLASSIFICATION_ITEM	
	GP3 Asset Class	GP3 classe d'actif		GP3_ASSET_CLASS	Yes	SMARTLIST_ITEM	GP3_ASSET_CLASS
	GP3 Criteria 1	GP3 critère 1		GP3_CRITERIA_1	Yes	SMARTLIST_ITEM	GP3_CRITERIA_1
	GP3 Criteria 2	GP3 critère 2		GP3_CRITERIA_2	Yes	SMARTLIST_ITEM	GP3_CRITERIA_2
	GP3 Fiscal Code	GP3 code fiscal		GP3_FISCAL_CODE	Yes	SMARTLIST_ITEM	GP3_FISCAL_CODE
	GP3 Security type	GP3 type d'instruments		GP3_SEC_TYPE	Yes	SMARTLIST_ITEM	GP3_SECURITY_TYPE
	Group	Group		Group	Yes	SMARTLIST_ITEM	BENCHMARK_GROUP

The new model has impacts on the following functional objects (Security & Agent):

- **SECURITY_CLASSIFICATION**
SECURITY_CLASS_GROUP new custom display based on MultiReferenceCustomUI instead of MultiListCustomUI
lib.clientui.custom.MultiReferenceCustomUI;SECURITY_CLASS_TYPE
- **AGENT_CLASSIFICATION**
AGENT_CLASS_GROUP: the old
lib.clientui.custom.MultiListCustomUI;MxAgent;AGENT_CLASS_TYPE has been replaced by **lib.clientui.custom.MultiReferenceCustomUI;AGENT_CLASS_TYPE**

New Business Rule

The new **CLASSIFICATION_ITEM_CUSTOMIZER** rule will adjust the drop-down list of the Parent to ensure end user picks up a classification item from the same classification.

GICS Use Case

New Screens

New Query screen Classification Item - GICS Code (**GICS_CLASSIFICATION_CODE_Q**) has been added, which allows displaying classifications based on the classification type GICS group, as it is the only type provided:

PATH: [HOMEPAGE](#) > [CLASSIFICATION ITEM - GICS CODE](#)

Classification Item - GICS Code

Query ▾

Actions ▾

2 Hidden columns

Group

3 Sorts

Code	GICS Classification Label	Start Dt	End Dt	Level	Parent Code	Parent Label
10	Energy	01/01/1999	12/31/2999	Level 1		
15	Materials	01/01/1999	12/31/2999	Level 1		
20	Industrials test1	01/01/1999	12/31/2999	Level 1		
25	Consumer Discretionary	01/01/1999	12/31/2999	Level 1		
30	Consumer Staples	01/01/1999	12/31/2999	Level 1		
35	Health Care	01/01/1999	12/31/2999	Level 1		
40	Financials	01/01/1999	12/31/2999	Level 1		
45	Information Technology	01/01/1999	12/31/2999	Level 1		
50	Communication Services	12/01/2018	12/31/2999	Level 1		
55	Telecommunication Services-deprecated on 01/12/2018	01/01/1999	12/31/2018	Level 1		
60	Utilities	01/01/1999	12/31/2999	Level 1		
65	Real Estate	09/01/2016	12/31/2999	Level 1		
70	Multi Industry Fund	04/01/2023	12/31/2999	Level 1		
75	Blockchain	01/01/2023	12/31/2999	Level 1		
80	Energy	01/01/1999	12/31/2999	Level 2	10	Energy
85	Materials	01/01/1999	12/31/2999	Level 2	15	Materials
90	Capital Goods	01/01/1999	12/31/2999	Level 2	20	Industrials test1
95	Commercial & Professional Services	08/30/2008	12/31/2999	Level 2	20	Industrials test1
100	Commercial Services & Supplies-deprecated on 30/06/2008	08/30/2008	12/31/2999	Level 2	20	Industrials test1
105	Transportation	01/01/1999	12/31/2999	Level 2	20	Industrials test1
110	Automobiles & Components	01/01/1999	12/31/2999	Level 2	25	Consumer Discretionary
115	Consumer Durables & Apparel	01/01/1999	12/31/2999	Level 2	25	Consumer Discretionary
120	Consumer Services	04/30/2005	12/31/2999	Level 2	25	Consumer Discretionary
125	Hotels, Restaurants & Leisure-deprecated on 30/04/2005	01/01/1999	04/30/2005	Level 2	25	Consumer Discretionary
130	Media-deprecated on 01/12/2018	01/01/1999	12/31/2018	Level 2	25	Consumer Discretionary
135	Consumer Discretionary Distribution & Retail	06/01/2023	12/31/2999	Level 2	25	Consumer Discretionary
140	Retailing-deprecated on 01/06/2023	01/01/1999	06/01/2023	Level 2	25	Consumer Discretionary
145	Consumer Staples Distribution & Retail	06/01/2023	12/31/2999	Level 2	30	Consumer Staples
150	Food & Staples Retailing-deprecated on 01/06/2023	01/01/2023	06/01/2023	Level 2	30	Consumer Staples
155	Food & Drug Retailing-deprecated on 01/06/2023	01/01/1999	06/01/2023	Level 2	30	Consumer Staples
160	Food, Beverage & Tobacco	01/01/1999	12/31/2999	Level 2	30	Consumer Staples
165	Household & Personal Products	01/01/1999	12/31/2999	Level 2	30	Consumer Staples
170	Health Care Equipment & Services	01/01/1999	12/31/2999	Level 2	35	Health Care
175	Pharmaceuticals, Biotechnology & Life Sciences	04/29/2006	12/31/2999	Level 2	35	Health Care
180	Pharmaceuticals & Biotechnology-deprecated on 29/04/2006	01/01/1999	04/29/2006	Level 2	35	Health Care
185	Banks	01/01/1999	12/31/2999	Level 2	40	Financials
190	Financial Services	06/01/2023	12/31/2999	Level 2	40	Financials
195	Disaffiliated Financials-deprecated on 01/06/2023	01/01/1999	06/01/2023	Level 2	40	Financials
200	Insurance	01/01/1999	12/31/2999	Level 2	40	Financials
205	Real Estate-deprecated on 01/09/2016	01/01/1999	09/01/2016	Level 2	40	Financials
210	Software & Services	01/01/1999	12/31/2999	Level 2	45	Information Technology
215	Technology Hardware & Equipment	01/01/1999	12/31/2999	Level 2	45	Information Technology
220	Semiconductors & Semiconductor Equipment	05/01/2003	12/31/2999	Level 2	45	Information Technology
225	Telecommunication Services	12/01/2018	12/31/2999	Level 2	50	Telecommunication Services-deprecated on 01/12/2018
230	Telecommunication Services-deprecated on 01/12/2018	01/01/1999	12/31/2018	Level 2	50	Telecommunication Services-deprecated on 01/12/2018
235	Media & Entertainment	12/01/2018	12/31/2999	Level 2	50	Telecommunication Services-deprecated on 01/12/2018
240	Media & Entertainment-deprecated on 01/12/2018	01/01/1999	12/31/2018	Level 2	50	Telecommunication Services-deprecated on 01/12/2018
245	Utilities	01/01/1999	12/31/2999	Level 2	55	Utilities
250	Equity Real Estate Investment Trusts (REITs)	06/01/2023	12/31/2999	Level 2	60	Real Estate
255	Real Estate-deprecated on 01/06/2023	01/01/2016	06/01/2023	Level 2	60	Real Estate
260	Real Estate Management & Development	03/18/2023	12/31/2999	Level 2	60	Real Estate
265	Fund	04/01/2023	12/31/2999	Level 2	80	Multi Industry Fund
270	Cryptocurrencies	04/01/2023	12/31/2999	Level 2	90	Blockchain
275	Stablecoins	04/01/2023	12/31/2999	Level 2	90	Blockchain
280	Oil, Gas & Consumable Fuels	01/01/1999	12/31/2999	Level 3	1010	Energy
1010	Oil, Gas & Consumable Fuels	04/30/2005	12/31/2999	Level 3	1010	Energy
101020	Oil & Gas-deprecated on 30/04/2005	01/01/1999	04/30/2005	Level 3	1010	Energy
1510	Chemicals	01/01/1999	12/31/2999	Level 3	1510	Materials

The previous screen is linked to the Detail screen Edit Classification Item (CLASSIFICATION_ITEM_D), which allows editing the classifications:

PATH: [HOMEPAGE](#) > [CLASSIFICATION ITEM - GICS CODE](#) > [EDIT CLASSIFICATION ITEM](#)

Edit Classification Item

Q Actions

Definition

Classification

GICS Group

Name

Energy

Code

10

Start Dt

01/01/1999

End Dt

12/31/2999

Level

Level 1

Hierarchy

Parent Code

Parent

System

ID

11

Version

Last Upd By

Tabri, Marviam

Last Upd Dt

02/20/2025

Last Upd Tim

12:16:42

GICS Classifications
MxClassificationItem has been applied to the GICS classifications.

Security and Agent now reference the new Classification Item object instead of the previous elements from the SECTOR_GICS list.

The classification BANK in SECTOR_GICS list has the internal code 401010:

PATH: HOMEPAGE > LISTS > LIST: SECTORS - GICS SECTOR_GICS

List: Sectors - GICS SECTOR_GICS

Q Actions

SECTOR_GICS

Values

Hide columns Group 3 Sorts

Sort	Label - English	Label - French	Label - Chinese	Internal Code	Active	Free 1	Free 2	Free 3
	Pharmaceuticals	Pharmaceuticaux	Pharmaceuticals	352020	Yes			
	Life Sciences Tools & Services	Life Sciences Tools & Services	Life Sciences Tools & Services	352030	Yes			
	Banks	Banques	Banks	401010	Yes			
	Thriffs & Mortgage Finance	Thriffs & Mortgage Finance	Thriffs & Mortgage Finance	401020	Yes			
	Diversified Financial Services	Diversified Financial Services	Diversified Financial Services	402010	Yes			
	Consumer Finance	Consumer Finance	Consumer Finance	402020	Yes			
	Capital Markets	Capital Markets	Capital Markets	402030	Yes			
	Mortgage Real Estate Investment Trusts (REITs)	Mortgage Real Estate Investment Trusts (REITs)	Mortgage Real Estate Investment Trusts (REITs)	402040	Yes			
	Insurance	Insurance	Insurance	403010	Yes			
	Real Estate -- Discontinued effective 04/28/2006	Real Estate -- Discontinued effective 04/28/2006	Real Estate -- Discontinued effective 04/28/2006	404010	Yes			
	Real Estate Investment Trusts (REITs)	Real Estate Investment Trusts (REITs)	Real Estate Investment Trusts (REITs)	404020	Yes			
	Real Estate Management & Development	Real Estate Management & Development	Real Estate Management & Development	404030	Yes			
	Internet Software & Services	Internet Software & Services	Internet Software & Services	451010	Yes			
	IT Services	IT Services	IT Services	451020	Yes			
	Software	Software	Software	451030	Yes			
	Communications Equipment	Communications Equipment	Communications Equipment	452010	Yes			
	Technology Hardware, Storage & Peripherals	Technology Hardware, Storage & Peripherals	Technology Hardware, Storage & Peripherals	452020	Yes			
	Electronic Equipment, Instruments & Components	Electronic Equipment, Instruments & Components	Electronic Equipment, Instruments & Components	452030	Yes			
	Office Electronics	Office Electronics	Office Electronics	452040	Yes			
	Semiconductor Equipment & Products -- Discontinued effective 04/30/2003.	Semiconductor Equipment & Products -- Discontinued effective 04/30/2003.	Semiconductor Equipment & Products -- Discontinued effective 04/30/2003.	452050	Yes			
	Semiconductors & Semiconductor Equipment	Semiconductors & Semiconductor Equipment	Semiconductors & Semiconductor Equipment	453010	Yes			

The classification **Banks** is used in the security **Malayan Bank Sp ADR Shs Sponsored American Depositary Receipt Repr 2 Shs**:

PATH: HOMEPAGE > SECURITY SCREENING > EQUITY DETAIL: MALAYAN BANKING RG REGISTERED SHS

Equity detail: Malayan Banking Rg Registered Shs

Golden copy

Q Actions

Codes

Code type	Code	Market code
-(3)		
Internal	INTERNAL_134555	
Sustainalytics ID	1008757506	
WPK (Germany)	552183	
Barcelona Stock Exc(B1 - Equity/Index)(3)		
BBG Global ID	BBG000JVC01V0	Barcelona Stock Exc(B1 - Equity/Index)
BBG Unique ID	EQ0000000062270819	Barcelona Stock Exc(B1 - Equity/Index)
Bloomberg Ticker	MAYMYR	Barcelona Stock Exc(B1 - Equity/Index)
BOERSE BERLIN(3)		
BBG Global ID	BBG0000BN1363	BOERSE BERLIN
BBG Unique ID	EQ0012544200001002	BOERSE BERLIN
Bloomberg Ticker	MYB	BOERSE BERLIN
BOERSE DUESSELDORF(3)		
BBG Global ID	BBG0000BN1157	BOERSE DUESSELDORF
BBG Unique ID	EQ0012544200001002	BOERSE DUESSELDORF
Bloomberg Ticker	MYB	BOERSE DUESSELDORF
BOERSE MUENCHEN(3)		

Security classifications

Class Prov	Classification	Classif Start Date
Develop Instrument Type(2)	EQUITIES - ORDINARY	01/01/2024
Golden copy	Equities - Ordinary	01/01/2024
GICS Industry(2)	Banks	01/01/2024
Golden copy	Banks	01/01/2024
GICS Industry Group(2)	Banks	01/01/2024
Golden copy	Banks	01/01/2024
GICS Sector(2)	Diversified Banks	07/22/2024
Golden copy	Diversified Banks	07/22/2024
GICS Sub-Industry(2)	Diversified Banks	01/01/2024
Golden copy	Diversified Banks	01/01/2024
Golden copy	Banks	01/01/2024

Now, the **Banks** classification in the security refers to the classification item object that has the same code as the **Banks** classification in the **SECTOR_GICS** list:

PATH: HOMEPAGE > CLASSIFICATION ITEM - GICS CODE

Classification Item - GICS Code

Query ^

Start Dt: <= MM/DD/YYYY End Dt: > MM/DD/YYYY Code: = Level: = Reset

CLASSIFICATION_IT

Actions

2 Hidden columns Group 3 Sorts

Code	GICS Classification Label	Start Dt	End Dt	Level	Parent Code	Parent Label
351020	Health Care Providers & Services	01/01/1999	12/31/1999	Level 3		
351030	Health Care Technology	04/29/2006	12/31/1999	Level 3		
352010	Biotechnology	04/29/2006	12/31/1999	Level 3	3520	Pharmaceuticals & Biotechnology-deprecated on 29/04/2006
352010	Biotechnology-deprecated on 29/04/2006	01/01/1999	04/29/2006	Level 3	3520	Pharmaceuticals & Biotechnology-deprecated on 29/04/2006
352020	Pharmaceuticals	04/29/2006	12/31/1999	Level 3	3520	Pharmaceuticals & Biotechnology-deprecated on 29/04/2006
352020	Pharmaceuticals-deprecated on 29/04/2006	01/01/1999	04/29/2006	Level 3	3520	Pharmaceuticals & Biotechnology-deprecated on 29/04/2006
352030	Life Sciences Tools & Services	04/29/2006	12/31/1999	Level 3	3520	Pharmaceuticals & Biotechnology-deprecated on 29/04/2006
401010	Banks	03/01/2014	12/31/1999	Level 3		
401010	Banks-deprecated on 01/03/2014	05/01/2003	01/01/2014	Level 3		
401010	Banks-deprecated on 01/05/2003	01/01/1999	05/01/2003	Level 3		
401020	Thriffs & Mortgage Finance-deprecated on 01/06/2023	05/01/2003	06/01/2023	Level 3		


DataHub Web Application

Homepage Enhancements

Dashboards configured using the **Dashboard configuration tool** of NeoXam DataHub Web Application can now be used on the Homepage.

This allows for a more advanced and flexible layout, enhancing the way data is displayed and organized.

This means that you can now configure a **Homepage widget** to directly open a specific screen when clicked. The target screen can be part of the local environment or belong to a different tenant (in a multi-tenant setup).

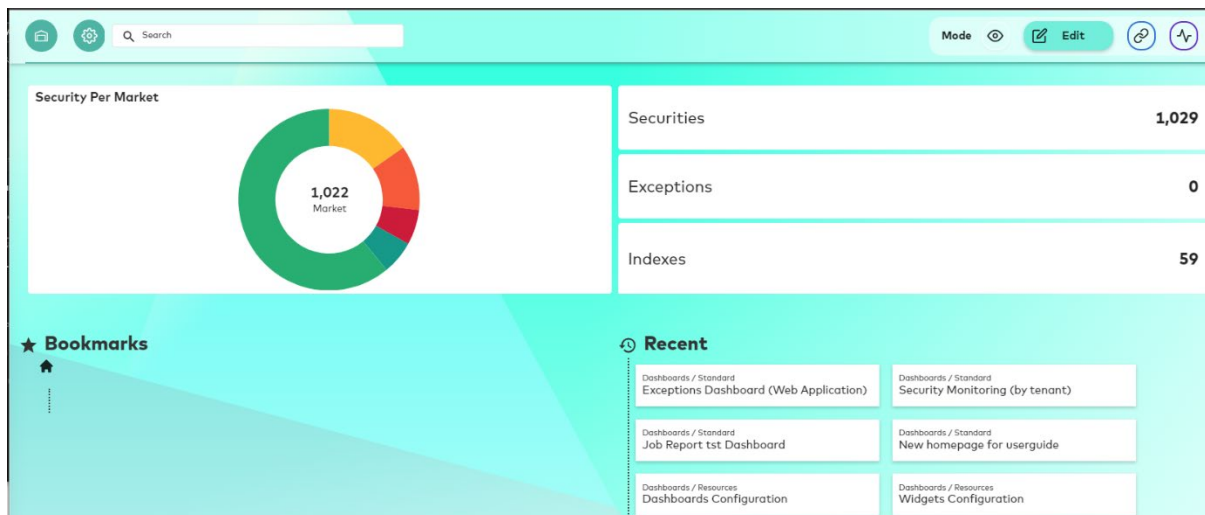

Note: Configuration mode is not available for the homepage. The homepage layout must be configured through the dashboard configuration tool.

How to Configure Widget Navigation

1. From the **Dashboard Configuration tool**, go to the **Widget Configuration** section.
2. From the "Link" pane, specify the code of the target screen:

Note: If several environments are defined in your system, it is also possible to specify on which environment the target screen will be displayed

3. Click **Save** to apply the changes.

From the Homepage, the widget is now clickable and redirects you to the related screen, based on the setup.

Configuring Grids in Configuration Mode

It is now possible to **configure grids** with breaks and sorts, and also to specify the view in which the data will be displayed: Finder, Pivot table, Transpose grid, Chart.

Grids configuration can be set on Detail or Query screens.


Once you have completed the configuration, simply click **Save** to apply the changes to the grid. You can then revisit the screen configuration to adjust the settings as needed.

Configuring Breaks

Breaks allow you to group data based on a selected criterion.

To add a break:

1. Go to **Configuration mode** and click the **Groups** button. The **Groups** panel is displayed.

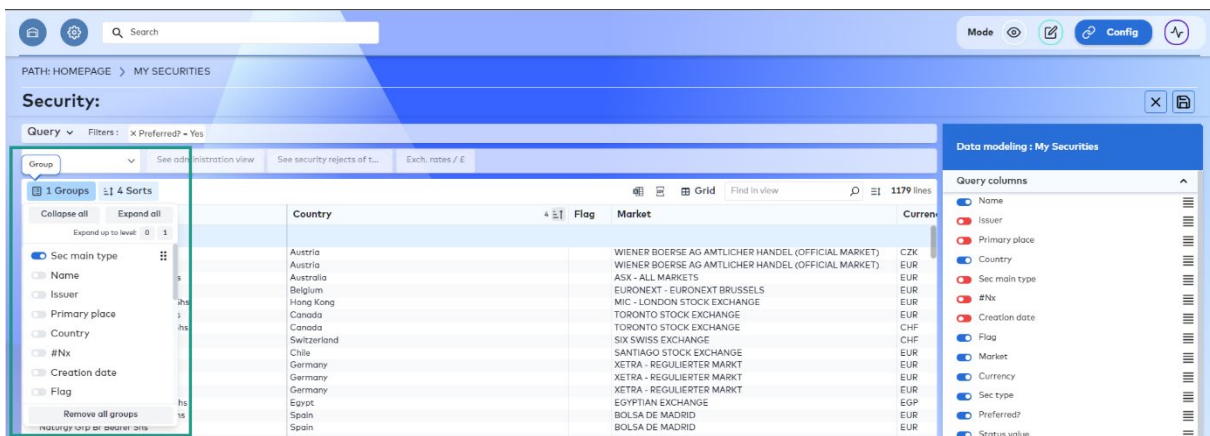


2. From the **Groups** panel, select the criteria by which you want to group the data. The grid will automatically group rows based on this selection.
3. If you need to remove a **Break**, locate the applied break from the Groups panel and unselect the criteria to delete the grouping.

Configuring Sort

Sorting defines the order in which rows are displayed.

To set up a sort:

1. Go to the **Configuration mode** and click the **Sort** button. The Sort panel is displayed.

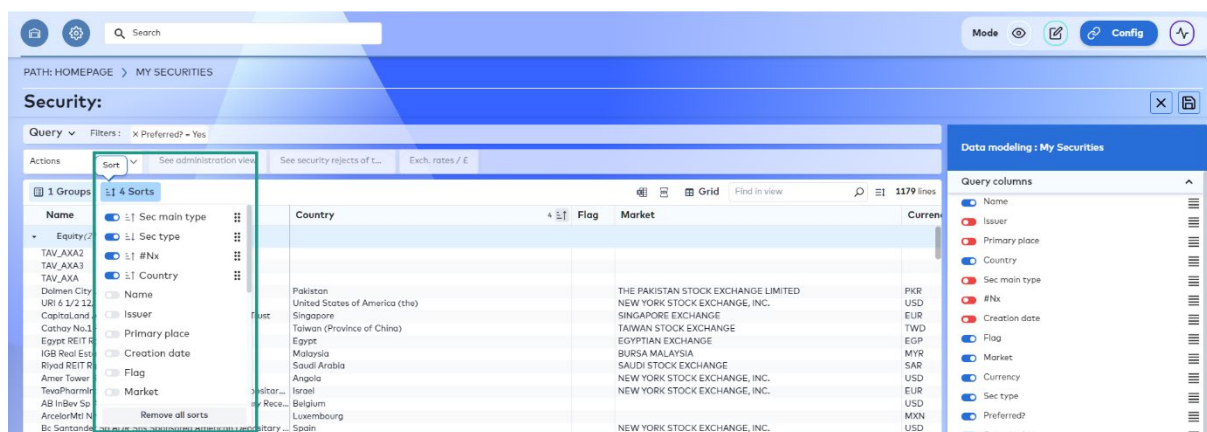

2. Choose the column(s) by which you want to sort the data.
3. Then, for each sorting criterion, indicate whether to sort in Ascending  or Descending  order.
The grid will update accordingly.
4. If you need to remove sorting, find the applied sorting criterion you want to remove and unselect it to clear the sorting.

Configuring Views

You can choose how to display the data using the different views: Finder, Pivot Table, Transpose Grid or Chart

Finder

The **Finder** view simplifies navigation through structured data.

Select columns for parent nodes and node label.

The grid will automatically display structured data according to your selection.

Axis				Finder							
Parent node		Header label		Allocated Pension Plan							
Effective date	date	Effective date	date	Effective date	Account ...	Account Desc	Currency	Price	Shares	EMV Net	
Interfunding Version	number	Interfunding Version	number	31/03/2024	USISNO	AP - International Shares	AUD	4.69	90,481,407.10	423,919,597.84	>
Parent	string	Parent	string	31/03/2024	USASNO	AP - Australian Shares	AUD	4.07	115,695,705.35	470,842,994.09	>
ParentAccountDescription	string	ParentAccountDescription	string	31/03/2024	USAEUO	AP - Australian Equity Income	AUD	3.99	44,760,741.67	178,492,946.67	>
ParentClassification	string	ParentClassification	string	31/03/2024	USBNO	AP - Sustainable Balanced	AUD	3.04	1,011,804,934.70	3,080,724,440.89	>
Account Code	string	Account Code	string	31/03/2024	USGAUO	AP - Global Co in Asia	AUD	5.29	56,109,644.63	296,886,005.06	>
Account Desc	string	Account Desc	string	31/03/2024	USCUJO	AP - Cash	AUD	2.22	572,652,703.36	1,269,095,741.60	>
ChildClassification	string	ChildClassification	string	31/03/2024	USGUJO	AP - Growth	AUD	7.23	159,574,380.91	1,153,038,199.86	>
Currency	string	Currency	string	31/03/2024	USCSJO	AP - Conservative	AUD	3.82	527,814,991.33	2,018,094,813.39	>
Price	number	Price	number	31/03/2024	USDCNO	AP - Diversified Credit Income	AUD	1.31	112,242,654.14	147,464,735.73	>
				31/03/2024	USBUIO	AP - Balanced	AUD	6.21	1,309,838,611.73	8,130,587,411.39	>
				31/03/2024	USSRIO	AP - Sustainable High Growth	AUD	6.76	148,154,578.50	1,000,945,369.97	>
				31/03/2024	USLPNO	AP - Listed Property	AUD	2.74	57,973,743.07	158,860,520.36	>
				31/03/2024	USSUIO	AP - High Growth	AUD	8.63	77,177,844.43	666,110,012.68	>
				31/03/2024	USCBIO	AP - Conservative Balanced	AUD	4.72	882,471,682.72	4,164,885,114.67	>
				31/03/2024	USAINO	AP - Australian Bond	AUD	1.95	205,324,157.05	400,428,304.18	>
				31/03/2024	USGEUO	AP - Global Environ Opps	AUD	4.06	82,328,908.50	334,469,999.96	>
				29/02/2024	USAINO	AP - Australian Bond	AUD	1.93	208,036,024.03	400,882,297.77	>

Pivot Table

The **Pivot** Table view allows you to summarize data dynamically.

You can select the data to be displayed as rows and columns, and select an aggregation method.

The grid will be transformed into a Pivot table.



Country	Name	Issuer	Primary place	Market	AED	AFN	ALL	AMD	AOA
<unknown>					0	0	0	0	0
Afghanistan					2	0	0	0	0
Albania					0	0	1	0	0
Algeria					0	0	0	1	0

Transposed Grid

The **Transposed Grid** view swaps rows and columns. Each row then becomes a column, and vice versa.

The Transposed view is useful for analyzing data from a different perspective.



Data provider	Name	Sec type	Country	Issuer	CFI level 1	CFI level 2	Divid. freq.	Right lotsize	Nominal	Currency
Golden copy	Royal Bank Canad Rg Registered Shs	EQ - Common Stock	Canada	Automatic BBG creation Id BB unique 110411	E - Equities	S - Shares - e.g. Common / Ordinary	Quarterly	1.00	0.00	Swiss franc

Chart

The **Chart** view displays a graphical representation of the data.

You can choose between several chart types: bar, line, pie, surface, etc.

You will then select data for the X-axis, Y-axis, Z-axis and the aggregation method.



Manual Override

Manual Override feature is now available on DataHub Web Application. If the data received from a provider is incomplete or erroneous, you can use this feature to complete or update the data.

Manual Override Set Up

As for Manual Override on the rich client, Manual Override strategies are defined in the Data dictionary at different level: class, table or fields.

Note: The priority always go to the most specific level. This means that a strategy defined at field level will have priority over a strategy defined at table or class level.

There are four available strategies at Data Dictionary level

Strategy	Value taken after the override
Cancel if new data vendor value	New data vendor value
Cancel only when expire (Keep new value)	Any new data input after expiration.
Cancel only when expire (Retrieve original value)	The original value (before the override) until new data input after expiration.
Never expire	No end planned for the override, unless the Manual Override is cancelled.

Histo Table

The Manual Override feature requires the configuration of a HISTO table to store all on going modifications on an object.

A new Strategy field (HISTO_STRATEGY) has been added to the HISTO table to allow you to select a strategy in the Manual override popup.

Note: For more information on the other fields of this table, please refer to the Manual Override documentation.

Enter a Manual Override

When an override strategy has been setup at Data Dictionary level for a field, table or class a new visual cue  is displayed next to the field.

To override a field:


1. Select a provider from the drop-down list in the screen header.
2. Click the Override badge next to the field you want to override.
The **Manual override** panel opens in the right of the screen.
3. Enter the **New value**.
The **Save** button now indicates a new change is pending validation. An orange dot is also displayed next to the overridden field.
4. Select a **Strategy**.
By default, the strategy defined in the Data Dictionary is displayed, unless it is not compatible with the field. Whether the field is already completed or not, you can change it directly in the Manual Override section of the right panel.

Note: The new Default strategy is available from the Strategy drop-down of the Manual Override panel. This strategy cannot be defined at Data Dictionary level, and can be used only when the field is empty and the Golden Copy selected. For more information on Multisource Strategies, please refer to the section.

5. Define an **End date**. By default, it is set to 12/31/2999, but you can specify one.

Important: When the **Cancel if new data vendor value** and the **Never expire** strategies are selected, the Manual Override section only includes the **Start date** field. This field is automatically set to today's date or the current date in Bitemporal mode and cannot be edited. For now, Manual Override can only be applied to the current version of an object when in Bitemporal mode.

6. Enter a **Comment** to specify the reason of the override.

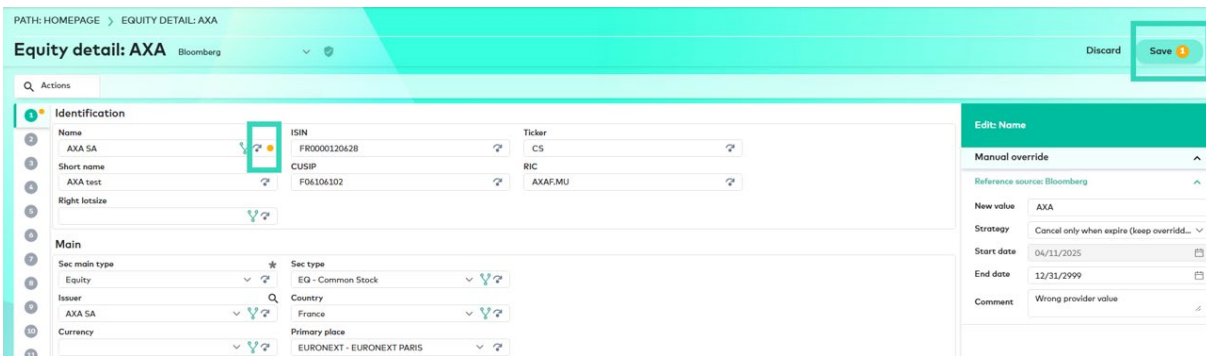


7. Save your changes.
If the override is correct, the object can be saved, otherwise an error message is displayed.

Workflow and Apply Manual Override

When the manual override is saved, the HISTO table is updated but the process status is set to NO, until the Manual Override is applied.

To apply the Manual Override, the built-in **applyManualOverride** method. You can use it in a business rule script such as the following:

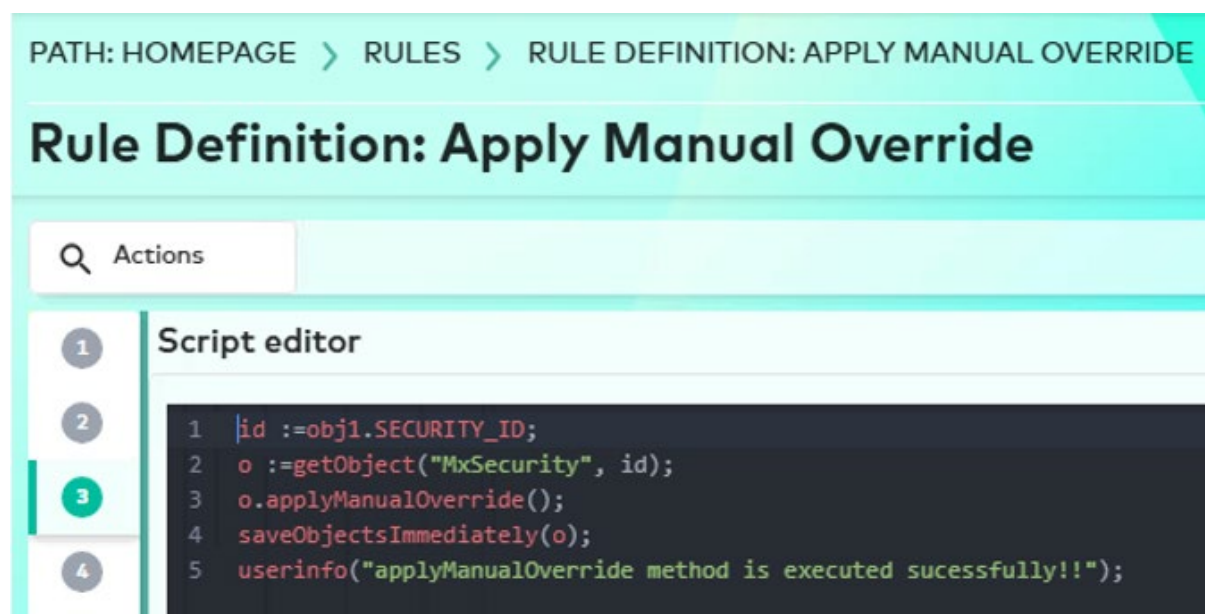

Manual Override and Multi-Source Fields

If a multisourced field is being overridden, the “Manual override” is only available if there is a record of the selected provider in the multisource table. For instance, in MxSecurity, the “Manual override” command is available if a record of the provider Bloomberg exists in SECURITY_MULTISOURCE table.

Important: You can only override the value supplied by a specific provider in the multisource table. It is then necessary to select the provider from the drop-down list at top of the screen before entering a Manual Override, otherwise an exception will be displayed.

Manual Override Strategies

The available strategy options vary depending on whether the Golden copy or Silver copy (original source) is selected, as explained in the table below:

Strategy	scenarii	Description	Retained Value
Cancel if New Data Vendor Value	- Manual override on a Silver Copy (source value) - Manual override on non-priority source	The Manual Override value is maintained as long as the source does not change	New data vendor value


		value. No end date field.	
Cancel Only When Expire (Keep Overridden Value)	- Manual override on a Silver Copy (source value) - Manual override on non-priority source - Manual override on an existing value of the Golden Copy	On expiration, Manual Override is deactivated, the overridden value is retained, and multi-source is reactivated.	Overridden value retained after expiration.
Cancel Only When Expire (Retrieve original Value)	- Manual override on a Silver Copy (source value) - Manual override on non-priority source - Manual override on an existing value of the Golden Copy	On expiration, Manual Override is deactivated, the original value is restored, and multi-source is reactivated.	Original value restored after expiration.
Never expire	- Manual override on a Silver Copy (source value) - Manual override on non-priority source - Manual override on an existing value of the Golden Copy	No end date field. No end planned, unless the Manual Override is cancelled.	
Override with default value (underwrite)	Manual override on an empty value of the Golden Copy	This strategy uses the source field default value which is a source with lowest priority. The strategy cannot be chosen as a default strategy from the Data Dictionary. It is available for selection in the Manual	The Golden Copy keeps the overridden value (default value) until the first vendor provides a value (then, the new vendor value will become the Golden Copy value) or until the manual

		Override panel only, and used to override empty field of the Golden Copy.	override expires (in this case, the field returns to an empty state).
--	--	---	---

Audit Trail for Multisource Overridden Fields


When in **Audit Mode**, the History section of the **Audit Trail** panel displays Manual Override information regarding multisource fields.

You will first need to select the source in the screen header banner and select the overridden field to display the history in the right panel.

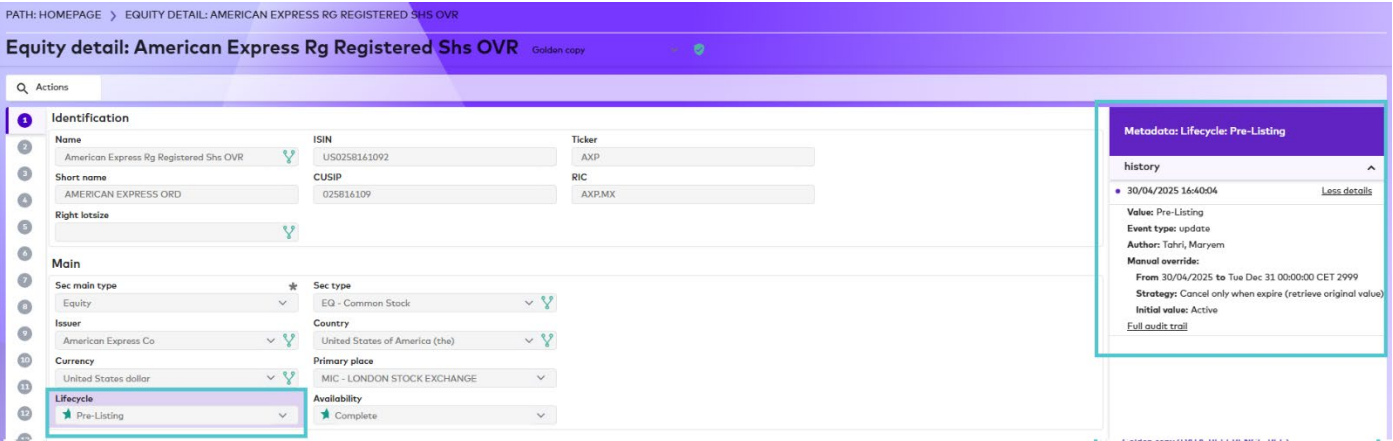

Cancelling Override

To cancel an override on a field that currently has an active override and appears as non-editable), click on the override badge, then click the **Cancel** button in the override window that opens.

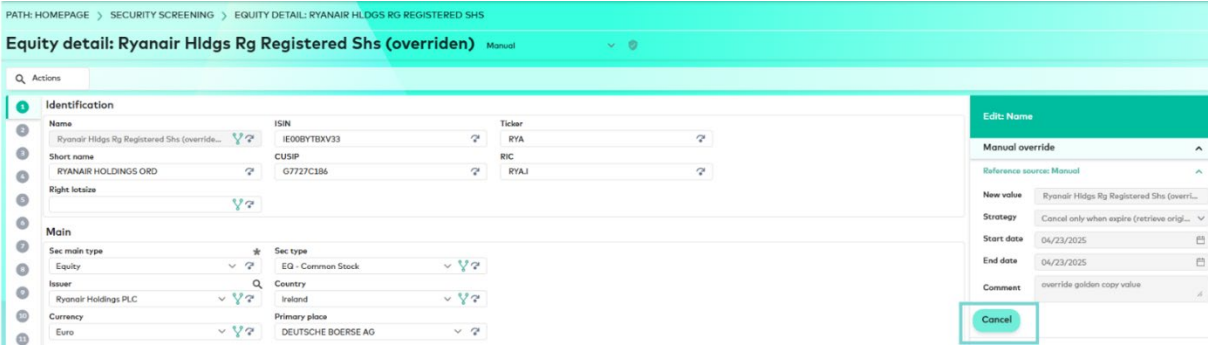

After the cancel the current value of the object is updated with the original value, i.e., the value as it was before the override took place and the field becomes editable again.

Federated Tenant

Introduction

The Federated Tenant offer enables a Central tenant to monitor and update clients tenant's environments.

The **Central tenant** is a NeoXam DataHub instance with the ability to view and **monitor the client tenants' environment**.

The **Central tenant** can also create and administrate client services that can be used to **activate, deactivate or override components** on the client tenant's environment.

The **Client tenant** is a regular NeoXam DataHub instance.


Creating the Client Tenants and Setting Up the Environment

Create the Client Tenant Communication Channel

Before creating the client tenants, you will need to configure an HTTP communication channel to access each of them.

In the Communication Channel screen, define the URL to be queried, the credentials, the HTTP method, etc.


Important: For security reasons, to authorize the API request on the clients' channels, it is necessary to add the URLs of the Client Tenants in the **system.http.trusteddomains** parameter.

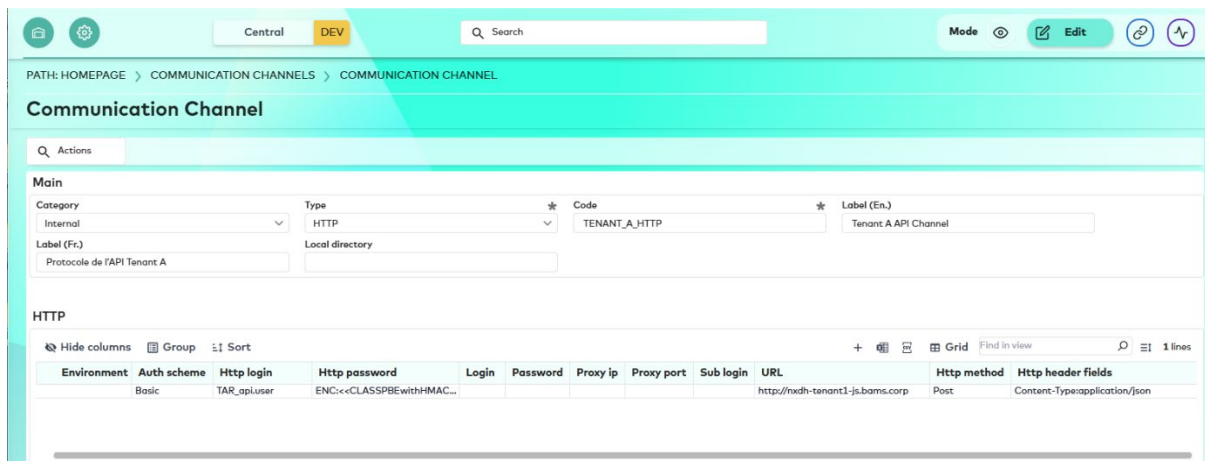

Environment	Auth scheme	Http login	Http password	Login	Password	Proxy ip	Proxy port	Sub login	URL	Http method	Http header fields
Basic	TAR_aplUser		ENC:<<CLASSPBewithHMAC...						http://mdh-tenant1-js.bams.corp	Post	Content-Type:application/json

Create the Client Tenant

Once you have created the clients' channels, you can open the new Federated Tenant screen that enables you to create all the Client tenants the Central tenant should administrate.

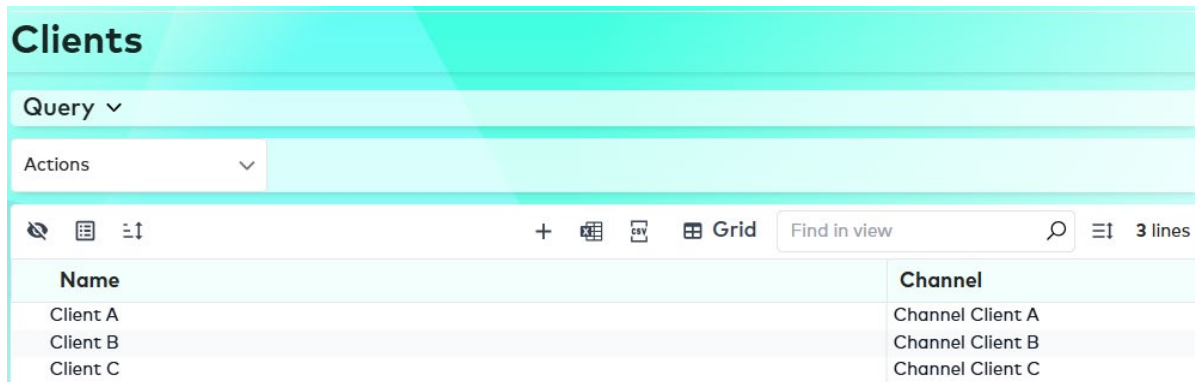


Name	Channel
Client A	Channel Client A
Client B	Channel Client B
Client C	Channel Client C

Note: Client tenants created within the Federated tenant screen are stored in the new **MxFederatedClient** class.

To create the Client Tenants, on the Central Tenant environment:

1. In the **Central Tenant's environment**, click the **DataHub Factory/ System Administration / Federated Tenant/ Clients** menu.
The Federated Tenant screen opens.
2. Click the **+** icon to add a new client.
3. Then enter a client tenant's code, name and select the HTTP Communication Channel that corresponds to this client tenant.

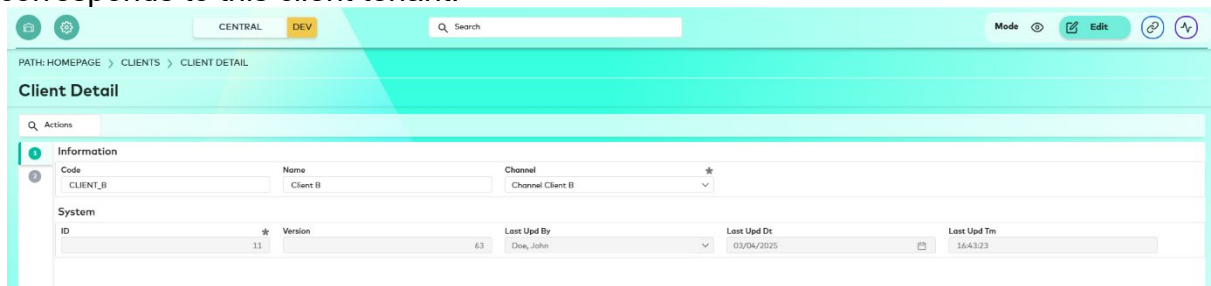

Client Detail

Code: CLIENT_B, Name: Client B, Channel: Channel Client B

System: 11, Version: 6.3, Last Upd By: Doe, John, Last Upd Dt: 03/04/2025, Last Upd Tm: 16:43:23

4. Repeat step 2 for each client tenant.
5. Then connect to the **Client Tenant's environment**.
6. Go to the Federated Tenant screen.
7. Create the Client Tenant corresponding to client tenant itself.

Configure the Environment File

After creating the Client tenants, you will need to configure the **env.override** or **userenv.sh** (for non-docker deployment) environment:

1. Specify the **Central tenant's environment**, by adding the **-environment"** option.

Note: You can also configure the environment by specifying the environment code (e.g. UAT, SIG, PROD) in the "**system.environment**" parameter.

2. Add both the central and client tenants, by using the **-tenant** option:
 - **TENANT_CONFIGURATION="-tenant CENTRAL"**, for the Central tenant.
 - **TENANT_CONFIGURATION="-tenant <your client tenant code>"**, for the Client tenant.

Important: The Client tenants codes must match the **CLIENT_CODE** defined in the **MxFederatedClient** class.

Activate the Federated Tenant Feature

Then set the **system.module.federated_tenant.activated** parameter to 1 to activate the Federated Tenant feature.

Important: Once all prerequisites have been configured, you must restart the environment.

New Rest API Scope

To enable Central Tenant communication with the Client Tenants, a new **Rest API Scope** has been added.


This scope makes it possible to query the various Client Tenants' environments from the Central Tenant and retrieve data aggregated in a single Dataset, according to the defined scope.

You can use this feature, for instance, to retrieve all the alerts/exceptions from the various Client Tenants in order to monitor them in the Central Tenant.

Note: The **conditions** (criteria and fields) of the **REST API Scope** will be taken from a **remote scope** (or parent scope) (**S_REMOTE_SCOPE**) of type condition. The remote scope will have to be previously defined.

To configure the **REST API scope**:

1. Select the **Remote Scope** on which the REST API Scope is based.
2. Configure the **Target Tenant Name** (refer to section [Create the Client Tenant](#) for more information).

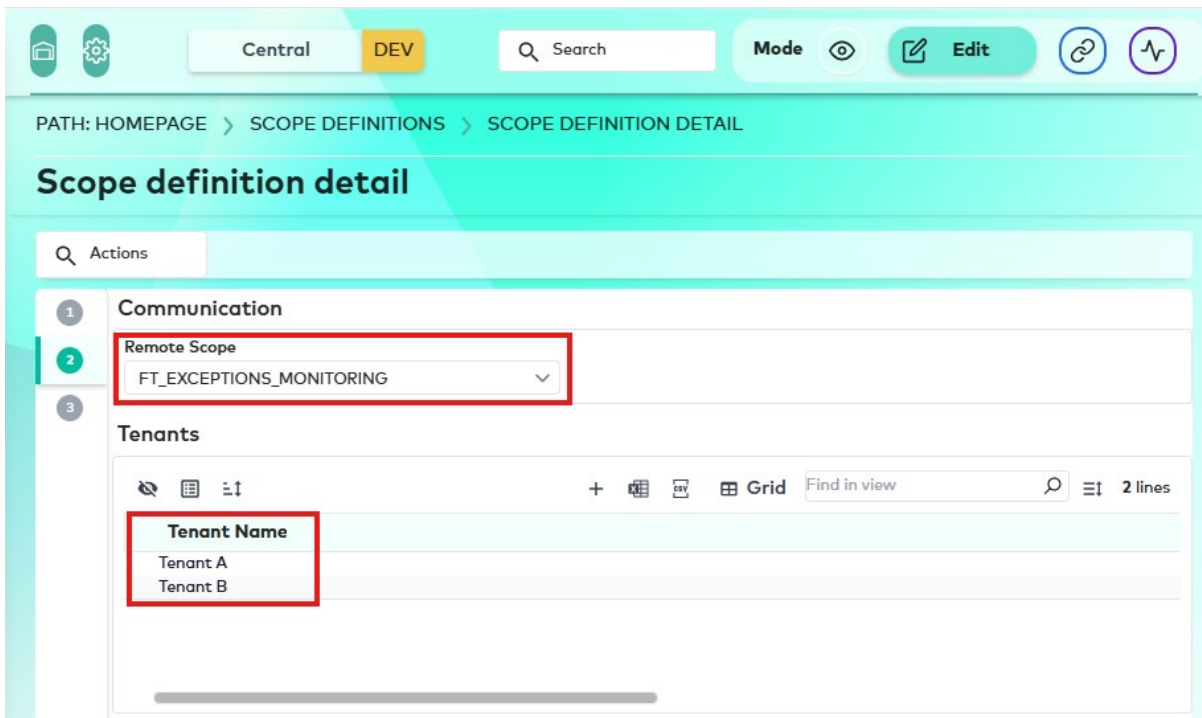

Warning: Remote Scopes of type 'condition' must be configured in exactly the same way for both the Central and Client Tenants, and must have the same code.

API Invocation and Responses

API Invocations will use a POST request and will be based on the information contained in the Rest API ScopeDef (Conditions, Client Tenants, Channel).

Important: For security reasons, to authorize the API request, it is necessary to add the URLs of the Client Tenants in the **system.http.trusteddomains** parameter.

- Invocations of the various endpoints will be performed in parallel mode.
- Responses will be sent on the fly to the Central Tenant, which means that users do not have to wait for all the API requests to be executed before returning the result.

Aggregated DataSet

API responses enable the creation of an aggregated DataSet with all the data retrieved from Client Tenants set in the current MxScopeDef object.

This result is displayed in the **DataSet** tab of the '**Scope definition**' screen.

To be able to differentiate where the data comes from, and thus enable dashboards to filter information by tenant, it is necessary to identify the Client Tenant that generated the data.

To identify the client tenant, you need to add a computed field to all **Client Tenants Remote Scopes**, using the **getTenantCode()** function.


Computed field configuration

Label

Tenant

Definition

Name

user_code_1

Type

String

List

Reference

Constraint

#Digits

Formula

1

2

3

4

5

6

7

8

9

10

getTenantCode()

Check syntax

Export doc

Ok

Cancel

This function returns the code passed on the server side via the '-tenant' argument and enables to indicate the source of the retrieved data in the **Tenant** column of the aggregated **DataSet**.

Central

DEV

Q Search

Mode

Edit

PATH: HOME PAGE > SCOPE DEFINITION DETAIL

Scope definition detail

Q Actions

Global

Remote Scope API

DataSet

2 Hidden columns


Group

1 Sort

FEEDREJECT_ID	Cate...	Suspect Field	Suspect Value	Control type	Status	Date	Assignment time	Priority	Assignee	Team	Reject type	Tenant
56799688	Security	Bid	-22.550	Series Jump	Open	06/11/2023	19:25:16	Warning	Assigned to my team	Currency Management	DGC Suspect Value	TENANT_A
56799688	Security	Cpn. amt.	0.0	If Series Direction is	Open	06/11/2023	07:11:52	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_A
56799689	Security	Cpn. amt.	3.060	Maximum Series Jump	Open	06/11/2023	07:12:24	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_A
56799690	Security	Cpn. amt.	0.0	If Series Direction is	Open	06/11/2023	07:11:52	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_A
56799691	Security	Cpn. amt.	0.0	If Series Direction is	Open	06/11/2023	07:11:52	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_A
56799692	Security	Cpn. amt.	14.9780220	Maximum Series Jump	Open	06/11/2023	07:11:52	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_A
56799694	Security	hour	142227	Series Source	Open	06/11/2023	19:43:30	High	Assigned to my team	Securities Management	DGC Suspect Value	TENANT_A
56799686	Security	Close	0.0600000	Maximum Series Jump	Open	06/11/2023	23:49:50	Urgent	Assigned to my team	Securities Management	DGC Suspect Value	TENANT_A
56799686	Security	Open	86.260	Creation and Change	Open	09/12/2024	11:18:24	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_B
56799687	Security	Open	109.210	Out of Range	Open	09/12/2024	11:18:24	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_B
56799688	Security	Open	289.350	Change	Open	09/12/2024	11:18:24	Warning	Assigned to my team	Equity Management	DGC Suspect Value	TENANT_B
56799689	Security	Open	0.780	Change	Open	09/12/2024	11:18:24	Warning	Assigned to my team	Equity Management	DGC Suspect Value	TENANT_B
56799690	Security	Open	29.19250	Change	Open	09/12/2024	11:18:24	Warning	Assigned to my team	Equity Management	DGC Suspect Value	TENANT_B
56799691	Security	Open	265.550	Change	Open	09/12/2024	11:18:24	Warning	Assigned to my team	Equity Management	DGC Suspect Value	TENANT_B
56799692	Security	Open	265.550	Change	Open	09/12/2024	11:18:24	Warning	Assigned to my team	Equity Management	DGC Suspect Value	TENANT_B
56799693	Security	Open	0.70	Out of Range	Open	09/12/2024	11:18:24	Warning	Assigned to my team	Equity Management	DGC Suspect Value	TENANT_B
56799694	Security	Open	300.350	Out of Range	Open	09/12/2024	11:18:24	Warning	Assigned to my team	Equity Management	DGC Suspect Value	TENANT_B
56799695	Security	Open	4.050	Out of Range	Open	09/12/2024	11:18:30	Warning	Assigned to my team	Equity Management	DGC Suspect Value	TENANT_B
56799696	Security	Open	102.50	Change	Open	09/12/2024	11:18:30	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_B
56799697	Security	Open	108.1070	Change	Open	09/12/2024	11:18:30	Information	Assigned to my team	Bond Management	DGC Suspect Value	TENANT_B

Scope Views (Central)

After defining a ScopeView linked to the ScopeDef on the Central environment, you can create Widgets and Dashboards displaying data from different Client tenant's environment. For example, the Dashboard below displays KPIs calculated on both Tenant A and Tenant B:

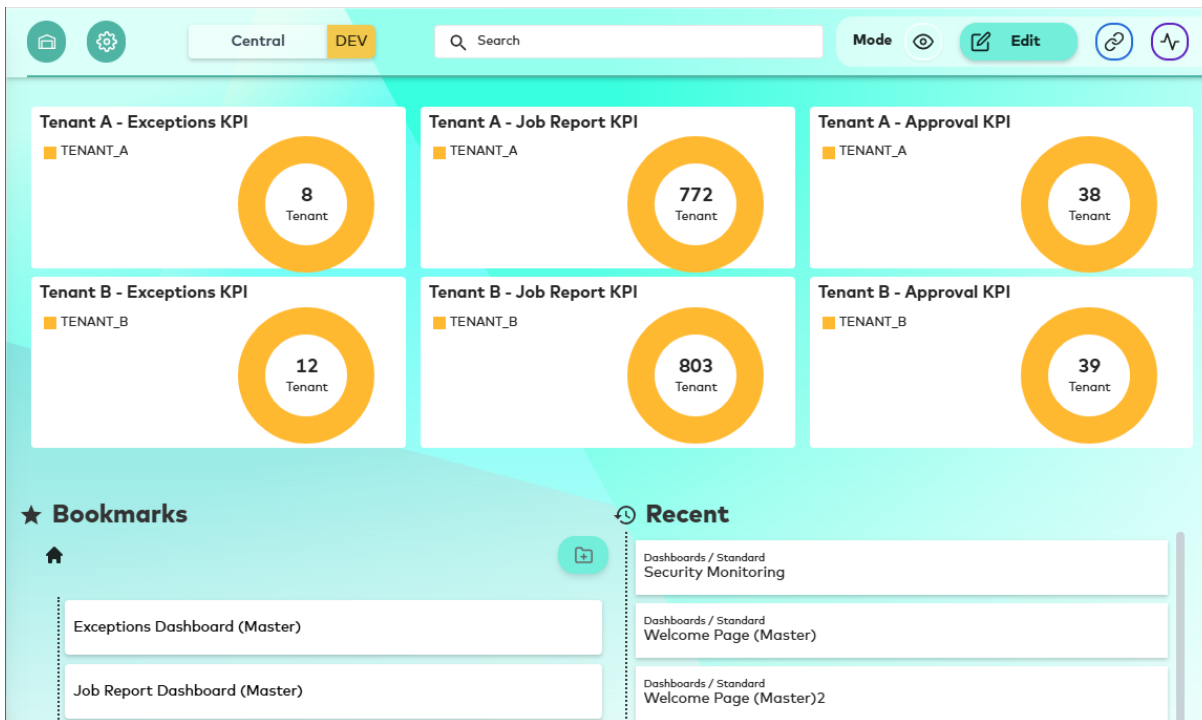


Displaying Central or Client Tenants Environment

Central Tenant can connect to the Client Tenant's environment, which created a need for a clear distinction between the central environment and the tenants' environments.

Any user with access to multiple environments must be able to immediately identify the current environment. You can now select the environment you wish to display from a new menu in the top banner.

- When the current environment is the Central Tenant's environment and at least one Client Tenant is defined in the **Federated Clients** screen, the menu in the top banner will look as follows:

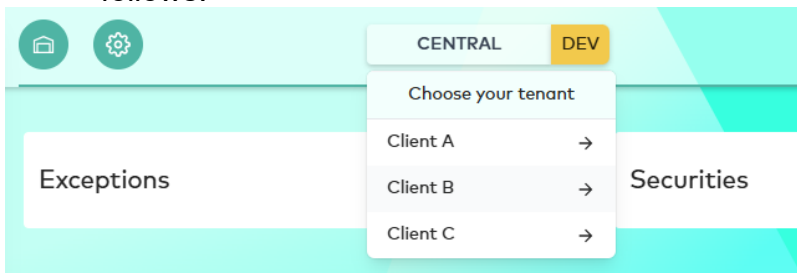


The drop-down menu enables you to:

- Identify the current environment, based on the **-tenant code** and **-environment** value.

Note: The **-environment** value is not displayed in PROD.

- Switch to a Client Tenant environment
- When a Tenant environment is selected from the drop-down list:
- It opens in a new browser tab, ensuring that the Central environment remains accessible.

- The name of the displayed environment is always clearly visible in the top banner, whether it is a Central or a Tenant environment.

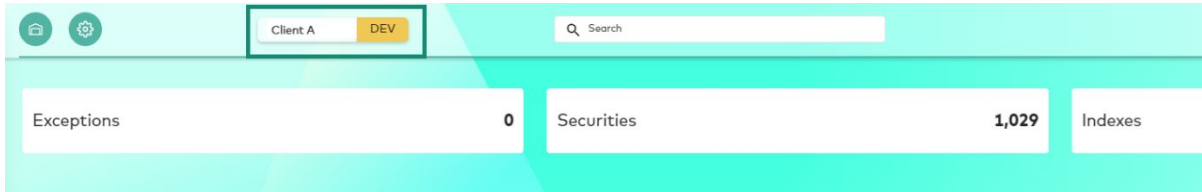

Note: If SSO (Single Sign-On) is properly configured, users can switch from Central to Tenant environments seamlessly.

Authentication is maintained, eliminating the need for re-login.

This setup provides smooth and efficient user experience, ensuring easy navigation between environments while maintaining a secured access.

Service Cards

In addition to receiving data from Client's environment, the Federated tenants feature enables Central tenants to activate, deactivate or override components at the Client tenant's environment using Client Services.

Client services are business services attached to specific clients.

A Business Service, is a service that can be sold to a given client, activated or deactivated at this client's, and to which a SLA can be attached. For example, the integration of FX Rates coming from Refinitiv, the normalization of ESG data, Golden Copy computation for Entities or Data distribution via API.

Business Services are made of components that can be activated/deactivated or overridden at a given client's environment.

These components can be: Parameters, Fields but also feedprocs, Scheduled Tasks, Multi-Source Configurations ...

Note: Some objects are not eligible to become components, for example:

- functional objects (Securities, Agents...),
- or some technical objects, such as Job Reports, System Packages

A **Client Service** is the materialization of a given Business Service for a given Client.

Components can be activated/deactivated or overridden in the client service and this configuration will be reflected on the Client's Tenant environment, once the Client Service configuration has been transmitted.

Important: Client Services are managed solely on the Central tenant.

Configure the Data Dictionary

Component configuration starts at Data Dictionary level, where the new **Federated Tenant** tab has been added to the **Class definition** screen (for technical classes only).

It makes it possible to specify:

- whether objects of this class are eligible to become components (**Comp Eligible**),
- whether they can be overridden or not (**Comp Override Allowed**),
- and which tables and/or fields can be overridden (**Overridable** columns).

PATH: HOMEPAGE > DATA DICTIONARY > EDIT DATA DICTIONARY MxMULTISOURCEPARAM

Edit Data Dictionary MxMultiSourceParam

Actions

General

Comp. Eligible ☒ Comp. Override Allowed ☒

Table Level

Table name	Overridable
MULTISOURCEPARAM	Yes
MULTISOURCEPARAM_FIELD	Yes
MULTISOURCEPARAM_STORE	Yes
MULTISOURCEPARAM_DETAIL	Yes
MULTISOURCEPARAM_COPY	Yes
MULTISOURCEPARAM_LINK	Yes
MULTISOURCEPARAM_BREAK	Yes
MULTISOURCEPARAM_MERGE	Yes

Field Level

Table	Name	Overridable
MULTISOURCEPARAM	ACCEPTED_QUALITY_LEVEL	
MULTISOURCEPARAM	ACTIVE	
MULTISOURCEPARAM	CODE	
MULTISOURCEPARAM	CREATE_IF_MATCH	
MULTISOURCEPARAM	DATAATTRIBUTE_FIELD	
MULTISOURCEPARAM	DECISION_TREE	
MULTISOURCEPARAM	EXECUTION_ORDER	
MULTISOURCEPARAM	INACTIVE_TRACEABILITY	
MULTISOURCEPARAM	MANAGE_PRICING_SOURCE_FIELD	
MULTISOURCEPARAM	MANUAL_SOURCE	
MULTISOURCEPARAM	MULTI_VERSION	
MULTISOURCEPARAM	MULTISOURCE_MODE	
MULTISOURCEPARAM	OBJECT_CREATION_MODE	
MULTISOURCEPARAM	PRICING_SOURCE_FIELD	
MULTISOURCEPARAM	REAL_TIME_FLAG	
MULTISOURCEPARAM	RECORD_CONDITION	
MULTISOURCEPARAM	REFERENCE_SOURCE	
MULTISOURCEPARAM	SOURCE_CONDITION	
MULTISOURCEPARAM	SOURCE_FIELD	
MULTISOURCEPARAM	STATUS_FIELD	
MULTISOURCEPARAM	TARGET_CLASS	
MULTISOURCEPARAM	TARGET_OBJECT	
MULTISOURCEPARAM	TARGET_TABLE	
MULTISOURCEPARAM	TIME_FIELD	

It is also possible to state, class per class, the name of the field that is used to activate or deactivate the objects of the class.

For instance, for Feedprocs, the Activation field is the **ACTIVE** field.

PATH: HOMEPAGE > DATA DICTIONARY > EDIT DATA DICTIONARY MxFEEDPROC

Edit Data Dictionary MxFeedProc

Actions

User definition

Name (En.)
Feed proc

Name (Fr.)
Proc d'import/export

Name (Ch.)
進出程序

Java definition

Class Name
MxFeedProc

Class Full Name
lib.system.io.MxFeedProc

Properties

Category
Integration Core

Privacy
NeoXam

Tables

Table name	Prefix	Rec type	Min records	Max records	Range ids alloc.	Code field	Naming field	Activation Field	Table privacy
FEEDPROCESS			0	1	1			ACTIVE	NeoXam
FEEDPROCESS_NAME	N		1	0	999				NeoXam
FEEDPROCESS_TRIGGERS	T		2	0	999				NeoXam
FEEDPROCESS_LINK	L		3	0	999				NeoXam


Important: The **Activation Field** should not be modified without the agreement of NeoXam R&D.

Create and Assign Components from the Central Environment

Create a Component

For each object eligible to become a component (as per the class definition in the data dictionary), you can create a component.

For example, from a scheduled task, if the component has not been created yet, the **Actions/Federated Tenant** menu will display the **Create Business Service Component** option as shown below:

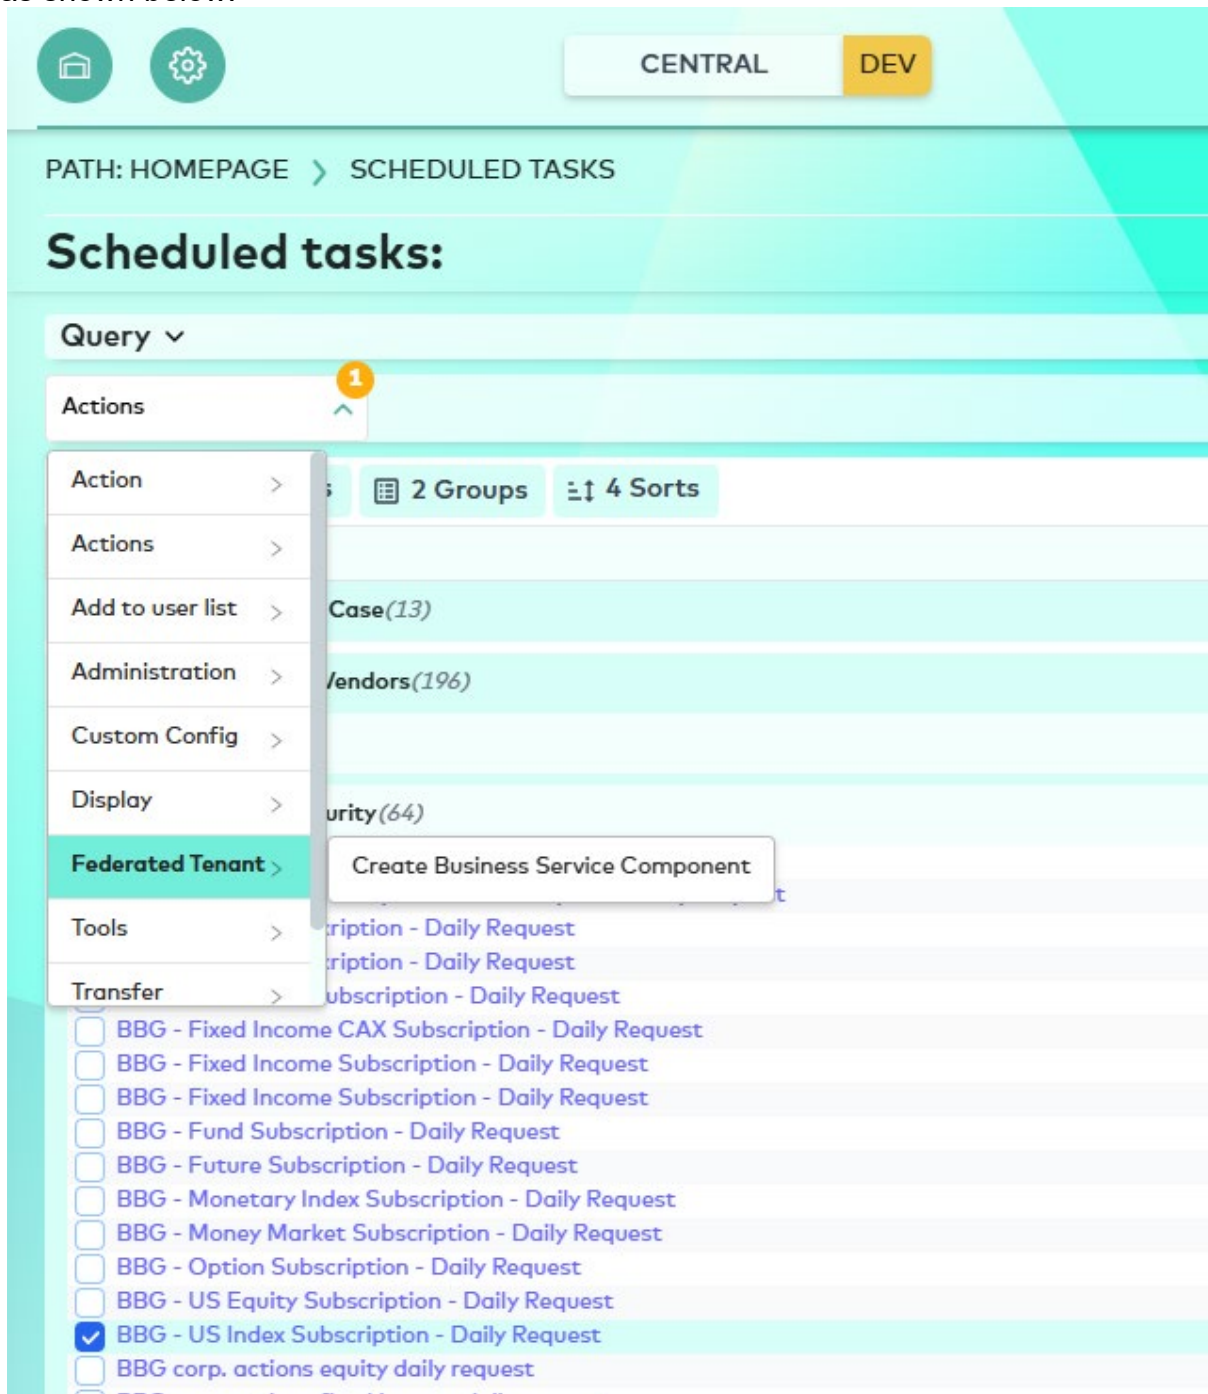

The screenshot shows the NeoXam interface with the 'Scheduled tasks' page. The 'Actions' menu is open, and the 'Federated Tenant' option is selected, displaying the 'Create Business Service Component' option. The interface includes a top navigation bar with 'CENTRAL' and 'DEV' tabs, a breadcrumb trail 'PATH: HOMEPAGE > SCHEDULED TASKS', and a list of scheduled tasks with checkboxes and a 'Query' dropdown.

Note: If a component already exists for the object, the **Show Business Service Component** option is displayed.

By default:

- the component code is **config_object_main_table_code_of_the_config_object**
- the component name is **name_of_the_config_object_class - name_of_the_config_object**

Example: For the Scheduled Task with code **BBG_BO_MSCI_DAILY** and name **BBG MSCI index composition daily**, the code of the component will be **SCHEDTASK_BB****BO_MSCI_DAILY**.

The name of the component will be **MxScheduledTask - BBG MSCI index composition daily**

By default, the component is created with the **Not Assigned** status.

Component Code	Tech. Class	Object	Comp. Status	Category	Scope	Bus. Service
Assigned (38)						
Not Assigned (55)						
Integration (5)						
Core (12)						
ESG (2)						
Integration (2)						
SCHEDTASK_CARBO4_DATA_IMP	Scheduled Task	CARBON4_DATA_IMP	Not Assigned	Integration	ESG	
SCHEDTASK_AGGREGATION_START_SCHEDULER	Scheduled Task	AGGREGATION_START_SCHEDULER	Not Assigned	Integration	ESG	
Investment Data (2)						
Integration (2)						
OUTVALUEMAP_MAP_FIX_FEE_TYPE	Output value map	MAP_FIX_FEE_TYPE	Not Assigned	Integration	Investment Data	
OUTVALUEMAP_MAP_FIX_TRADE_TYPE	Output value map	MAP_FIX_TRADE_TYPE	Not Assigned	Integration	Investment Data	

Note: The **Component mass creation option** enables you to create the components by bulk for an existing environment. The **COMPONENT_MASS_CREATION** scheduled task will then create a component for each configuration object eligible to become a component in the environment.

Important: Please note that a component is linked to only one configuration object.

Business Services


Create or Delete a Business Service

Business Services screen can be found from the **DataHub Factory / System Administration / Federated Tenant** menu.


From the Business Service Query screen, you can create and delete Business Services via dedicated action buttons.

For the creation, you will be prompted to enter:

- The code (mandatory)
- The name (mandatory)
- The scope (optional)
- The category (optional)

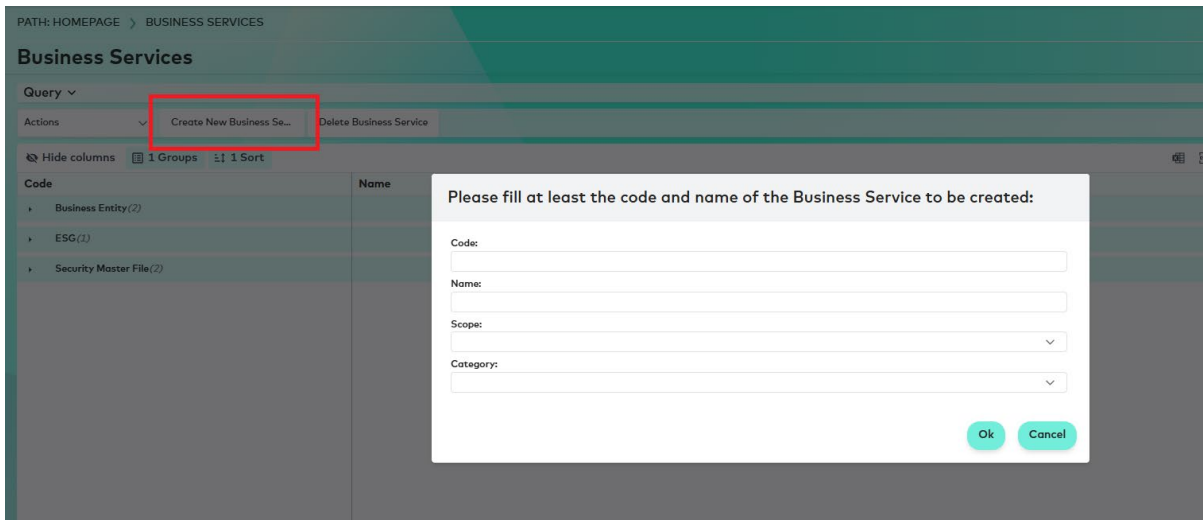

Regarding deletion, only Business Services with inactive status can be deleted.

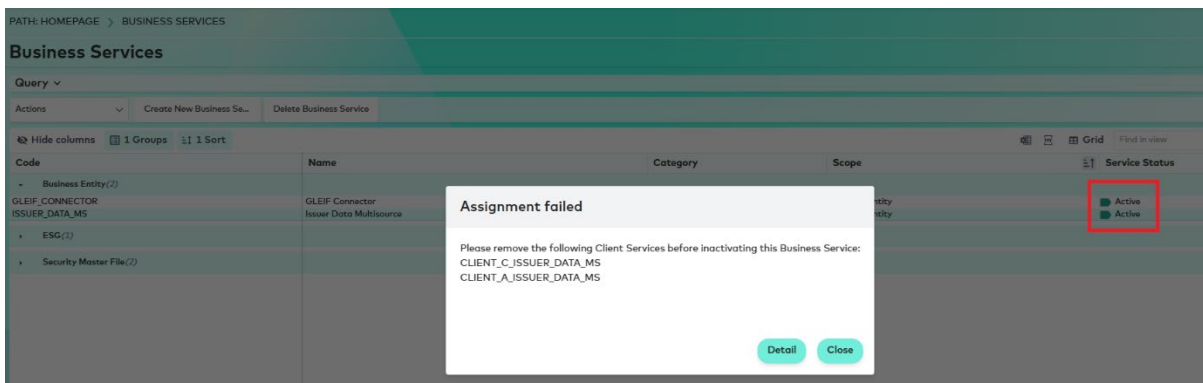

Note: A business service cannot be set to **Inactive** as long as there is at least one Client Service linked to it.

Add Components to a Business Service


From the Components Screen

Once the component is created, you can adjust the scope and category of the component (no other field is meant to be editable).

You can also link the component to a business service.

To add a component to a business service:

1. Click the **Add Component to Service** button.
The **Please pick a Business Service** window opens.
2. Select the Service from the **Business Service** list.

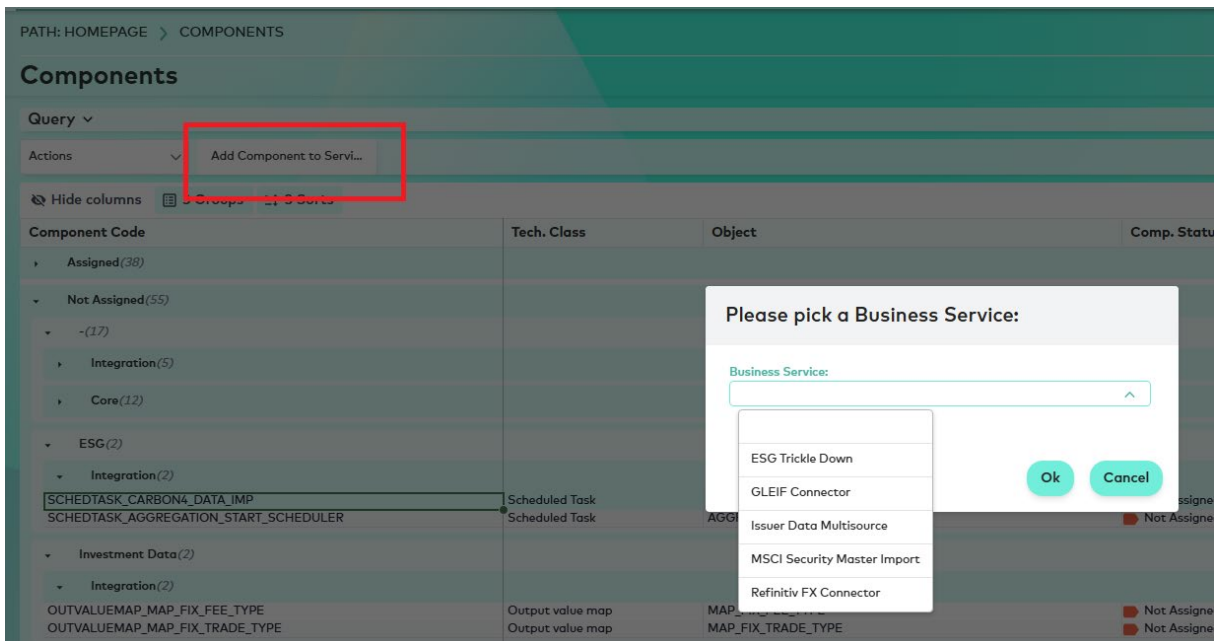

3. You can then click **OK** to validate.

Once assigned, the component status changes automatically to **Assigned**.


Important: Please note that a component can belong to only one business service.

From the Business Service Screen

From the **Business Service Detail** screen, you can add components to a business service.

1. Click the **Add Component** button.
The Components list displays the components with the **Not Assigned** status.
2. Select the component to be added.
3. Click **OK**.
As soon as the component is assigned to the Business Service, its status switches to **Assigned** and you cannot assign it anymore to another Business Service (unless it is unassigned from the first Business Service).

Note: A component can belong to only one Business Service.

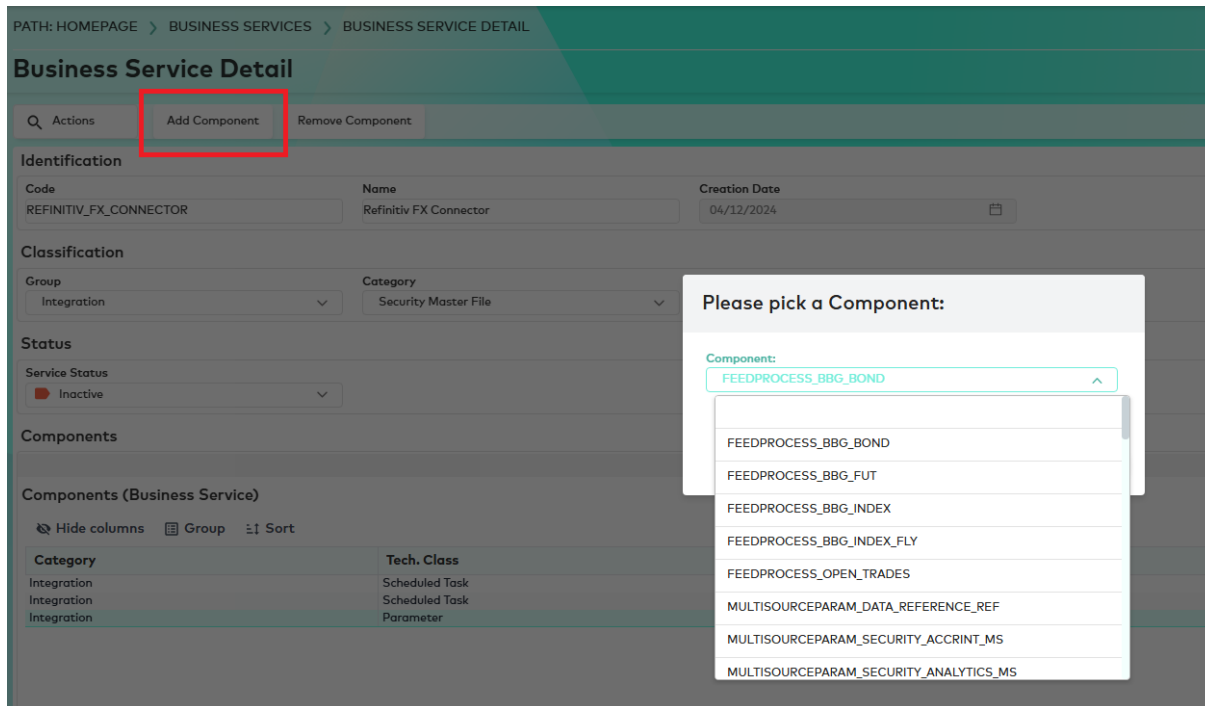


Remove Components from a Business Service

Only if components that have not been activated in any of the Client Tenants can be removed from a Business Service. Therefore, only components that can be deleted will be available in the dedicated drop-down list.

Important: When removed from a Business Service, the status of the component automatically switches back to **Not Assigned** and the component is also automatically removed from the corresponding Client Services.

If all the components of a Business Service are active in at least one Client Service, the following message will be displayed and no list will be displayed:

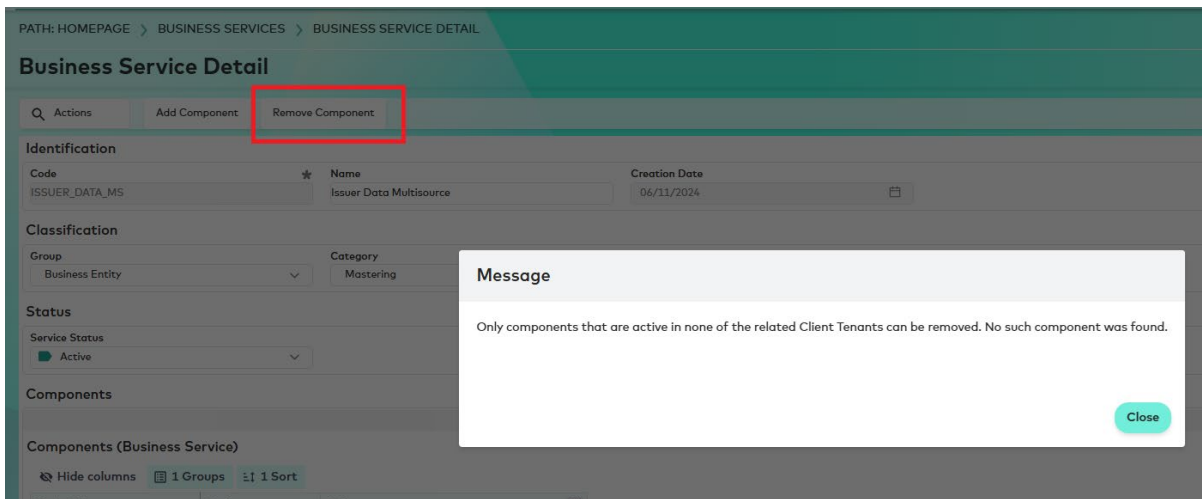


Client Services

Create or Delete a Client Service

From the **Client Service Query** screen, you can create a **Client Service**.

You will have to specify a Client and a Business Service.

Note: Only active Business Services will be suggested.

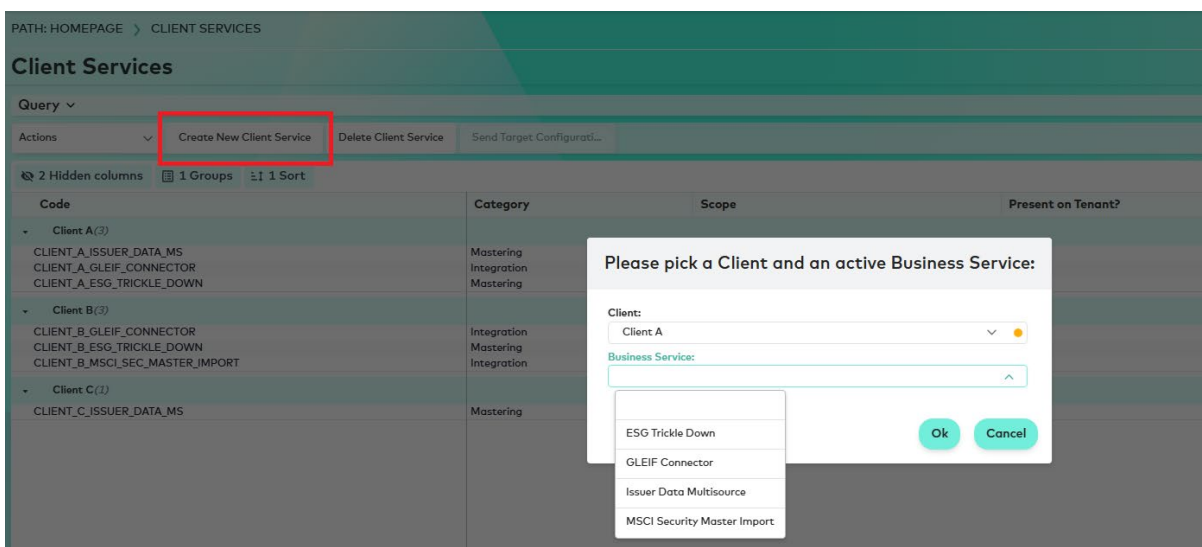

In a newly-created Client Service, all **components** are **deactivated** by default and the status of the Client Service is by default set to **Modifications to be sent**.

Regarding the deletion, only Client Services that have never been sent to the Tenant can be deleted.

Those Client Services have the **Present on Tenant?** checkbox unchecked.

Edit a Client Service

From the **Client Service**, you can activate or deactivate components at the Client Tenant's environment, and also override them.

As soon as a change is made in the Client Service, its status switches to **Modifications to be sent**.

PATH: HOMEPAGE > CLIENT SERVICES > CLIENT SERVICE DETAIL

Client Service Detail

Actions: Activate All Components, Deactivate All Compone..., Activate/Deactivate a C..., Override a Component, Cancel An Override, Show Component (With...

Identification

Code CLIENT_C_ISSUER_DATA_MS	Name Issuer Data Multisource	Creation Date 18/12/2024	Business Service Issuer Data Multisource
---------------------------------	---------------------------------	-----------------------------	---

Classification

Group Business Entity	Category Mastering
--------------------------	-----------------------

Status

Present on Tenant? ☐	Service Status Modifications to Be Sent
--	--


Components

Important: No change of configuration is transmitted in real-time to the Client Tenant. The configuration is created or updated on the Central Tenant environment, and sent later to the Client Tenant via a Web Service, as part of a wider Client Tenant upgrade.

Activate/Deactivate of a Component

To activate or deactivate a component:

1. Click either the **Activate** or **Deactivate Component** button.
The drop-down with the list of the service's components that can be activated or deactivated is displayed.

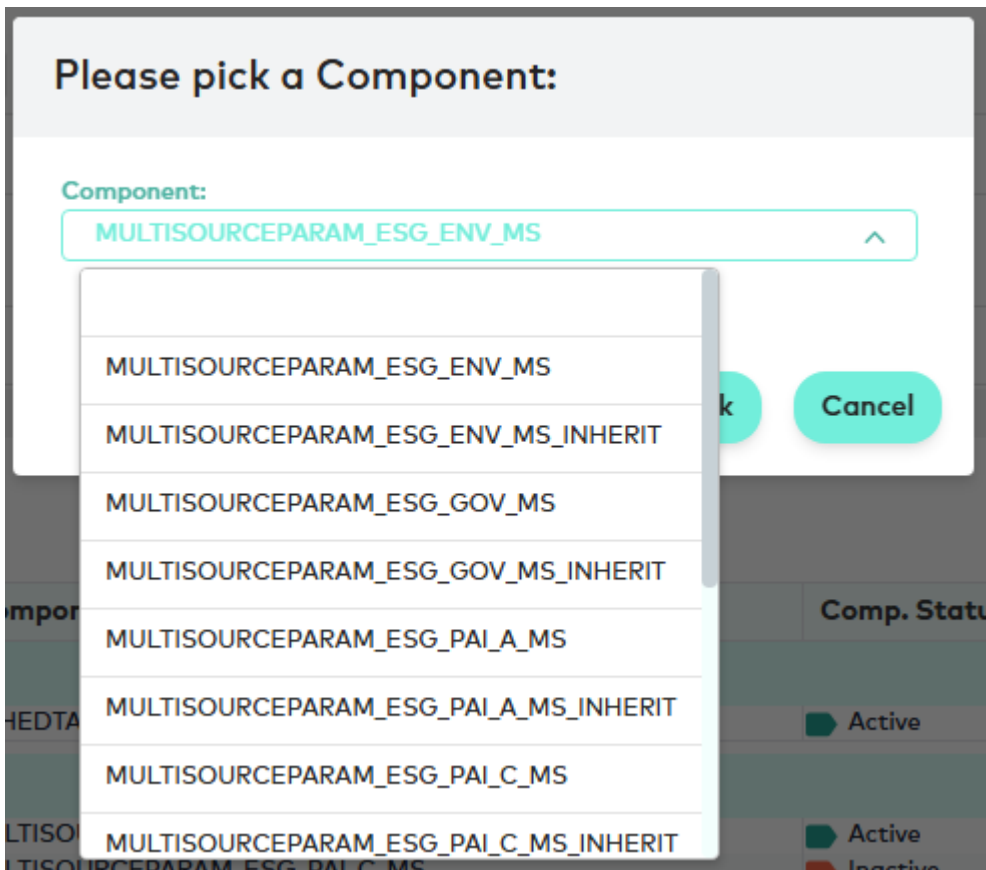

2. Select the component you want to Activate or Deactivate.
3. Click **OK**.
The component is then stored in the Central Tenant's environment as activated or deactivated component.
4. Upon Client Service transmission to the Client Tenant, the configuration corresponding to the component will be activated or deactivated accordingly (via the modification of the field defined at Data Dictionary level, in the **Activation field** field). Refer to the [Client Service Upgrade](#) section for more information.

Note: When the activation status of a component changes, the status of the Client Service automatically switches to **Modifications to be sent**.

Important: When a component is added in a Business Service, it is also automatically added in the corresponding Client Service with the status deactivated.

PATH: HOMEPAGE > CLIENT SERVICES > CLIENT SERVICE DETAIL

Client Service Detail

Identification

Code: CLIENT_A_ISSUER_DATA_MS
 Name: Client A - Issuer Data Multisource
 Creation Date: 17/12/2024
 Business Service: Issuer Data Multisource

Classification

Group: Business Entity
 Category: Mastering

Status

Present on Tenant? ☒
 Service Status: ● Modifications to Be Sent

Components

Component Status (Client Service)

Category	Tech. Class	Component	Comp. Status	Overridden?
Mastering(5)				
Mastering	Multi-source parameter	MULTISOURCEPARAM_AGENT_LINK_MS	Active	Y
Mastering	Multi-source parameter	MULTISOURCEPARAM_AGENT_MULTISOURCE	Active	N
Mastering	Multi-source parameter	MULTISOURCEPARAM_AGENT_CLASSIFICATION	Active	N
Mastering	Multi-source parameter	MULTISOURCEPARAM_AGENT_ADDRESS	Inactive	N
Mastering	Multi-source parameter	MULTISOURCEPARAM_AGENT_RATING_MS	Active	N

From the **Client Service** screen, you also have the ability to :

- **Activate All Components**
- or **Deactivate All Components**

Override of a Component

From the Central Tenant, you can override a component on the Client Tenant's environment.

Depending on the workflow step, an override can have four statuses:

- **To be applied:** when it has been created/updated, but not yet transmitted to the Client Tenant
- **Applied:** once transmitted to the Client Tenant
- **To be cancelled:** when the override has been cancelled the override, but not transmitted to the Client Tenant.
- **Cancelled:** once transmitted to the Client Tenant

In the Client Service screen:

1. Select the service that contains the override.
2. In the **Actions** menu, select **Administration/Override a Component**.
A drop-down with the list of the service's components will be provided to the user.

3. Chose the component to be overridden.
The configuration object corresponding to the component is displayed in a pop-up.

MultiSource Parameter - Definition v2

Setup detail Audit Golden copy rules Linked field

General

Class *
ESG Data

Table *
ESGDATA_PAI_ADD

Target object

Decision tree
All esgs

Code *
ESG_PAI_A_MS

Multi contrib.? ☒

No ref. if empty? ☐

Real time? * ☒

Use another golden copy? ☒

Execution order 1

Inactive trace? ☐

Source and status

Status field

Provider field
PAIA_FEED

Secondary Source Field

Time field

Reference source *
Golden Copy 0

Manual source
Manual

Data attributes field

Use a quality level? ☐

Use the record quality level? ☐

Acceptable quality level
Any Data

Manage pricing source field? ☐

Ok Cancel

4. Enter the object's modifications.

Note: Greyed out fields such as Class, Table, Target Object cannot be modified as **Override Status** has been set to No for these field in the MxMultiSourceParam class definition. For more information on fields' configuration, refer to the [Configuring Data Dictionary](#) section.

5. Once the modifications to the object have been specified, you can enter a comment.
6. Then click **OK** to save the override in the Central Tenant.
The status of the component moves to **To Be Applied** and the status of the Client Service moves to **Modifications to Be Sent**.

PATH: HOMEPAGE > CLIENT SERVICES > CLIENT SERVICE DETAIL

Client Service Detail

Identification

Code: CLIENT_B_ESG_TRICKLE_DOWN * Name: Client B - ESG Trickle Down Creation Date: 19/12/2024 Business Service: ESG Trickle Down Client: Client B

Classification

Group: ESG Category: Mastering

Status

Present on Tenant? ☒ Service Status: ■ Modifications to Be Sent

Components

Component Status (Client Service)

2 Hidden columns 1 Groups 1 Sort

Tech. Class	Category	Component	Comp. Status	Overriden?	Override Status	Override Comment
Integration(1)	Integration	SCHEDTASK_CARBONL_DATA_CAT_IMP	Active	Y	To Be Applied	Override by Doe, John on 03/04/2025: Changed Scheduler to Scheduler 2
Mastering(14)	Mastering	MULTISOURCEPARAM_ESG_ENV_MS	Active	Y	To Be Applied	Override by Doe, John on 03/04/2025: Removed MultiContrib
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_C_MS	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_TAXO_MS	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_GOV_MS	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_A_MS	Active	Y	To Be Applied	Override by Doe, John on 03/04/2025: Removed RT
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_S_MS	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_SOC_MS	Active	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_ENV_MS_INHERIT	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_GOV_MS_INHERIT	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_C_MS_INHERIT	Active	Y	To Be Applied	Override by Doe, John on 03/04/2025: Removed RT
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_S_MS_INHERIT	Inactive	Y	To Be Applied	Override by Doe, John on 03/04/2025: Removed RT
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_SOC_MS_INHERIT	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_TAXO_MS_INHERIT	Inactive	N		

Upon Client Service transmission to the Client Tenant, the configuration object corresponding to the component will be overridden accordingly. On the Central, the status of the override will move to **Applied**.

Client Service Detail

Identification

Code: CLIENT_B_ESG_TRICKLE_DOWN * Name: Client B - ESG Trickle Down Creation Date: 19/12/2024 Business Service: ESG Trickle Down Client: Client B

Classification

Group: ESG Category: Mastering

Status

Present on Tenant? ☒ Service Status: ■ Tenant Up-to-date

Components

Component Status (Client Service)

2 Hidden columns 1 Groups 1 Sort

Tech. Class	Category	Component	Comp. Status	Overriden?	Override Status	Override Comment
Integration(1)	Integration	SCHEDTASK_CARBONL_DATA_CAT_IMP	Active	Y	Applied	Override by Doe, John on 03/04/2025: Changed Scheduler to Scheduler 2
Mastering(14)	Mastering	MULTISOURCEPARAM_ESG_ENV_MS	Active	Y	Applied	Override by Doe, John on 03/04/2025: Removed MultiContrib
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_C_MS	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_TAXO_MS	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_GOV_MS	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_A_MS	Active	Y	Applied	Override by Doe, John on 03/04/2025: Removed RT
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_S_MS	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_SOC_MS	Active	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_ENV_MS_INHERIT	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_GOV_MS_INHERIT	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_C_MS_INHERIT	Active	Y	Applied	Override by Doe, John on 03/04/2025: Removed RT
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_PAI_S_MS_INHERIT	Inactive	Y	Applied	Override by Doe, John on 03/04/2025: Removed RT
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_SOC_MS_INHERIT	Inactive	N		
Multi-source parameter	Mastering	MULTISOURCEPARAM_ESG_TAXO_MS_INHERIT	Inactive	N		

Show the Component (with its override)

From the **Client Service** screen, you can view the configuration object corresponding to a component.

If an override exists for this component, it will be applied in the displayed object:

MultiSource Parameter - Definition v2

Setup detail 1

Audit

Golden copy rules

Linked field

General

Class

ESG Data

Table

ESGDATA_PAI_ADD

Target object

Decision tree

All esgs

Code

ESG_PAI_A_MS

Multi contrib.?

☒

No ref. if empty?

☐

Real time?

☐

Use another golden copy?

☒

Execution order

1

Inactive trace?

☐

Source and status

Status field

Provider field

PAIA_FEED

Secondary Source Field

Time field

Reference source

Golden Copy 0

Manual source

Manual

Data attributes field

Use a quality level?

☐

Use the record quality level?

☐

Acceptable quality level

Any Data

Manage pricing source field?

☐

Ok

Cancel

Cancelling an Override

Cancelling the Override will be processed differently depending on whether the Override has already been sent to the Client Tenant or not:

- If the override has not been sent** to the Client, then the **Override Status** is **To Be Applied**, and cancelling the override will simply **delete the override from the Central**.
- If the override has already been sent** to the Client Tenant, then the **Override Status** is **Applied**, and it is **not possible to delete** it, but the **Override Status** will move to **To Be Cancelled**.

Important: When the **Override Status** is **To Be Cancelled**, you cannot enter a new override. You have to wait until the configuration is transmitted to the Client Tenant and the **Override Status** of the component is changed to **Cancelled**, to enter a new override.

Mode

Edit

PATH: HOMEPAGE > CLIENT SERVICES > CLIENT SERVICE DETAIL

Client Service Detail

Q Actions

Activate All Components

Deactivate All Components

Activate/Deactivate a C...

Override a Component

Cancel An Override

Show Component (With...

Identification

Code

CLIENT_R_ESG_TRICKLE_DOWN

Name

Client B - ESG Trickle Down

Creation Date

19/12/2024

Business Service

ESG Trickle Down

Client

Client 9

Classification

Group

ESG

Category

Mastering

Status

Present on Tenant?

☒

Service Status

Modifications to be sent

Components

Component Status (Client Service)

2 Hidden columns

1 Groups

1 Sort

Tech. Class	Category	Component	Comp. Status	Overriden?	Override Status	Override Comment
Integration (2)	Integration	SCHEDTASK_CARBONI_DATA_CAT_IMP	Active	Y	Applied	Override by Doe, John on 03/04/2025: Changed Scheduler to Scheduler 2
Mastering (24)	Mastering	MULTISOURCEPARAM_ESG_ENV_MS	Active	Y	Applied	Override by Doe, John on 03/04/2025: Removed MultiContrib
	Mastering	MULTISOURCEPARAM_ESG_PAI_C_MS	Inactive	N		
	Mastering	MULTISOURCEPARAM_ESG_TAXO_MS	Inactive	N		
	Mastering	MULTISOURCEPARAM_ESG_GOV_MS	Inactive	N		
	Mastering	MULTISOURCEPARAM_ESG_PAI_A_MS	Active	Y	Applied	Override by Doe, John on 03/04/2025: Removed RT
	Mastering	MULTISOURCEPARAM_ESG_PAI_S_MS	Inactive	N		
	Mastering	MULTISOURCEPARAM_ESG_SOC_MS	Active	N		
	Mastering	MULTISOURCEPARAM_ESG_ENV_MS_INHERIT	Inactive	N		
	Mastering	MULTISOURCEPARAM_ESG_GOV_MS_INHERIT	Inactive	N		
	Mastering	MULTISOURCEPARAM_ESG_PAI_A_MS_INHERIT	Inactive	N		
	Mastering	MULTISOURCEPARAM_ESG_PAI_C_MS_INHERIT	Active	Y	Applied	Override by Doe, John on 03/04/2025: Removed RT
	Mastering	MULTISOURCEPARAM_ESG_PAI_S_MS_INHERIT	Inactive	Y		
	Mastering	MULTISOURCEPARAM_ESG_SOC_MS_INHERIT	Inactive	N		
	Mastering	MULTISOURCEPARAM_ESG_TAXO_MS_INHERIT	Inactive	N		

©2025 NeoXam. All Rights Reserved. This document contains valuable, proprietary information. No portion of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, without prior written consent of NeoXam. The information in this document is believed to be accurate at the time of printing; however, NeoXam and its affiliates assume no responsibility or liability for errors or omissions that may appear in this document. The information in this document is subject to change without notice and has no contractual value.

The What's New is also available on line: https://datahub.neoxam.com/docs/Documentation_Welcome_Page/index.html

PATH: HOMEPAGE > CLIENT SERVICES > CLIENT SERVICE DETAIL

Client Service Detail

Q Actions Activate All Components Deactivate All Components... Activate/Deactivate a C... Override a Component Cancel An Override Show Component (With...

Identification

Code: CLIENT_B_ESG_TRICKLE_DOWN ★ Name: Client B - ESG Trickle Down Creation Date: 19/12/2024 Business Service: ESG Trickle Down Client: Client B

Classification

Group: ESG Category: Mastering

Status

Present on Tenant? ☒ Service Status: Tenant Up-to-date

Components

Component Status (Client Service)

2 Hidden columns 1 Groups 1 Sort Grid Find in view

Category	Tech. Class	Component	Comp. Status	Override?	Override Status	Override Comment
Integration(1)	Scheduled Task	SCHEDTASK_CARBONL_DATA_CAT_JMP	Active	Y	Applied	Override by Doe, John on 03/04/2025: Changed Scheduler to Scheduler 2
Mastering(14)						
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_ENV_MS	Active	Y	Applied	Override by Doe, John on 03/04/2025: Removed MultiContrib
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_PAI_C_MS	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_TAXO_MS	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_GOV_MS	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_PAI_A_MS	Active	Y	Applied	Override by Doe, John on 03/04/2025: Removed RT
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_PAI_S_MS	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_SOC_MS	Active	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_ENV_MS_INHERIT	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_GOV_MS_INHERIT	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_PAI_A_MS_INHERIT	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_PAI_C_MS_INHERIT	Active	Y	Cancelled	Override by Doe, John on 03/04/2025: Removed RT
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_PAI_S_MS_INHERIT	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_SOC_MS_INHERIT	Inactive	N		
Mastering	Multi-source parameter	MULTISOURCEPARAM_ESG_TAXO_MS_INHERIT	Inactive	N		

Client Service Upgrade on the Client Tenant

The **Client Service upgrade** on the Client Tenant is triggered via Web Service, from the Central Tenant.

Upon selection of a given Client Service, the user action will trigger a scheduled task (code FT_SEND_CONFIG_TO_TENANT) that will first send the overrides, and then send the Client Service itself.

JOB 1 - Sending the Overrides

The overrides are sent through the first job of the task.

- First, if the override status is **To Be Cancelled**, the previous version of the override (if it exists) is rolled back.
- Then, if the override status is **To Be Applied**, the new override is applied (using the new **MxComponentOverride.applyOverride()** method).
- The override statuses then switches:
 - From 'To be cancelled' to 'Cancelled'
 - Or, from 'To be applied' to 'Applied'.

The Message of related audit entries is overridden to explicitly state the action performed.

Audit trail

Query ▾ Filters: × Object type = Scheduled Task × Object id = 122940 × Msg date = From 03/04/2025 To ...

Actions ▾

5 Hidden columns Group 2 Sorts

Msg date	1	Msg time	2	User	Msg type	Message
03/04/2025		17:50:51		Doe, John	Object Update	Activation from Client Service
03/04/2025		17:50:50		Doe, John	Object Update	Override application
03/04/2025		17:50:50		Doe, John	Object Update	Override rollback

JOB 2 - Sending the Client Service

The Client Service is sent with the second job.

Depending on the activation status of each of the components, the corresponding configuration object will then be activated or inactivated on the Client Tenant.

The **Message** column of the related audit entries explicitly state the performed action (Override application, Override, rollback,...).

Data Quality Level

Introduction

Following the delivery of DQL status calculations for Static Data in NeoXam DataHub version DH 7.1.0, DQL have been improved in NeoXam DataHub the version 7.2.0 with:

- DQL on Time Series
- DQL labels enhancements for both Static Data and Time Series to provide more information.
- **Static Data Management of Multi-listed Instruments**

Time Series

Time Series refers to all tables for which 'historisation' is configured in the **Data Dictionary**, as below:

PATH: [HOMEPAGE](#) > [DATA DICTIONARY](#) > [EDIT DATA DICTIONARY MXSECURITY](#)

Edit Data Dictionary MxSecurity

Q Actions

	Table name	Date field	Time field	Date end field	Histo
1	SECURITY_FEES				
2	SECURITY_FINANCING				
3	SECURITY_FOREX				
4	SECURITY_FUND				
5	SECURITY_GENERIC				
6	SECURITY_HISTO				
7	SECURITY_INDEX				
8	SECURITY_INDEX_SOURCE				
9	SECURITY_INTEREST				
10	SECURITY_ISSUE_RESTRICTION				
11	SECURITY_LINK				
12	SECURITY_MARKET				
13	SECURITY_MIFID	MIFID_PUBLISH_DATE		MIFID_PUBLISH_END_DATE	
14	SECURITY_MULTISOURCE				
15	SECURITY_NAME				
16	SECURITY_PROPERTY				
17	SECURITY_QUOTE	QUOTE_DATE	QUOTE_TIME	QUOTE_DATE_END	D-7
18	SECURITY_RANKING	RANKING_DATE		RANKING_END_DATE	D-7
19	SECURITY_RATING	RATING_DATE		RATING_DATE_END	D-7
20	SECURITY_RETURNS	RETURN_DATE		RETURN_DATE_END	D-7
21	SECURITY_SECURITIZATION	SECURITIZATION_DATE		SECURITIZATION_DATE_END	
22	SECURITY_SETTLEMENT				
23	SECURITY_STATISTICS				
24	SECURITY_STATUS				
25	SECURITY_STRUCTPROD				
26	SECURITY_TAX				
27	SECURITY_TAX_CLASSIFICATION				

The main requirement for Time Series data is to calculate a DQL status for each generated Golden Copy, and for each date.

This means, for example, that you will get a DQL status for each field group defined by considering all the Golden Copy generated (according to Multi-Source settings) at every date.

The **Time Series DQL Status calculation** is similar to the Static Data calculation and takes into account exceptions linked to objects (Agent, Security....), assigning a Silver status when there are open exceptions on the object and Gold status when there is none.

Time Series Field Group Configuration

The specific settings for **Time Series field group**, are the following ones:

- Check the **Time Series** checkbox.
- Define the **Target Table** to be used for calculations. The fields assigned to the field group will necessarily be fields from this target table (control in the business dictionary).
- Ability to define a condition in the field group, e.g. to exclude instruments that are not in '**Preferred**' status.

Note: It is not possible to define a **Catch All** field group for volumetric reasons.

PATH: HOMEPAGE > FIELD GROUP > FIELD GROUP DETAIL

Field Group Detail

Q Actions

1 Definition

2 Label (En) Security- Prices Label (Fr) Security- Prices

3 Code DQFS_SECURITY_QUOTES *

Rules

Detail Time Series

Class Security * Target Time Series ✓

Category DQ FieldSet Target Target Table SECURITY_QUOTE

Propagation

Hide columns Group Sort + Grid Find in view 0 lines

Source Field Group

No data found

Data Quality Level Status Computation

The **DQL status computation** is triggered in the following cases:

- **Upon Golden Copy creation** on prices/analytics, etc.... - **No exception**
All Data DQLs are initialized when a new Golden Copy is created (manually or via import) if the DQL parameter is set for this class.
If there is **no exception** generated during the Golden Copy creation process all DQLs are initialized with the **GOLD status**.

PATH: HOMEPAGE > DQL FOR SECURITY STATIC DATA

DQL for Security Static Data

Query ^

Security = FieldSet =
 Exceptions = #id =

Actions

3 Hidden columns 3 Groups 3 Sorts

Label	Level	FieldSet	Series Date	Exceptions
adidas N Namen-Akt/BARCAP/United States dollar/Security- Prices	Gold	Security- Prices	14/03/2019	
adidas N Namen-Akt/BARBADOS STOCK EXCHANGE/United States dollar/Sec...	Gold	Security- Prices	14/03/2019	
13/03/2019 (5)				
adidas N Namen-Akt/Fundcollect/Euro/Security- Prices	Gold	Security- Prices	13/03/2019	
adidas N Namen-Akt/AB NASDAQ VILNIUS/Euro/Security- Prices	Gold	Security- Prices	13/03/2019	
adidas N Namen-Akt/NAIROBI STOCK EXCHANGE/United States dollar/Securit...	Gold	Security- Prices	13/03/2019	
adidas N Namen-Akt/ZURCHER KANTONALBANK SECURITIES EXCHANGE/Eur...	Gold	Security- Prices	13/03/2019	
adidas N Namen-Akt/Schweiz/Euro/Security- Prices	Gold	Security- Prices	13/03/2019	
12/03/2019 (4)				
adidas N Namen-Akt/SINGAPORE EXCHANGE/Euro/Security- Prices	Gold	Security- Prices	12/03/2019	
adidas N Namen-Akt/MIC - JOHANNESBURG STOCK EXCHANGE/Euro/Securit...	Gold	Security- Prices	12/03/2019	
adidas N Namen-Akt/SHANGHAI STOCK EXCHANGE/Euro/Security- Prices	Gold	Security- Prices	12/03/2019	
adidas N Namen-Akt/EUREX BONDS/United States dollar/Security- Prices	Gold	Security- Prices	12/03/2019	
11/03/2019 (1)				
adidas N Namen-Akt/NYMEX GLOBEX/Euro/Security- Prices	Gold	Security- Prices	11/03/2019	
08/03/2019 (1)				
adidas N Namen-Akt/EURONEXT - EURONEXT PARIS/Euro/Security- Prices	Gold	Security- Prices	08/03/2019	

The **Record_ID** of the Golden Copy is stored in the main table and displayed in the screen **DQL for Security**.

The field **Series Date** is populated.

PATH: [HOMEPAGE](#) > [DQL FOR SECURITY STATIC DATA](#) > [DATA QUALITY LEVEL DETAIL](#)

Data Quality Level Detail

Q Actions

1

2

Main

DQ Label
adidas N Namen-Akt/SINGAPORE EXCHANGE/Euro/...

Object Label
adidas N Namen-Akt

Series Date
12/03/2019

Object Id
414,988

DQ Level
Gold

Field Group
Security- Prices

Field Except. List

Record ID
24,110,390

Exceptions

Hide columns Group Sort

Feed Reject	Business Field	Status	Technical Field	Exception Date	RecSpec
 No data found					

Antecedent

Hide columns Group Sort

Antecedent DQ Level

- Upon Golden Copy creation on prices/analytics etc.... - With exception**
During Golden Copy creation, exceptions can be generated due to triggered DQC (during the import process) or due to the execution of the completeness feature while saving the Golden Copy.
In that case, the exception needs to be considered for the initialization of the Golden Copy DQLs and the **exception details** will be attached in **DQLEVEL_EXCEPTION**.
The status of the calculated DQL will then be **SILVER**, since there is at least one exception attached to the DQL.

The figure below shows an example of **SILVER** DQL:

PATH: HOMEPAGE > DQL FOR SECURITY STATIC DATA

DQL for Security Static Data

Query ▾ Filters: x Class = Security

Actions ▾

3 Hidden columns 3 Groups 3 Sorts + [Icons] Grid Find in view

Label	Level	FieldSet	Series Date	Exceptions	Antecedent	DQLEVEL
Time Series(110)						1
14/04/2025(1)						1
adidas N Namen-Akt/EURONEXT - EURONEXT LISBON/Euro/Security- Prices	Silver	Security- Prices	14/04/2025	1		
12/02/2025(12)						
adidas N Namen-Akt/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/Mexican peso/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/Hungarian forint/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/Polish zloty/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/EURONEXT - EURONEXT PARIS/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/EURONEXT - EURONEXT LONDON/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/EURONEXT - EURONEXT AMSTERDAM/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/EU ClimateEx/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/EURONEXT UK - REPORTING SERVICES/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/BERN(BERN - Corp)/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/EURONEXT - APA/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
adidas N Namen-Akt/EUROMTS LTD/Euro/Security- Prices	Gold	Security- Prices	12/02/2025			
18/12/2024(2)						
adidas N Namen-Akt/Swiss franc/Security- Prices	Gold	Security- Prices	18/12/2024			
adidas N Namen-Akt/United States dollar/Security- Prices	Gold	Security- Prices	18/12/2024			

In this case, the exception is displayed within the **Exceptions** section of the **Data Quality Level Detail** screen:

PATH: HOMEPAGE > DQL FOR SECURITY STATIC DATA > DATA QUALITY LEVEL DETAIL

Data Quality Level Detail

Q Actions

1 Main

2

DQ Label

adidas N Namen-Akt/EURONEXT - EURONEXT LISBO...

Series Date

14/04/2025

DQ Level

✓ Silver

Field Except. List

Close Quote:1

Record ID

31,759,459

Object Label

adidas N Namen-Akt

Object Id

414,988

Field Group

Security- Prices

Exceptions

Hide columns

Group

Sort

+

Grid

Find in view

1 lines

Feed Reject	Business Field	Status	Technical Field	Exception Date	RecSpec
57374268	Close Quote	⚙ Open	Close	14/04/2025	

Antecedent

Hide columns

Group

Sort

+

Grid

Find in view

0 lines

Antecedent DQ Level

- Ability to **trigger DQL status update**
DQL status is updated each time an exception changes from **Closed to Open** or **from Open to Closed**.

Note: To avoid unnecessary DQL status update, the parameter **system.dql.data_exception.open_statuses** is used to list reject intermediary statuses that can be considered as open (e.g. ASSIGNED, CONTROL, ERROR, INPROCESS, INVALID, NEW, OPEN, PENDING_APPROVAL, SPLIT, WAITING).

▪ Bulk Initialization of DQL Status

To cover the initialization of DQL status for a scope of existing objects, the **DataQualityLevelUpdateService** service is implemented, with the following parameters:

- Arg 1:** Mode (mandatory)
- INITIALIZATION: for DQL mass initialization
- Arg 2:** Class (mandatory): contains the class name
- Arg 3:** Scope (mandatory): code of the scope of object on which the initialization is applied.
- Arg 4:** Bulk Size (Optional): contain the bulksize in order to process the business object by series (to be multiplied by fieldSet for bulk DQL recording).
- Arg 5:** DATEHISTO: This argument is used to define the date from which the initialization for Time Series tables is processed (QUOTE_DATE_END >= DATE_HISTO)

Note: By default, if the **DATEHISTO** argument is not specified in the job using the service, the DQL calculation engine will use the Histo Depth parameter defined in the technical class (usually D-7).

Important: For technical reasons, **DATEHISTO** cannot be less than D-7.


Static Data Management of Multi-Listed Instruments

Static Data Management of Multi-listed Instruments has also been added in NeoXam DataHub version 7.2.0.

The aim is to enable the identification of the record to which an exception is attached, allowing you to manage the exception.

This additional information is provided through the **DQE_RECSPEC** field, and for example displays the market and currency on which an exception has occurred.

In the example below, an exception has occurred on the field **Settlement Mode** (SECURITY_MARKET), and the record displayed shows that it comes from the market **NASDAQ - ALL MARKETS** in **US Dollar**.

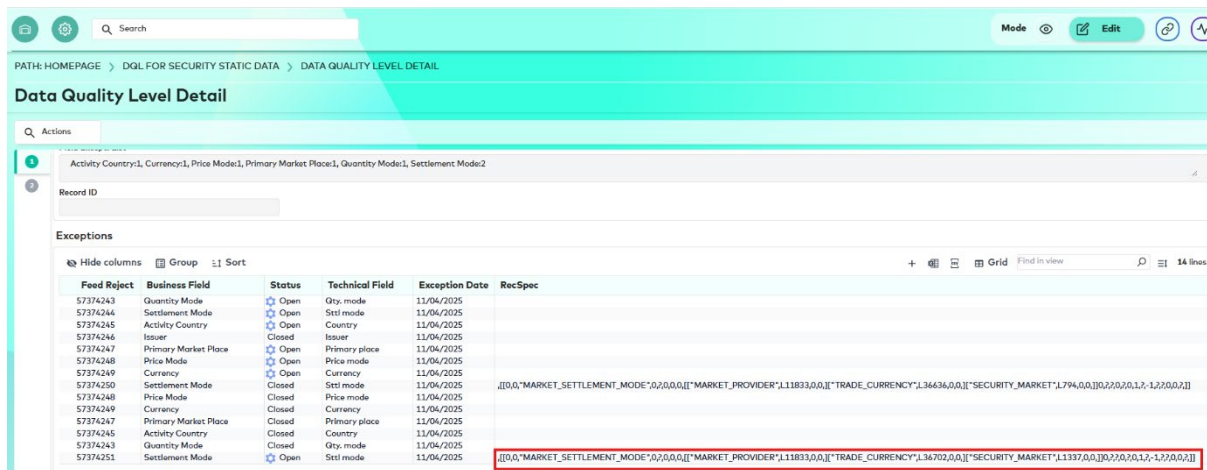

Feed Reject	Business Field	Status	Technical Field	Exception Date	RecSpec
57374243	Quantity Mode	Open	Qty. mode	11/04/2025	
57374244	Settlement Mode	Open	Sett. mode	11/04/2025	
57374245	Activity Country	Open	Country	11/04/2025	
57374246	Issuer	Closed	Issuer	11/04/2025	
57374247	Primary Market Place	Open	Primary place	11/04/2025	
57374248	Price Mode	Open	Price mode	11/04/2025	
57374249	Currency	Open	Currency	11/04/2025	
57374250	Settlement Mode	Closed	Sett. mode	11/04/2025	[[{"MARKET_SETTLEMENT_MODE": "02/00/01", "MARKET_PROVIDER": "11833/00/01", "TRADE_CURRENCY": "136636/00/01", "SECURITY_MARKET": "1794/00/01", "02/00/01", "17/00/01"}]]
57374249	Price Mode	Closed	Price mode	11/04/2025	
57374249	Currency	Closed	Currency	11/04/2025	
57374247	Primary Market Place	Closed	Primary place	11/04/2025	
57374245	Activity Country	Closed	Country	11/04/2025	
57374243	Quantity Mode	Closed	Qty. mode	11/04/2025	
57374251	Settlement Mode	Open	Sett. mode	11/04/2025	[[{"MARKET_SETTLEMENT_MODE": "02/00/01", "MARKET_PROVIDER": "11833/00/01", "TRADE_CURRENCY": "136702/00/01", "SECURITY_MARKET": "11337/00/01", "02/00/01", "17/00/01"}]]

DQL Labels Enhancements

In this version, two new parameters have been introduced to improve DQL labels and enhance their information content:

- **system.dql.label.MxClass**
- **system.dql.label.MxClass.TABLE**

system.dql.label.MxClass

This parameter applies to Static data and in particular to classes such as **MxYieldCurveValu** or **MxVolatCurveValu** whose object label is stored in another class (**MxYieldCurve**, **MxVolatCurve**).

For instance, the setting below will provide a DQL label that includes, by default, the name of the reference Volat Curve, the Value Date and the field group:

Parameter: system.dql.label.MxVolatCurveValu

1

General

Code *

system.dql.label.MxVolatCurveValu

Category

Connectivity and Quality

Privacy level *

NeoXam

Activated?



Is restart server mandatory ? *



Description

Append the value of the field to DQL label

Value

Value Type *

Text

Value

VOLATCURVE;VALUE_DATE

DQL screen will display the following labels:




PATH: [HOMEPAGE](#) > [DQL FOR SECURITY STATIC DATA](#)

DQL for Security Static Data

Query ^

Security

Exceptions

FieldSet

#id

Actions

Label	Level	FieldSet
▼ -(2)		
▼ Static(2)		
▼ -(2)		
AUD/USD_10/05/2007/Volatility Curve Value - Core	✓ Gold	Volatility Curve Value - Core
AUD/USD_03/28/2008/Volatility Curve Value - Core	✓ Gold	Volatility Curve Value - Core

system.dql.label.MxClass.TABLE

This parameter applies to Time Series data and allows to distinguish DQL by market and currency.

For instance, the setting below will provide a DQL label that includes, by default, the Name of the security, the Market, the Currency and the field group:

PATH: HOMEPAGE > PARAMETERS > PARAMETER: SYSTEM.DQL.LABEL.MXSECURITY.SECURITY_QUOTE

Parameter: system.dql.label.MxSecurity.SECURITY_QUOTE

Q Actions

1 General

2 Code
system.dql.label.MxSecurity.SECURITY_QUOTE *

Category
Connectivity and Quality

Privacy level
NeoXam *

Activated?
☒

Is restart server mandatory? *

Description

Append the value of the field to DQL label

Value

Value Type
Text *

Value
QUOTE_MARKET;QUOTE_CURRENCY *

The labels will be displayed as follows in the DQL screen:

PATH: HOMEPAGE > DQL FOR SECURITY STATIC DATA

DQL for Security Static Data

Query ▾ Filters : x Class = Security

Actions ▾

3 Hidden columns 3 Groups 3 Sorts

Label
14/03/2019(7)
adidas N Namen-Akt/LME Steel/Euro/Security- Prices
adidas N Namen-Akt/MIC - LONDON STOCK EXCHANGE/Euro/Security- Prices
adidas N Namen-Akt/Ber Steu Fin/Euro/Security- Prices
adidas N Namen-Akt/LME London/Euro/Security- Prices
adidas N Namen-Akt/NASDAQ HELSINKI LTD/Euro/Security- Prices
adidas N Namen-Akt/BARCAP/United States dollar/Security- Prices
adidas N Namen-Akt/BARBADOS STOCK EXCHANGE/United States dollar/Security- Prices
13/03/2019(5)
adidas N Namen-Akt/Fundcollect/Euro/Security- Prices
adidas N Namen-Akt/AB NASDAQ VILNIUS/Euro/Security- Prices
adidas N Namen-Akt/NAIROBI STOCK EXCHANGE/United States dollar/Security- Prices
adidas N Namen-Akt/ZURCHER KANTONALBANK SECURITIES EXCHANGE/Euro/Security- Prices
adidas N Namen-Akt/Schweiz/Euro/Security- Prices
12/03/2019(4)
adidas N Namen-Akt/SINGAPORE EXCHANGE/Euro/Security- Prices
adidas N Namen-Akt/MIC - JOHANNESBURG STOCK EXCHANGE/Euro/Security- Prices
adidas N Namen-Akt/SHANGHAI STOCK EXCHANGE/Euro/Security- Prices
adidas N Namen-Akt/EUREX BONDS/United States dollar/Security- Prices

DQL Publication

Publishing/exporting a functional object (Agent, Security...) to third-party systems is the ultimate goal of the Data Quality Level concept.

New `system.dql.publication.rule_code` Parameter


Selecting the objects on which this publication should take place when its data/characteristics are modified, and the DQL status at the same time, is not a problem with the different tools available in NeoXam DataHub.

On the other hand, the selection of objects for which the DQL status is modified simply because an alert/exception is closed must be proposed in the standard solution.

For this reason, a parameter has been implemented to define the code of a management rule: **`system.dql.publication.rule_code`**

As a standard feature, the **DQL_BIZ_OBJECT_UPDATE business rule** is delivered and configured in this parameter, which enables objects to be selected and added to `MxPublishStatus`.

This business rule can be changed and adapted to each user's needs.

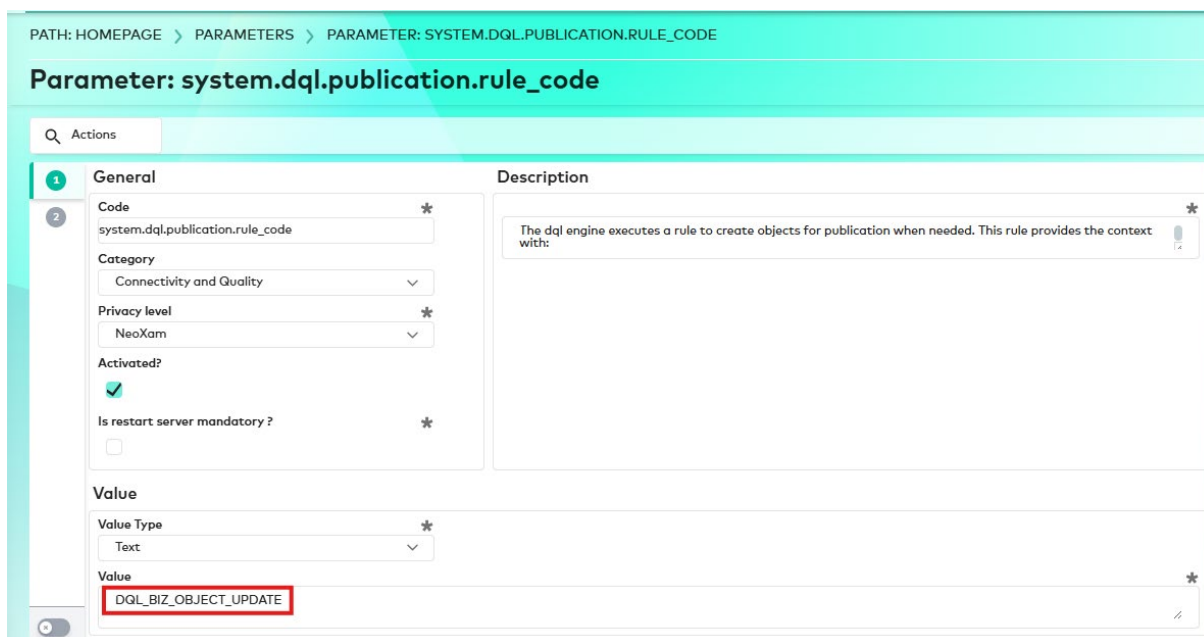

PATH: HOMEPAGE > PARAMETERS > PARAMETER: SYSTEM.DQL.PUBLICATION.RULE_CODE

Parameter: `system.dql.publication.rule_code`

Q Actions

1 General

2

Code *

`system.dql.publication.rule_code`

Category

Connectivity and Quality

Privacy level *

NeoXam

Activated?

☒

Is restart server mandatory? *

☐

Description *

The dql engine executes a rule to create objects for publication when needed. This rule provides the context with:

Value

Value Type *

Text

Value *

DQL_BIZ_OBJECT_UPDATE