



NEOXAM DATAHUB - WHAT'S NEW 7.3.0.0.

WHAT'S NEW

DISCLAIMER – NEOXAM SOFTWARE DOCUMENTATION

NeoXam Portfolio Management SAS, a 'société par actions simplifiée' with share capital €15,575,931, registered with the Paris Company's register under No. 349 467 449 ('NeoXam'), is the owner of this Software Documentation. NeoXam holds all the rights required for the publication, together with, but not limited to, all logos, trademarks, screenshots, any data used herein. The Client is granted a right to use this Software Documentation only as agreed in writing with NeoXam. This Software Documentation is confidential and the Client shall protect the confidentiality and NeoXam's intellectual property rights. Unless otherwise agreed in writing by NeoXam, this Software Documentation is provided 'as is' without warranty of any kind, either express or implied, including, but not limited to, that the Software Documentation will not include technical or other mistakes, inaccuracies or typographical errors. The Software Documentation may be changed, and NeoXam makes no commitment to update such materials, unless otherwise agreed in writing. Screenshots and examples provided in this Software Documentation are not contractual and may be changed, according to the Client's needs, operational and technical constraints. NeoXam assumes no responsibility for errors or omissions in the Software Documentation. In no event shall NeoXam be liable for any special, punitive, incidental, indirect or consequential damages of any kind, or any damages whatsoever, including, without limitation, those resulting from loss of use, data or profits, whether or not NeoXam has been advised of the possibility of such damages, and on any theory of liability, arising out of or in connection with the use of this Software Documentation.

©2025 NeoXam

TABLE OF CONTENTS

New Features	4
Release Management	5
Introduction	5
Architecture	5
Repositories	5
Releases	5
Package Folder	6
Release Management Overview	6
Package Release Screen	7
Managing the Release Lifecycle Steps	9
Creation of a New Environment	9
Creation of a New Release	9
Start Development of a Release	11
Create a Package (from environment)	12
Upload Packages to Release (from environment)	15
Upload Packages to Release (from file)	17
Close a Release	18
Install a Release	19
NeoXam DataHub Web Application	21
Introduction	21
Searching Drop-Down Lists using Codes	21
Custom UI Screens	22
Screen Configuration	23
Adding Fields from Related Classes	23
Configuring Query Criteria	24
Decision Tree Management	25
Updating the List of Externally Mapped Fields	25
Data Quality Control New Design	27

New Features

We are pleased to announce the availability of NeoXam DataHub **Version 7.3.0.0**.

This version also introduces new features around:

- The new [Release Management](#) process. It now provides a more efficient way to create, store, retrieve and install NeoXam DataHub releases.
- [NeoXam DataHub Web Application](#), with:
 - **Manual Override** new visual cue for overridden fields.
 - the ability to **search drop-down lists** using object alphanumeric codes.
 - the migration of some **Custom UI screens**.
 - enhancement on **screen configuration** that now enables adding fields from related classes into a screen and defining advanced options on query search criteria.
 - the ability to display and configure **decision trees**, by editing nodes or associating actions with specific nodes.
 - Feed Process enhancements on **externally mapped fields** to allow adding or removing fields from the list of mapped fields.
- [Data Quality Control New Design](#), with the addition of the rule execution tracking feature consists of recording the results of data quality checks and displaying them in a new **Data Quality Screening Report** screen.



Release Management

Introduction

The release management workflow provides a more efficient way to create, store, retrieve and install configuration releases.

It is designed to ensure that environments are up-to-date and consistent across all standard NeoXam DataHub deployments for both development and project implementation teams.

Architecture

Repositories

NeoXam DataHub releases are centralized on repositories allowing release collaboration and consistency throughout the NeoXam DataHub release management process.

There are two main types of repositories:

- **NeoXam Core Repository**, created and maintained by NeoXam teams contains Core releases.


Note: Access to the repository is managed by SSH keys that grants either Read-Only or Ready-Write access.

- **Ready-Write** access is granted to NeoXam internal teams only, for release management (creation, status change) and release development purposes.
- **Ready-Only** access is required in all environments for release deployment.
- **Client Repository**, which is a proprietary repository that stores client versions.

Releases

Each repository then contains DataHub versions.

Links between clients releases and NeoXam Core releases allow the creation and deployment of clients' custom releases.

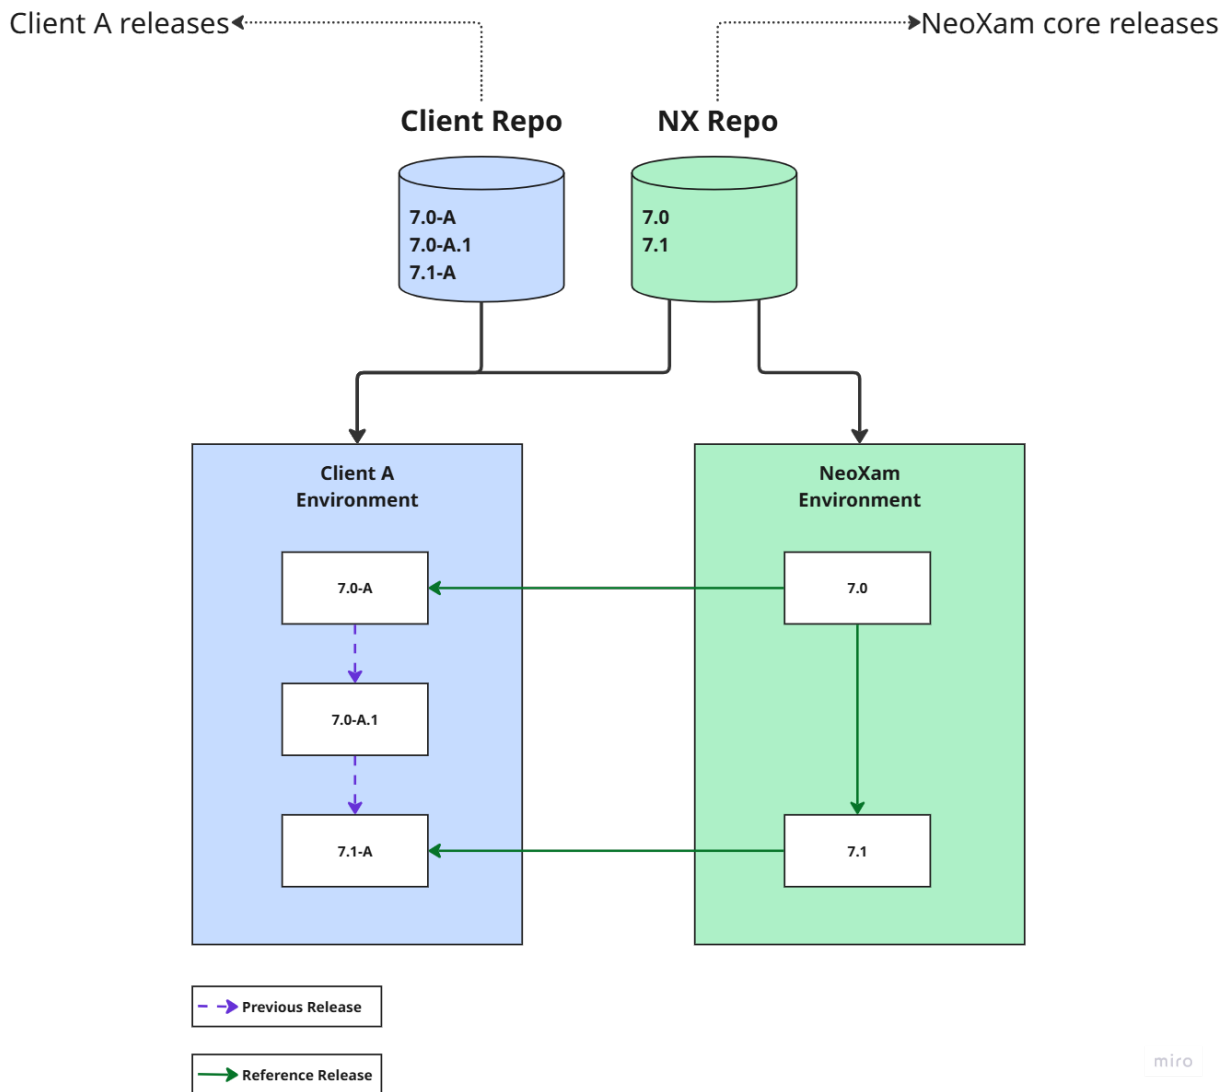

Package Folder

All the packages required for a version (development packages, configuration and even some technical or business core use cases) are gathered into a unique package folder to ensure the delivery of reliable set of packages.

Release Management Overview

The release management process includes:

- **Release collaboration using Git**, for robust version control and collaboration on releases configuration. The solution includes built-in support for Git commands, making it effortless to commit, push, and manage package files from NeoXam DataHub interface.


Note: An encapsulated Git installation is delivered within a Docker image as part of NeoXam DataHub official delivery.

- **Release Creation:** The creation and configuration of releases directly from NeoXam DataHub environment eases the delivery of reliable set of packages. Each NeoXam DataHub version has a unique folder that wraps all the packages required for a version (development packages, configuration and even some technical or business core use cases).
- **Release Retrieval:** Releases are retrieved from a remote repository on any target environment. Release meta-data and content retrieval are performed from a Git repository, ensuring that the correct configuration version is ready to be deployed.
- **Release Installation:** This step offers automated installation of releases configuration into the target environment, and success or fail status monitoring on each deployment package. This approach reduces manual intervention, minimizes errors, and ensures that configurations are applied uniformly on different environments.

Package Release Screen

A release is represented by a NeoXam DataHub object displayed in the **Package Releases** screen. Currently, one release is created per NeoXam DataHub version (major, minor, patches) to be delivered.

From the **Package Releases** screen, you can select a release and display the release's details in the **Package Release Detail** screen.

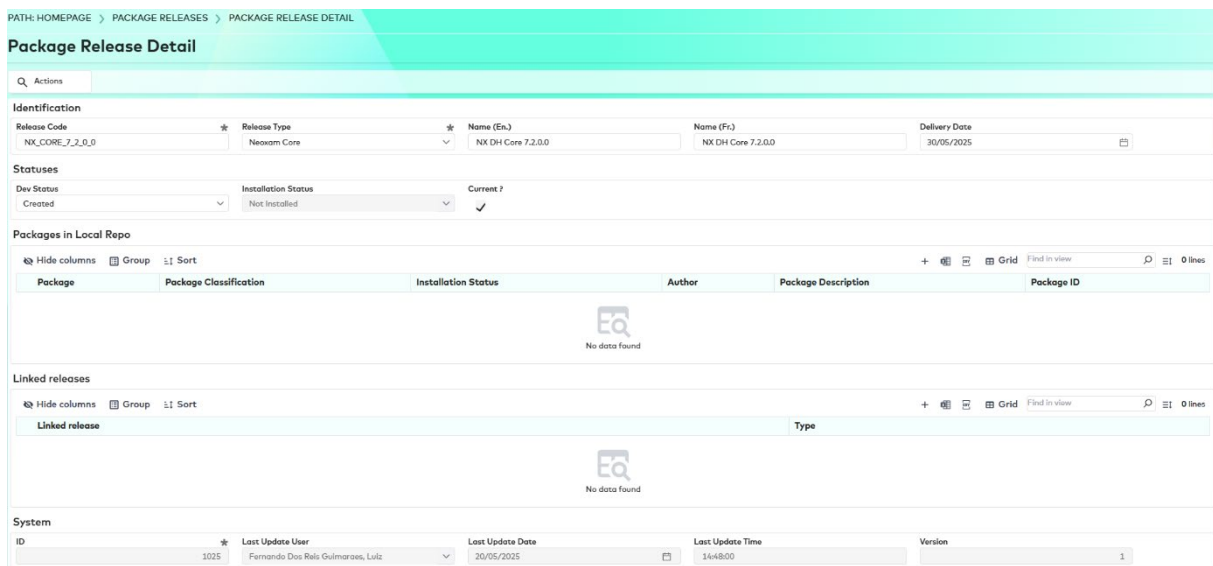

The screen contains the following information:

Fields	Description
Release Code	Unique identifier of a release.

Release Type	A release type corresponds to a specific repository in which is stored either releases delivered by NeoXam Core development team or clients releases corresponding to local implementations on client projects. Note: Release types are created in the Package Release Types list screen and a GIT type communication channel must be configured for each one of them.
Name	Name of the Release
Dev status	Indicates the development status of the release. ▪ Created, when the release has just been created but does not contain packages and cannot be installed yet, ▪ In development, when the release can contain packages but can still be enriched (this status is available for NeoXam internal deployment only), ▪ Ready when the release is validated and can be installed both internally and at clients. Note: Users with a Release Manager profile are responsible for managing the development status and can change the status from Created to In Development and Ready.
Installation status	Indicates the release installation status on current environment: ▪ Installed, when the release is successfully installed, ▪ Partially installed, when the release has been installed but some errors occurred, ▪ Not installed, when the release has not been installed in environment Note: The latest release installed on the environment becomes the current baseline version of the environment. In this case, the Current? checkbox is selected.
Current?	A selected check box indicates that this version is the current version on the environment.
Packages in local repo	A list of packages can be associated with a release either by uploading a package file or by selecting packages created in the current environment (Package ID column). Refer to the Upload Packages to Release (from environment) and Upload Packages to Release (from file) sections for more information.

Linked Releases	Release representing an immediate previous version. During release installation process, this field is used to determine the sequence of installation.
Delivery date	Expected delivery date of release

Managing the Release Lifecycle Steps

The release and package lifecycle is represented by multiple tasks that will be executed by different actors (Release Manager, Quality Analysts, Development team, Business Analysts, implementation team...) during their user journeys. They include:

1. The creation of a new environment
2. The creation of a new release by the release manager
3. The development of a release
4. The creation of packages
5. The uploading of packages to the release, from the local environment or .pack files.
6. The close of a release
7. The installation of a release using a service

Important: For more information on release management lifecycle tasks, refer to the Release Management documentation.

Creation of a New Environment

The release management process starts with the creation of a new environment from a reference template. This template should contain the latest delivery build and configuration release of NeoXam DataHub.


Creation of a New Release

The creation of new releases is executed by a release manager from a baseline environment. In case of an internal development, the releases will be created and managed from a dedicated Release Manager environment.

To create a new release:

1. Go to **DatHub factory>Production>Data Transfer>Package Releases** screen.
2. Click the **Refresh Package Releases** button to make sure the NeoXam DataHub environment is aligned with the content of the GIT repository.
This action will fetch the content from the GIT repository and update (if needed)

the Package Releases present in NeoXam DataHub database.

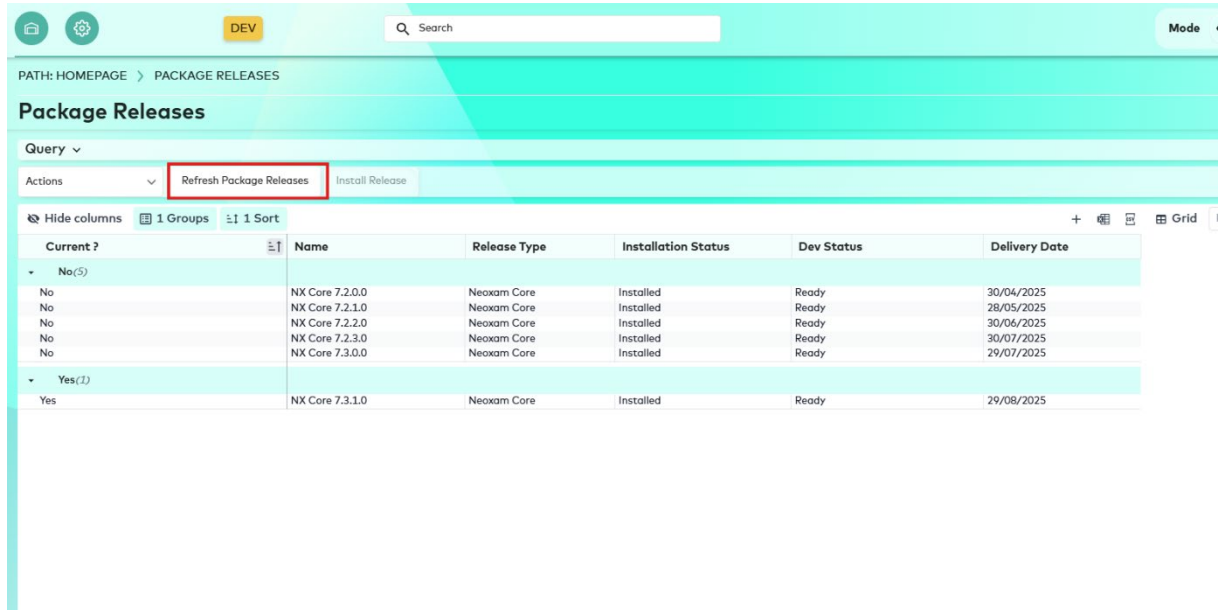

PATH: HOMEPAGE > PACKAGE RELEASES

Package Releases


Query ▾

Actions ▾ Refresh Package Releases Install Release

Hide columns 1 Groups 1 Sort + ☰ Grid

Current ?	Name	Release Type	Installation Status	Dev Status	Delivery Date
▾ No(5)					
No	NX Core 7.2.0.0	Neoxam Core	Installed	Ready	30/04/2025
No	NX Core 7.2.1.0	Neoxam Core	Installed	Ready	28/05/2025
No	NX Core 7.2.2.0	Neoxam Core	Installed	Ready	30/06/2025
No	NX Core 7.2.3.0	Neoxam Core	Installed	Ready	30/07/2025
No	NX Core 7.3.0.0	Neoxam Core	Installed	Ready	29/07/2025
▾ Yes(1)					
Yes	NX Core 7.3.1.0	Neoxam Core	Installed	Ready	29/08/2025

3. Click the + icon to create a new release.

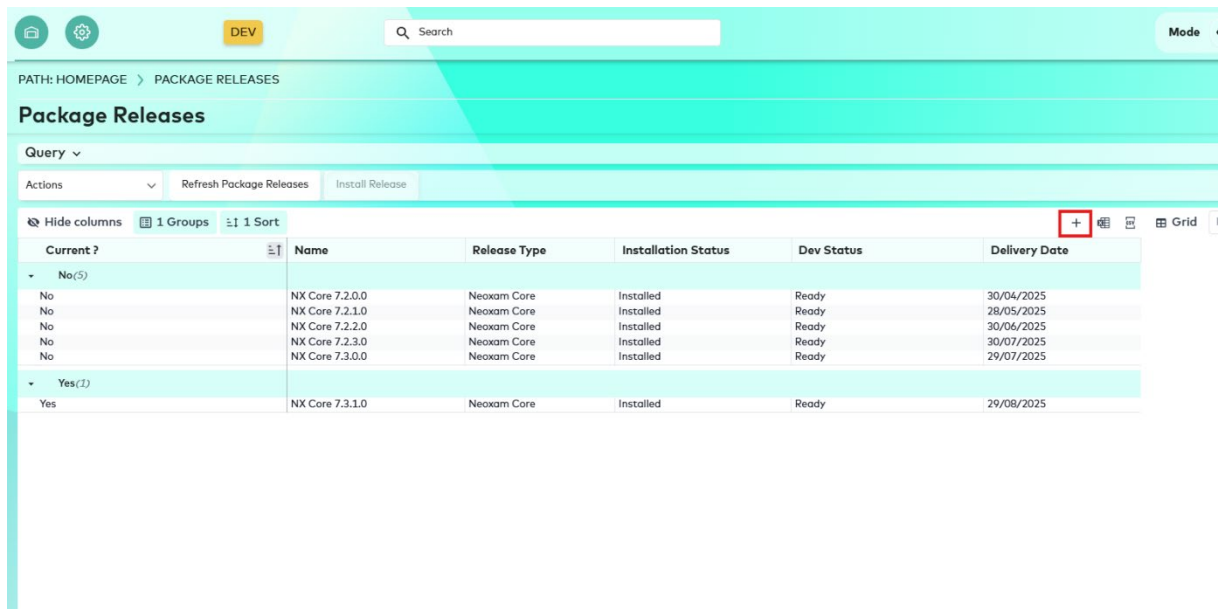

PATH: HOMEPAGE > PACKAGE RELEASES

Package Releases

Query ▾

Actions ▾ Refresh Package Releases Install Release

Hide columns 1 Groups 1 Sort + ☰ Grid

Current ?	Name	Release Type	Installation Status	Dev Status	Delivery Date
▾ No(5)					
No	NX Core 7.2.0.0	Neoxam Core	Installed	Ready	30/04/2025
No	NX Core 7.2.1.0	Neoxam Core	Installed	Ready	28/05/2025
No	NX Core 7.2.2.0	Neoxam Core	Installed	Ready	30/06/2025
No	NX Core 7.2.3.0	Neoxam Core	Installed	Ready	30/07/2025
No	NX Core 7.3.0.0	Neoxam Core	Installed	Ready	29/07/2025
▾ Yes(1)					
Yes	NX Core 7.3.1.0	Neoxam Core	Installed	Ready	29/08/2025

The following fields must be entered:

- **Release Code:** unique identifier of a release.
- **Release Type:** "Neoxam Core or Client project, for example.
- **Name**
- **Linked Releases:** select a release representing an immediate previous version. During release installation processes, this field is used to determine the sequence of installation.

Note: A release can only be created by having a link to a currently installed release.

- **Delivery date:** expected delivery date of release


4. Click **Save**.
5. The release development status must be in status **Created**.

Start Development of a Release

The development of a release starts by setting its status to **In Development**. It can be executed only by a user with a Release Manager profile. Once done, packages can be added to the release, which can then be installed in Development environments.

To update the development status:

1. Go to **Datahub factory>Production>Data Transfer>Package Releases** screen and click the **Refresh Package Releases**.

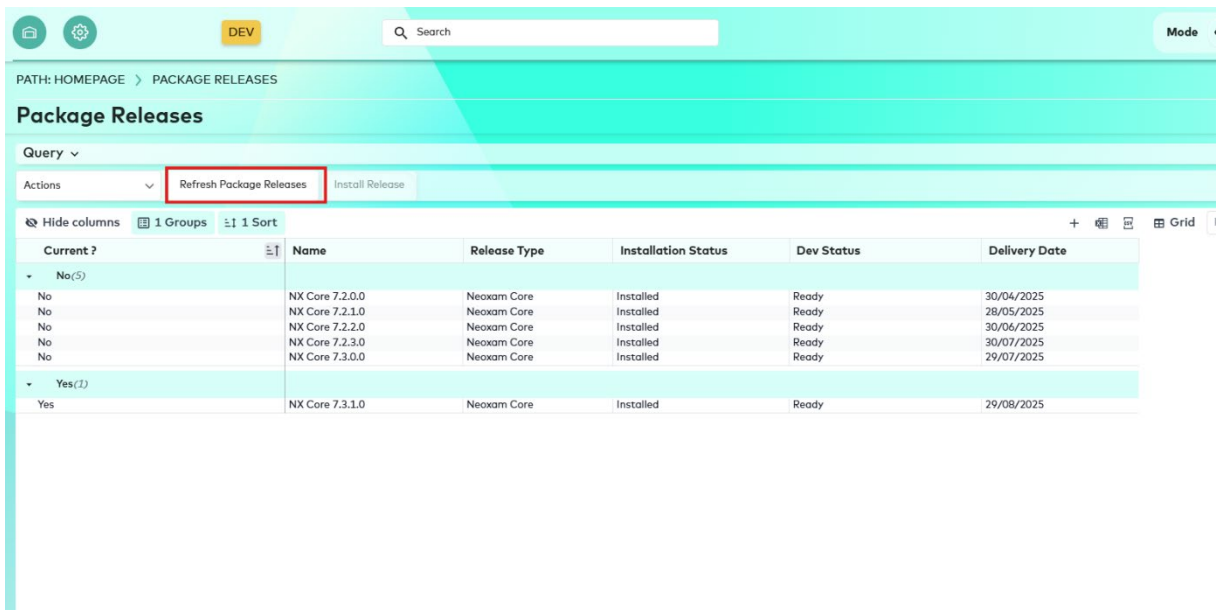

PATH: HOMEPAGE > PACKAGE RELEASES

Package Releases


Query ▾

Actions ▾ Refresh Package Releases Install Release

Hide columns 1 Groups 1 Sort + ☰ ☷ Grid

Current ?	Name	Release Type	Installation Status	Dev Status	Delivery Date
▾ No(5)					
No	NX Core 7.2.0.0	Neoxam Core	Installed	Ready	30/04/2025
No	NX Core 7.2.1.0	Neoxam Core	Installed	Ready	28/05/2025
No	NX Core 7.2.2.0	Neoxam Core	Installed	Ready	30/06/2025
No	NX Core 7.2.3.0	Neoxam Core	Installed	Ready	30/07/2025
No	NX Core 7.3.0.0	Neoxam Core	Installed	Ready	29/07/2025
▾ Yes(1)					
Yes	NX Core 7.3.1.0	Neoxam Core	Installed	Ready	29/08/2025

2. Open the release to be updated.

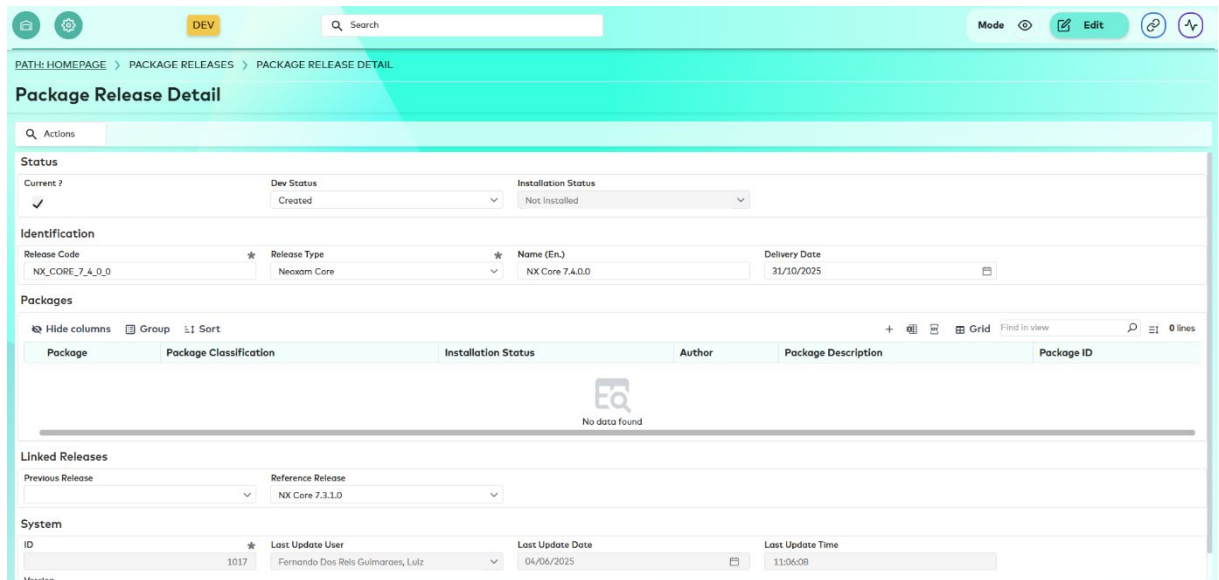

PATH: HOMEPAGE > PACKAGE RELEASES > PACKAGE RELEASE DETAIL

Package Release Detail

Actions

Status

Current ? ☒ Dev Status: Created Installation Status: Not Installed

Identification

Release Code: NX_CORE_7.4.0.0 Release Type: Neoxam Core Name (En.): NX Core 7.4.0.0 Delivery Date: 31/10/2025

Packages

Hide columns Group Sort + Grid Find in view 0 lines

No data found


Linked Releases

Previous Release Reference Release: NX Core 7.3.1.0

System

ID: 1017 Last Update User: Fernando Dos Reis Guimarães, Luiz Last Update Date: 04/06/2025 Last Update Time: 11:06:08

3. Set the **Development status** to **In development**.

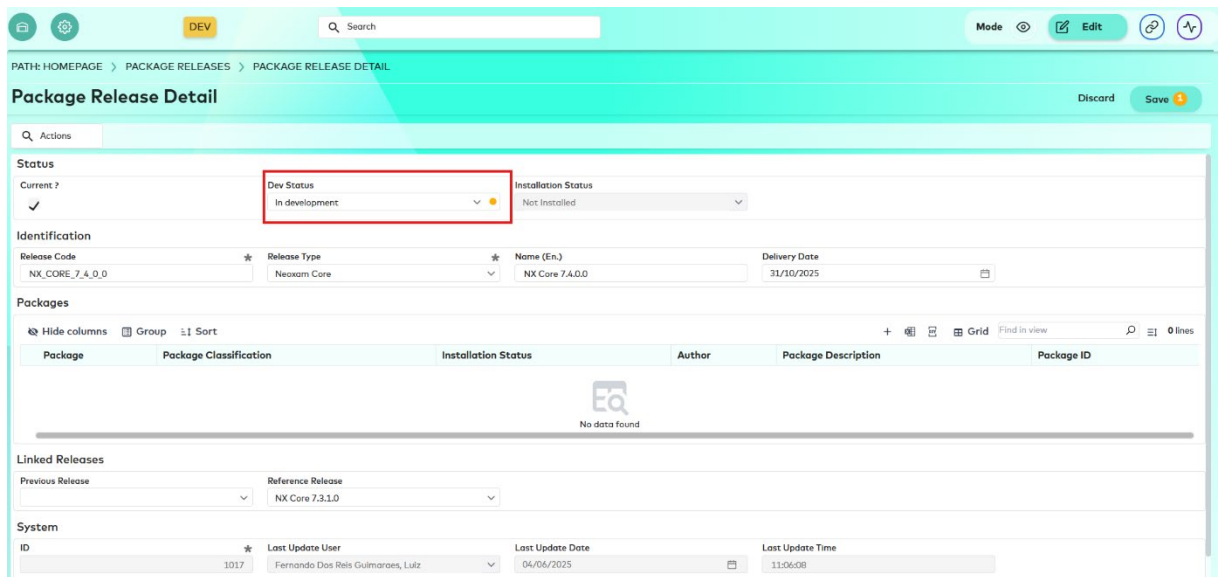

PATH: HOMEPAGE > PACKAGE RELEASES > PACKAGE RELEASE DETAIL

Package Release Detail

Discard Save

Actions

Status

Current ? ☒ Dev Status: In development Installation Status: Not Installed

Identification

Release Code: NX_CORE_7.4.0.0 Release Type: Neoxam Core Name (En.): NX Core 7.4.0.0 Delivery Date: 31/10/2025

Packages

Hide columns Group Sort + Grid Find in view 0 lines

No data found

Linked Releases

Previous Release Reference Release: NX Core 7.3.1.0

System

ID: 1017 Last Update User: Fernando Dos Reis Guimarães, Luiz Last Update Date: 04/06/2025 Last Update Time: 11:06:08

4. **Save** the update.

Create a Package (from environment)

As part of a Jira ticket development, you may need to create packages when:

- A new feature is being developed
- A bug is corrected
- A new business use case must be added or enhanced in the standard product release (e.g. updates on a connector or a new dashboard).

On NeoXam DataHub Web Application, the process of creation of a package has two main steps:

- Create a package
- Add object modifications to package

To create a package:

1. Go to the **Package List** screen.




SYSTEM_PACKAGE_ID	Name	Code	Install mode
233620	DHRD_PRD2_ADD_ACTION_INSTALL	DHRD_PRD2_ADD_ACTION_INSTALL	Mandatory

2. Click the **+** icon to add a new package.



SYSTEM_PACKAGE_ID	Name	Code	Install mode
233620	DHRD_PRD2_ADD_ACTION_INSTALL	DHRD_PRD2_ADD_ACTION_INSTALL	Mandatory

3. Enter the package information.

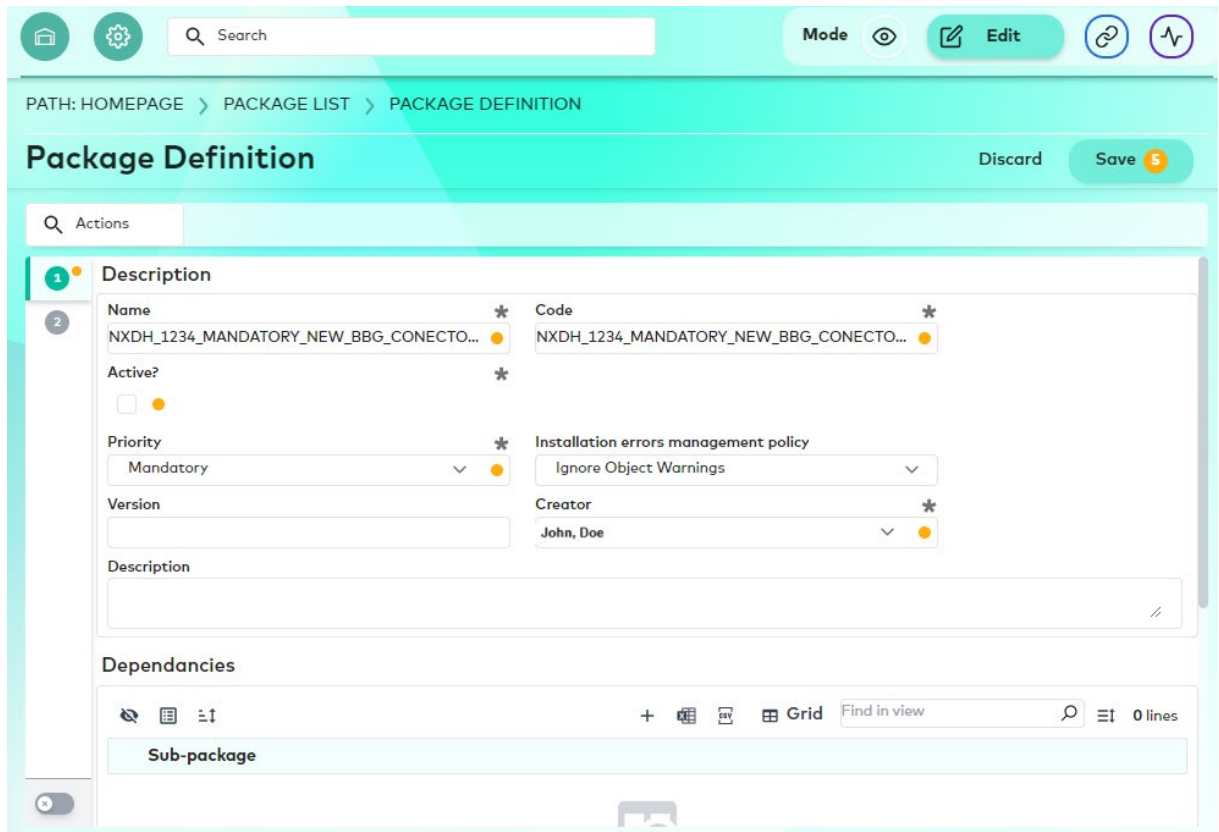

PATH: HOMEPAGE > PACKAGE LIST > PACKAGE DEFINITION

Package Definition

Discard Save

Actions

1 Description

2

Name * Code *

NXDH_1234_MANDATORY_NEW_BBG_CONECTO... NXDH_1234_MANDATORY_NEW_BBG_CONECTO...

Active? *

☐

Priority * Installation errors management policy

Mandatory Ignore Object Warnings

Version * Creator *

John, Doe


Description

Dependencies

Sub-package

4. Click **Save**.

5. Then go to the **Audit Trail** screen.

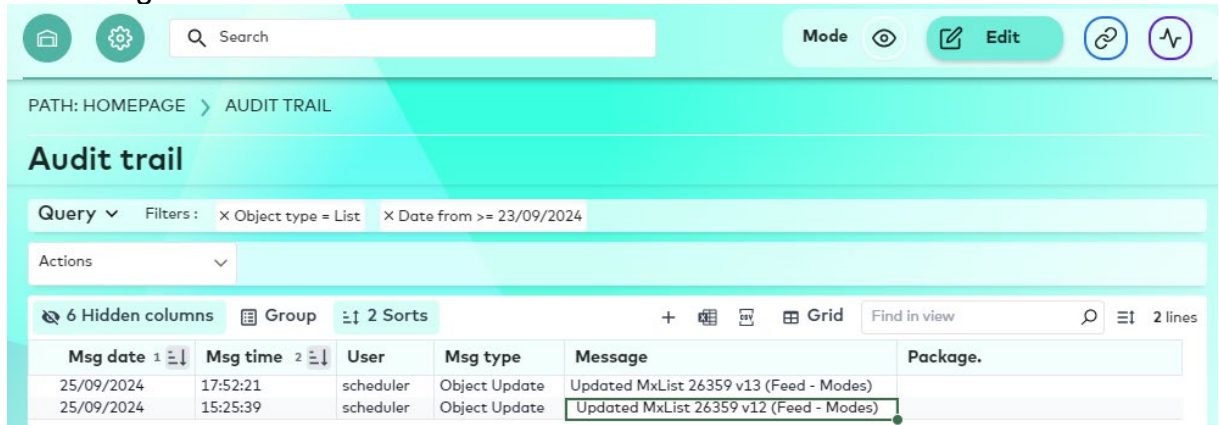

PATH: HOMEPAGE > AUDIT TRAIL

Audit trail

Query Filters: X Object type = List X Date from >= 23/09/2024


Actions

6 Hidden columns Group 2 Sorts

Grid Find in view 2 lines

Msg date	Msg time	User	Msg type	Message	Package.
25/09/2024	17:52:21	scheduler	Object Update	Updated MxList 26359 v13 (Feed - Modes)	
25/09/2024	15:25:39	scheduler	Object Update	Updated MxList 26359 v12 (Feed - Modes)	

6. Add the target package.

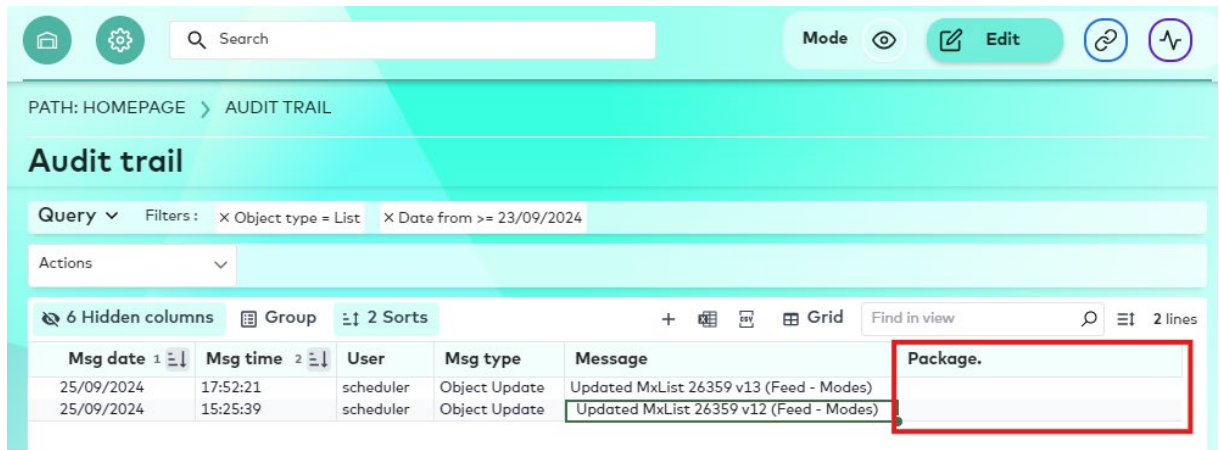

PATH: HOMEPAGE > AUDIT TRAIL

Audit trail


Query ▾ Filters: X Object type = List X Date from >= 23/09/2024

Actions ▾

6 Hidden columns Group 2 Sorts + Grid Find in view 2 lines

Msg date 1	Msg time 2	User	Msg type	Message	Package.
25/09/2024	17:52:21	scheduler	Object Update	Updated MxList 26359 v13 (Feed - Modes)	
25/09/2024	15:25:39	scheduler	Object Update	Updated MxList 26359 v12 (Feed - Modes)	

7. Repeat the addition of package for all relevant rows.

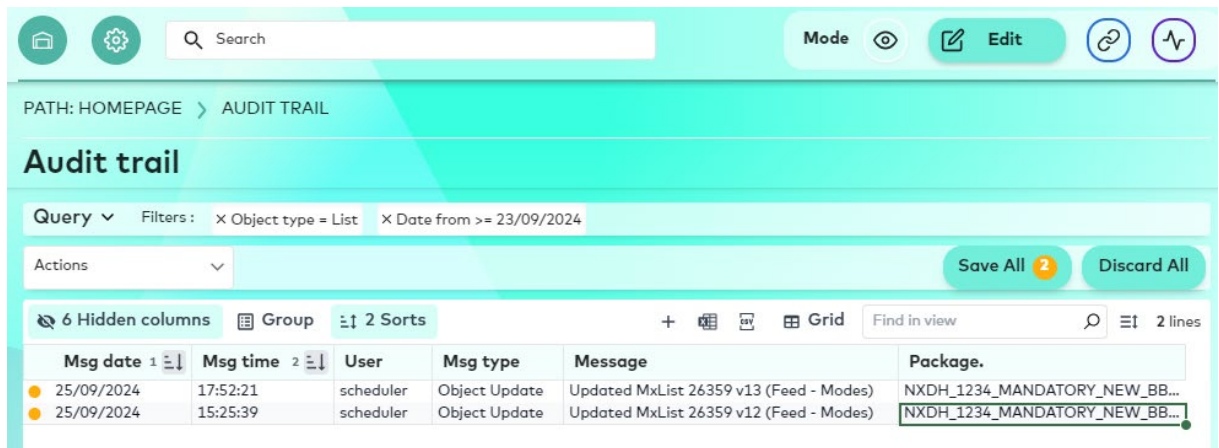

PATH: HOMEPAGE > AUDIT TRAIL

Audit trail

Query ▾ Filters: X Object type = List X Date from >= 23/09/2024

Actions ▾ Save All 2 Discard All

6 Hidden columns Group 2 Sorts + Grid Find in view 2 lines

Msg date 1	Msg time 2	User	Msg type	Message	Package.
25/09/2024	17:52:21	scheduler	Object Update	Updated MxList 26359 v13 (Feed - Modes)	NXDH_1234_MANDATORY_NEW_BB...
25/09/2024	15:25:39	scheduler	Object Update	Updated MxList 26359 v12 (Feed - Modes)	NXDH_1234_MANDATORY_NEW_BB...

8. Click **Save All** to save all changes.

Upload Packages to Release (from environment)

Once the development of requirements described in a Jira ticket is finished, the packages wrapping all changes applied on objects can be uploaded to the target release.

1. Go to **Datahub factory>Production>Data Transfer>Package Releases** screen.
2. Open a release with an **In development** status.

PATH: HOMEPAGE > PACKAGE RELEASES > PACKAGE RELEASE DETAIL

Package Release Detail

Actions

Status

Current ? Dev Status In development Installation Status Not installed

Identification

Release Code NX_CORE_7.4.1.0 * Release Type Neoxam Core * Name (En.) Nx Core 7.4.1.0 Delivery Date 30/11/2025

Packages

Hide columns Group Sort + Grid Find in view 0 lines

Package	Package Classification	Installation Status	Author	Package Description	Package ID
No data found					

Linked Releases

Previous Release Reference Release NX Core 7.4.0.0

System

ID 1018 * Last Update User Fernando Dos Reis Guimaraes, Luiz * Last Update Date 04/06/2025 * Last Update Time 14:54:30

- In the **Packages** section, click the **+** icon to add a package.
- In the **Package ID** column, select the package.

PATH: HOMEPAGE > PACKAGE RELEASES > PACKAGE RELEASE DETAIL

Package Release Detail

Discard Save

Actions

Status

Current ? ✓ Dev Status In development Installation Status Not installed

Identification

Release Code NX_CORE_7.4.1.0 * Release Type Neoxam Core * Name (En.) Nx Core 7.4.1.0 Delivery Date 30/11/2025

Packages

Hide columns Group Sort Edited rows only + Grid Find in view 1 lines

Package	Package Classification	Installation Status	Author	Package Description	Package ID
☒		Not installed			


Linked Releases

Previous Release Reference Release NX Core 7.4.0.0

0.5 HK Ex 17 CV-8/3/2016 11:01:31
00000_PACKAGE_RELEASE_DH_7.0.0.0_
00000_PACKAGE_RELEASE_NX_CORE_7.2.0.0_
00001_PACKAGE_RELEASE_NX_CORE_7.2.1.0_
00000_PACKAGE_RELEASE_NX_CORE_7.2.2.0_

Note: You can type the first letters of the package name and let the auto-completion feature help you to find the full package name.

5. Click **Save** to validate.

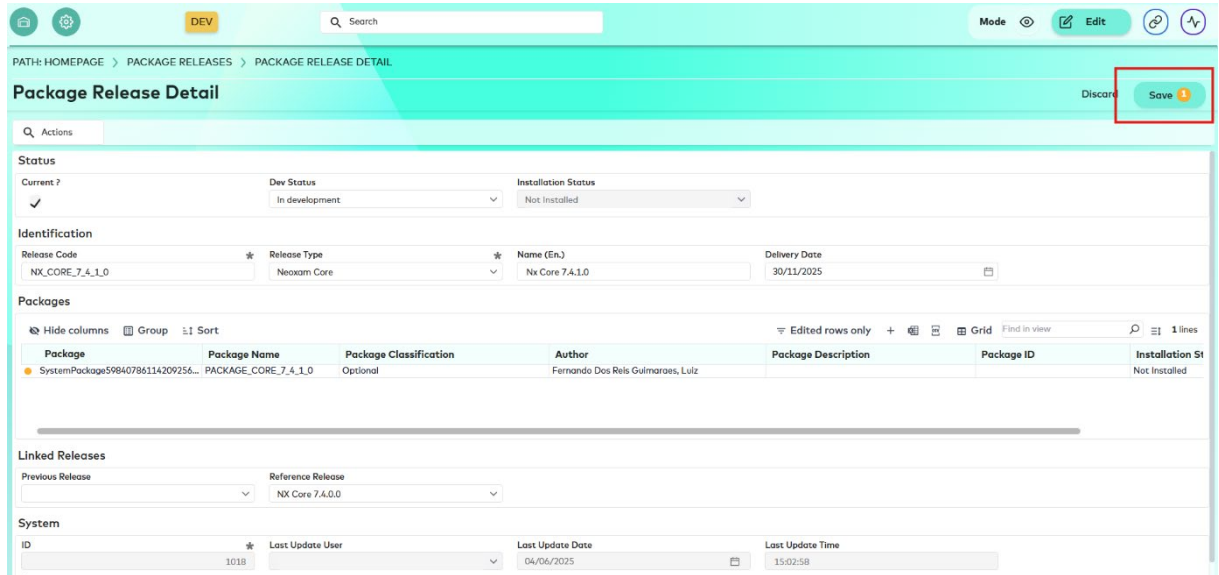

PATH: HOMEPAGE > PACKAGE RELEASES > PACKAGE RELEASE DETAIL

Package Release Detail

Discard Save

Actions

Status

Current ? ☒ Dev Status: In development Installation Status: Not installed

Identification

Release Code: NX_CORE_7.4.1.0 Release Type: Neoxam Core Name (En.): Nx Core 7.4.1.0 Delivery Date: 30/11/2025

Packages

Package	Package Name	Package Classification	Author	Package Description	Package ID	Installation St
SystemPackage59840786114209256...	PACKAGE_CORE_7.4.1.0	Optional	Fernando Dos Reis Guimaraes, Luiz			Not installed

Linked Releases

Previous Release: Reference Release: NX Core 7.4.0.0

System


ID: 1018 Last Update User: Last Update Date: 04/06/2025 Last Update Time: 15:02:58

Note: Saving a release after a package addition will automatically trigger the installation of the entire release to ensure a consistent state of configuration. At the end, if no conflicts are identified, the release is installed and is identified the current release of environment.

Upload Packages to Release (from file)

You can also add packaging to the release by loading .pack files.

1. Go to **Datahub factory>Production>Data Transfer>Package Releases** screen.
2. Open a release with an **In development** status.
3. In the **Packages** section, click the **+** icon to add a row.
4. Then click the **upload** icon, in the **Package** column.

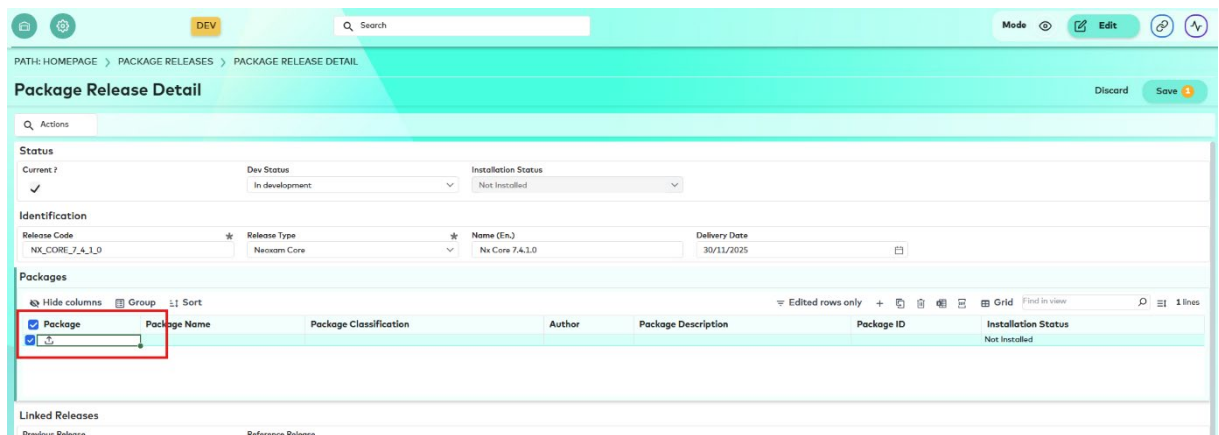

PATH: HOMEPAGE > PACKAGE RELEASES > PACKAGE RELEASE DETAIL

Package Release Detail

Discard Save

Actions

Status

Current ? ☒ Dev Status: In development Installation Status: Not installed

Identification

Release Code: NX_CORE_7.4.1.0 Release Type: Neoxam Core Name (En.): Nx Core 7.4.1.0 Delivery Date: 30/11/2025

Packages

Package	Package Name	Package Classification	Author	Package Description	Package ID	Installation Status
☒ 						Not installed

Linked Releases

Previous Release: Reference Release:

- Click **Save** to validate.


Note: Saving a release after a package addition will automatically trigger the installation of the entire release to ensure a consistent state of configuration. At the end, if no conflicts are identified, the release is installed and is identified the current release of environment.

Close a Release

The release must be closed when ready to be delivered. It will prevent further modifications to its definition and/or content.


Release must be in status “**In Development**” and installed on current environment.

- Go to **Datashub factory>Production>Data Transfer>Package Releases** screen.
- Refresh existing releases.

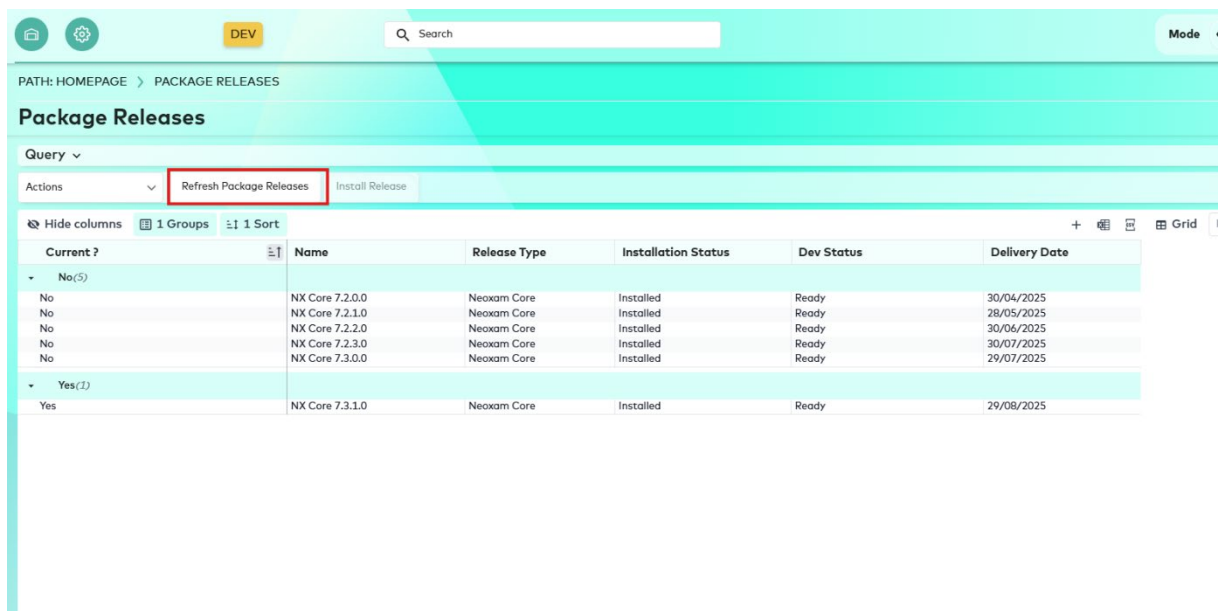

Current ?	Name	Release Type	Installation Status	Dev Status	Delivery Date
No (5)					
No	NX Core 7.2.0.0	NeoXam Core	Installed	Ready	30/04/2025
No	NX Core 7.2.1.0	NeoXam Core	Installed	Ready	28/05/2025
No	NX Core 7.2.2.0	NeoXam Core	Installed	Ready	30/06/2025
No	NX Core 7.2.3.0	NeoXam Core	Installed	Ready	30/07/2025
No	NX Core 7.3.0.0	NeoXam Core	Installed	Ready	29/07/2025
Yes (1)					
Yes	NX Core 7.3.1.0	NeoXam Core	Installed	Ready	29/08/2025

- Open a release with an **In development** status.
- Change the status to **Ready**.

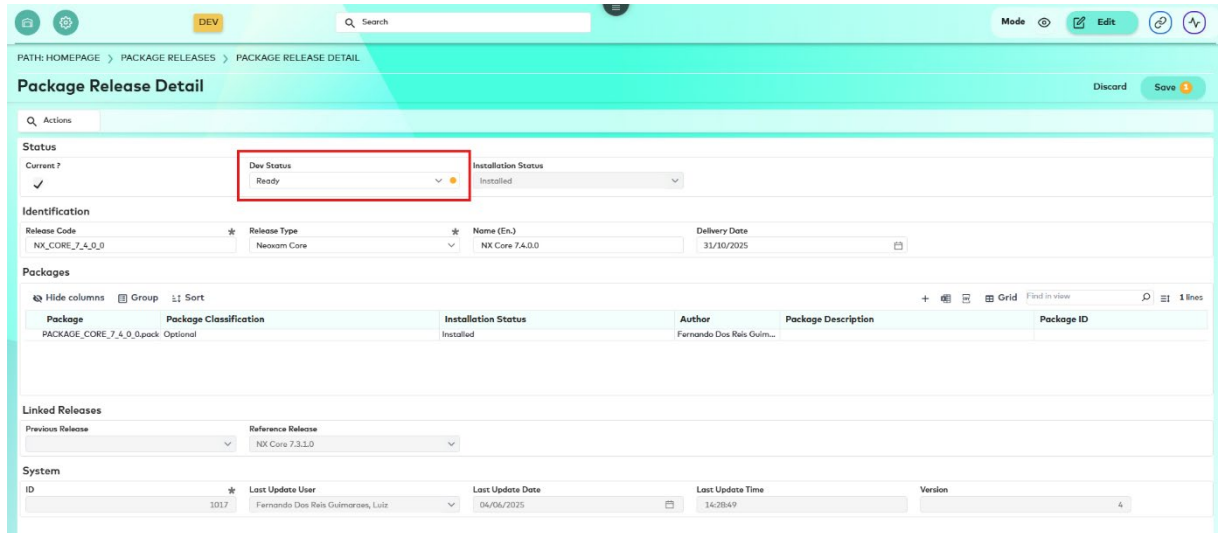

PATH: HOMEPAGE > PACKAGE RELEASES > PACKAGE RELEASE DETAIL

Package Release Detail

Actions

Status

Current ? ☒ Dev Status Ready Installation Status Installed

Identification

Release Code Release Type Name (En.) Delivery Date

Packages

Package	Package Classification	Installation Status	Author	Package Description	Package ID
PACKAGE_CORE_7_4_0_0.pack	Optional	Installed	Fernando Dos Reis Guil...		

Linked Releases

Previous Release Reference Release

System


ID	Last Update User	Last Update Date	Last Update Time	Version
1017	Fernando Dos Reis Guimaraes, Luis	04/06/2025	14:2849	4

5. Save the status update.

Install a Release

The installation of a release can be performed in three different ways:

- A release can be installed by executing the **packagesinstallerservice** service in a scheduled task.
The code of target release to installed must be informed on job parameters; as example: **"-RELEASE RELEASE_7_0"**

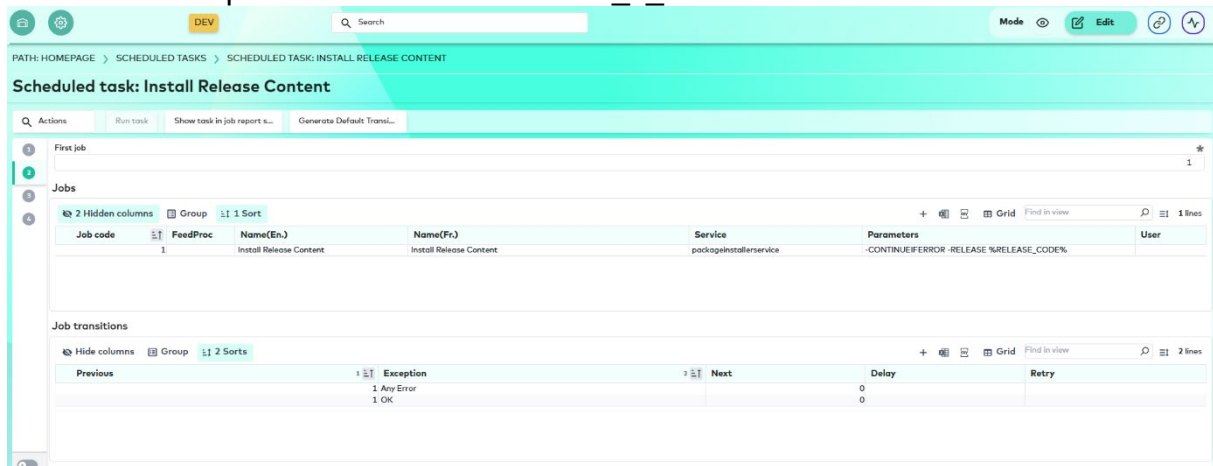

PATH: HOMEPAGE > SCHEDULED TASKS > SCHEDULED TASK: INSTALL RELEASE CONTENT

Scheduled task: Install Release Content

Actions

Run task Show task in job report... Generate Default Trans...

First job

Jobs

Job code	FeedProc	Name(En.)	Name(Fr.)	Service	Parameters	User
1	Install Release Content	Install Release Content	Install Release Content	packagesinstallerservice	-CONTINUEIFERROR -RELEASE %RELEASE_CODE%	

Job transitions

Previous	Exception	Next	Delay	Retry
	1 Any Error		0	
	1 OK		0	

- It can also be installed by clicking the **Install Release** button in the **Package Releases** screen.



PATH: HOMEPAGE > PACKAGE RELEASES

Package Releases

Query ▾

Actions Refresh Package Releases Install Release

Hide columns 1 Groups 1 Sort

Current ?	Name	Release Type	Installation Status	Dev Status	Delivery Date
☐ No	NX Core 7.2.0.0	NeoXam Core	Installed	Ready	30/04/2025
☐ No	NX Core 7.2.1.0	NeoXam Core	Installed	Ready	28/05/2025
☐ No	NX Core 7.2.2.0	NeoXam Core	Installed	Ready	30/06/2025
☐ No	NX Core 7.3.0.0	NeoXam Core	Installed	Ready	30/07/2025
☐ No	NX Core 7.3.1.0	NeoXam Core	Installed	Ready	29/07/2025
☐ No	NX Core 7.3.1.0	NeoXam Core	Installed	Ready	29/08/2025
☐ No	NX Core 7.4.0.0	NeoXam Core	Installed	Ready	31/10/2025
☒ Yes (1)	NX Core 7.4.1.0	NeoXam Core	Installed	In development	30/11/2025

- The installation can also be triggered from **command line**. During the installation process, some controls are performed:
 - **Development and Production status check:** Only **In Development** (for Development environments) and **Ready** (for Development and Production environments) releases can be installed.
 - **Linked releases check.** The installation of a release will apply to all packages listed on it. Before that, it will check if a linked release is defined. If it is the case, that release will be installed first (and recursively). Packages that are already installed are skipped from installation if no changes are applied to it.
 - If any conflict is found during a release installation, its **Installation Status** will be **"Partially Installed"** and the error can be found on the related job, otherwise the status is updated to **Installed**.

Note: For more information on how to perform the various steps of the release management workflow, please refer to the Release Management documentation.

NeoXam DataHub Web Application

Introduction

Version 7.3 takes a significant step forward in optimizing user journeys, making them more intuitive and efficient with the following features:

- Ability to search drop-down lists using alphanumeric codes,
- Integration of Custom UIs screens,
- New Manual Override Visual Cue,
- A more comprehensive and integrated screen configuration system, with the ability to add secondary fields to a screen and configure query criteria properties,
- Ability to view and configure decision tree for Data Quality Control,
- Addition of new actions for Import Feedproc to manage the list of externally mapped fields.

Searching Drop-Down Lists using Codes


Drop-down lists are used in two main cases:

- When the field is a **reference to a list (MxList)**
- When the field refers to a **secondary object**.
For example, when a security is linked to an issuer, the drop-down list displays all issuers available in the system, and the user can select the appropriate one from the list or filter the list by typing the issuer's name. The autocomplete mechanism dynamically filters the list based on the input, making it easier to find the right match.

Starting from version 7.3, the system can parse both alphanumeric and numeric object codes in addition to the object name.


For example, you can either type:

- "RBS" code to return the ABN Amro issuer

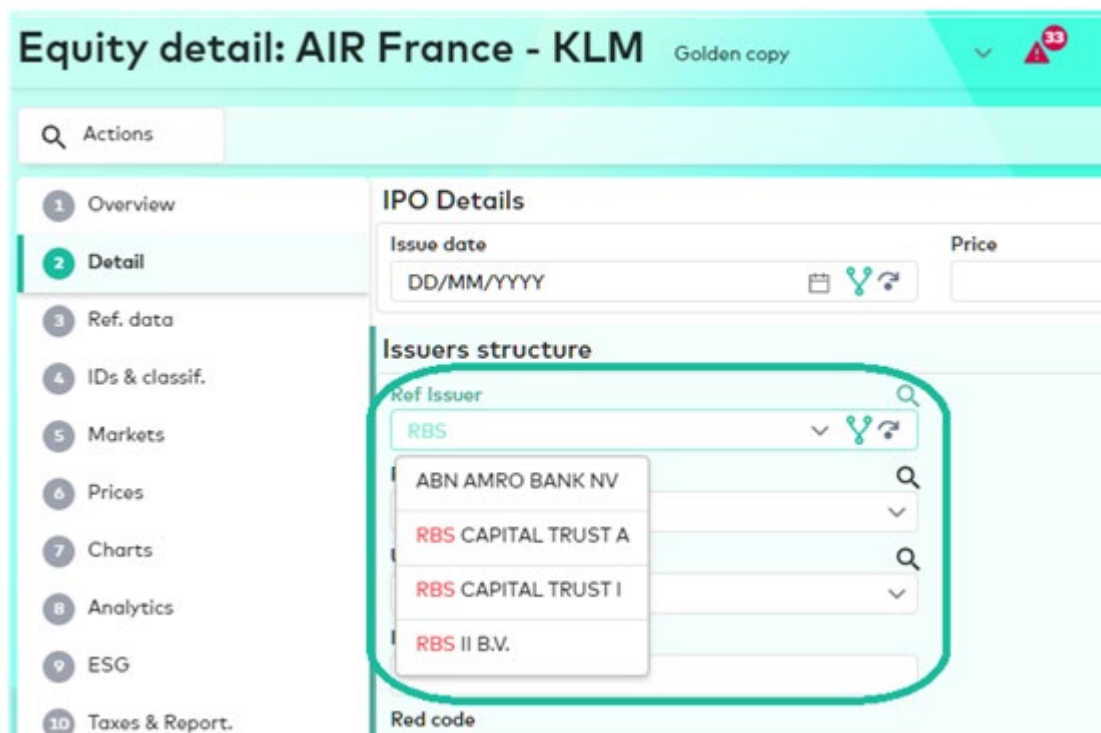

Note: This also returns any other issuers whose name or code contains "RBS".

- or its object numeric code "196190", this will trigger the same filtering logic.

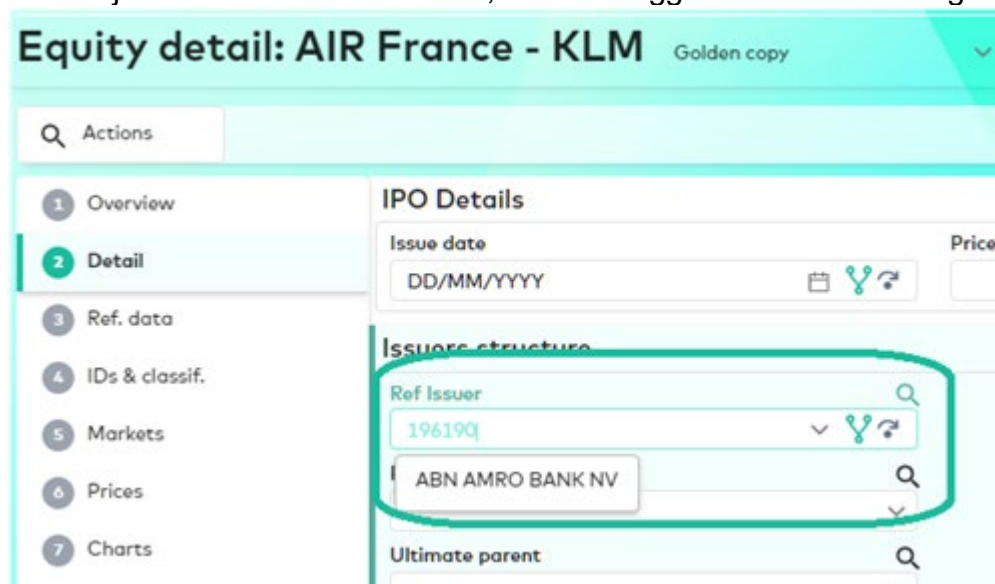

This enhancement improves efficiency for users who are familiar with internal codes or when multiple objects have similar names.

Custom UI Screens

In NeoXam DataHub, many CustomUIs originally implemented in the Core part of the rich client are progressively integrated to the web application.

In version 7.3, the following CustomUIs have been integrated into the Web application:

- **EventProcessingFieldCustomUI:** This UI component is used to define Corporate Action processes within the system.

Note: For more information on Corporate Action workflows and configuration, refer to [Corporate Action Processing](#).

- **DataDerivationObjectCustomUI** and **DataDerivationFieldCustomUI:** These components are used to define and configure rules for the Data Derivation service.

Note: For more information on data derivation processes and rule setup, refer to [Data Derivation](#).

- **MultiSourceTreeFieldCustomUI:** This UI component is used to define Golden Copy rules within the system.

Note: For more information on Multi Source processes and rule setup, refer to [Multi Source and Data Quality Control](#).

Screen Configuration

Adding Fields from Related Classes


By default, NeoXam DataHub screens are based on **main objects classes**, and screens then display fields of the object class. Starting with version 7.3, NeoXam DataHub Web Application also supports the display of fields belonging to secondary (related) classes.

In **Config mode**, you can freely add fields from both the business and technical dictionaries to a Detail or Query screen.


You can also select and add secondary fields. If the selected field is a reference to another object, clicking the expand icon ">" displays the referenced object, and its available fields. This intuitive and user-friendly way to browse the data dictionary and add fields to screens, enables you to create and update screens without requiring a deep knowledge of the data model.

Example: You can add the **city name** field to a security screen.

Using Technical fields, here, **MxSecurity.Country** is a reference to MxCountry, and the city name (**MxCountry.COUNTRY_CITY**) is a field of MxCountry.

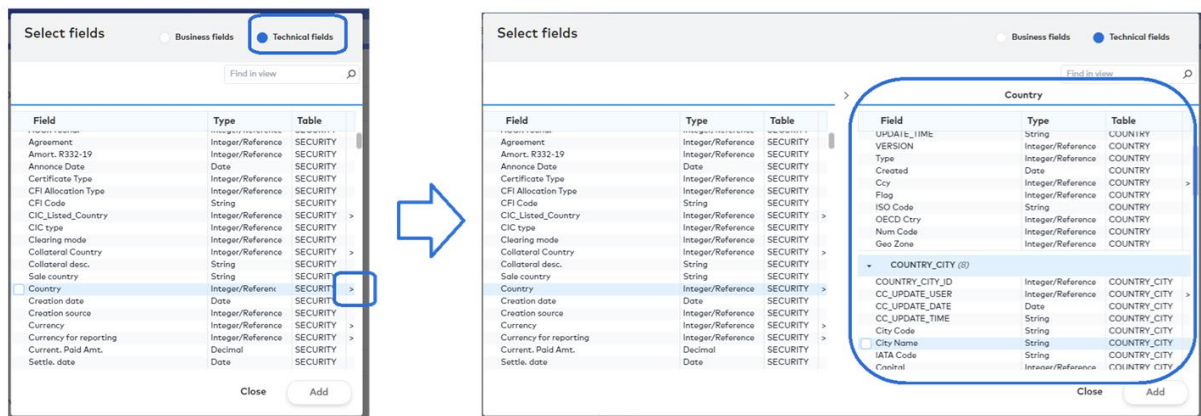

You can also add secondary fields using business fields, for example.

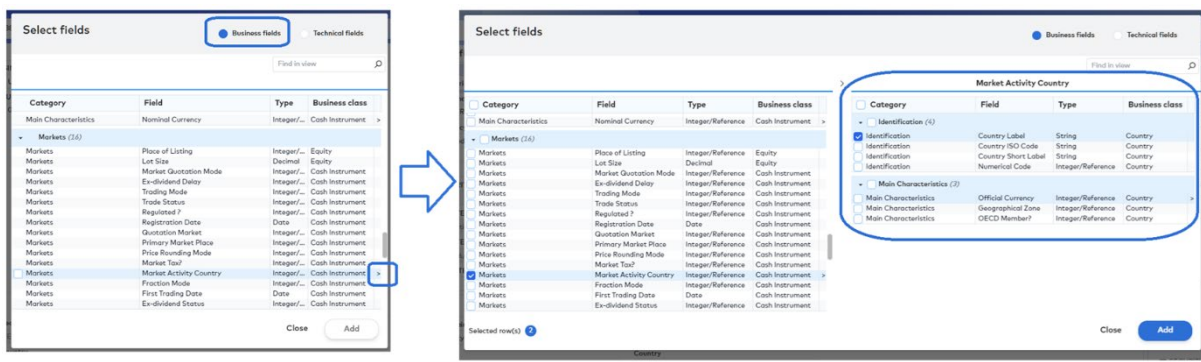

Configuring Query Criteria

When configuring a Query screen in NeoXam DataHub Web Application, it is now possible to **define advanced options for each query criterion**.

To access Criterion Properties:

1. Select the **Config** mode.
2. Click on the criterion you want to configure.
3. In the right panel, define the properties of the selected criterion, as indicated below.

Properties	Definition
Is Active	Allows deactivating a criterion without deleting it, by unchecking the "Active" option.
Is Extended	Enables extended usage of the criterion. For example, for a date field, switching to extended mode allows the use of a "From ... To ..." range instead of a simple operator.

Is Mandatory	Enabling the "Mandatory" option, forces users to provide a value for this criterion.
Is Grouped	Allows grouping criteria for better screen organization and readability.

Note: For more information on screen configuration, refer to the [Advanced User Guide](#) and [NeoXam DataHub Web Application](#) documentation.

Decision Tree Management

Decision Trees, that are part of the Data Quality Control framework, are used to represent business views based on dynamic object-selection criteria.

With version 7.3, NeoXam DataHub Web Application introduces the ability to view and configure decision trees.

You can now:

- Edit nodes by defining object selection conditions
- Edit nodes by defining references
- and Associate actions with specific nodes

Note: Node-level actions (such as creating, editing, or deleting nodes directly from the UI) are not yet available in NeoXam DataHub Web Application and will be delivered in an upcoming release.

For more information, refer to the [Decision Tree](#) documentation.

Updating the List of Externally Mapped Fields

In some cases, the list of mapped fields in FeedProc needs to be updated. This might happen when:

- The provider catalog contains a large number of fields, and only a subset is currently mapped and you need to add a new field.
- Some mapped fields are no longer needed and you want to remove them from the list.

With NeoXam DataHub 7.3, new actions are available from the **import FeedProc** screen to manage the list of externally mapped fields.

- To delete fields:
 1. Select one or more fields from the list of external mapped fields, and click the bin icon.

Mapping - Definition: BBG - Equity - Subscription - Credit Risk

Actions Execution properties Edit scripts Header & Properties Code filter

1 DEFINITION 2 DATA 3 MAPPING

Select a provider
Data License - Per Security

Setup provider

Field name Type Description

Field name	Type	Description
☐ EXCH_CODE	abc Character	Code for the trading venue or environment on which the instrument trades. If an exchange
☐ ID_BB_GLOBAL	abc Character	"Financial Instrument Global Identifier (FIGI) is a twelve character, alphanumeric identifier
☐ ID_BB_UNIQUE	abc Character	A proprietary identifier assigned to all instruments. The construction and length of this id
☒ ID_ISIN	abc Character	A twelve-character number assigned by the local national numbering agency. The Interna
☐ MARKET_SECTOR_DES	abc Character	Market Sector refers to the Bloomberg yellow key assigned to the instrument.
☐ NAME	abc Character	Name of the company or brief description of the instrument. The Name of an instrument.
☐ SECURITY_DES	abc Character	Bloomberg description of security. Corporate, Government and Preferred; The ticker, coup
☐ SECURITY_SHORT_DES	abc Character	Alternate Short Description for a given security comprised of the ticker, coupon and matu
☐ SECURITY_TYP	abc Character	Description of the specific instrument type within its market sector. Corps and Preferred
☐ SECURITY_TYP2	abc Character	"A description of the security type. Money Market: Returns the mmkt product type which
☐ TICKER	abc Character	Ticker is a specific identifier for a financial instrument that reflects common usage. Ticker
☐ LAST_UPDATE_DT	Date	Date the security last traded/updated. All values are translated into the user's date and t
☐ NUM_FIELDS	Integer	Number of fields returned in the Data License files. This field serves as a placeholder to di
☐ RET_CODE		
☐ SEC_ID		
☐ SEC_PRICING_SOURCE		
☐ SEC_SCO		

Statistics

The selected fields will be removed from the list of external mapped fields.

Note: If any mapping rules were previously defined for these fields, they will be deleted as well (a confirmation popup will appear before the operation is applied).

- To add new fields:
 - Click the "+" icon to open the complete list of available provider fields.
 - Select one or more fields from the list.

The selected fields will be added to the list of external mapped fields, and ready for mapping.

Data Quality Control New Design

Data Quality Control has been improved with the ability to record the results of data quality checks and display them in a new screen.

The rule execution tracking feature consists of recording the results of data quality checks performed for a given object. If an anomaly is detected during the verification, the Fail status is propagated from the control clause level to the rule level.

Each rule execution (rule, control, clause) can then result in one of the following statuses:

- **PASS:** no anomaly is found. It means that the assessed value does not match the target value that refers to a data issue.
- **FAIL:** an anomaly is found. It means that the assessed value matches the target value that refers to a data issue.
- **ERROR:** a technical error occurred during the rule execution (invalid syntax in control, server unavailable, etc).

The result of all control rule executions, along with their statuses, is now stored and accessible from the **Datahub Factory> Data Administration> Data Quality> DQC> Data Quality Screening Report**

PATH: HOMEPAGE > DATA QUALITY SCREENING REPORT

Data Quality Screening Report

Query ▾

Actions

1 Hidden column 2 Groups 3 Sorts

Date	Time	Object	Rule	Rule Status
27/06/2025	16:50:02	Xero Rg Registered Shs	check-secCore	Pass
27/06/2025	16:50:02	Xero Rg Registered Shs	check-Ask-CS	Pass
27/06/2025	16:50:02	Xero Rg Registered Shs	Check-CS	Fail
27/06/2025	16:50:02	Xero Rg Registered Shs	Check-valueOf	Pass
27/06/2025	16:50:02	Xero Rg Registered Shs	Check-CS-Rule-Web	Fail
27/06/2025	16:50:02	Xero Rg Registered Shs	Check-High-quote	Pass
27/06/2025	16:50:02	Xero Rg Registered Shs	check-bid-quote	Pass
27/06/2025	16:50:02	Xero Rg Registered Shs	check-prices	Pass
27/06/2025	16:50:02	Xero Rg Registered Shs	check-shortName	Error
27/06/2025	16:50:02	Xero Rg Registered Shs	Check-Ask-Quote	Pass
27/06/2025	16:50:02	Xero Rg Registered Shs	Check_CashInstrument	Pass
27/06/2025	16:50:02	Xero Rg Registered Shs	check-secCore	Pass
27/06/2025	16:43:04	Xero Rg Registered Shs	check-Ask-CS	Pass
27/06/2025	16:43:04	Xero Rg Registered Shs	Check-CS	Fail
27/06/2025	16:43:04	Xero Rg Registered Shs	Check-valueOf	Pass
27/06/2025	16:43:04	Xero Rg Registered Shs	Check-CS-Rule-Web	Fail
27/06/2025	16:43:04	Xero Rg Registered Shs	Check-High-quote	Pass
27/06/2025	16:43:04	Xero Rg Registered Shs	check-bid-quote	Pass
27/06/2025	16:43:04	Xero Rg Registered Shs	check-prices	Pass
27/06/2025	16:43:04	Xero Rg Registered Shs	check-shortName	Error
27/06/2025	16:43:04	Xero Rg Registered Shs	Check-Ask-Quote	Pass
27/06/2025	16:43:04	Xero Rg Registered Shs	Check_CashInstrument	Pass
27/06/2025	16:43:04	Xero Rg Registered Shs	check-secCore	Pass

For each data quality performed on a given object, a new **MxControlExecResult** is created to carry the results of the rule execution. It contains the following data:

- **Object:** label of the object for which the quality control is performed.
- **Rule:** reference to the rule executed as part of the quality check.
- **Status:** final status of the rule execution.
- **Trigger:** refers to the action that launched the quality check. For now, only “on-demand” type of trigger is implemented (data quality check, can only be launched via business rules).
- **Control Summary:** contains the list of all controls executed as part of the quality check along with their statuses.

- **Control Details:** contains the list of all clauses verified with the following information:
 - Clause Label
 - Clause Status
 - Assessed Value
 - Target Value

PATH: [HOMEPAGE](#) > [DATA QUALITY SCREENING REPORT](#) > [EXECUTION RESULT DETAILS](#)

Execution Result Details

Q Actions

Object	Rule	Status	Trigger Type
Tallinna Sadam Rg Registered Shs	Equity Price Check - Relative	Fail	On Demand

Controls Summary

Hide columns Group 1:1 Sort + Grid Find in view 3 lines

Status	Control
Pass	Series Jump - Ask Quote > 10%
Pass	Series Jump - High Quote > 10%
Fail	Series Jump - Close Quote > 20%

Controls Details

3 Hidden columns Group 1:1 Sort + Grid Find in view 3 lines

Clause	Status	Assessed Value	Target Value
Series Jump Ask Quote > Value of 0.1	Pass	0.0	0.1
Series Jump Reference close quote > Value of 0.2	Fail	0.2372881355932203	0.2
Series Jump High Quote > Value of 0.1	Pass	-0.18000000000000002	0.1