



NEOXAM DATAHUB - WHAT'S NEW 7.5.0-0

WHAT'S NEW

DISCLAIMER – NEOXAM SOFTWARE DOCUMENTATION

NeoXam Portfolio Management SAS, a 'société par actions simplifiée' with share capital €15,575,931, registered with the Paris Company's register under No. 349 467 449 ('NeoXam'), is the owner of this Software Documentation. NeoXam holds all the rights required for the publication, together with, but not limited to, all logos, trademarks, screenshots, any data used herein. The Client is granted a right to use this Software Documentation only as agreed in writing with NeoXam. This Software Documentation is confidential and the Client shall protect the confidentiality and NeoXam's intellectual property rights. Unless otherwise agreed in writing by NeoXam, this Software Documentation is provided 'as is' without warranty of any kind, either express or implied, including, but not limited to, that the Software Documentation will not include technical or other mistakes, inaccuracies or typographical errors. The Software Documentation may be changed, and NeoXam makes no commitment to update such materials, unless otherwise agreed in writing. Screenshots and examples provided in this Software Documentation are not contractual and may be changed, according to the Client's needs, operational and technical constraints. NeoXam assumes no responsibility for errors or omissions in the Software Documentation. In no event shall NeoXam be liable for any special, punitive, incidental, indirect or consequential damages of any kind, or any damages whatsoever, including, without limitation, those resulting from loss of use, data or profits, whether or not NeoXam has been advised of the possibility of such damages, and on any theory of liability, arising out of or in connection with the use of this Software Documentation.

TABLE OF CONTENTS

New Features	5
NeoXam DataHub Application	6
Actual Framework	6
Chart Display and Interactions	6
Displaying Chart and Grids	6
Chart Timeline Thresholds	8
Zoom In and Zoom Out the Chart Timeline	9
Time Series in Query Screens	9
Adding and Configuring Custom Panels on Detail Screens	10
Adding a Custom Panel	11
Editing an Existing Custom Panel	13
Workflows Management	14
Introduction	14
Definitions	14
Workflow Definition	14
Step Definition	15
Event Definition	16
Workflow Template	16
Workflow Run	16
Workflow Use Case	17
Data Quality Control New Design	20
Introduction	20
Dynamic Data Consistency Control	20
Object Saved Trigger	23
LSEG Real-Time Optimized Connector	25
Introduction	25
Configure Real Time Optimized Channel	25
Configure Feed Procedure Properties	28
Services	29
Fields Extraction Service	30
Real-Time API Service	31
RTO Message Structure	32
RefreshMsg Structure	32



Header Attributes	32
Payload with FieldList and FieldEntry	33
Example of Complete RefreshMsg Response	33
ESG Urgewald Connector	35
Introduction	35
Data Coverage	35
Data Catalog Import	35
Report	35
Fields	38
Data Load	39
ESG Discovery	41

New Features

We are pleased to announce the availability of NeoXam DataHub Version 7.5.0-0.

This version introduces new features around:

- [NeoXam DataHub Web Application](#), with:
 - improvements on User experience with new grids based on the **Actual framework**,
 - enhancements on **Chart visualization and interactions**, with the possibility to **display the chart underlying grid** on the same screen,
 - the ability to display **time series in Query screens**, and add **custom panels in Detail screens**,
- [Workflows Management](#), with the ability to **create event driven and standardized workflow templates**, run workflows, monitor workflows' steps statuses and perform actions to ensure the workflow successful completion.
- [Data Quality Control New Design](#), with improvements on **Control clause configuration** to ensure data type consistency and the addition of the **Object Saved trigger** for Automatic execution of control rule.
- The creation of two new connectors:
 - [LSEG Real-Time Optimized](#) to retrieve and integrate **real-time data from London Stock Exchange Cloud** services.
 - [ESG - Urgewald](#) to integrate **Urgewald** benchmark databases on companies operating in the **fossil fuel sector** into NeoXam DataHub ESG module.


NeoXam DataHub Application

Actual Framework

NeoXam DataHub Web Application grid interface has been redesigned based on the shared Actual framework. This redesign brings a cleaner layout and a unified experience across NeoXam products. Its asynchronous loading also offers better performance.

The grid now shares the same UX principles as other Actual-based applications:

- **Actions** are now split into two distinct levels:
 - **Data actions** (create, delete, export, etc.)
 - **Grid actions** (filter, sort, find in view, etc.)
- **Filters, sorting, and grouping** are accessible directly from column's headers.
- **Contextual actions** are available using right-click or integrated menus.

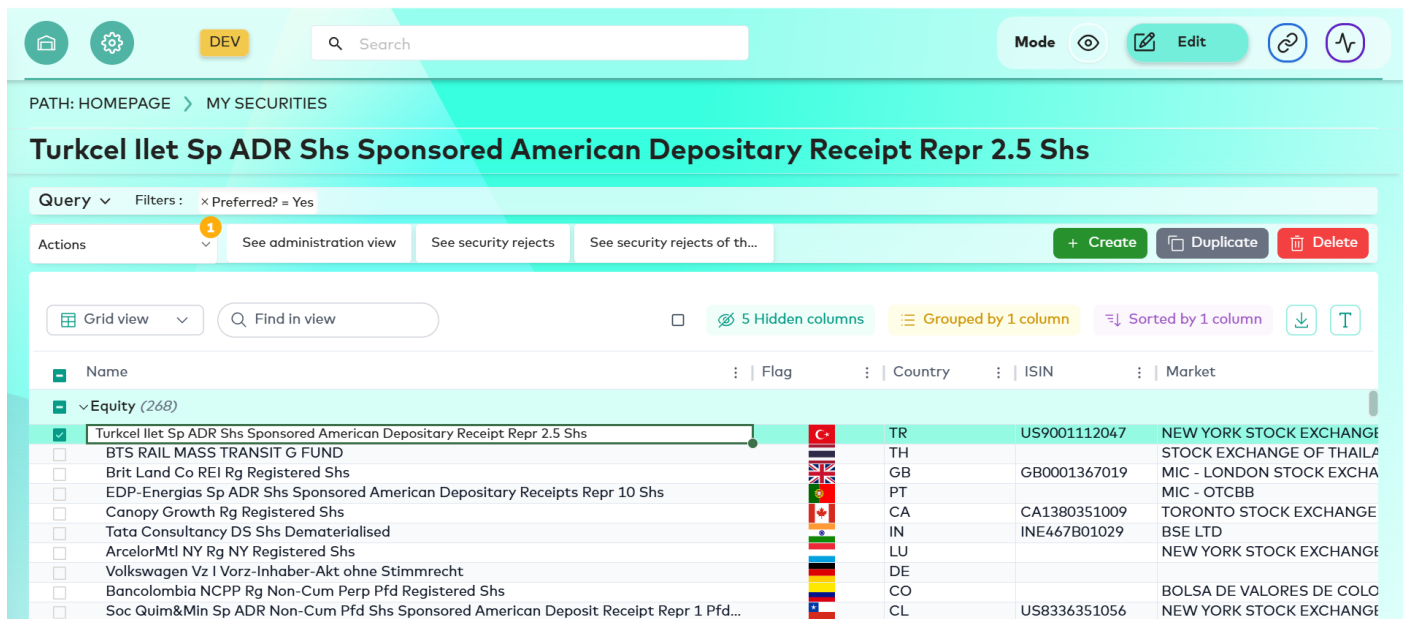

The screenshot displays the NeoXam DataHub application interface. At the top, there is a navigation bar with icons for home, settings, and a search bar. Below the navigation bar, the breadcrumb path is "PATH: HOMEPAGE > MY SECURITIES". The main title is "Turkcel Ilet Sp ADR Shs Sponsored American Depositary Receipt Repr 2.5 Shs". Below the title, there is a "Query" dropdown and a "Filters" section showing "x Preferred? = Yes". The "Actions" section includes buttons for "See administration view", "See security rejects", and "See security rejects of th...". There are also buttons for "+ Create", "Duplicate", and "Delete". The grid view is selected, and there is a "Find in view" search bar. The grid shows columns for Name, Flag, Country, ISIN, and Market. The first row is highlighted, showing "Turkcel Ilet Sp ADR Shs Sponsored American Depositary Receipt Repr 2.5 Shs" with a flag of Turkey, country "TR", ISIN "US9001112047", and market "NEW YORK STOCK EXCHANGE".

Name	Flag	Country	ISIN	Market
Turkcel Ilet Sp ADR Shs Sponsored American Depositary Receipt Repr 2.5 Shs		TR	US9001112047	NEW YORK STOCK EXCHANGE
BTS RAIL MASS TRANSIT G FUND		TH		STOCK EXCHANGE OF THAILAND
Brit Land Co REI Rg Registered Shs		GB	GB0001367019	MIC - LONDON STOCK EXCHANGE
EDP-Energias Sp ADR Shs Sponsored American Depositary Receipts Repr 10 Shs		PT		MIC - OTCBB
Canopy Growth Rg Registered Shs		CA	CA1380351009	TORONTO STOCK EXCHANGE
Tata Consultancy DS Shs Dematerialised		IN	INE467B01029	BSE LTD
ArcelorMittl NY Rg NY Registered Shs		LU		NEW YORK STOCK EXCHANGE
Volkswagen Vz I Vorz-Inhaber-Akt ohne Stimmrecht		DE		
Bancolombia NCPP Rg Non-Cum Perp Pfd Registered Shs		CO		BOLSA DE VALORES DE COLOMBIA
Soc Quim&Min Sp ADR Non-Cum Pfd Shs Sponsored American Deposit Receipt Repr 1 Pfd...		CL	US8336351056	NEW YORK STOCK EXCHANGE

Chart Display and Interactions

Displaying Chart and Grids

It is now possible to display a chart and its underlying data grid at the same time.


When a chart is shown on screen, you can use the **Chart View** menu and select the new **Display Grid** option to display the chart and grid on the same screen.

©2026 NeoXam. All Rights Reserved. This document contains valuable, proprietary information. No portion of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, without prior written consent of NeoXam. The information in this document is believed to be accurate at the time of printing; however, NeoXam and its affiliates assume no responsibility or liability for errors or omissions that may appear in this document. The information in this document is subject to change without notice and has no contractual value.

This user guide is also available on line: https://datahub.neoexam.com/docs/Documentation_Welcome_Page/index.html

When this option is enabled, the data grid is displayed directly below the chart.

This allows you to visually analyze trends while accessing detailed data simultaneously.

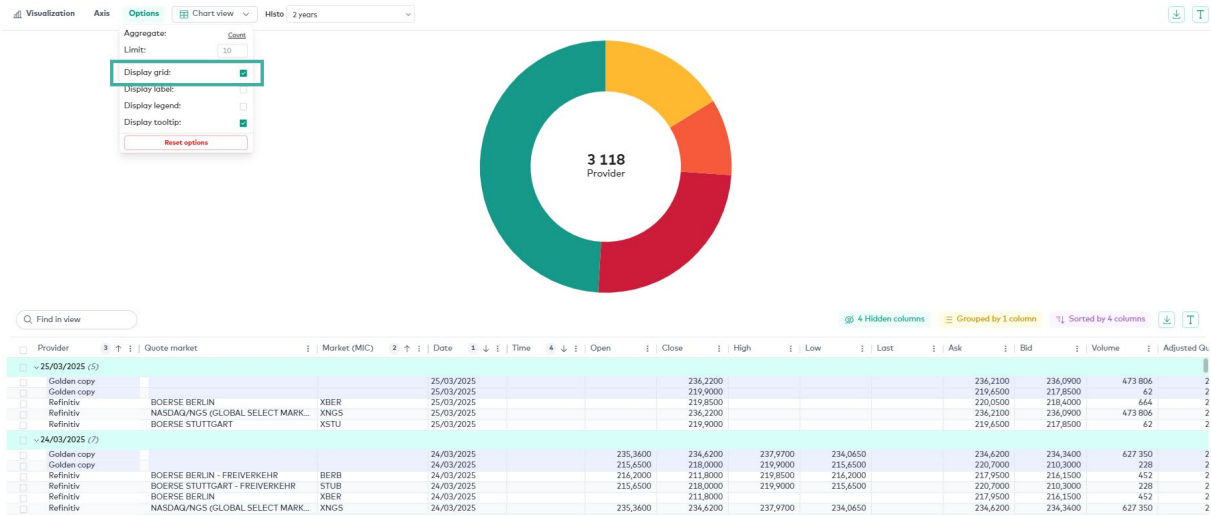

Note: When the **Display Grid** option is enabled in **Config Mode**, the screen layout (chart with grid displayed below) can be saved. The saved configuration ensures that the expected combined chart and grid view is restored when the screen is reopened.

Executing Actions from Charts

Charts now support direct interactions; you can then select a specific area of the chart and observe the following changes:

- Selected area is **delimited by a black border**,
- Selection is reflected in the underlying grid for **charts with a combined grid**,
- Actions** menu is active and updated with all actions available for the selected rows,
- Number of rows in the selection is also displayed,
- Actions** buttons related to the selected data are activated in the Action banner,

This improvement enables seamless transition from visual analysis to data-driven actions without leaving the chart view.

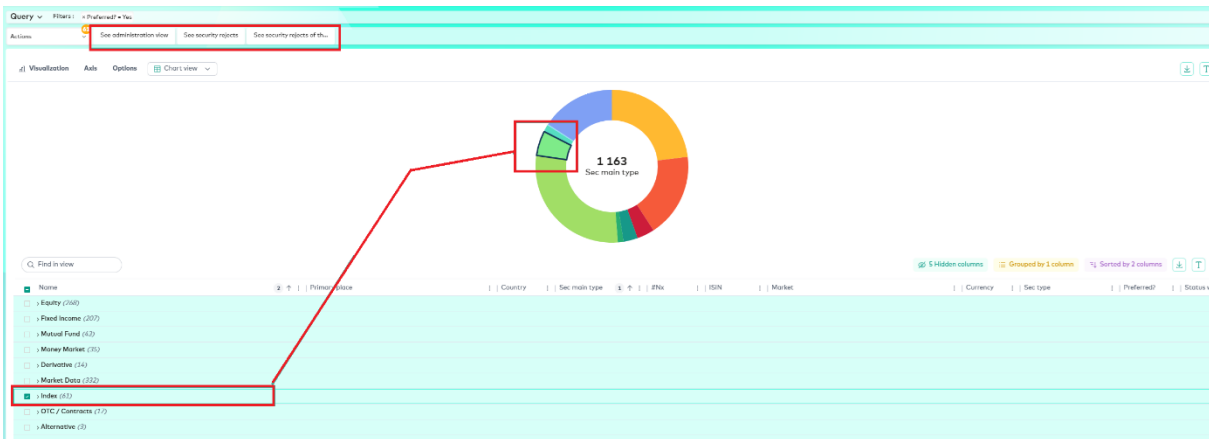


Chart Timeline Thresholds

The Chart Timeline now provides advanced threshold display capabilities to improve data interpretation and monitoring.

Two configurable thresholds can be defined: **Lower Bound** and **Upper Bound**.

Each threshold is displayed on the chart as a **dotted line**, clearly distinguishing them from the data series.

The area between the lower and upper boundaries is highlighted, making the acceptable or target range immediately visible and allowing you to quickly detect values that fall inside or outside the defined thresholds over time.



This improvement enhances readability and supports faster anomaly detection and analysis.


Note: When thresholds (Lower Bound / Upper Bound) are configured in **Config Mode**, the chart configuration can be saved. Once saved, the chart timeline will consistently retrieve and display the defined thresholds as expected.

Zoom In and Zoom Out the Chart Timeline

The Chart Timeline now supports zooming for improved data exploration.

- **Zoom in** by selecting a specific section directly on the chart.
- **Zoom in/out** using the mouse wheel for smooth and precise navigation across time ranges.

This enhancement allows faster focus on relevant periods while maintaining easy access to the full timeline.

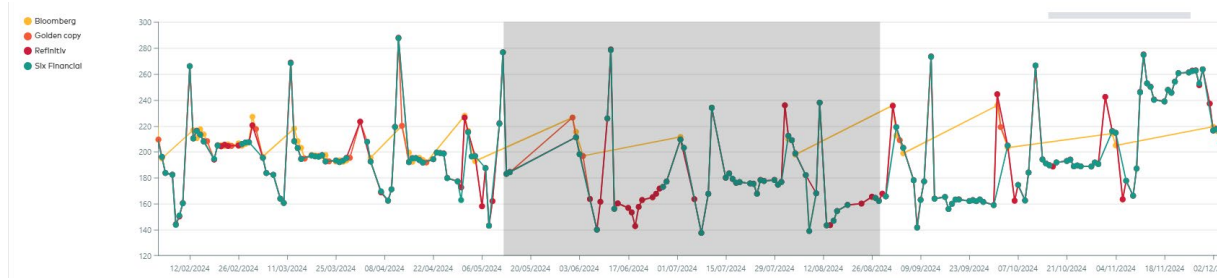


Time Series in Query Screens

Query screens have been improved to display historicized data.

The new **Display the entire set of historicized data (time series)** feature has been added and is available in both Rich client and Web Application:

- **Using the Rich client**, you can display this option from the Misc tab of the Query screen configuration using **ctrl+G > Misc**.
- **Using the Web Application**, this option is displayed in the **General settings** section of the **Data modeling panel** when in **Config mode**.

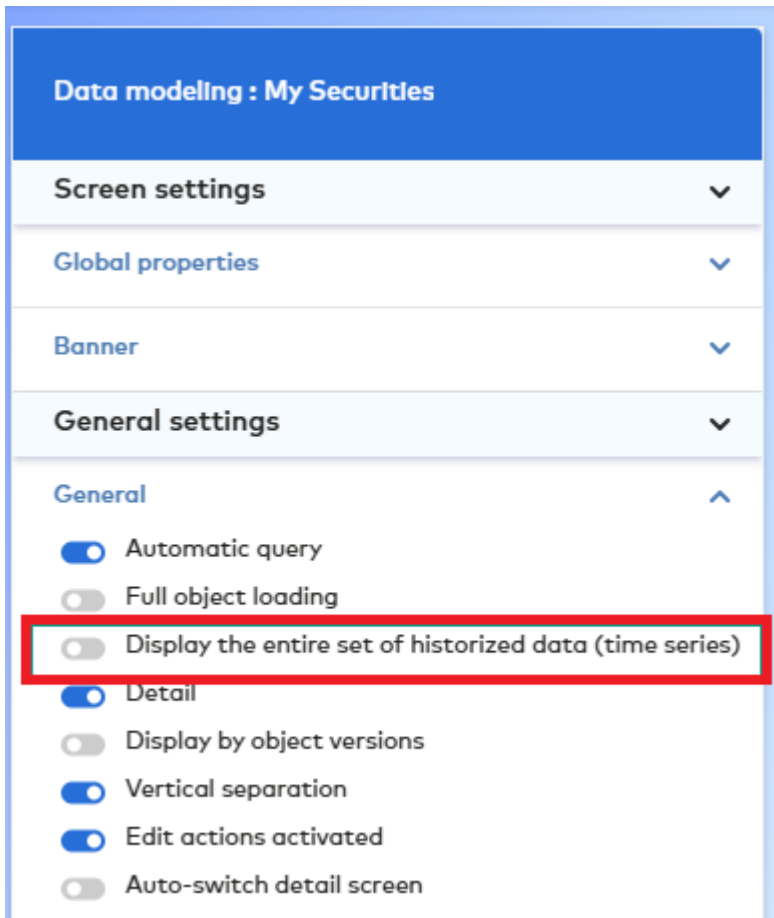

By default, the feature is not active, and the Query screen displays a subset of rows from the historicized table.

When active, the Query screen displays all versioned rows from the historicized table.

Warning: To protect servers overload caused by large data requests and avoid performance issues, it is strongly recommended to limit your requests using query criteria such as a **time range** (start date and end date). Please also enable the **clientui.query.limit.***** parameters to define the maximum number of rows to be returned.

Adding and Configuring Custom Panels on Detail Screens


Custom panels can now be added and configured from **Detail screen's Configuration** mode to tailor the screen to your specific needs.

Adding a Custom Panel

To add a custom panel in a **Detail screen**:

1. Open the target **Detail screen** and switch to **Configuration** mode.
2. Select an existing panel in the screen layout.
3. Click the **+** button.
4. Select the **Add custom panel** from the available options.


A selection popup opens, displaying all custom panels available for the current screen.

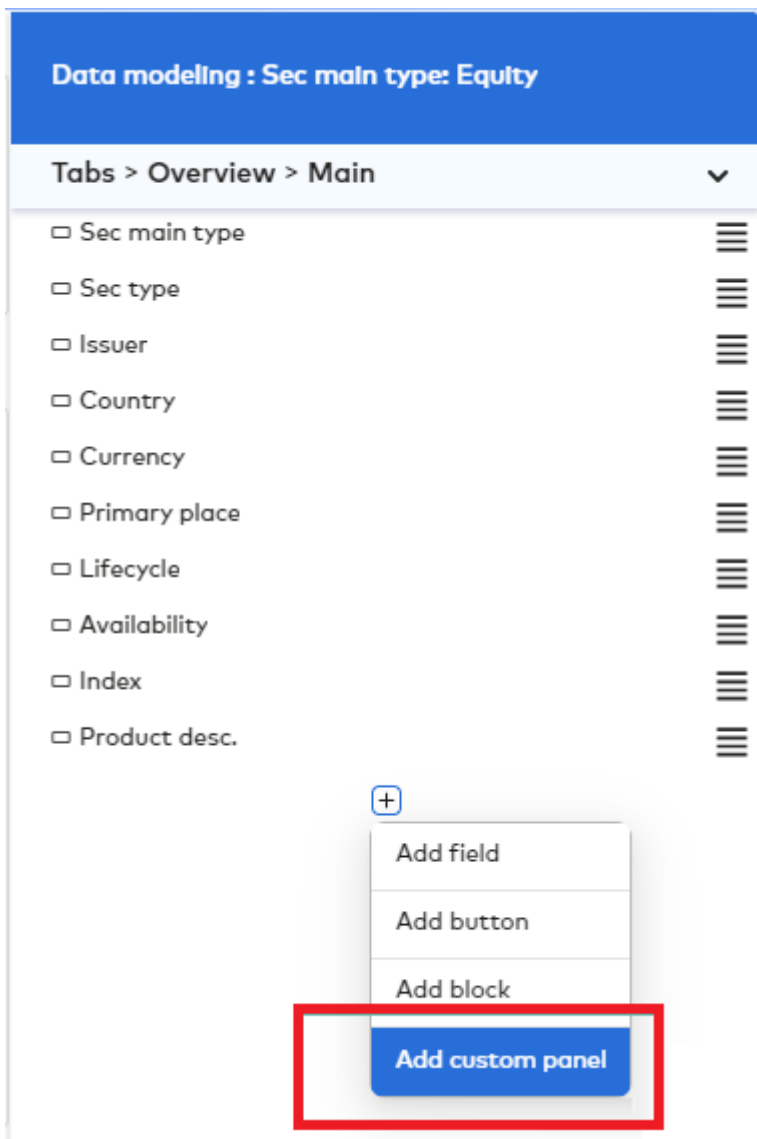

5. Select the custom panel you want to add.

6. Click **Save** to confirm your choice.

Once validated, the Detail screen is refreshed, and the new custom panel is added with its default configuration.

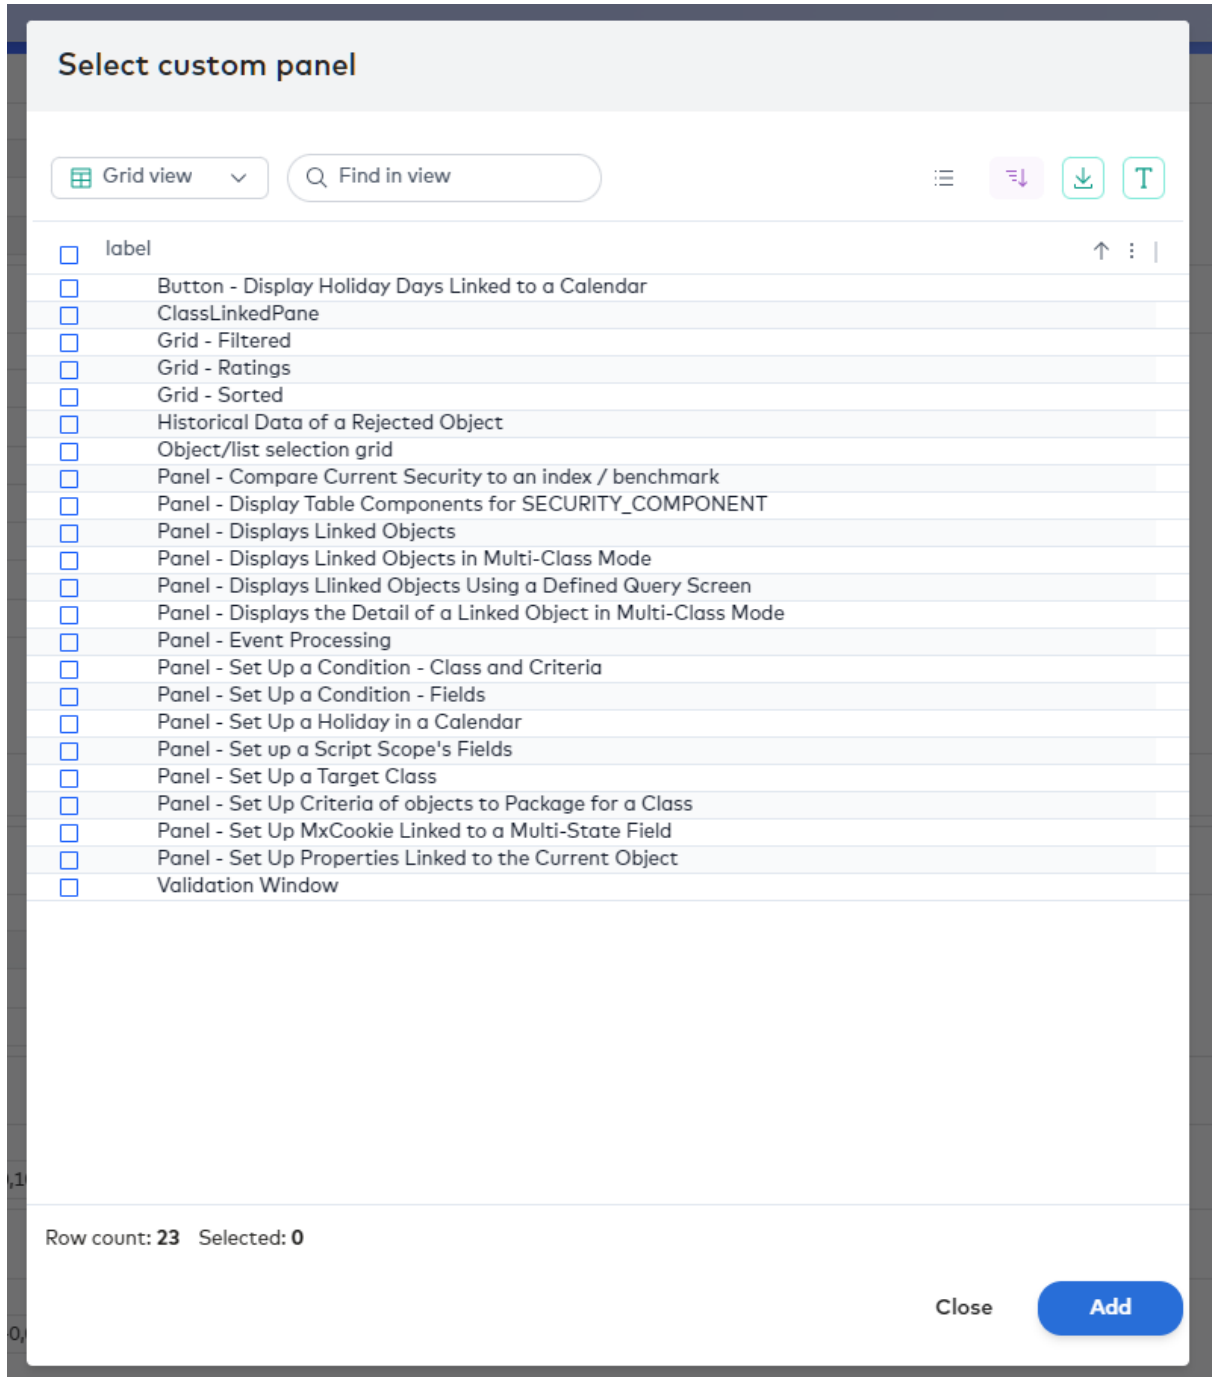


Editing an Existing Custom Panel

If a custom panel has already been added to the **Detail screen**, its configuration can be updated at any time.

To edit the custom panel configuration:

1. Select the custom panel in the screen layout.
2. Edit its configuration using the **Parameter** field.

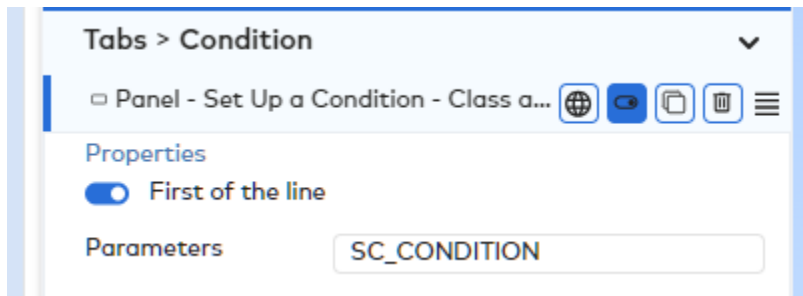

3. Save the screen configuration to apply the changes.

Note: For more information on custom panels, refer to the NeoXam DataHub - Advanced User Guide.pdf or [Advanced Features](#) section of the online documentation.

Workflows Management

Introduction

The **Workflow Management** feature enables the creation, execution, and monitoring of workflows within NeoXam DataHub.

The main goal is to provide a framework for managing workflow steps, events, and their associated runs. This also ensures that technical and business processes are correctly executed.

Workflows represent NeoXam DataHub processes such as:

- Preparing data and running a report creation.
- Management of technical or functional alerts.
- Creation of business-oriented objects.

Definitions


Workflow Definition

A workflow can be associated with a specific object lifecycle or reflect a business process within NeoXam DataHub.

It is an orchestration process, that defines the sequence of steps and events required to achieve specific goals, ensuring standardization and the ability to repeat this workflow across executions.

The workflow might have an **SLA** that defines its run **timeframe** and helps monitoring the task to be executed by users or other processes.

The workflow is composed of several steps, and the orchestration of these steps is driven by events.

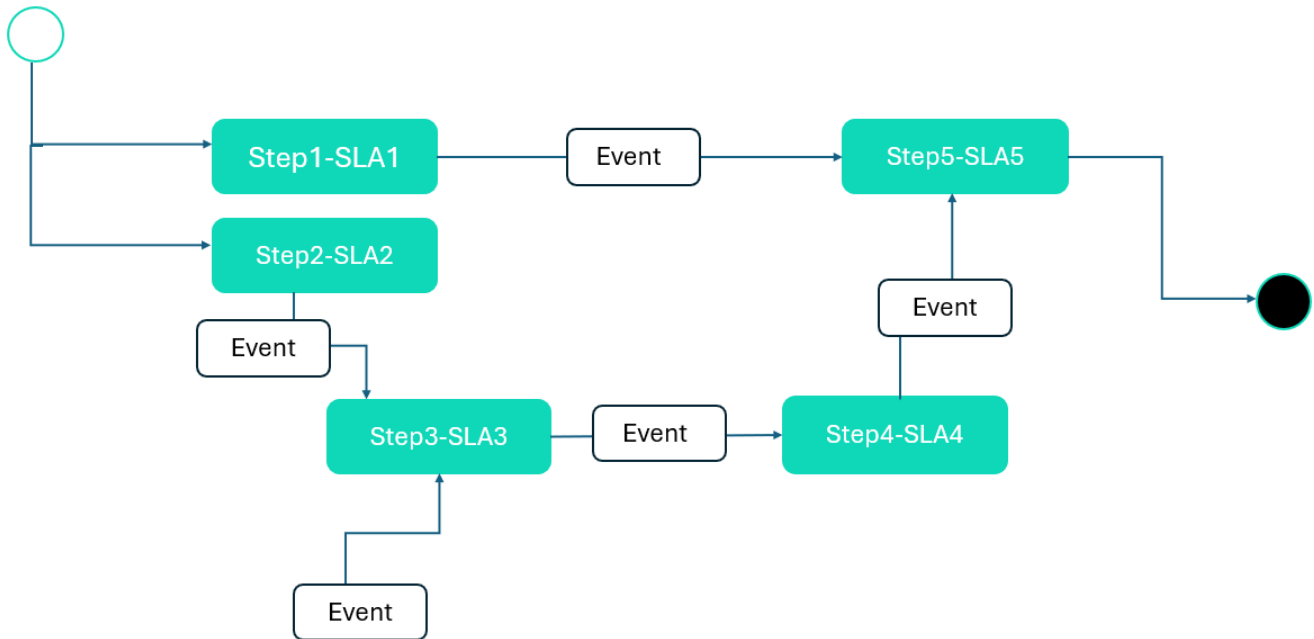


Step Definition

A **step** defines an action or a task within a workflow, and its completion represents an event that can be consumed by other steps to ensure the workflow dynamic.

Steps can be completed either automatically or manually by a user, provided that the user belongs to the role affected to the step.

Manual inputs can be of the following types:

- **INPUT:** Steps wait for validation action from user. In this case, available actions are: Accept, Reject.
- **INPUT WITH VALIDATION:** In addition to initial user acceptance, validation is needed from a different user.

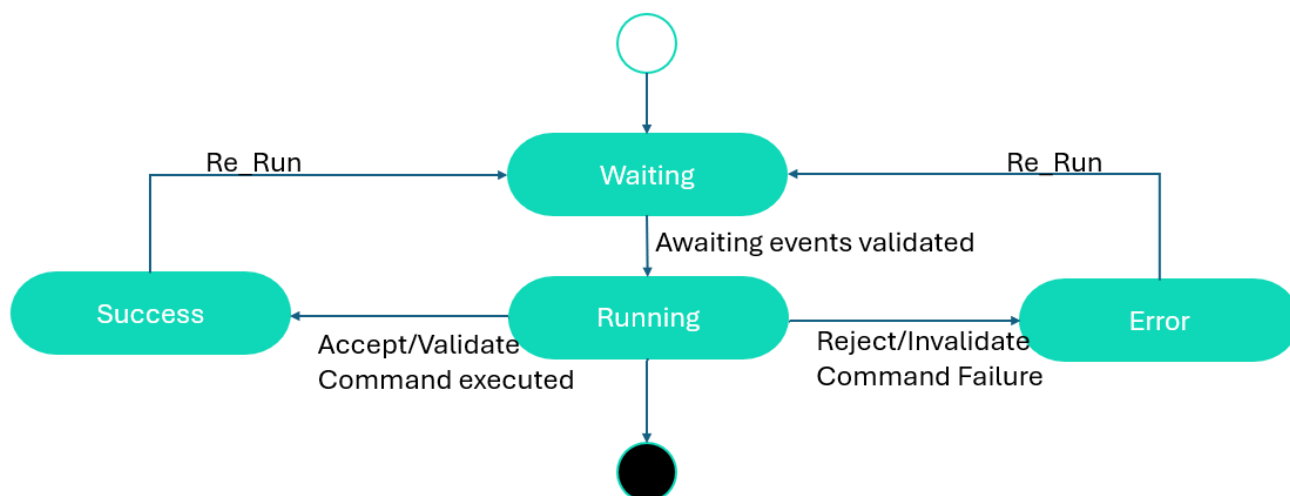

Event Definition

An **event** represents a log that marks the end of a step, this trigger can be consumed by workflow steps. The observability of events ensures synchronization with real-time triggers before proceeding to the next step of a workflow.

Note: At any stage during the workflow process, you can view the event logs in the **Workflow Event Log** screen.

Workflow Template

A **workflow template** is a predefined structure that defines the sequence of steps, rules, and conditions of a workflow. It serves as a reusable model that can be instantiated to create multiple workflow instances.


Workflow Run

The **workflow run** tracks the execution of a workflow instance, offering visibility into its steps statuses. Each run reflects the dynamic interactions of steps and events as they are executed. The workflow run tracks the execution status of each step and allows complete monitoring of executed steps and steps to be executed.

Note: At any stage during the workflow process, you can view the **workflow logs** and detailed information on the **workflow and steps statuses** from the **Workflow Run Details** screen (**Workflow Run** and **Workflow Logs** tabs).

Workflow Use Case

The example below is based on the following diagram:

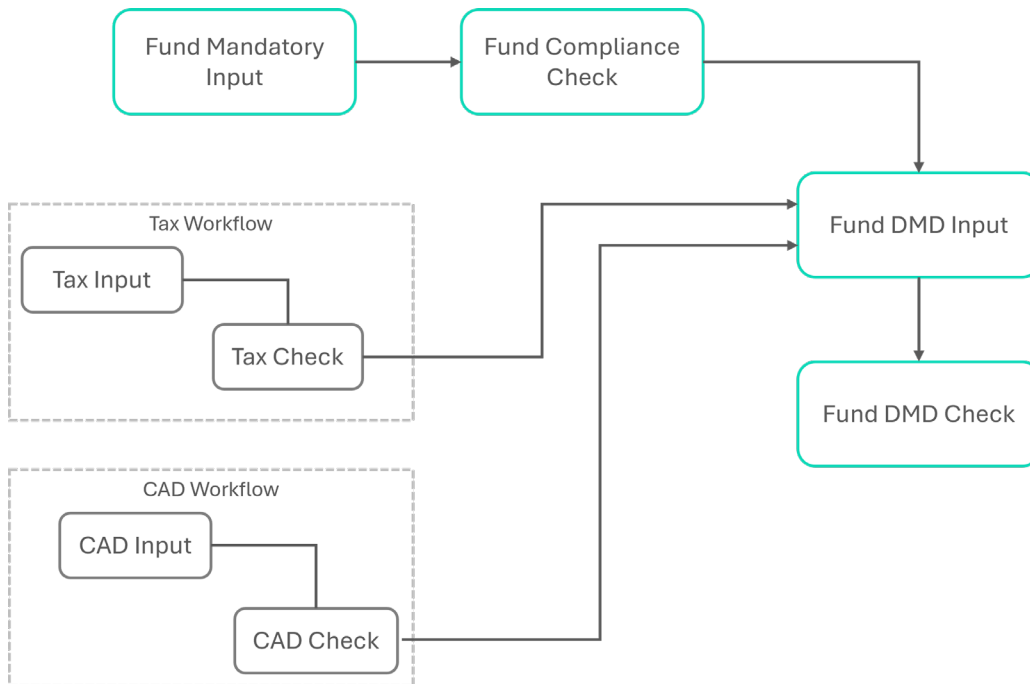

You can build the workflow template or display the workflow details from the **Workflow Template details** screen:

PATH: HOMEPAGE > WORKFLOW TEMPLATES > **WORKFLOW TEMPLATE DETAILS**

Workflow Template Details

Discard Save

Actions Duplicate Template

Template Identification

Name Fund Workflow

Code FUND_WORKFLOW

Template Scope and Roles

Role / Group

Applicable Class Fund Event

Calendar France

Template Steps

1 Hidden column Group 1 Sort

Seq...	Step Type	Blocking?	Name	Code	SLA	Action Role / Group	Validation Role / Group	Out Event	On Success	On Error
1	Input With Validation	Yes	Fund Mandatory Input	FUND_MANDATORY_INPUT	D+2	Product - PBD	Product - PBD	Mandatory Fields Filled		userInfo("WORKFLOW RUN FINISHED WITH ERROR")
2	Input	Yes	Fund Compliance Check	FUND_COMPLIANCE_CHECK	H+1	Compliance - Managem...	Data Management	Compliance Check Approved	WF_CREATE_RUN("TA...	
3	Input With Validation	Yes	Fund DMD Input	FUND_DMD_INPUT	D+3	Data Management	Data Management	DMD Info Submitted		
4	Auto	No	Fund DMD Check	FUND_DMD_CHECK	H+2	Data Management	Data Management			

Template Steps Wait For

Hide columns Group 1 Sort

Waiting Step	Awaiting Event
Fund Compliance Check	Mandatory Fields Filled
Fund DMD Input	CAD Info Approved
Fund DMD Input	Compliance Check Approved
Fund DMD Input	Tax Check Approved

©2026 NeoXam. All Rights Reserved. This document contains valuable, proprietary information. No portion of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, without prior written consent of NeoXam. The information in this document is believed to be accurate at the time of printing; however, NeoXam and its affiliates assume no responsibility or liability for errors or omissions that may appear in this document. The information in this document is subject to change without notice and has no contractual value.

This user guide is also available on line: https://datahub.neoxam.com/docs/Documentation_Welcome_Page/index.html

17


Workflows can be triggered **automatically**, for example, when an object is saved, or **manually** from a custom button (using the **WF_Create_Run()** function).

Once the workflow is initiated, a new run workflow instance is created in the **Workflow Runs** dashboard. From this screen, you can monitor and take actions on a **Running** workflow.

Note: All output events from each step are instantiated in the **Event Log** screen for each **Event Out** of each step with a status of **Not Validated**.

To interact with the workflow:

1. Select the **Workflow** and click the **Accept** button in the Action banner to perform acceptance on the first step.

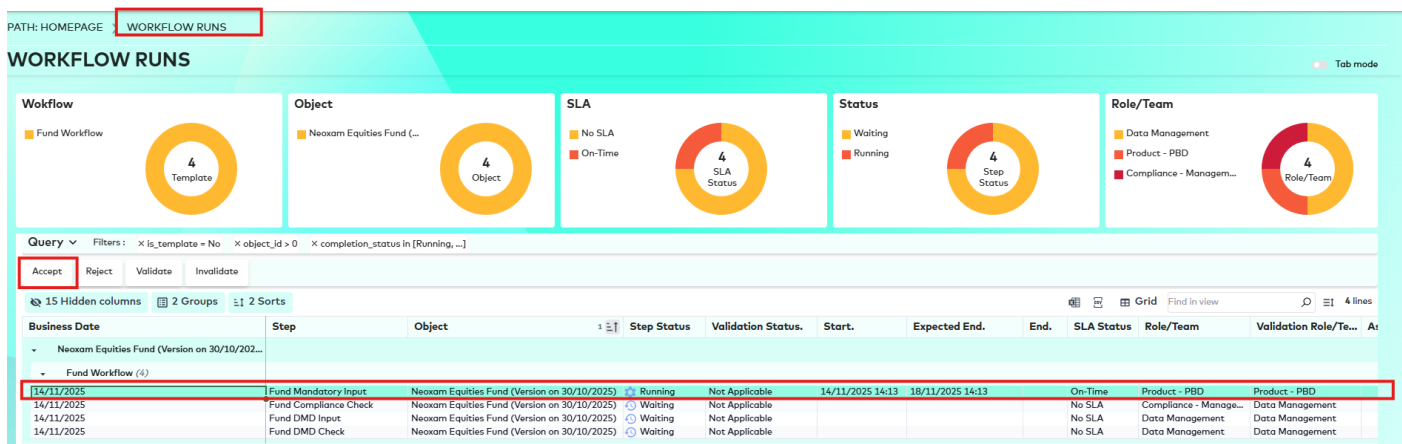

Workflow Runs

Query: Filters: X is_template = No X object_id > 0 X completion_status in [Running, ...]

Accept Reject Validate Invalidate

15 Hidden columns 2 Groups 2 Sorts

Business Date	Step	Object	Step Status	Validation Status	Start	Expected End	End	SLA Status	Role/Team	Validation Role/Team
14/11/2025	Fund Mandatory Input	NeoXam Equities Fund (Version on 30/10/2025)	Running	Not Applicable	14/11/2025 14:13	18/11/2025 14:13		On-Time	Product - PBD	Product - PBD
14/11/2025	Fund Compliance Check	NeoXam Equities Fund (Version on 30/10/2025)	Waiting	Not Applicable				No SLA	Compliance - Manage...	Data Management
14/11/2025	Fund DMD Input	NeoXam Equities Fund (Version on 30/10/2025)	Waiting	Not Applicable				No SLA	Data Management	Data Management
14/11/2025	Fund DMD Check	NeoXam Equities Fund (Version on 30/10/2025)	Waiting	Not Applicable				No SLA	Data Management	Data Management

The **Fund Mandatory Input** step requires 4-eyes validation from another user.

Note: The system checks users' rights to perform the different actions and automatically moves the step and validation statuses as steps are processed.

Please refer to the Workflow Management documentation for more information on authorized users.

2. The user with validation rights can then click the **Validate** button to successfully complete the first step.

All the statuses and dates are updated, and the second step can now be processed.

3. Click the **Accept** button to proceed with the second step.

Fund Compliance Check step does not require 4 eyes validation.

As the acceptance request passes the system checks, the step status changes to

Success, and NeoXam DataHub automatically executes the **On Success script** defined in the Workflow template (**On Success** field of the step).

This script creates two sub-workflows: **Tax Workflow** and **CAD Workflow**.
The status of the **Fund DMD Input** step remains **Waiting** until these two workflows are successfully completed.

PATH: HOMEPAGE > WORKFLOW RUNS

WORKFLOW RUNS

Tab mode

Workflow
 Fund Workflow
 Tax Workflow
 CAD Workflow


Object
 Neoxam Equities Fund (...)


SLA
 On-Time
 No SLA


Status
 Waiting
 Running
 Success


Role/Team
 Tax Management
 CAD Management
 Data Management
 Compliance - Manage...
 Product - PBD


Query Filters: X Is_Template = No X Object_Id > 0 X completion_status in [Running, ...]

Accept Reject Validate Invalidate

15 Hidden columns 2 Groups 3 Sorts Grid Find in view 8 lines

Business Date	Object	Step	Step Status	Validation Status	Start	Expected End	End	SLA Status	Role/Team
Neoxam Equities Fund (Version on 30/10/202...)									
CAD Workflow (2)									
14/11/2025	Neoxam Equities Fund (Version on 30/10/2025)	CAD Input	Running	Not Applicable	14/11/2025 15:07	19/11/2025 15:07		On-Time	CAD Manager
14/11/2025	Neoxam Equities Fund (Version on 30/10/2025)	CAD Check	Waiting	Not Applicable				No SLA	CAD Manager
Fund Workflow (4)									
14/11/2025	Neoxam Equities Fund (Version on 30/10/2025)	Fund Mandatory Input	Success	Validated	14/11/2025 14:24	18/11/2025 14:24	14/11/2025 15:01	On-Time	Product - PBD
14/11/2025	Neoxam Equities Fund (Version on 30/10/2025)	Fund Compliance Check	Success	No Validation Required	14/11/2025 15:01	14/11/2025 16:01	14/11/2025 15:07	On-Time	Compliance - M...
14/11/2025	Neoxam Equities Fund (Version on 30/10/2025)	Fund DMD Input	Waiting	Not Applicable				No SLA	Data Managem...
14/11/2025	Neoxam Equities Fund (Version on 30/10/2025)	Fund DMD Check	Waiting	Not Applicable				No SLA	Data Managem...
Tax Workflow (2)									
14/11/2025	Neoxam Equities Fund (Version on 30/10/2025)	Tax Input	Running	Not Applicable	14/11/2025 15:07	19/11/2025 15:07		On-Time	Tax Manager
14/11/2025	Neoxam Equities Fund (Version on 30/10/2025)	Tax Check	Waiting	Not Applicable				No SLA	Tax Manager

- Accept the steps to successfully complete two sub-workflows.
The **Fund Compliance Check** step moves to **Success** and the next step **Fund DMD Input** turns to **Running**.
- Accept the **Fund DMD Input** step.
This last step also requires 4 eyes validation.
- The validator **Validates** the step.
Its status then moves to **Success**.

Note: When the final step of the workflow is marked as **Success**, the overall workflow status is updated to **Success**, and the workflow's end date is populated accordingly.

Note: Other actions are available at different stages in the workflow:

- **Reject:** can be performed on running steps with **Input** or **Input Validation** step before any acceptance is done.
- **Invalidate:** validators can invalidate a step after it has previously been accepted by another user. Only steps with 4 eyes validation (**Input with validation** step type) can be invalidated.
- **Rerun:** can be performed on any completed steps with **Success** or **Error** status. In this case, the rerun step and all subsequent steps are instantiated.

Data Quality Control New Design

Introduction

Improvements have been made to the **New Data Quality Control** module.

This module enables setting-up controls that mix different fields and types of data control within an execution context of DQC. The new model is based on two main elements:

- **Data control:** defines a set of data verification over different data values
- **Control Execution rules:** define how the controls will be triggered and for what scope of objects.

Version 7.5.0-0 new DQC enhancements include:

- **Dynamic Data Consistency Control** between Assessed and Target data defined within the Control Clause of the Data Control.
- a new **Object Saved trigger** for Control Execution Rule.

Dynamic Data Consistency Control

Dynamic Data Consistency Control has been added at **Control Clause level** to prevent the creation of controls with irrelevant or incompatible control clauses, and **ensure consistency between Assessed and Target Data**.

Restrictions are applied to **Target Data** based on data type of the result produced by the control type applied to the business field selected in Assessed Data.

The table below illustrates the resulting data type when a control type is applied to a business field:

Value of	Same as the selected business field
Series Jump	Numeric
Stale	Numeric

Once the **Assessed Data** is configured (i.e the business field and the control type are selected), it triggers restrictions in the following part of the control clause:

- **Clause operators:** the list of available operators is restricted based on the Assessed Data configuration.
Below is the list of operators available depending on the Assessed Data resulting data type:

Assessed Data Resulting Data Type	Available Operators Data Clause
Numeric - Date	All
List - Object - String	<> ; = ; is Null ; is not Null

Comparison Block

Assessed Data

Type

Data Source Type

Business Field

Business Field

Activity Country

Control

Control Type

Value of

Operator

=

<>


=

Is Null

Is not Null

- **Target Data - Business Field:** the list of available business fields is filtered to include only options for which data type matches the resulting data type of **Assessed Data**.


Comparison Block

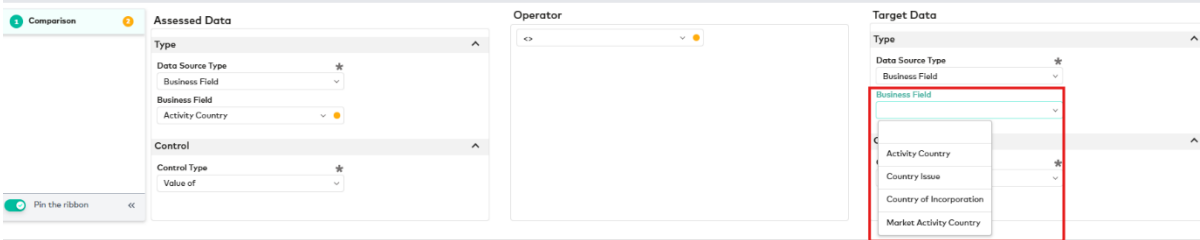

The screenshot shows the 'Comparison Block' interface. It has three main sections: 'Assessed Data', 'Operator', and 'Target Data'. The 'Assessed Data' section has a 'Type' dropdown set to 'Business Field' and a 'Control' dropdown set to 'Value of'. The 'Operator' section has a dropdown set to '<='. The 'Target Data' section has a 'Type' dropdown set to 'Business Field' and a 'Fixed Value' dropdown set to 'Value'. A red box highlights the 'Fixed Value' dropdown menu, which is open and shows a list of options: 'Activity Country', 'Country Issue', 'Country of Incorporation', and 'Market Activity Country'.


- **Target Data – Fixed Value:** the input control is adapted to the resulting data type of the Assessed Data:

- **Object:** the list of instances for the selected object is displayed.

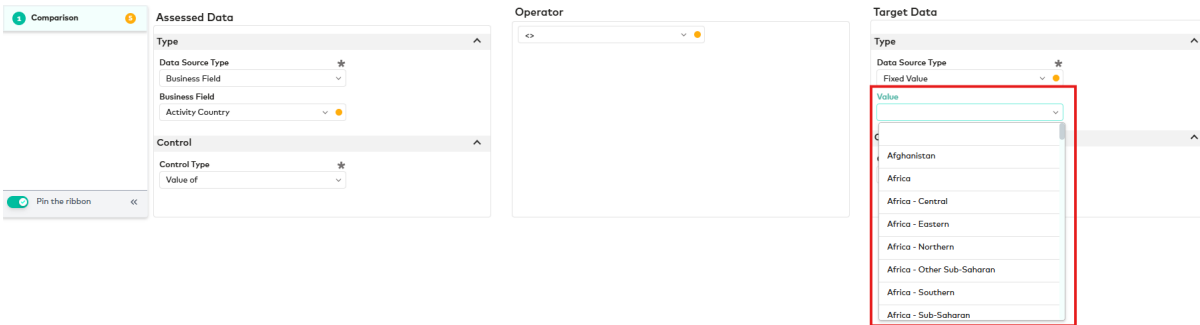

This screenshot shows the 'Comparison Block' interface with the 'Target Data' section's 'Fixed Value' dropdown set to 'Value'. A red box highlights the dropdown menu, which is open and displays a list of countries: 'Afghanistan', 'Africa', 'Africa - Central', 'Africa - Eastern', 'Africa - Northern', 'Africa - Other Sub-Saharan', 'Africa - Southern', and 'Africa - Sub-Saharan'.


- **List:** all list items of the target list are displayed.

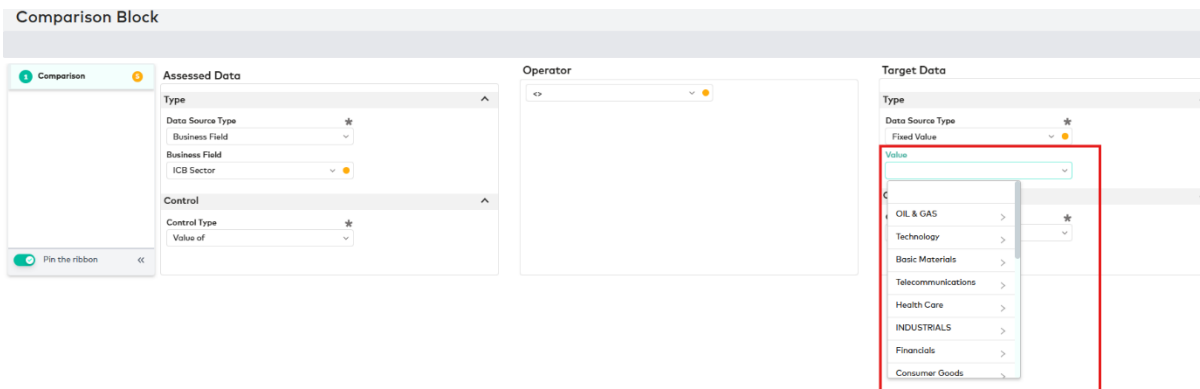

This screenshot shows the 'Comparison Block' interface with the 'Target Data' section's 'Fixed Value' dropdown set to 'Value'. A red box highlights the dropdown menu, which is open and displays a list of industries: 'OIL & GAS', 'Technology', 'Basic Materials', 'Telecommunications', 'Health Care', 'INDUSTRIALS', 'Financials', and 'Consumer Goods'.

- **Date:** a date picker is displayed to select a specific date.

Comparison Block

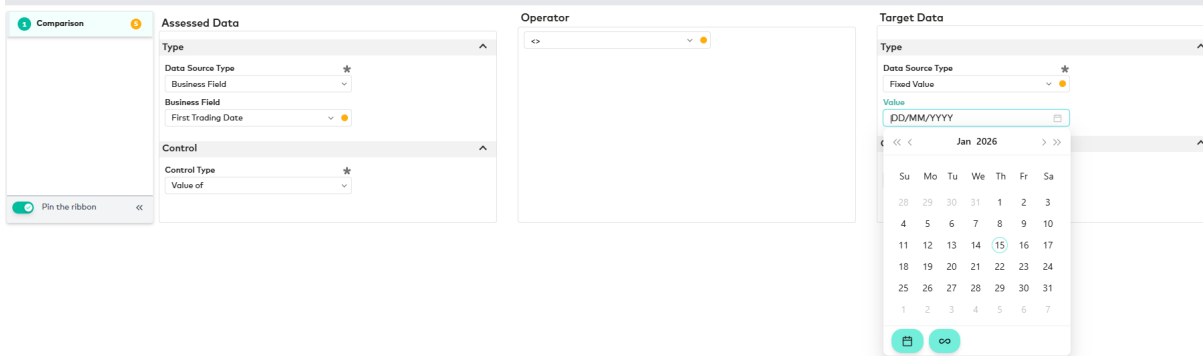


- **Numeric:** only numeric values can be entered in the field.

Object Saved Trigger

This new DQC feature allows to automatically execute quality control.

This execution is driven by the trigger set at control rule level.

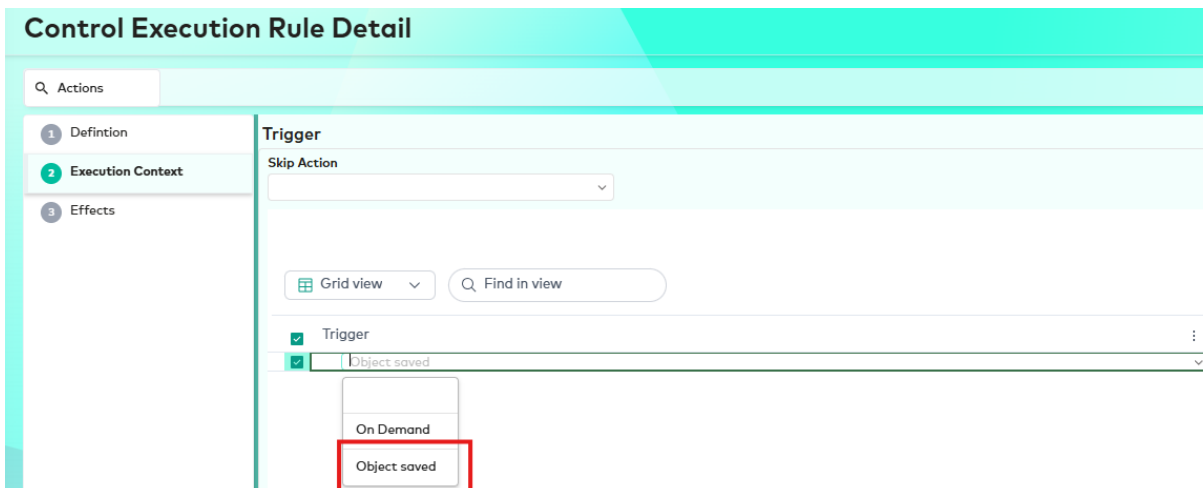

A control rule configured with the **Object Saved** trigger is executed automatically when:

- **An object is saved from a screen** (interactive mode)
- **An object is saved through a file import or business rule** (non-interactive mode)

If no trigger is defined or if the **Trigger** field is set to **On Demand**, the rule is executed on demand only.

All automatically executed controls are logged in the tracking, with clear identification of the trigger that launched the execution rule.

Execution Result Details

Q Actions Execution Result Details

Object: Bco Sant Ar NCPP Rg Non-Cum Perp Pfd Registered Shs Rule: Equity Price Check - Object Saved Status: Fail Trigger Type: Object saved

Panel - Displays Linked Objects Using a Defined Query Screen

Controls Summary

Grid view Find in view Hidden columns Group by Sorted by 1 column Create

Status	Control
Fail	Quote Last is null

Execution Result Details

Q Actions

Row count: 2 Selected: 0

Panel - Displays Linked Objects Using a Defined Query Screen

Controls Details

Grid view Find in view

Clause	Status	Assessed Value	Target Value
Test01_DDCV_SMARTLIST (3)			
Value of CFI - Highest Level = Value of Status	Pass	E - Equities	Active
Value of ICB Sector = Telecommunications	Pass	Telecommunications	Telecommunications
Value of Security Main Type = Equity	Fail	Equity	Equity
Test03_DDCV_SMARTCLASS (2)			
Value of Activity Country <> Value of Country Issue	Pass	France	France
Value of Country Issue <> China	Fail	France	China

LSEG Real-Time Optimized Connector

Introduction

The **Real-Time Optimized (RTO) connector** makes it possible to fetch real-time data such as quotes, from LSEG Cloud services, and then store it using different methods (regular mappings, direct SQL update, etc.).

Real-Time Optimized (RTO) operates in the Cloud, providing enhanced scalability, reliability, and accessibility.

Real-Time Optimized (RTO) connector manages the complete data lifecycle and can:

- **Update the Data Dictionary**, by automatically downloading the list of all available data fields from LSEG "Field Dictionary" to know how to interpret received data.

Note: The **RefinitivFieldsExtraction** service is used to update the **REFINITIV_ELEKTRON_FIELDS** list. Please refer to the [Services](#) section for more information.

- **Retrieve data** using two modes:
 - **SNAPSHOT:** Take an instant "snapshot" of an instrument's price at a specific moment
 - **STREAMING:** Open a real-time stream to receive all updates (ticks) of an instrument. Only changed fields are sent in update messages, not the complete field list.

Note: Data retrieval is performed using the '**RealTimeAPIService**' service. Please refer to the [Services](#) section for more information.

Configure Real Time Optimized Channel

The new communication channel type, RTO Channel, has been added to support the migration to RTO.

Communication Channel

Discard Save

Q Actions

Main

Category

Vendor

Type

Refinitiv RTO

Code

NX_RTO

Label (En.)

NX_RTO

Label (Fr.)

NX_RTO

Local directory

LSEG RTO

+ Create Duplicate Delete

Grid view Find in view Edited rows only Hidden columns Group by Sort by

Environment	Client ID	Client Secret	Service N...	Channel Name	Consumer Name	Proxy Host (Op...	Proxy Password (Optional)
☒			ELEKTRON_DD	channel_v1	consumer_v1		

Authentication for RTO Access

Access to the RTO service requires modern Version 2 authentication (CIAM/Service Account), which is based on the OAuth 2.0 protocol.

Based on access tokens, the EMA uses the **Client ID** and **Client Secret** to obtain a temporary access token from the authorization service, which is then used for the Login Domain.

The **Client ID** and **Client Secret** replace the old V1 App Key and are required to initiate any RTO connection. They are set up in RTO channel.

RTO Channel Parameters

RTO Channel parameters should be configured as follows:

Field Name	Description
Client ID CHANNEL_RTO_CLIENT_ID	CIAM/V2 Client ID (e.g., "GE-XXXXXXXXXXXX"). Important: Mandatory for OAuth2 authentication with RTO services.
Client Secret CHANNEL_RTO_CLIENT_SECRET	CIAM/V2 Client Authentication Password. Important: Mandatory for OAuth2 authentication with RTO services.

Service Name CHANNEL_RTO_SERVICE_NAME	RTO Logical Service Name (e.g., "ELEKTRON_DD"). Important: The service name must match the RTO service you are connecting to (e.g., "ELEKTRON_DD" for Elektron Data Direct).
Position CHANNEL_RTO_POSITION	RTO Endpoint Configuration (Host/Port) (e.g., "ap-southeast", "eu-west-1"). The Position field specifies the RTO endpoint region. Common values include: - ap-southeast (Asia Pacific - Southeast) - eu-west-1 (Europe - West) - us-east-1 (US - East) Other regions as provided by LSEG. Note: RTO messages can include data for different trading sessions (Asia, Europe, US) with separate timestamps for each region.
Environment CHANNEL_RTO_ENVIRONMENT	Reference to the Target Environment (dev, prod, cloud region). This field references the SYSTEM_ENVIRONMENT list in NeoXam DataHub, allowing you to select from predefined environment values (e.g., dev, prod).
Channel Name CHANNEL_RTO_CHANNEL_NAME	Logical Channel Name for EMA (Elektron Message API) Configuration
Consumer Name CHANNEL_RTO_CONSUMER_NAME	Logical Consumer Name for EMA (Elektron Message API) Configuration
Proxy Host (Optional)	Proxy Server IP Address or Hostname (e.g., >proxy.company.com or 192.168.1.100).

CHANNEL_RTO_PROXY_HOST	Important: Mandatory only if your network requires proxy access to reach LSEG cloud services. Otherwise, leave this field empty.
Proxy Port (Optional) CHANNEL_RTO_PROXY_PORT	Proxy Server Port Number (e.g., 8080, 3128). Important: Mandatory only if your network requires proxy access to reach LSEG cloud services. Otherwise, leave this field empty.
Proxy User Name (Optional) CHANNEL_RTO_PROXY_USER	Proxy Authentication User name. Enter the username if your proxy requires authentication. Important: This field is mandatory only if your network requires proxy access to reach LSEG cloud services and your proxy requires authentication. Otherwise, leave this field empty.
Proxy Password (Optional) CHANNEL_RTO_PROXY_PASSWORD	Proxy Authentication Password. Important: This field is mandatory only if your network requires proxy access to reach LSEG cloud services and your proxy requires authentication. Otherwise, leave this field empty.


Configure Feed Procedure Properties

RTO feed procedure should specify:

- the **Communication Channel**, that should be of RTO type,
- the **RTO Parser**
- the **Storage Method** using the **RTC_STORAGE_MANAGER** property:
 - **Storage Modes:** Define how data is stored. Four storage modes are available:
 - **DG Controller:** This is the standard mapping mode. External fields are mapped onto any kind of class.
 - **SQL:** A connection to the database is opened and the data is stored without compression.
 - **BLOB:** Received data is compressed before it is stored in a specific table.

- **Object Manager:** Stores data in the specific class through the Object Manager.
- **Query Types:** Define how data is requested (Standard query or Data Request query)

Important: For security concerns, **RTC_STORAGE_MANAGER** property is editable by admin users only.

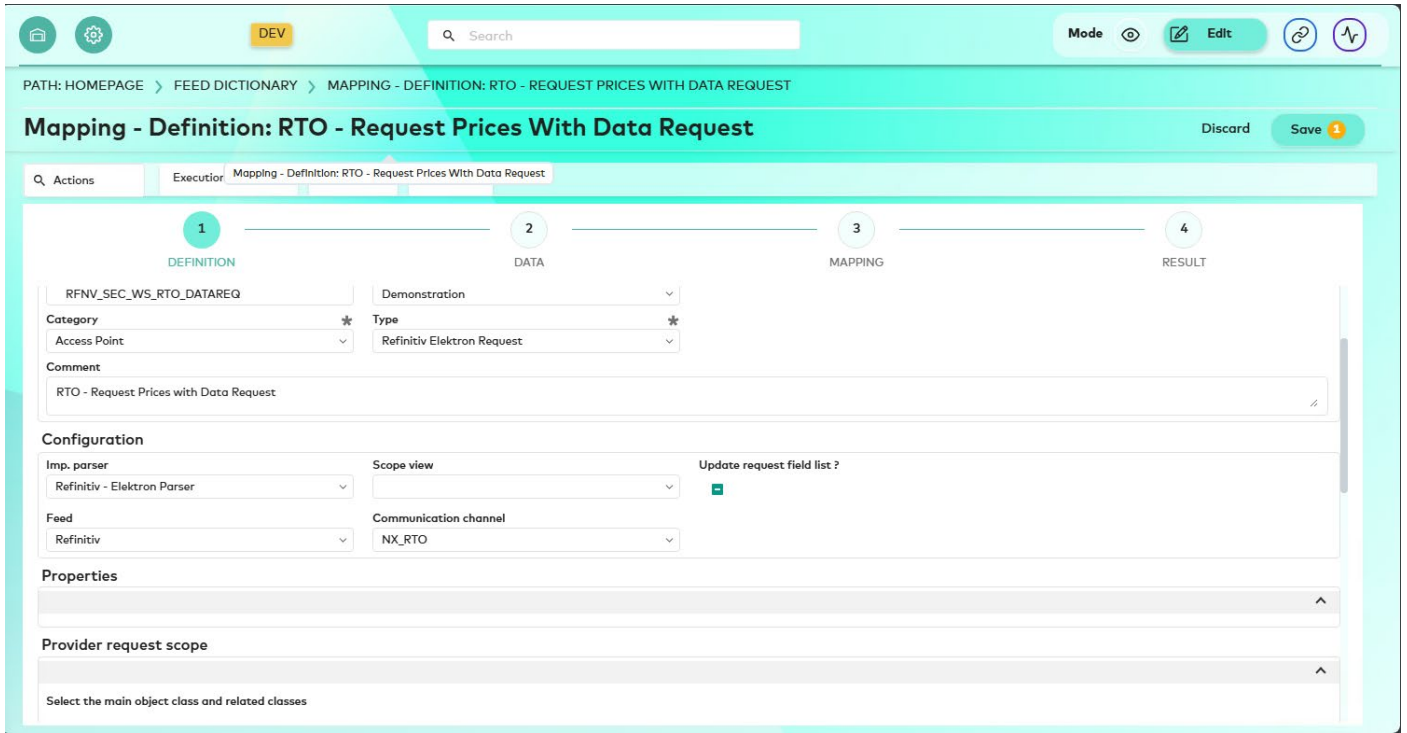

PATH: HOMEPAGE > FEED DICTIONARY > MAPPING - DEFINITION: RTO - REQUEST PRICES WITH DATA REQUEST

Mapping - Definition: RTO - Request Prices With Data Request

Discard Save

Q Actions

Execution Mapping - Definition: RTO - Request Prices With Data Request

1 2 3 4

DEFINITION DATA MAPPING RESULT

RFNV_SEC_WS_RTO_DATAREQ Demonstration

Category * Type *

Access Point Refinitiv Elektron Request

Comment

RTO - Request Prices with Data Request

Configuration

Imp. parser Scope view Update request field list?

Refinitiv - Elektron Parser

Feed Communication channel

Refinitiv NX_RTO

Properties

Provider request scope

Select the main object class and related classes

Note: Please refer to the connector documentation for a comprehensive list of the feed procedure properties.

Services

The RTO connector relies on two services:

- The **RefinitivFieldsExtraction** service

Service: RefinitivFieldsExtraction

1

Code

*

reutersfieldsextraction

2

Category

*

Staging Import / Export

▼

Technical location

*

opt.finance.services.refinitiv.ElektronFieldsExtraction

Used by system only ?

☐

Name

*

RefinitivFieldsExtraction

Privacy

*

NeoXam

▼

+ Create

- The **RealTimeAPIService** service

Service: RealTimeAPIService

DiscardSave 1

Actions

1

Code

realtimeapiservice

*

2

Category

Staging Import / Export

▼

*

Technical location

opt.finance.services.refinitiv.RealTimeAPIService

*

Used by system only ?

☒ ☐

Name

RealTimeAPIService

*

Privacy

NeoXam

▼

*

Fields Extraction Service

The **RefinitivFieldsExtraction** service takes as unique argument a **Communication Channel**, that should be of **RTO** type.

The scheduled task used to launch the service should specify the channel.

Scheduled task: Extract Field RTO

Q Actions

Run task

Show task in job report s...

Generate Default Transl...

1 First job

2

3 Jobs

4

Grid view

Q Find in view

2 Hidden columns

Group by

Sorted by 1 column

Download

Print

Job code	FeedProc	Name(En.)	Name(Fr.)	Service	Parameters	User
1	Champs Refinitiv	Refinitiv fields	RefinitivFieldsExtraction	NX_RTO_PROXY		

The RTO communication channel must be properly configured with the following mandatory fields before running the service:

- **CHANNEL_RTO_CLIENT_ID**: CIAM/V2 Client ID for authentication
- **CHANNEL_RTO_CLIENT_SECRET**: CIAM/V2 Client Secret for authentication
- **CHANNEL_RTO_SERVICE_NAME**: The RTO service name (e.g., ELEKTRON_DD)
- **CHANNEL_RTO_POSITION**: (if required by your network) RTO endpoint region configuration - Proxy configuration fields

Once triggered, the service connects to LSEG using the channel credentials, retrieves LSEG latest “Field Dictionary”, and updates the **REFINITIV_ELEKTRON_FIELDS** list in NeoXam DataHub.

List: Refinitiv Elektron fields REFINITIV_ELEKTRON_FIELDS

Q Actions

1 Name (En.)
Refinitiv Elektron fields

2 Name (Fr.)
Champs Refinitiv Elektron

3 Name (Ch.)

Code
REFINITIV_ELEKTRON_FIELDS *

Category
Fields

Type
Standard

Privacy
Data Admin *

Feed
Refinitiv

Custom Sort

Type Complement

Not Hierarchical Sort

Values

Grid view

Find in view

Hidden columns

Group by

Sorted by 3 columns

Create

Sort	1 ↑	Label - English	Label - French	Label - Chinese	Internal Code	2 ↑	Active	Free 1	3 ↑	Free 2	Free 3	Fr
☐		1ST_SH_CPN	1ST_SH_CPN		1ST_SH_CPN		Yes	3556				
☐		2ND_FREQ	2ND_FREQ		2ND_FREQ		Yes	591				
☐		3MT_B_HIGH	3MT_B_HIGH		3MT_B_HIGH		Yes	10680				
☐		3MT_B_LOW	3MT_B_LOW		3MT_B_LOW		Yes	10681				
☐		6M_ATM_IM	6M_ATM_IM		6M_ATM_IM		Yes	10812				
☐		7D_ATM_IM	7D_ATM_IM		7D_ATM_IM		Yes	11092				
☐		9M_ATM_IM	9M_ATM_IM		9M_ATM_IM		Yes	10813				
☐		12M_ATM_IM	12M_ATM_IM		12M_ATM_IM		Yes	10809				
☐		12M_CDIST	12M_CDIST		12M_CDIST		Yes	11150				
☐		12M_ATM_IM	12M_ATM_IM		12M_ATM_IM		Yes	11093				

This list is then used in the feed procedures involved in the data request process.

Real-Time API Service


The **RealTimeAPIService** makes it possible to start a streaming process and then pause it, resume it, and/or take snapshots.

You will then have to specify the action to be performed:

- STREAMING
- PAUSE
- RESUME

- STOP
- SNAPSHOT

It is also mandatory to specify in the **job**, the **feed procedure** to be used.

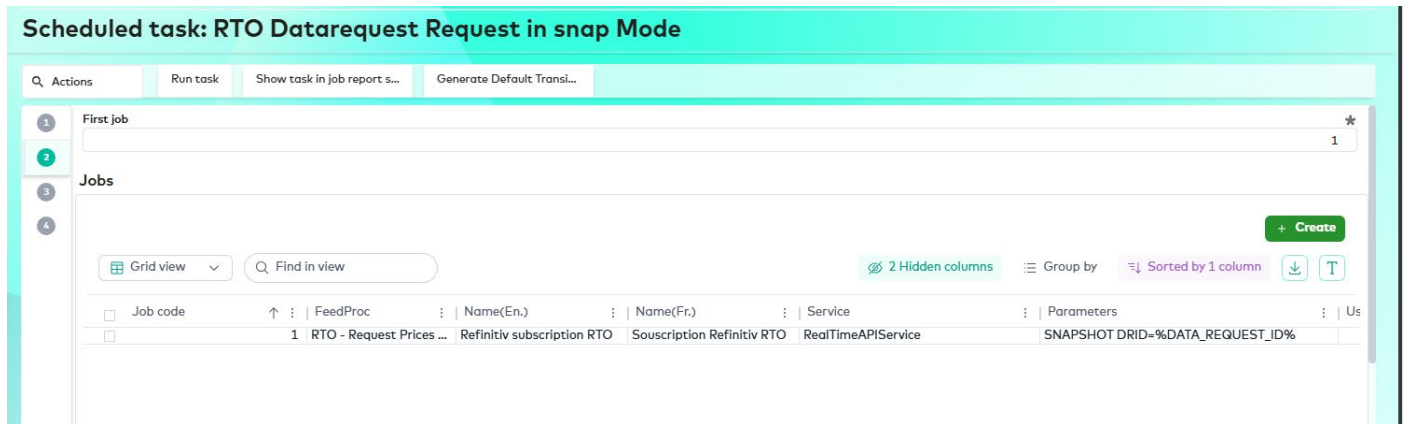

RTO Message Structure

When subscribing to RTO data, the connector receives messages in **EMA (Elektron Message API)** format.

Understanding the message structure is essential for proper data mapping and interpretation.

RefreshMsg Structure

A typical RTO response message is a **RefreshMsg** that contains market data for a specific instrument (RIC). The message structure follows this hierarchy:

RefreshMsg

- └─ Header Attributes (streamId, domain, qos, state, etc.)
- └─ Service Information (serviceId, serviceName)
- └─ Instrument Identification (name, nameType)
- └─ Payload (FieldList)
 - └─ FieldEntry (fid, name, dataType, value)

Header Attributes

The **RefreshMsg** header contains important metadata:

©2026 NeoXam. All Rights Reserved. This document contains valuable, proprietary information. No portion of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, without prior written consent of NeoXam. The information in this document is believed to be accurate at the time of printing; however, NeoXam and its affiliates assume no responsibility or liability for errors or omissions that may appear in this document. The information in this document is subject to change without notice and has no contractual value.

This user guide is also available on line: https://datahub.neoxam.com/docs/Documentation_Welcome_Page/index.html

- **streamId**: Unique identifier for the data stream
- **domain**: Message domain (e.g., "MarketPrice Domain")
- **qos**: Quality of Service indicator (e.g., "RealTime/JustInTimeConflated")
- **state**: Stream state (e.g., "Non-streaming / Ok / None / """)
- **serviceId**: Numeric service identifier
- **serviceName**: Service name (e.g., "ELEKTRON_DD")
- **name**: The RIC code (e.g., "EUR=")

Payload with FieldList and FieldEntry

The **Payload** contains a **FieldList** with multiple **FieldEntry** elements.

Each **FieldEntry** represents a data field with:

- **fid**: Field ID (numeric identifier)
- **name**: Field name (e.g., "BID", "ASK", "HIGH_1")
- **dataType**: Data type.

The most common date and field types are the following ones:

- **Real**: Numeric values with decimal precision (e.g., prices, volumes)
- **Time**: Time values in format "HH:MM:SS:mmm:uuu:nnn" (hours:minutes:seconds:milliseconds:microseconds:nanoseconds)
- **Date**: Date values in format "DD MMM YYYY" (e.g., "03 OCT 2025")
- **UInt/Int**: Integer values
- **Enum**: Enumerated values (numeric codes that map to specific meanings)
- **Rmtes**: Rich Text Markup Language Encoded String
- **Ascii**: ASCII text strings
- **value**: The actual field value

Example of Complete RefreshMsg Response

Below is an example of a complete **RefreshMsg** response for a currency pair (EUR=):

RefreshMsg

```
streamId="5"  
domain="MarketPrice Domain"  
solicited  
RefreshComplete  
clearCache  
qos="RealTime/JustInTimeConflated"
```

```
state="Non-streaming / Ok / None / ""
itemGroup="00 10"
permissionData="03 01 01 52 6c"
name="EUR="
nameType="1"
serviceId="257"
serviceName="ELEKTRON_DD"
Payload dataType="FieldList"
  FieldList FieldListNum="99" DictionaryId="1"
    FieldEntry fid="1" name="PROD_PERM" dataType="UInt" value="526"
    FieldEntry fid="2" name="RDNDISPLAY" dataType="UInt" value="153"
    FieldEntry fid="3" name="DSPLY_NAME" dataType="Rmtes" value="BARCLAYS  LON"
    FieldEntry fid="5" name="TIMACT" dataType="Time" value="12:36:00:000:000:000"
    FieldEntry fid="11" name="NETCHNG_1" dataType="Real" value="0,0019"
    FieldEntry fid="12" name="HIGH_1" dataType="Real" value="1,1744"
    FieldEntry fid="13" name="LOW_1" dataType="Real" value="1,1714"
    FieldEntry fid="15" name="CURRENCY" dataType="Enum" value="840"
    FieldEntry fid="17" name="ACTIV_DATE" dataType="Date" value="03 OCT 2025"
    FieldEntry fid="19" name="OPEN_PRC" dataType="Real" value="1,1714"
    FieldEntry fid="21" name="HST_CLOSE" dataType="Real" value="1,1714"
    FieldEntry fid="22" name="BID" dataType="Real" value="1,1733"
    FieldEntry fid="25" name="ASK" dataType="Real" value="1,1735"
    FieldEntry fid="32" name="ACVOL_1" dataType="Real" value="43829.0"
    FieldEntry fid="56" name="PCTCHNG" dataType="Real" value="0,16"
    FieldEntry fid="134" name="MID_PRICE" dataType="Real" value="1,1734"
    FieldEntry fid="1025" name="QUOTIM" dataType="Time" value="12:36:09:000:000:000"
    ... (many more fields)
  FieldListEnd
PayloadEnd <
RefreshMsgEnd
```

Note: Some fields may contain "(blank data)" when no value is available for that field.

ESG Urgewald Connector

Introduction

The **Urgewald** connector is designed to integrate Urgewald data into NeoXam DataHub ESG module.

Before retrieving data, the following steps must be completed:

- Create and Update the Data Catalog (reports and fields)
- Integrate Urgewald specific identifiers (GOGEL and GCEL Ids) in Mxagent
- Configure objects Data Load (Mapping)

Data Coverage

Urgewald annually publishes two benchmark databases on companies operating in the fossil fuel sector, the **Global Oil & Gas Exit List (GOGEL)** and the **Global Coal Exit List (GCEL)**.

- The **Global Oil & Gas Exit List (GOGEL)** presents different metrics designed to describe the size and composition of a company's oil & gas operations and its expansion activities in the Upstream, Midstream, and Power sector.
- The **Global Coal Exit List (GCEL)** captures the entire global coal industry.

Data Catalog Import

Report

- For **Global Oil & Gas Exit Lit (GOGEL)**, three reports are created in NeoXam DataHub:
 - **Midstream Expansion** (Report code: MIDSTREAM)

Feed Report Catalog detail

Report Information

Vendor * Urgewald	Report Code * MIDSTREAM
Report Name Midstream Expansion	
Suffix on rawdata table name UR0002	
Description The Midstream expansion report contains information about companies developing new pipelines and LNG terminals. Data provided by Global Energy Monitor (GEM) facilitates our project detection process and serves as a starting point for our midstream research.	

- **Upstream** (Report code: UPSTREAM)

Feed Report Catalog detail

Report Information

Vendor * Urgewald	Report Code * UPSTREAM
Report Name Upstream	
Suffix on rawdata table name UR0001	
Description The Upstream report is based on quantitative data obtained from Rystad Energy. Rystad Energy compiles asset-level data on hydrocarbons production, resources, and the associated economics. Its data is based on government and industry documents, as well as Rystad's own modeling.	

- Oil and Gas-Fired Power Expansion (Report code: POWER)

Feed Report Catalog detail

Report Information

Vendor * Urgewald	Report Code * POWER
Report Name Oil and Gas-Fired Power Expansion	
Suffix on rawdata table name UR0003	

Description

power capacity. Data provided by Global Energy Monitor (GEM) facilitates our project detection process and serves as a starting point for our power research.

Our revenue analysis and power portfolio research is based on company sources, like annual reports, financial statements, and investor presentations. For our project research, we also rely on government sources and reliable news outlets.

- **For Global Coal Exit List (GCEL)**, a dedicated report is created in NeoXam DataHub (Report Code: GCEL):

Feed Report Catalog detail

Report Information

Vendor

Report Code

Report Name

Suffix on rawdata table name

Description


The aim of Urgewald's database is to capture the entire global coal industry. The GCEL currently provides coal-related data for over 2800 companies, comprised of more than 1500 parent companies and their subsidiaries.

Fields


Once the reports are created two feed procedures are used to import the fields:

- **URGEWALD_ESG_IN_GOGEL:** this feed procedure imports fields from Data_Dictionnary_GOGEL.xlsx in the target reports.

Mapping - Definition: Urgewald GOGEL Feeddatadef Import

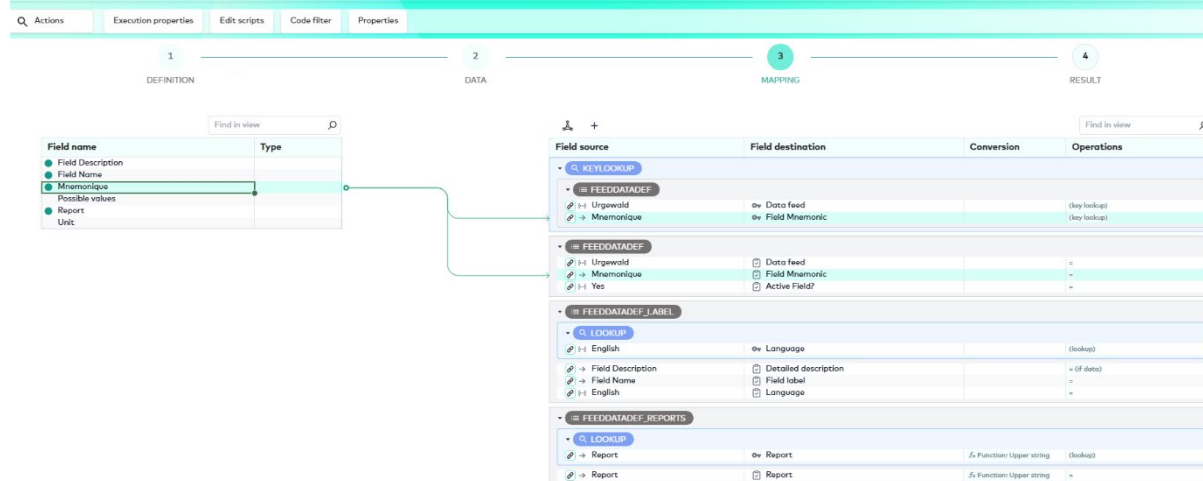

- **URGEWALD_ESG_IN_GCEL:** this feed procedure imports fields from Data_Dictionnary_GCEL.xlsx in GCEL target structure.

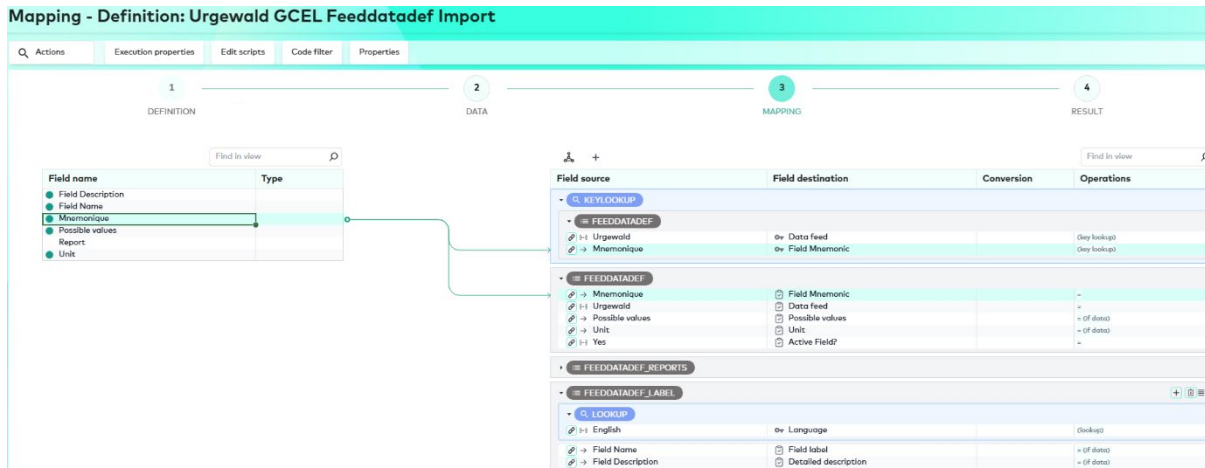

Data Dictionary for both Global Oil & Gas Exit List (GOGEL) and Global Coal Exit List (GCEL) is not provided by Urgewald and **must be created in NeoXam DataHub based on the structure and content of the GOGEL and GCEL data**

files: urgewald_GOGEL_2024_V1.1_with_identifiers.csv and urgewald_GCEL_2024_for_FIs.csv.

- Below is the target structure for GOGEL file - Data Dictionary

A	B	C	D	E	F
Report	Field Column	Field Name	Mnemonic	Unit	Field Description
Upstream	Column A	Production ≥ 20 mmbœ	production_threshold		This column indicates if a company meets our Production threshold (≥ 20 mmbœ).
Upstream	Column B	Unconventional Production ≥ 2 mmbœ	unconventional_production_threshold		This column indicates if a company meets our Unconventional Production threshold (≥ 2 mmbœ).
Upstream	Column C	Short-Term Expansion ≥ 20 mmbœ	ste_threshold		This column indicates if a company meets our Short-Term Expansion threshold (≥ 20 mmbœ).
Upstream	Column D	Exploration CAPEX ≥ 10 MUSD	exploration_threshold		This column indicates if a company meets our Exploration CAPEX threshold (≥ 10 MUSD).

- Below the target structure for GCEL file - Data Dictionary

C	D	E	F	G
Field Name	Mnemonic	Unit	Possible Values	Field Description
>10Mt / >5GW	10mt_5gw_thresholds		>10Mt ; >5GW	The company produces 10 million tons or more of (thermal) coal annually.
csr >10%	csr_threshold_10			The company operates 5 GW or more of installed coal-fired capacity.
csp >10%	csp_threshold_10			The coal share of revenue equals 10% or more.
				The coal share of power production equals 10% or more.
				The company meets the GCEL expansion criterion for either power, mining and/or infrastructure. The entry

Data Load

Once the data catalog is set up, it is possible to create a raw data model (**MxRawDataUrgewald**). The class **MxRawDataUrgewald** will be used to store ESG data imported from Urgewald files.

The data model is created through **Update Raw Data Tables** action button on ESG screen.

The update of the data model in case of data catalog modification can be done through a **rule service** job in a scheduled task e.g: **UPDATE_RAWDATA_TABLES_BATCH "URGOWALD" "REPORT_CODE:UPSTREAM;MIDSTREAM;POWER;GCEL"**

Edit Data Dictionary MxRawDataUrgewald

Q Actions

User definition

Name (En.)

Raw data - Urgewald

Name (Fr.)

Raw data - Urgewald

Name (Ch.)

Java definition

Class Name

MxRawDataUrgewald

Class Full Name

Properties

Category

ESG

Privacy

NeoXam

Tables

Hide columns

Group

2 Sorts

Table name

Prefix

Rec type

Min records

Max records

Range ids alloc.

Code field

Naming field

Activation Field

Table privacy

Comment

RAWD_URGEWALD			0	1	1					
RAWD_URGEWALD_UR0002	UR0002		1	0	999				NeoXam	
RAWD_URGEWALD_UR0003	UR0003		2	0	999				NeoXam	
RAWD_URGEWALD_UR0004	UR0004		3	0	999				NeoXam	
RAWD_URGEWALD_UR0004	UR0004		4	0	999				NeoXam	

A data load procedure allows you to trigger the creation or update of data import feed procedure to load data into raw data tables. This procedure is based on Urgewald Data Catalog and will generate one feed procedure by report. The creation can be triggered by the **Update Raw Data Mapping** action button from ESG screen or through a rule service job in a scheduled task:

e.g **UPD_DATALOAD_URGEWALD "REPORT_CODE:UPSTREAM" "GOGEL ID"**

ESG Reports Urgewald

Query

Actions

Update raw data tables

Update raw data mappi...

Preview ESG basket

Grid

Find in view

82 lines

Vendor	Report Name
Carbon4Finance (3)	
FinDatEx (1)	
MSCI (6)	
Standard & Poors (24)	
Sustainalytics (44)	
Urgewald (4)	
Urgewald	Global Coal Exit List
Urgewald	Midstream Expansion
Urgewald	Oil and Gas-Fired Power Expansion
Urgewald	Upstream

The following feed procedure and mapping will be automatically generated:

Mapping - Definition: Urgewald - Upstream

Q

Actions

Execution properties

Edit scripts

Code filter

Properties

1

DEFINITION

2

DATA

3

MAPPING

4

RESULT

General

English

Urgewald - Upstream

Chinese

Code

URGEWALD_ESG_IN_UR0001

*

Category

Manual Import

*

Comment

Generated automatically URGEWALD_ESG_IN_UR0001

//

French

Urgewald - Upstream

Privacy

Data Admin

▼

Pack level

ESG

▼

Type

Manual file import

*

Configuration

Imp. parser

Generic - CSV parser

▼

Update request field list ?

☐

Feed

Urgewald

▼

Scope view

▼

Communication channel

▼

ESG Discovery

The following scheduled task (**ESG - Urgewald Workflow**) can be used as a reference to run the end-to-end creation of Data Catalog, Raw Data and Data Load for Urgewald reports:

Scheduled task: ESG - Urgewald Workflow						
Q Actions Run task Show task in job report >... Generate Default Transl...						
1 First job 2 Jobs 3 4						
2 Hidden columns Group 11 Sort + Grid Find in view 10 lines						
Job code	FeedProc	Name(En.)	Name(Fr.)	Service	Parameters	
1	Urgewald GOGEL Feeddatadef Import	Urgewald GOGEL Feeddatadef Import	Urgewald GOGEL Feeddatadef Import	FileImport	%path_demo%\Kpath_urgewald%\Data_Dictionary_GOGEL.xlsx	
2	Urgewald GOGEL Feeddatadef Import	Urgewald GOGEL Feeddatadef Import	Urgewald GOGEL Feeddatadef Import	FileImport	%path_demo%\Kpath_urgewald%\Data_Dictionary_GOGEL.xlsx	
3	Urgewald - GOGEL & GCEL ID Import	Urgewald GOGEL and GCEL Id Import	Urgewald Import des Identifiants GOGEL et G.	FileImport	%path_demo%\Kpath_urgewald%\Urgewald_GOGEL_2024_V111_withIdentifiers.csv	
4	Urgewald - GCEL ID Import	Urgewald GCEL Id Import	Urgewald Import des Identifiants GCEL	FileImport	%path_demo%\Kpath_urgewald%\Urgewald_GCEL_2024_for_Fisc.csv	
5	Feed Data Def Update Keys	Feed Data Def Update Keys	Feed Data Def Update Keys	RuleService	UPDATE_REPORT_KEYS="URGEGWALD_FEEDREPCAT_KEYS" "MNEMONIC" "REPORT_CODE"	
6	Update Raw Data Tables	Update Raw Data Tables	Update Raw Data Tables	RuleService	UPDATE_RAWDATA_TABLES_BATCH="URGEGWALD" "REPORT_CODE:UPSTREAMMIDSTREAMPOWER..."	
7	Urgewald - Midstream Data Load Update	Urgewald - Midstream Data Load Update	Urgewald - Midstream Data Load Update	RuleService	UPD_DATALOAD_URGEGWALD "REPORT_CODE:MIDSTREAM" "GOGEL ID"	
8	Urgewald - Power Data Load Update	Urgewald - Power Data Load Update	Urgewald - Power Data Load Update	RuleService	UPD_DATALOAD_URGEGWALD "REPORT_CODE:POWER" "GOGEL ID"	
9	Urgewald - Upstream Data Load Update	Urgewald - Upstream Data Load Update	Urgewald - Upstream Data Load Update	RuleService	UPD_DATALOAD_URGEGWALD "REPORT_CODE:UPSTREAM" "GOGEL ID"	
10	Urgewald - GCEL Data Load Update	Urgewald - GCEL Data Load Update	Urgewald - GCEL Data Load Update	RuleService	UPD_DATALOAD_URGEGWALD "REPORT_CODE:GCEL" "GOGEL company ID"	

The **ESG - Urgewald Workflow** contains the following jobs:

- **Job 1 & 2:** import the Urgewald data catalog.



- **Job 3 & 4:** import the GOGEL and GCEL Ids in MxAgent AGENT_CODE table.
- **Job 5:** updates the report keys
- **Job 6:** updates the raw data model
- **Job 7 to 10:** create feed procedures data load mappings