



NEOXAM DATAHUB - WHAT'S NEW 7.6.0-0

WHAT'S NEW

DISCLAIMER – NEOXAM SOFTWARE DOCUMENTATION

NeoXam Portfolio Management SAS, a 'société par actions simplifiée' with share capital €15,575,931, registered with the Paris Company's register under No. 349 467 449 ('NeoXam'), is the owner of this Software Documentation. NeoXam holds all the rights required for the publication, together with, but not limited to, all logos, trademarks, screenshots, any data used herein. The Client is granted a right to use this Software Documentation only as agreed in writing with NeoXam. This Software Documentation is confidential and the Client shall protect the confidentiality and NeoXam's intellectual property rights. Unless otherwise agreed in writing by NeoXam, this Software Documentation is provided 'as is' without warranty of any kind, either express or implied, including, but not limited to, that the Software Documentation will not include technical or other mistakes, inaccuracies or typographical errors. The Software Documentation may be changed, and NeoXam makes no commitment to update such materials, unless otherwise agreed in writing. Screenshots and examples provided in this Software Documentation are not contractual and may be changed, according to the Client's needs, operational and technical constraints. NeoXam assumes no responsibility for errors or omissions in the Software Documentation. In no event shall NeoXam be liable for any special, punitive, incidental, indirect or consequential damages of any kind, or any damages whatsoever, including, without limitation, those resulting from loss of use, data or profits, whether or not NeoXam has been advised of the possibility of such damages, and on any theory of liability, arising out of or in connection with the use of this Software Documentation.

TABLE OF CONTENTS

New Features	5
NeoXam DataHub Web Application	6
Views	6
Create a New View	6
Define a Favorite View	7
Apply a View	8
Edit a View	8
Duplicate a View	10
Delete a View	10
Open a Query Screen with a Specific View	11
Performing Actions in Detail Screens	12
Pivot Tables Total and Grand Total	14
Data Quality Control New Design	15
Overview	15
Control Type Field Configuration	15
Use Case 1 – Custom Control Type with Numeric Return Format	16
Use Case 2 – Custom Control Type with Smartlistitem Return Format - Verify if a Date is a Holiday	18
Use Case 3 – Custom Control Type with Smartclass Return Format - Entity Country	20
Checklist for Control Based on Business Rule Script	21
IBOR	23
Generic Handling for Trade Movement Generation	23
Trade Generic Handling	23
Stock Management Method Mapping Types	23
Data Model Enhancement	26
Cashflow and Accrued Interest	27
Filtering of SECURITY_LEG Records	27
Data Override	28
Examples combining filtering and override	28

ESG - Sovereign Carbon Footprint	29
Introduction	29
World Bank — GDP PPP Data	29
Introduction	29
Data Coverage	29
Data Integration	30
Feed Procedure	30
Data Parsing	31
Data Mapping	32
UNFCCC — Country Carbon Data	33
Introduction	33
Dataset Coverage	33
Data Integration	34
Feed Procedures	35
Scheduled Task	36
ICE Volatility Connector	37
Introduction	37
Data Integration	39
Objects and Classes	39
Feed Procedures (MxFeedProcess)	39
Execution Order and Dependencies	40

New Features

We are pleased to announce the availability of **NeoXam DataHub Version 7.6.0-0**.

This version introduces new features around:

- **NeoXam DataHub Web Application**, with the ability to create, apply, and manage customized Views on Query and Detail screens, contextual actions directly available for data selected in grids or charts, automatic display of totals and grand totals on pivot tables.
- **Data Quality Control New Design**, with the ability to create a control type by using a business rule script.
- **IBOR** with generic handling for trade movement generation, leg filtering and new override capabilities on cash flow and accrued interest.
- The creation of two new connectors:
 - **ESG - Sovereign Carbon Footprint** to consolidate and integrate data provided by **World Bank** (GDP, PPP indicators) and the **UNFCCC** (country carbon data).
 - **ICE Volatility** to import ICE data and create volatility curves for Forex options, Cap and Floor interest rates, and Swaption interest rates.

NeoXam DataHub Web Application

Views


The new **Views** functionality allows you to save, manage, and reuse customized grid views.

The view stores grid configuration (columns, sorting, grouping, display mode, etc.), enabling you to quickly reapply your preferred views.

To access this feature, click on the **Views icon**  available in the grid toolbar.

The **Views** panel is displayed, with a **+Create** button and **Search views...** field.

Note: This feature is available on both **Query** and **Detail** screens, but not on **Dashboard** screens.

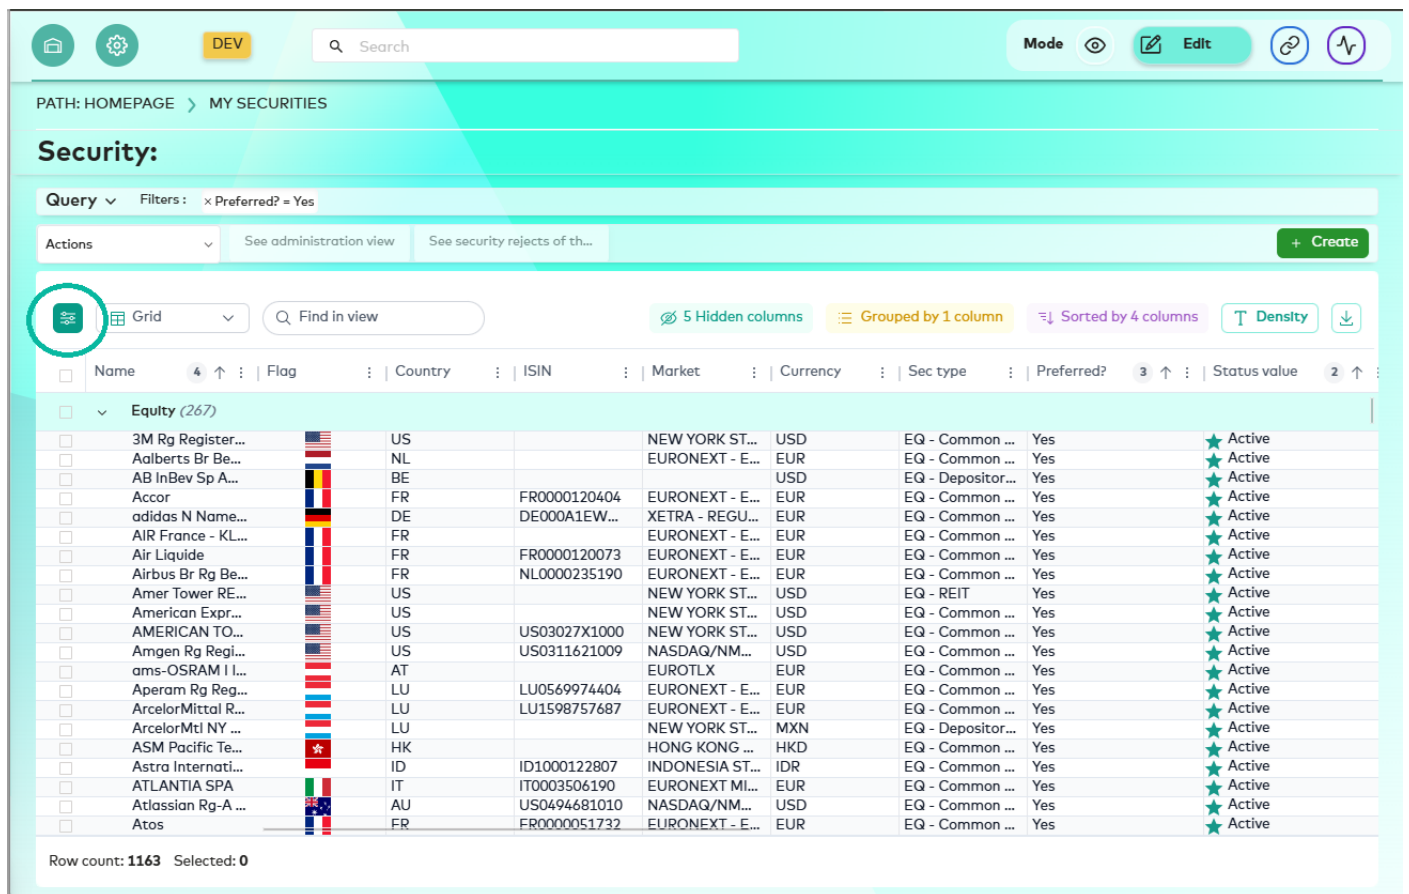


The screenshot shows the NeoXam DataHub Web Application interface. At the top, there is a navigation bar with a home icon, a settings icon, a 'DEV' status indicator, a search bar, and buttons for 'Mode', 'Edit', and a link icon. Below the navigation bar, the breadcrumb path is 'PATH: HOMEPAGE > MY SECURITIES'. The main section is titled 'Security:'. Underneath, there is a 'Query' dropdown and a filter 'x Preferred? = Yes'. Below that, there are two buttons: 'See administration view' and 'See security rejects of th...'. To the right of these buttons is a green '+ Create' button. The main content area is a grid. In the top-left corner of the grid, there is a circular icon with a grid pattern, which is the 'Views' icon. To its right is a 'Grid' dropdown menu and a search bar 'Find in view'. Further right, there are three status indicators: '5 Hidden columns', 'Grouped by 1 column', and 'Sorted by 4 columns'. To the right of these is a 'Density' button and a download icon. The grid itself has columns for 'Name', 'Flag', 'Country', 'ISIN', 'Market', 'Currency', 'Sec type', 'Preferred?', 'Status value', and 'Status'. The first row is expanded, showing a list of securities under the 'Equity (267)' group. The securities listed include '3M Rg Register...', 'Aalberts Br Be...', 'AB InBev Sp A...', 'Accor', 'adidas N Name...', 'AIR France - KL...', 'Air Liquide', 'Airbus Br Rg Be...', 'Amer Tower RE...', 'American Expr...', 'AMERICAN TO...', 'Amgen Rg Regl...', 'ams-OSRAM I I...', 'Aperam Rg Reg...', 'ArcelorMittal R...', 'ArcelorMtl NY ...', 'ASM Pacific Te...', 'Astro Internati...', 'ATLANTIA SPA', 'Atlantian Rg-A ...', and 'Atos'. Each row has a checkbox, a flag, a country code, an ISIN, a market, a currency, a security type, a 'Preferred?' checkbox, and a 'Status' (Active or Rejected).

Create a New View

You can save your current grid configuration as a view for future use.

1. Click on **Create view**.

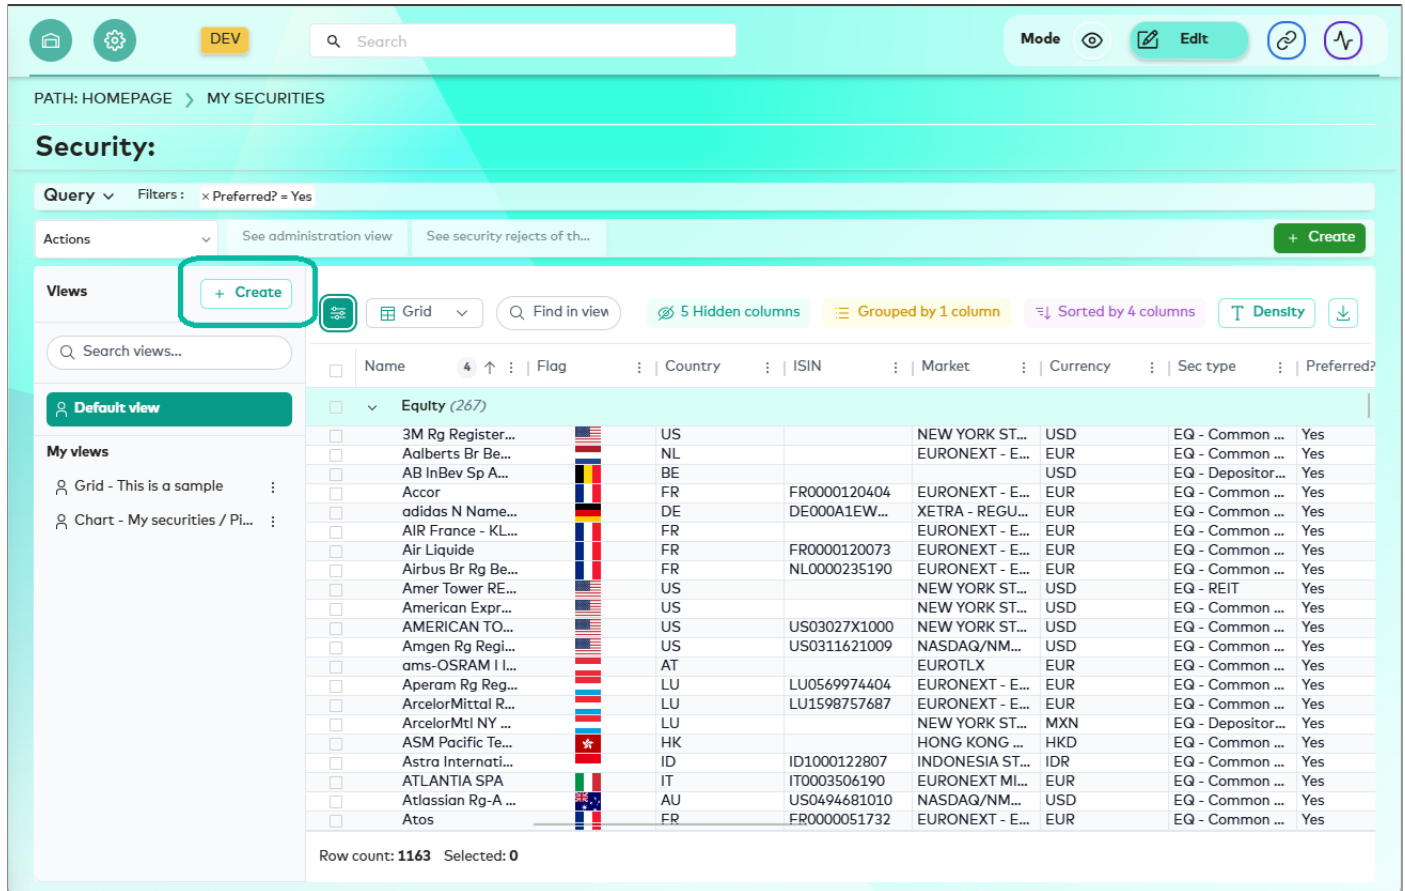

The screenshot shows the NeoXam Security interface. The top navigation bar includes a home icon, a settings icon, a 'DEV' status indicator, a search bar, and buttons for 'Mode', 'Edit', and a refresh icon. The breadcrumb trail shows 'PATH: HOMEPAGE > MY SECURITIES'. The main section is titled 'Security:'. Below this, there's a 'Query' dropdown and a filter 'x Preferred? = Yes'. The 'Actions' section has a dropdown and two links: 'See administration view' and 'See security rejects of th...'. The 'Views' sidebar on the left contains a '+ Create' button, which is highlighted with a red box. Below the sidebar, there's a 'Default view' section and a 'My views' section with two items: 'Grid - This is a sample' and 'Chart - My securities / Pi...'. The main table displays a list of securities with columns: Name, Flag, Country, ISIN, Market, Currency, Sec type, and Preferred?. The table is filtered to show 'Equity (267)' items. The bottom of the table shows 'Row count: 1163 Selected: 0'.

2. Enter a name and description.
3. Save your view.


Your view is now available under **My views**.

Define a Favorite View

You can mark a view as your favorite.

1. Select a view.
2. Click on the **ellipsis button** to display actions available on this view.
3. Select **Define as favorite view**.

The view is automatically applied when the grid loads and is displayed in the **Favorite views** section.

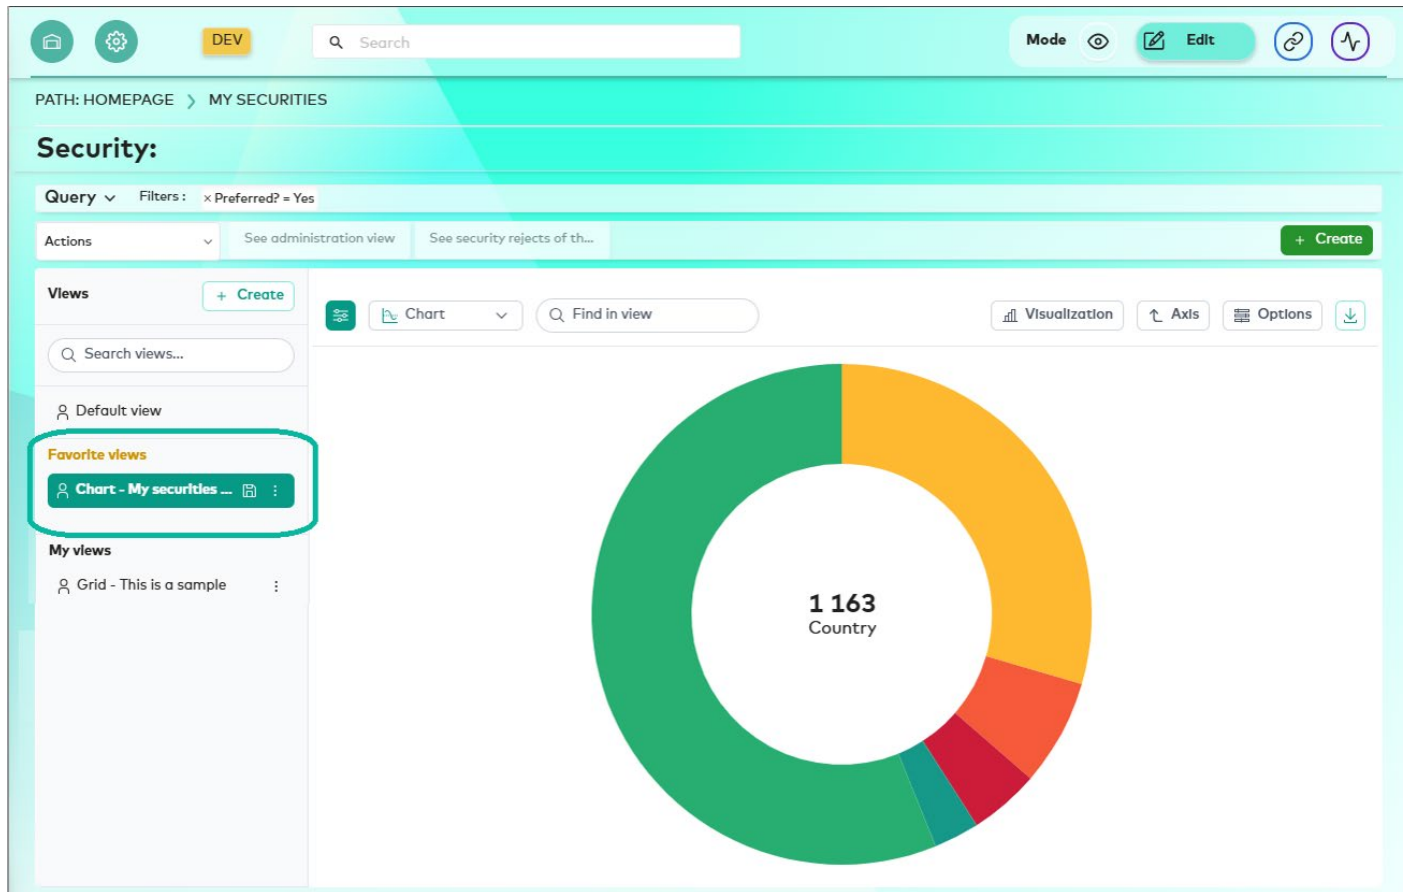

Note: Only one favorite is allowed per grid.

Apply a View


You can apply any available view to update the grid display.

1. Open the **Views** panel.
2. Select a view among **Default view**, **Favorite view** or any other view in the **My views** section. The main panel is immediately updated.


Edit a View

You can update your own views.

1. Click the **ellipsis button** of the view you wish to edit.

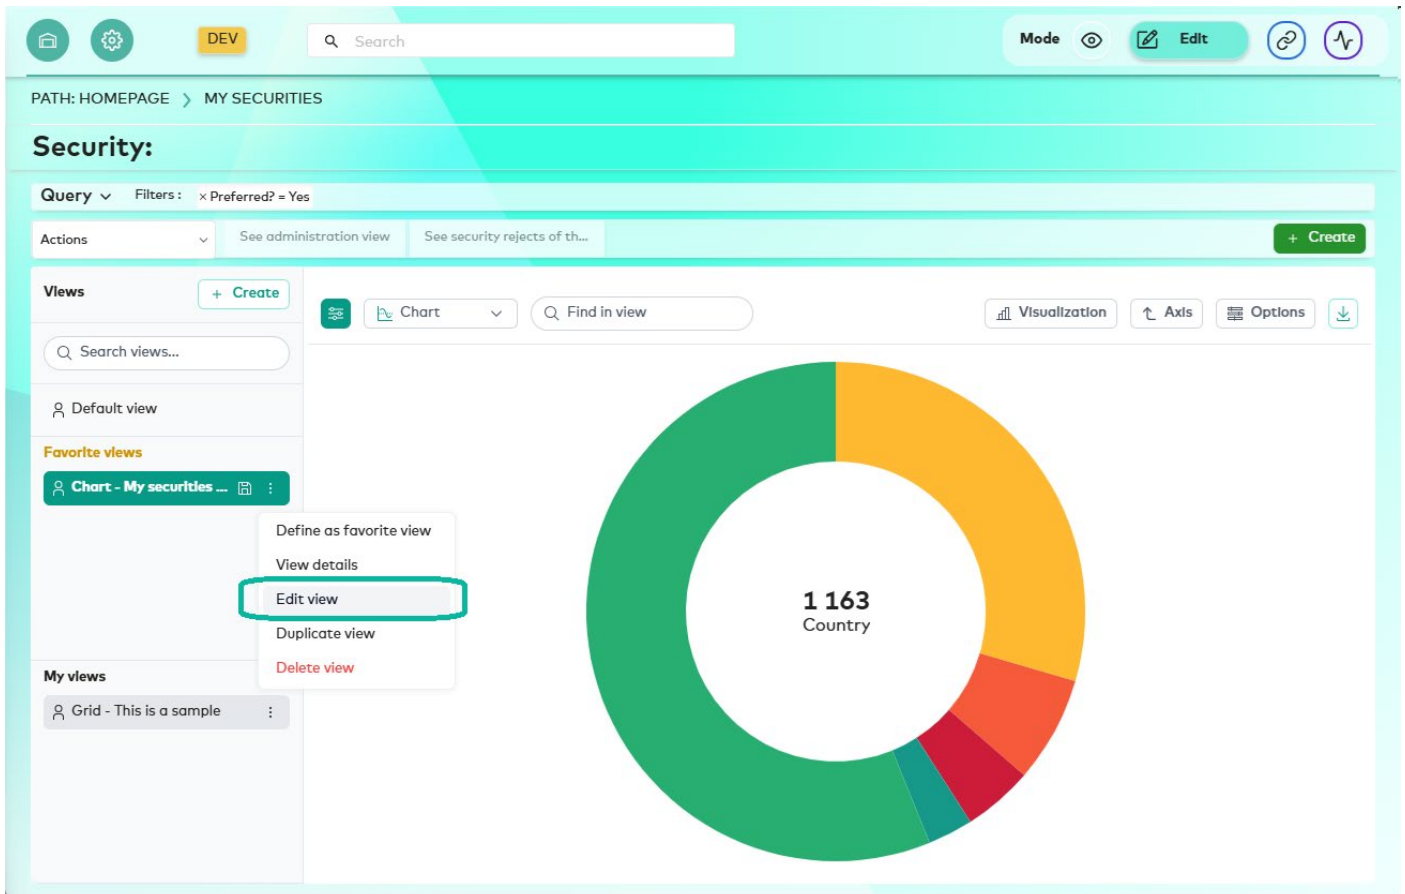

2. Select the **Edit view** menu option.
The **Edit View** window opens.

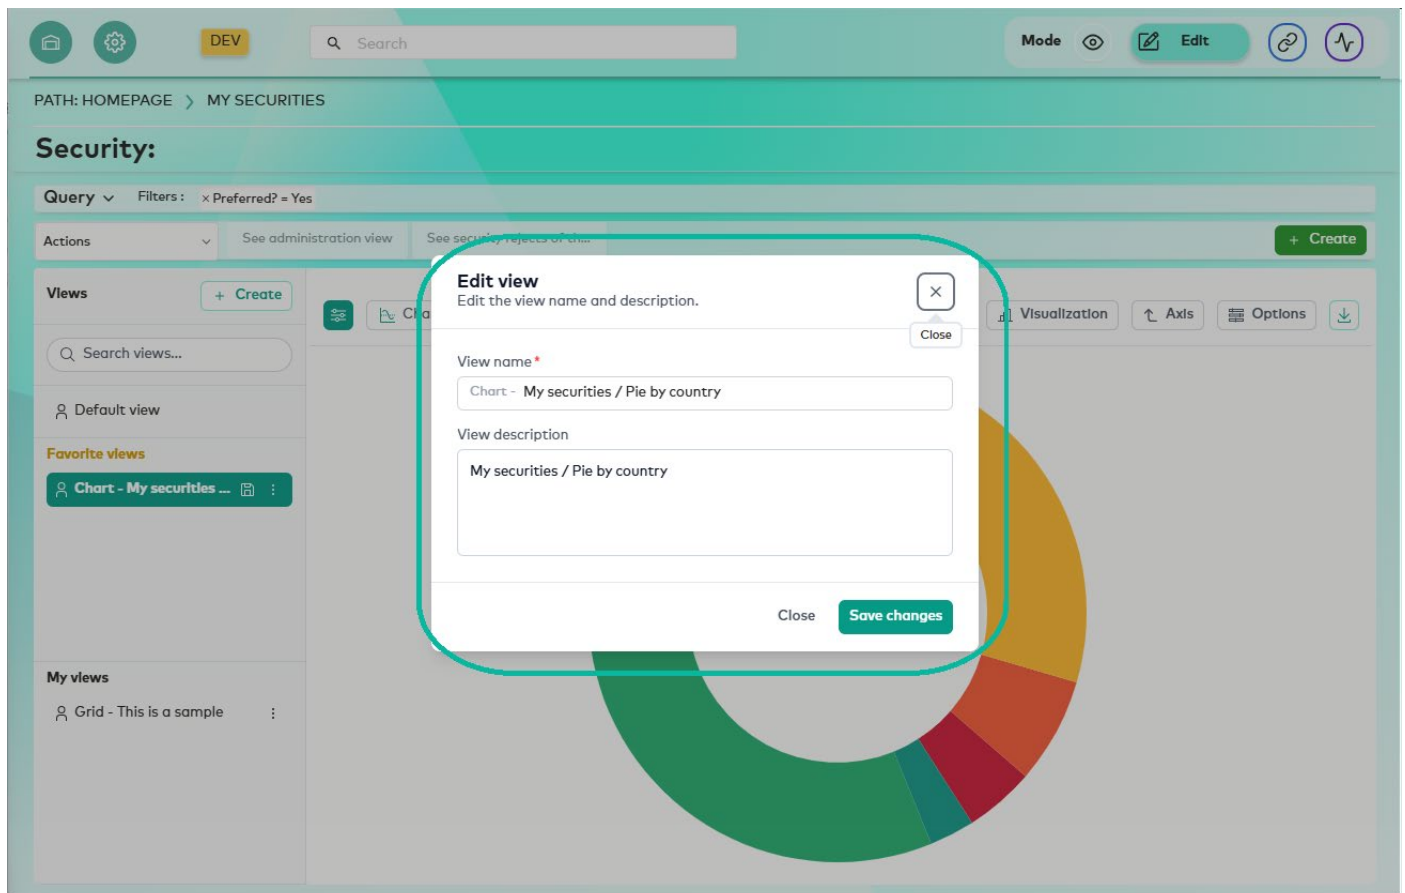

3. Rename the view and update the view description.
4. Click **Save changes** to save the current grid configuration.

Duplicate a View


You can duplicate one of your views by selecting the **Duplicate view** option from the **Actions** menu. A new view is created in **My views**, which you can customize independently.

Delete a View

You can delete views you have created.

1. Select a view in **My views**.

- From the view menu, select **Delete view**.
A confirmation message is displayed.

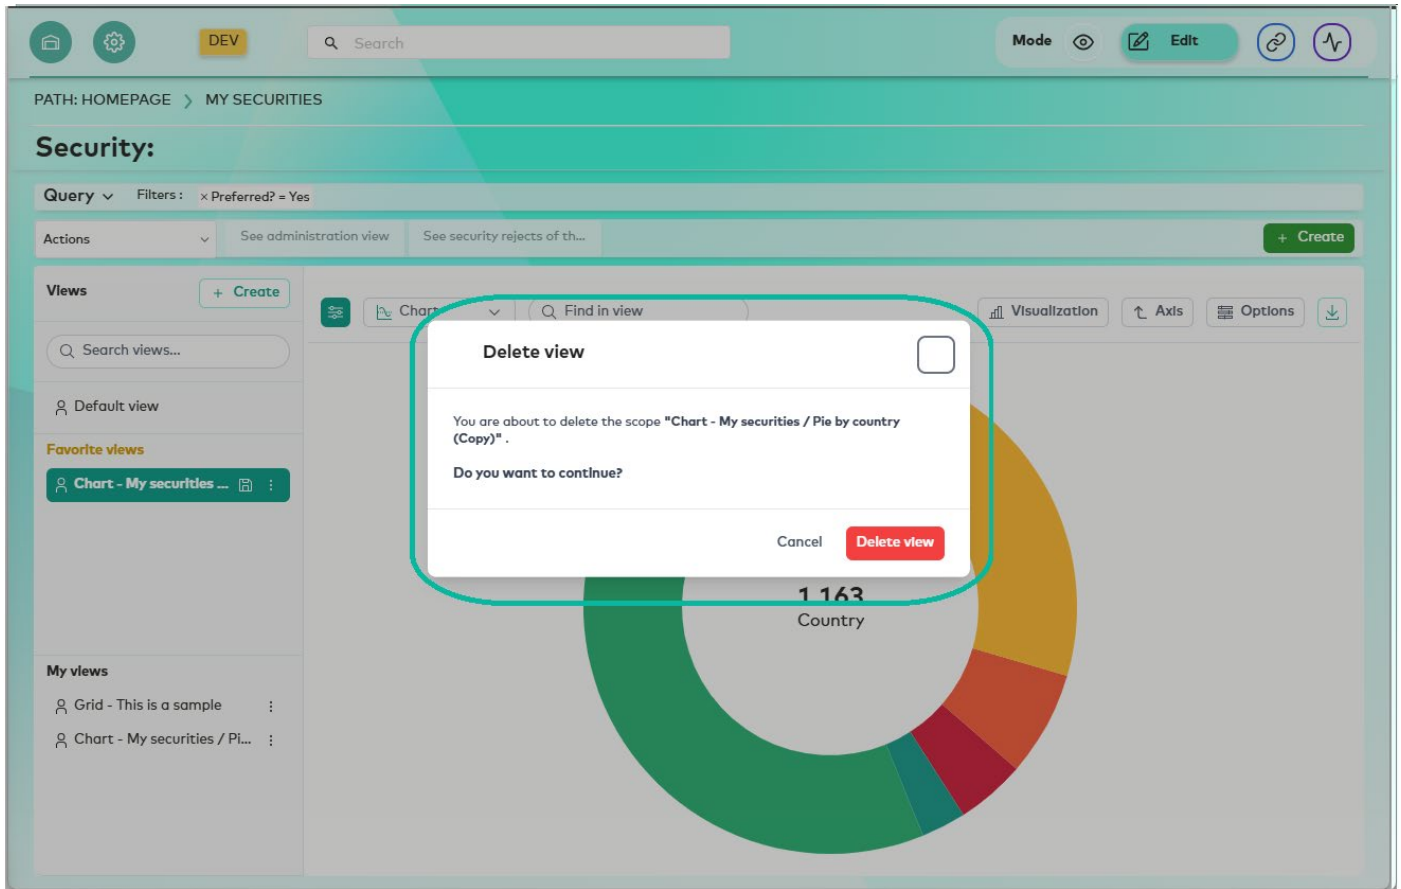

- Click the **Delete view** button to confirm the deletion.
The view is permanently removed.

Open a Query Screen with a Specific View

It is now possible to open a Query screen with a predefined view using the following functions:

- `showObjectQueryWindow,`
- `showObjectQueryWindowWithArg,`
- `showObjectQueryWindowWithObj().`

The view can be passed using its identification code.


Example

If you have created a view on **My Securities** Query screen, you can display the view ID by selecting **View details** from the view menu.

The view details are displayed, including the view ID:

©2026 NeoXam. All Rights Reserved. This document contains valuable, proprietary information. No portion of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, without prior written consent of NeoXam. The information in this document is believed to be accurate at the time of printing; however, NeoXam and its affiliates assume no responsibility or liability for errors or omissions that may appear in this document. The information in this document is subject to change without notice and has no contractual value.

This user guide is also available on line: https://datahub.neoexam.com/docs/Documentation_Welcome_Page/index.html

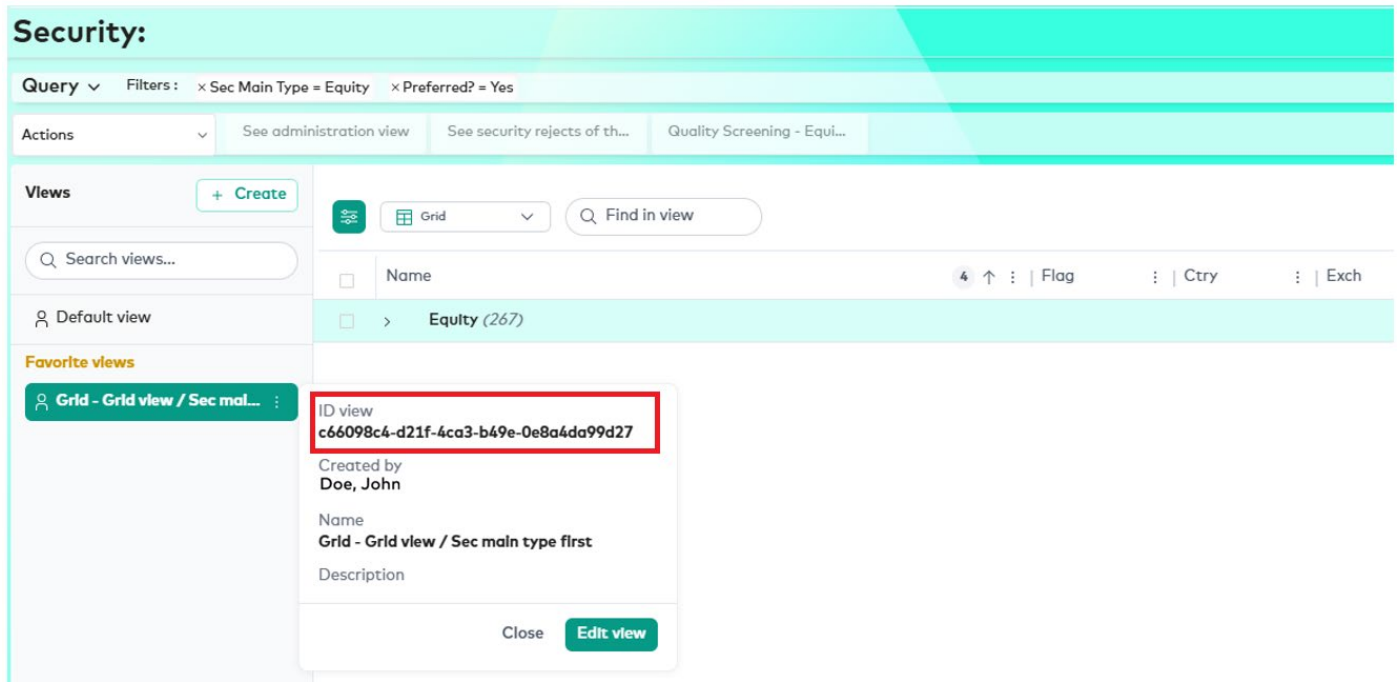

The following example opens the **My Securities** Query screen and applies the specific view on load:

```
crit := array();
showObjectQueryWindow("_SEC_MY_SECURITY_SEARCH_Q",crit,"","",1," c66098c4-d21f-4ca3-b49e-0e8a4da99d27");
```


The view ID (c66098c4-d21f-4ca3-b49e-0e8a4da99d27) is the identifier of the view to apply on load.

Note: No access control is applied in version 7.6. A view can be used regardless of its owner. Access control will be enforced in future versions.


Performing Actions in Detail Screens

It is now possible to execute **contextual actions** directly from grids or charts displayed within Detail screens, allowing you to interact with data and trigger workflows without leaving the screen.

A new **Actions** menu is available on grids when actions are configured. This menu provides access to contextual actions that depend on the selected data and applicable business rules.

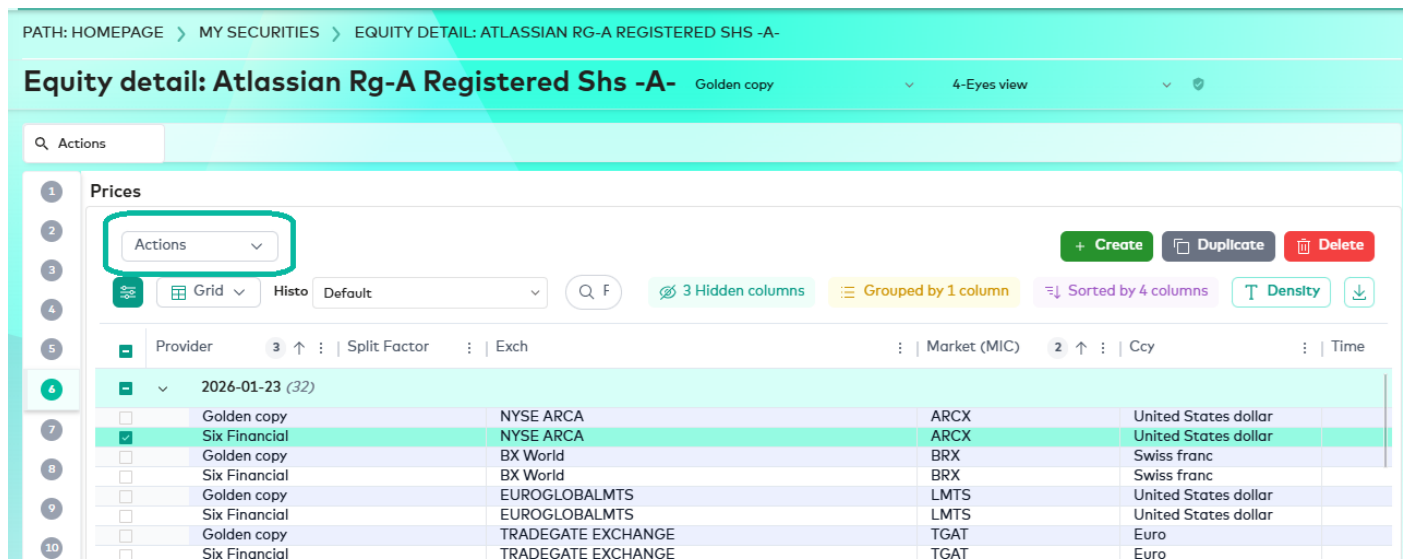

When grids are displayed in **chart mode**, selecting one or several parts of the chart (such as bars or segments) will also display available actions in the **Actions** menu.

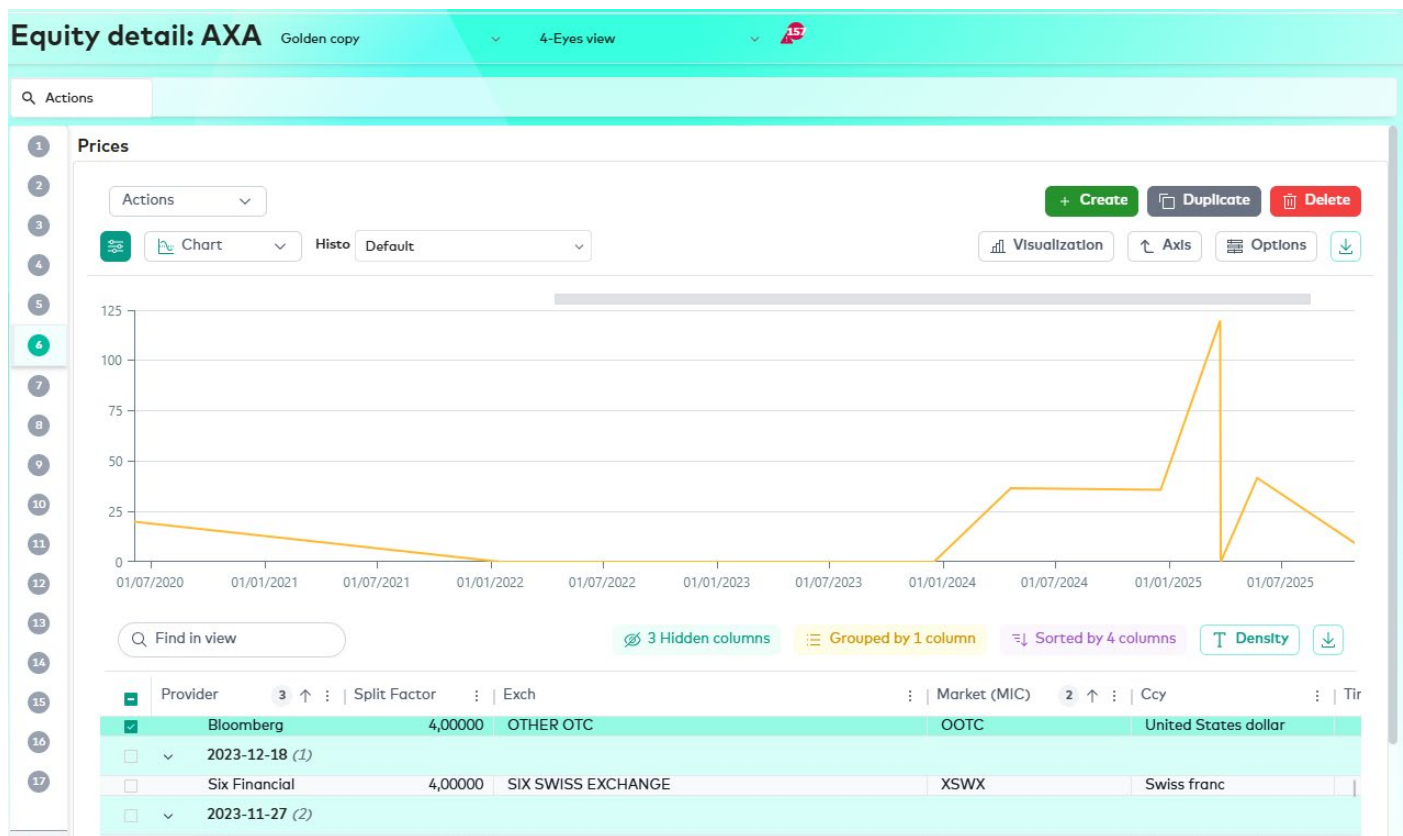

Pivot Tables Total and Grand Total

Pivot tables now support the display of **Totals** and **Grand Totals**, improving data readability and analysis.

This includes:

- The ability to display **Totals** for rows and/or columns.

Pivot

Find in view


2 Columns

2 Rows

Aggregates values

Portfolio / Currency										Grand Total
	2022-0...	+ 23/02/2022	- 24/02/2022		- 28/02/2022			- 01/03/2022		
	al 2022-0...		Settlement ...	Trade Date	Total 2022-0...	Settlement ...	Trade Date	Total 2022-0...	Settlement ...	
> FUND4 (1)	0				0			0		782 839,9100
> French Equities Growth (1)	0				0			0		4 999 238 327,6800
Euro	0				0			0		4 999 238 327,6960
> Multifund (3)	100 000 000,0000		50 014 159,4800	43 374 339,4000	93 388 498,8700	43 825 872,3800	43 435 905,0600	87 261 777,4300	43 658 855,8800	585 753 130,8400
Euro	100 000 000,0000		50 014 159,4750	43 374 339,3950	93 388 498,8700	43 825 872,3750	43 435 905,0575	87 261 777,4325	43 658 855,8750	585 732 926,9625
Pound sterling	0				0			0		8 361,8000
United States dollar	0				0			0		11 842,0520
> NeoXam Diversified II (1)	0				0			0		-7 108 244,2600
Euro	0				0			0		-7 108 244,2573
> NeoXam FoF (1)	0				0			0		-5 691 390,0000
Euro	0				0			0		-5 691 390,0000
NeoXam Dynamic (1)	0				0			0		500 000 0000
Grand Total	100 000 000,0000	-4 618 342,7500	50 014 159,4750	43 374 339,3950	93 388 498,8700	43 825 872,3750	43 435 905,0575	87 261 777,4325	43 658 855,8750	6 483 413 397,9632

The ability to display **Grand Totals** for the entire pivot table.

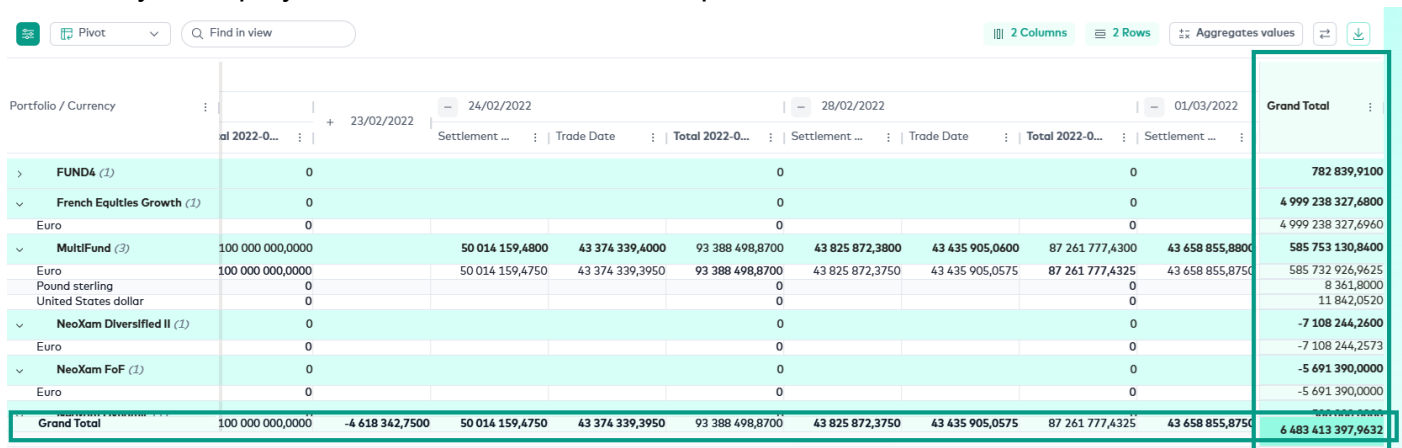

The screenshot shows the same pivot table as above, but with the **Grand Total** column highlighted in green, indicating it is the focus of this feature.

Note: **Totals** and **Grand Totals** are now automatically calculated and displayed by default for all pivot grids, without required action or configuration. This behavior will be configurable in future versions, with the ability to enable or disable Totals and Grand Totals.

Data Quality Control New Design

Business rule-based control types are now available and allow you to define custom control validation logic using business rules. It removes the constraint of relying solely on built-in Java control types. It works similarly to a standard control type, but the logic is written and maintained by you.

Overview

In Control Type based on Business Rule, the built-in Java function is replaced by a business rule script that you configure. The engine passes **two arguments** to the rule and uses its return value to evaluate the control comparison:

- **arg1 – The controlled object:** business object on which the data quality control is launched (e.g. Equity, Agent).
- **arg2 – The control clause data:** the clause currently being evaluated, giving the rule access to clause configuration data.

Control Type Field Configuration

This custom control type supports two categories of return types:

- Simple format: numeric, date or String.
- Complex format: reference object (SMARTCLASS) or reference list (SMARTLIST).


To configure a control type based on a business rule, set the following three fields from the **Data Control Type** list:

Field	Description
FREE 1 – Rule Code	The code of the business rule to execute. When defined, the engine handles this control type as rule-based. Mandatory.
FREE 2 – Return Type	The expected return data format, specified as a code from Data Control Value Format List (e.g. DATEF; NUMERICF; REFCLASSF; REF_LISTF; STRINGF). Mandatory. This field is used to ensure control clause data consistency within the comparison block.
FREE 3 – Reference	Required only if returned type is REF_CLASSF or REF_LISTF. if Return Type = REF_CLASSF the reference must contain the class name of the returned object (e.g MxCountry). if Return Type = REF_LISTF the reference must contain the list code of the returned list item (e.g. SECURITY_MAIN_TYPE).

Use Case 1 – Custom Control Type with Numeric Return Format

Check ISIN code coherence (length, structure, SEDOL and CUSIP compliance).

List: Data Control Type DATACONTROL_TYPE

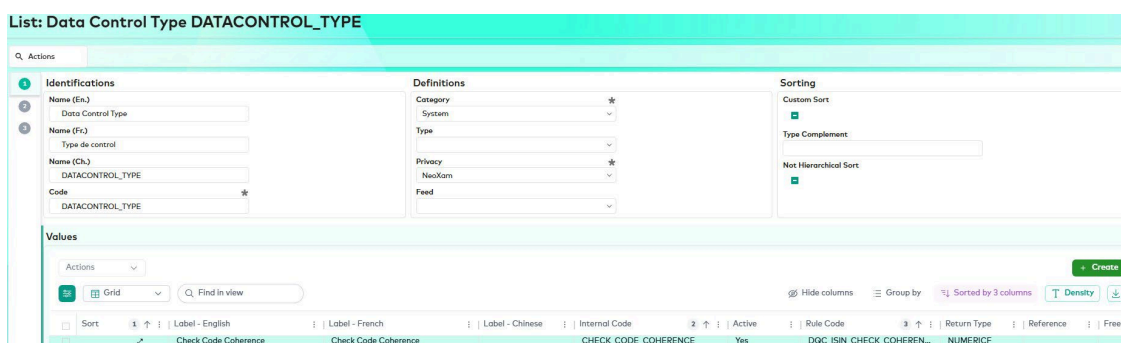

Sort	Label - English	Label - French	Label - Chinese	Internal Code	Active	Rule Code	Return Type	Reference	Free 4
	Check Code Coherence	Check Code Coherence	CHECK_CODE_COHERENCE	Yes	DGC_ISIN_CHECK_COHEREN...	NUMERICF			

The related business rule is specified as follows:

Rule Definition: Check ISIN Coherence

1

2

3

4

Name (Eng.)

Check ISIN Coherence

Name (Fr.)

Name (Ch.)

Code

DGC_ISIN_CHECK_COHERENCE

UI (Eng.)

UI (Fr.)

UI (Ch.)

Activated ?

☒

Characteristics

Category

DGC

Group

Administration

Type

Autonomous Rule

Privacy

Data Admin

Status

Product

Availability

Complete

Description

Comment

This function check on ISIN : key value, country code, size, coherence with CUSIP or SEDOL. It's called in DGC module.

arg 1: Object for which the control is launched

arg 2: Control Clause

Rule Definition: Check ISIN Coherence

Q

Actions

1

2

3

4

Script editor

```

1 // arg1: controlled object
2 // arg2: MxControlClauseData clause
3 MxSecurity objCtrl := arg1;
4 MxControlClauseData clauseCtrlData := arg2;
5 businessfield:= getObject("MxBusinessField", clauseCtrlData.BUSINESS_FIELD);
6
7 // Get Isin; Cusip and Sedol value from business field
8 isin := objCtrl.getBusinessFieldValue(businessfield.CODE);
9 cusip := objCtrl.getBusinessFieldValue("CUSIP");
10 sedol := objCtrl.getBusinessFieldValue("SEDOL");
11
12 // Normalization
13 if (isin = null) isin := "";
14 if (cusip = null) cusip := "";
15 if (sedol = null) sedol := "";
16 isin := strupper(strtrim(isin));
17 cusip := strupper(strtrim(cusip));
18 sedol := strupper(strtrim(sedol));
19
20 // No issue if isin is null (existing behavior is kept)
21 if (isin = ""){
22     msgtrace("*****ISIN_CHECK_COHERENCE: ISIN code value is null*****");
23     return 1;
24 }
25

```

Once the control type and its related rule are created and active, the control type can be used in a comparison clause to be executed as part of a control execution rule:

Comparison Block

1

Comparison

Assessed Data

Type

Data Source Type

Business Field

Business Field

ISIN

Control

Control Type

Check Code Coherence

Operator

<>

Target Data

Type

Data

Fixed Value

Value

1

Control

Control Type

Value of

Control Details: Code [Check ISIN]

Q Actions

Identification

Name(en) Code [Check ISIN] Active ☒

Quality Level Quality Indicator

Comment

Applicability/Groups

Applicability Business Dictionary Business Class Equity

Data Check Clauses

Actions Grid Find in view 5 Hidden columns Group by Sorted by 1 column Density

0 Check Code Coherence ISIN <= 1

The business rule returned value is shown in the tracking:

Execution Result Details

Q Actions

Row count: 1 Selected: 0

Panel - Displays Linked Objects Using a Defined Query Screen

Controls Details

Grid Find in view 5 Hidden columns Grouped by 1 column Sorted by 1 column Density

Clause	Status	Assessed Value	Target Value
Code [Check ISIN] (1)			
Check Code Coherence ISIN <= 1	Pass	1	1

Use Case 2 – Custom Control Type with Smartlistitem Return Format - Verify if a Date is a Holiday

The **Is Holiday** control type has been added to the **Data Control Type** list and is used to check if any date in the instrument is a holiday in a specific calendar.

The rule returns **Y/N** values from the **Yes/No** list. **N** is returned when the date is missing or when the calendar cannot be found.

Sort	Label - English	Label - French	Label - Chinese	Internal Code	Active	Rule Code	Return Type	Reference	Free
	Is Holiday	Is Holiday		IS_HOLIDAY	Yes	DGC_HOLIDAY_CHECK	REF_LISTF	YES_NO	

The related business rule is specified as follows:

Rule Definition: Check Holiday

Discard Save

Q Actions

Description

Code DGC_HOLIDAY_CHECK On ☒

Name (Eng.) Check Holiday UI (Eng.)

Name (Fr.) UI (Fr.)

Name (Ch.) UI (Ch.)

Description

Reexecute ☒

Comment

This function check if any date in the controlled object is a holiday in a specific calendar.
arg 1: Object for which the control is launched
arg 2: Control Clause

Classifications

Category DGC

Group Administration

Type Autonomous Rule

Privacy Data Admin

Status

Product

Availability Complete

Rule Definition: Check Holiday

Q Actions

```

1 MxSecurity objCtrl := arg1;
2 MxControlClauseData clauseCtrlData := arg2;
3 businessfield:= getObject("MxBusinessField", clauseCtrlData.BUSINESS_FIELD);
4
5 // Maturity date value from the business field selected in the clause
6 maturityDate := objCtrl.getBusinessFieldValue(businessfield.CODE);
7
8 if (maturityDate="") {
9     msgtrace("*****DQC_HOLIDAY_CHECK: Maturity date value is null*****");
10    return getItemId("YES_NO", "N");
11 }
12
13 //Get EUR Calendar - it can be replaced by any calendar;
14 calId := getObjectIdByCode("CALENDAR", "EUR");
15 if (calId = "") {
16     msgtrace("*****MATURITY_HOLIDAY_CHECK: European Calendar not found*****");
17     return getItemId("YES_NO", "N");
18 }
19
20
21 calendar := getObject("MxCalendar", calId);
22 // check if the date is a holiday in the selected calendar
23 if (isHoliday(maturityDate, calendar) = 1) {
24     return getItemId("YES_NO", "Y");
25 }

```

Once the control type and its related rule are created and active, it can be used in a comparison clause to be executed as part of a control execution rule:

Comparison Block

Comparison

Assessed Data

Type

Data Source Type *

Business Field *

Business Field *

Maturity Date *

Control

Control Type *

Is Holiday *

Operator

=

Target Data

Type

Data *

Fixed Value *

Value *

Control

Control Type *

Value of *

Data Check Clauses

Actions

Grid

Find in view

5 Hidden columns

Group by

Sorted by 1 column

Density

#	Clause	Status	Assessed Value	Target Value
0	Is Holiday Maturity Date = Yes			

The business rule return value is shown in the tracking, it can either be a list item code of, its id, an array of codes or an array of ids:

Execution Result Details

Q Actions

Row count: 1 Selected: 0

Panel - Displays Linked Objects Using a Defined Query Screen

Controls Details

Grid

Find in view

5 Hidden columns

Grouped by 1 column

Sorted by 1 column

Density

Clause	Status	Assessed Value	Target Value
Maturity Date [Check Holiday] (1)			
Is Holiday Maturity Date = Yes	Fail	Yes	Yes

Use Case 3 – Custom Control Type with Smartclass Return Format - Entity Country

The Entity Country control type has been added to the **Data Control Type** list and can be used to retrieve the country for the issuer of the controlled instrument.

The rule returns a **MxCountry** instance found in the Agent linked to the instrument.

☐	Sort	↑ ↓	Label - English	:	Label - French	:	Label - Chinese	:	Internal Code	2 ↑ ↓	Active	:	Rule Code	3 ↑ ↓	Return Type	:	Reference	:	Free 4
☐			Entity Country		Entity Country				ENTITY_COUNTRY		Yes		DQC_AGENT_COUNTRY		REF_CLASSF		MxCountry		

The related business rule is specified as follows:

Rule Definition: Get Agent Country

Discard Save 1

Q Actions

Rule Definition: Get Agent Country

Description

Code

DQC_AGENT_COUNTRY

On

☒

Name (Eng.)

Get Agent Country

UI (Eng.)

Name (Fr.)

UI (Fr.)

Name (Ch.)

UI (Ch.)

Description

Reexecute

☒

Comment

This function returns the Agent Country issuer of the linked instrument.

arg 1: Object for which the control is launched

arg 2: Control Clause

Classifications

Category

DQC

Group

Administration

Type

Autonomous Rule

Privacy

Data Admin

Status

Product

Availability

Complete

Rule Definition: Get Agent Country

Q Actions

1

2

3

```

1 // arg1: controlled object
2 // arg2: MxControlClauseData clause
3 MxSecurity objCtrl1 := arg1;
4 MxControlClauseData clauseCtrlData := arg2;
5
6 //RetrieveIssuerId from the controlled object
7 issuerId := objCtrl1.ISSUER;
8
9 if (issuerId=="") {
10     msgtrace("*****DQC_AGENT_COUNTRY: Issuer value is null*****");
11     return null;
12 }
13
14 //Get Issuer along with the country;
15 issuer:= getObject("MxAgent", issuerId);
16 countryAgent:= issuer.getBusinessFieldValue("ENT.COUNTRY"); // or "ENT.COUNTRY_OF_INCORPORATION"
17 if (countryAgent == "") {
18     msgtrace("*****DQC_AGENT_COUNTRY: Agent country is null*****");
19     return null;
20 }
21
22 return countryAgent;

```

Once the control type and its related rule are created and active, it can be used in a comparison clause to be executed as part of a control execution rule:

Comparison Block

Comparison

Assessed Data

Type
Data Source Type
Business Field
Business Field
Issuer
Control
Control Type
Entity Country

Operator

Target Data

Type
Data Source Type
Business Field
Business Field
Country Issue
Control
Control Type
Value of

Data Check Clauses

Actions
Grid
Find in view
5 Hidden columns
Group by
Sorted by 1 column
Density
Create

#	Clause
0	Entity Country Issue <=> Value of Country Issue

The business rule return value is shown in the tracking, it can either be an object, object id, array of objects or array of objects ids:

Rule Definition: Get Agent Country

Actions

```

1 // arg1: controlled object
2 // arg2: MxControlClauseData clause
3 MxSecurity objCtrl := arg1;
4 MxControlClauseData clauseCtrlData := arg2;
5
6 //RetrieveIssuerId from the controlled object
7 issuerId := objCtrl.ISSUER;
8
9 if (issuerId=="") {
10  msgtrace("*****DQC_AGENT_COUNTRY: Issuer value is null*****")
11  return null;
12 }
13
14 //Get Issuer along with the country;
15 issuer:= getObject("MxAgent", issuerId);
16 countryAgent:= issuer.getBusinessFieldValue("ENT.COUNTRY"); // or "ENT.COUNTRY_OF_INCORPORATION"
17 if (countryAgent = "") {
18  msgtrace("*****DQC_AGENT_COUNTRY: Agent country is null*****");
19  return null;
20 }
21
22 return countryAgent;
  
```

PATH: HOMEPAGE > DATA QUALITY SCREENING REPORT > EXECUTION RESULT DETAILS

Execution Result Details

Actions

Row count: 1 Selected: 0

Panel - Displays Linked Objects Using a Defined Query Screen
Controls Details

Grid
Find in view
4 Hidden columns
Grouped by 1 column
Sorted by 1 column
Density
Create

Clause	Status	Assessed Value	Target Value	Error Detail
Issuer / Security Country Consistency (1)				
Entity Country Issue <=> Value of Country Issue	Fail	Gabon	France	

Sort
Label - English
Label - French
Label - Chinese
Internal Code
Active
Rule Code
Return Type
Reference
Free 4

Entity Country	Entity Country	ENTITY_COUNTRY	Yes	DQC_AGENT_COUNTRY	REF_CLASSF	MxCountry
----------------	----------------	----------------	-----	-------------------	------------	-----------

Checklist for Control Based on Business Rule Script

Before activating a new control, it is recommended to check that:

- The rule exists and is active.

- Rule Code and Return Type are mandatory and not empty.
- Reference is correctly populated according to the specified return type.
- The rule returned value matches the defined return format.

Important: If these rules are not respected, the clause cannot be evaluated and an error is logged in the tracking.

Generic Handling for Trade Movement Generation

Trade Generic Handling

It is now possible to add new “generic” fields to transaction type movements, so that they can be dynamically processed by the computeMovements method to populate the TRADE_MOVEMENT table.

You can add fields in TRADETYPE_MOVEMENT using the format:

TRADE_MOVEMENT.<field_name> + '_TYPE', along with an associated list of formulas.

For example: To populate the new field MVT_ORIGINAL_FACE in TRADE_MOVEMENT.

1. Create the field MVT_ORIGINAL_FACE_TYPE in TRADETYPE_MOVEMENT.
2. In this case, you can link the field to the existing “Transaction - Quantity Fields” list since the field represents a quantity, though a dedicated list may be required depending on the field type.

Important: The following fields are excluded from this generic handling, even though they follow the expected naming convention: MVT_ACCRINT_TYPE, MVT_AMOUNT_TYPE, MVT_FEES_TYPE, MVT_ACCOUNT_TYPE, MVT_TYPE, MVT_OPERATION_TYPE.

Stock Management Method Mapping Types

The mapping type logic has also been enhanced.

The **sum** option now aggregates values for both the HOLDING_LOT and HOLDING tables.

To ensure both tables are populated, the corresponding lot field must be selected in the stock management method.

When a matching field is identified, the HOLDING table will also be populated based on the following logic:

- In **HOLDING_LOT**, the field must follow the format:
LOT_ + FIELD_NAME (e.g., LOT_ORIGINAL_FACE)
- In **HOLDING**, the corresponding field must follow the format:
TOTAL_ + FIELD_NAME (e.g., TOTAL_ORIGINAL_FACE)

Note: If no matching field exists in HOLDING, only the HOLDING_LOT table is populated.

Example:

Stock mgmt method : FIFO

Row count: **3** Selected: **0**

Additional data

☐	Movement Field	Holding Field	Mapping Type
☐	Exchange Market	Exch	Key
☐	Holding Type	Hldg Type	Key
☐	Original Face	Lot OF	Sum
☐	Share Class	Shr Clss	Key
☐	Security Sub Type	Sub Type	Key
☐	Currency	Ccy	Key

The **Lot OF** (LOT_ORIGINAL_FACE) is assigned the **Sum** mapping type, so the amount from the trade movement populates this field in HOLDING_LOT.

Edit Data Dictionary MxHolding

Q Actions

1 Actions

2 Grid Find in view

3 Table 1 ↑ : | Key 2 ↓ : | Field Name 3 ↑ : | Short Name (En.) :

Table	Field Name	Short Name (En.)
HOLDING (28)		
HOLDING_LOCKED (...)		
HOLDING_LOT (15)		
☐ HOLDING_LOT	LOT_COST	Cost, Pcpl (Bse)
☐ HOLDING_LOT	LOT_COST_SCUR	Cost, Pcpl (Lcl)
☐ HOLDING_LOT	LOT_CPN	Cost, Accr (Bse)
☐ HOLDING_LOT	LOT_CPN_SCUR	Cost, Accr (Lcl)
☐ HOLDING_LOT	LOT_EXCHANGE_MARKET	Lot Exch
☐ HOLDING_LOT	LOT_FEES	Cost, Fees (Bse)
☐ HOLDING_LOT	LOT_FEES_SCUR	Cost, Fees (Lcl)
☒ HOLDING_LOT	LOT_ORIGINAL_FACE	Lot OF
☐ HOLDING_LOT	LOT_QUANTITY	Lot Qty

In addition, because the field TOTAL_ORIGINAL_FACE exists in the main table HOLDING, the value is also populated there.

Edit Data Dictionary MxHolding

Q Actions Edit Data Dictionary MxHolding

1 Actions

2 Grid Find in view

3 Table 1 ↑ : | Key 2 ↓ : | Field Name 3 ↑ : | Short Name (En.) :

Table	Field Name	Short Name (En.)
HOLDING (28)		
☐ HOLDING	CHANNEL	Distributor
☐ HOLDING	END_DATE	End Dt
☐ HOLDING	STOCKMGMT_LOT_METH...	Cost Calc
☐ HOLDING	TOTAL_COST	Tot Cost, Pcpl (Bse)
☐ HOLDING	TOTAL_COST_SCUR	Tot Cost, Pcpl (Lcl)
☐ HOLDING	TOTAL_CPN	Tot Cost, Accr (Bse)
☐ HOLDING	TOTAL_CPN_SCUR	Tot Cost, Accr (Lcl)
☐ HOLDING	TOTAL_FEES	Tot Cost, Fees (Bse)
☐ HOLDING	TOTAL_FEES_SCUR	Tot Cost, Fees (Lcl)
☒ HOLDING	TOTAL_ORIGINAL_FACE	Orig Face

Data Model Enhancement

As part of this enhancement, the following fields have been introduced across the entire value chain:

Table	New Field
TRADETYPE_MOVEMENT	MVT_ORIGINAL_FACE_TYPE
TRADE	ORIGINAL_FACE
TRADE_MOVEMENT	MVT_ORIGINAL_FACE
HOLDING	TOTAL_ORIGINAL_FACE
HOLDING_LOT	LOT_ORIGINAL_FACE
VALUATION	ORIGINAL_FACE
TRADETYPE_MOVEMENT	MVT_SHARE_CLASS_TYPE
TRADE	SHARE_CLASS
TRADE_MOVEMENT	MVT_SHARE_CLASS
HOLDING	SHARE_CLASS
VALUATION	SHARE_CLASS
TRADETYPE_MOVEMENT	MVT_CURRENCY_TYPE
TRADE_MOVEMENT	MVT_CURRENCY
HOLDING	CURRENCY

TRADETYPE_MOVEMENT	MVT_SECURITY_CODE_SUBTYPE_TYPE
TRADE_MOVEMENT	MVT_SECURITY_CODE_SUBTYPE
TRADE	SECURITY_CODE_SUBTYPE
HOLDING	SECURITY_CODE_SUBTYPE
VALUATION	SECURITY_CODE_SUBTYPE

Cashflow and Accrued Interest

Filtering of SECURITY_LEG Records

The SECURITY_LEG data model now supports multiple records. When using the cashflow or accrued interest services, you can specify filtering criteria via an optional argument so that the service only considers records matching the provided value(s).

Note: If no filtering is specified, the system only considers golden copy records (LEG_PROVIDER = REFERENCE) with a leg type of "Interest" (LEG_TYPE = INTEREST).

Impacted Services and Methods

- MxSecurity.computeAccruedInterest
- MxSecurity.createAccruedInterest
- MxSecurity.computeCashFlows
- MxSecurity.computeCashFlowsQuiet
- AccruedInterestService
- CashFlowComputeService

Filtering Argument

Services

For services, filtering is done through the argument **LEG_COND** which is an array. Each array element uses the format **fieldName=value** where value can specify a comma-separated list. Each **fieldName** is semi-colon separated.

Example: **LEG_COND=[LEG_PROVIDER=BLOOMBERG,INTERNAL;LEG_TYPE=SECURITY]**

Methods

The argument is an array specifying override values. Each element uses the format `fieldName=value`. Each `fieldName` is comma-separated.

Example: `array("LEG_PROVIDER=INTERNAL,REFERENCE", "LEG_TYPE=INTEREST")`

Data Override

The existing override capabilities have been extended to all fields, not just those from **SECURITY_LEG** (e.g. **MATURITY_DATE**).

Note: The override is applied to all legs returned by the filter. In the future, it will be possible to target specific legs for override.

Impacted Services and Methods

- `MxSecurity.computeAccruedInterest`
- `MxSecurity.createAccruedInterest`
- `MxSecurity.computeCashFlows`
- `MxSecurity.computeCashFlowsQuiet`
- `AccruedInterestService`

Note: This feature will be added later for the `CashFlowService`.

Override Argument

Service

All fields must be populated with `"fieldName=value"` separated by a space.

Example: `"LEG_FIXED_RATE=2" "MATURITY_DATE=20270101"`

Methods

The argument is an array specifying override values.

Example: `array("LEG_FIXED_RATE=3", "MATURITY_DATE=20270101", "LEG_INTEREST_ACCRUAL_DATE=20230101")`

Examples combining filtering and override

Services

`"COND=[SECURITY_ID=556373]" "DATE=20260102"`
`"LEG_COND=[LEG_PROVIDER=INTERNAL;LEG_TYPE=PROTECTION]"`
`"LEG_FIXED_RATE=2" "MATURITY_DATE=20270101"`

Methods

```
getObject("MxSecurity",556373);  
sec.computeCashFlows("", "",array("LEG_PROVIDER=BLOOMBERG,REFERENCE","LEG_TYPE  
=INTEREST"),array("LEG_FIXED_RATE=3","MATURITY_DATE=20270101"))
```

ESG - Sovereign Carbon Footprint

Introduction

The **Sovereign Carbon Footprint connector** is designed to consolidate and integrate two different data sources into NeoXam DataHub Raw Data layer:

- **World Bank:** GDP based on purchasing power parity (GDP, PPP, current international \$) for each country.
- **UNFCCC:** Country-level carbon emissions data.

By combining these two datasets, it becomes possible to calculate the carbon footprint of each country.

World Bank — GDP PPP Data

Introduction

The World Bank indicator provides the value of a country's gross domestic product (GDP) expressed in current international dollars, using a purchasing power parity (PPP) conversion factor. GDP represents the total value added by all resident producers, plus product taxes and minus subsidies. PPP conversion factor adjusts for differences in price levels between countries, acting as both a currency converter and a spatial price deflator.

Data Coverage

The World Bank publishes **annual GDP data** for countries and economies, measured in Purchasing Power Parity (PPP) in current international dollars, available for download in CSV format from the World Development Indicators (WDI) database.

The dataset covers:

- All countries and economies for which the World Bank publishes GDP (PPP) data.
- Annual observations, typically starting from the 1960s.
- Most recent year available in the WDI at the time of file generation.
- Regional and income-group aggregates (e.g. World, High-income countries, Sub-Saharan Africa).

©2026 NeoXam. All Rights Reserved. This document contains valuable, proprietary information. No portion of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, without prior written consent of NeoXam. The information in this document is believed to be accurate at the time of printing; however, NeoXam and its affiliates assume no responsibility or liability for errors or omissions that may appear in this document. The information in this document is subject to change without notice and has no contractual value.

This user guide is also available on line: https://datahub.neoxam.com/docs/Documentation_Welcome_Page/index.html

Data Integration

MxEconomics Data Model

A new field, **ACCOUNT_VALUE_YEAR** (integer), has been added to store the year in which the data is integrated.

This change was required because GDP data expressed in current USD may change between two import dates.

As a result, the import date must be used as the validity date.

This date is stored in **ACCOUNT_VALUE_DATE**, which is a date type (not a string) and is set to the import date (i.e. today).

The GDP data must be integrated into the **MxEconomics class**.

PATH: [HOMEPAGE](#) > [DATA DICTIONARY](#) > [EDIT DATA DICTIONARY MxECONOMICS](#)

Edit Data Dictionary MxEconomics

Q Actions

Fields

Grid view Find in view 10 Hidden columns Grouped by 1 column Sorted by 3 columns

Table 1 2 3 4 5 6 7 8 9 10

	1	2	3	4	5	6	7	8	9	10
	↑	↓	↑	↓	↑	↓	↑	↓	↑	↓
	Key	Name	Short Name (En.)	Long Name (En.)	Comment (En.)	Short Name (Fr.)	Long Na...	Type		
▼ ECONOMICS (10)										
☐		ECONOMICS	Country	Country		Pays	Pays	Integer / Reference		
☐		ECONOMICS	Currency	Currency		Devise	Devise	Integer / Reference		
☐		ECONOMICS	Link	Link		Lien	Lien	Text		
☐		ECONOMICS	Detail	Detail		Détail	Détail	String		
☐		ECONOMICS	ECONOMICS_CODE	Code		Code	Code	String		
☐		ECONOMICS	ECONOMICS_NAME	Name		Name	Name	String		
☐		ECONOMICS	ECONOMICS_TYPE	Type		Type	Type	Integer / Reference		
☐		ECONOMICS	FREQUENCY	Frequency		Fréquence	Fréquence	Integer / Reference		
☐		ECONOMICS	PUBLICBODIES	Public bodies		Collectivités	Collectivités	Integer / Reference		
☐		ECONOMICS	UNITS	Units		Unité	Unité	Integer / Reference		
▼ ECONOMICS_ACCOUNT_VALUE (2)										
☐		ECONOMICS_ACCOUNT_VALUE	ACCOUNT_VALUE	Value		Valeur	Valeur	Decimal		
☐		ECONOMICS_ACCOUNT_VALUE	ACCOUNT_VALUE_CODE	External code		Code Externe	Code Externe	String		
☐		ECONOMICS_ACCOUNT_VALUE	ACCOUNT_VALUE_DATE	Date		Date	Date	Date		
☐		ECONOMICS_ACCOUNT_VALUE	ACCOUNT_VALUE_ID	Account		Poste	Poste	Integer / Reference		
☐		ECONOMICS_ACCOUNT_VALUE	ACCOUNT_VALUE_PERIOD	Periodpoint		Période	Période	Integer / Reference		
☐		ECONOMICS_ACCOUNT_VALUE	ACCOUNT_VALUE_PROVIDER	Provider		Provider	Provider	Integer / Reference		
☐		ECONOMICS_ACCOUNT_VALUE	ACCOUNT_VALUE_SOURCE	Source		Source	Source	Integer / Reference		
☐		ECONOMICS_ACCOUNT_VALUE	ACCOUNT_VALUE_YEAR	Year		Année	Année	Integer / Reference		

Feed Procedure

The feed procedure **Import Worldbank Data - GDP.PPP** is used to integrate GDP.PPP data into the target MxEconomics class fields.

Mapping - Definition: Import Worldbank Data - GDP.PPP

Q

Actions

Execution properties

Edit scripts

Code filter

Properties

1

DEFINITION

2

DATA

General

English

Import Worldbank Data - GDP.PPP

French

Import données banque mondiale - GDP.PPP

Chinese

Privacy

Data Admin

Code

INT_ESG_IN_GDP_PPP

Pack level

ESG

Category

Manual Import

Type

Manual file import

Comment

Manual Import of World Bank Financial Data: GDP (PPP)

Configuration

Imp. parser

Generic - Matrix parser

Scope view

Update request field list ?

Feed

Manual

Communication channel

Data Parsing

The GDP file contains one column per year, which cannot be directly integrated into NeoXam DataHub format. The **Matrix Parser** converts date-based columns into rows, making the data loadable by the system.

During this process, the parser automatically adds two new fields:

- **YEAR:** created from the column names that represent the transposed years (configured through TRANSPOSED_COLUMN_NAME = YEAR).
- **VALUE:** which contains the corresponding numeric value for each year (configured through RESULT_FIXED_NAME = VALUE).

These two fields allow the original format (one column per year) to be transformed into a normalized row-based structure suitable for ingestion into NeoXam DataHub.

The Matrix Parser requires a feed procedure to be configured with the following properties:

Properties			
1 Hidden column 1 Groups 3 Sorts + Grid Find in view 26 lines			
Active	Name	Value	Comments
Other properties (14)			
Yes	ALL_TRANSPOSED_COLUMN_IN_ONE_LINE	0	Default value is "0".
Yes	COLUMN_INDEX_RESULT_NAME	0	Default value is "-1". Column number which contains the name of the result data if not fixed
Yes	CSV_DELIMITER	,	Default value is ";". Separator for csv files
Yes	CSV_TEXT_DELIMITER	"	
Yes	DEFAULT_MAPPING_LIST	GDP_PPP_LIST	List of field names used to do the mapping (automatically added during the feedproc initialisation in
Yes	FIRST_LINE_HEADER		Default value is "0". The header line contains the columns' name
Yes	FIRST_TRANSPOSED_COLUMN	4	Default value is "0". The 1st column number from which the data must be transposed into line
Yes	KEEP_HEADER_SURROUNDED_QUOTES		Flag to keep the surrounded quotes in header
Yes	KEEP_SURROUNDED_QUOTES	0	Flag to keep the surrounded quotes
Yes	QUOTE_PRIOR_TO_DELIMITER	1	Every delimiter between " must be ignored
Yes	RESULT_FIXED_NAME	VALUE	Default value is "null". Column name of result data if fixed
Yes	SKIP_FOOT_LINES	0	
Yes	SKIP_HEADER_LINES	4	
Yes	TRANSPOSED_COLUMN_NAME	YEAR	Default value is "NAME". The name of the column containing the key of the transposition
Execution properties (12)			
No	ALLOW_NO_OBJECT_MATCH	0	Default value is "0". To use in "update only" mode in order not to generate the identification errors
No	BULK_SIZE_OPT		Default value is "null".
No	KEYLOOKUP_SERVICE	0	Default value is "0". To activate the keylookup service
Yes	BULK_SIZE	1000	
Yes	CREATE_ONLY	0	Default value is "0". To use if the mapping is valid only for new objects
Yes	DB_STORED_PROC	0	Default value is "0".
Yes	IGNORE_INFO_REJECTS	1	Default value is "1".
Yes	IGNORE_SKIP_REJECTS	1	Default value is "1".
Yes	IGNORE_WARNING_REJECTS	1	Default value is "1".
Yes	NO_ERROR_ALLOWED	0	Default value is "0".
Yes	OBJECT_MARKER	1	Default value is "1". Used to inactiv the use of the partial loading of the objects in an import or an ex
Yes	UPDATE_ONLY	0	Default value is "0". To use if no object should be created

Note: The **KEEP_SURROUNDED_QUOTES** and **KEEP_HEADER_SURROUNDED_QUOTES** properties have been added to the matrix parser to ignore quotes surrounding both values and headers in the World Bank file.

These properties must be set to (zero) to ignore the quotes.

Yes	KEEP_HEADER_SURROUNDED_QUOTES	0	Default value is "1". Flag to keep the surrounded quotes in header
Yes	KEEP_SURROUNDED_QUOTES	0	Default value is "0". Flag to keep the surrounded quotes

Data Mapping

- A lookup is performed on the country using its ISO3 code.
- The **World Bank** provider is added to **FEED** list.
- The type **Gross Domestic Product - By Purchasing Power Parity** is added to **Economic Data Types** list.
- Mapping of the year (4 digits) to the Year field (**ACCOUNT_VALUE_YEAR**).
- Mapping of the current date to the Date field (**ACCOUNT_VALUE_DATE**)

PATH: HOMEPAGE > FEED DICTIONARY > MAPPING - DEFINITION: WORLD BANK - GDP.PPP

Mapping - Definition: World Bank - GDP.PPP

Q Actions Execution properties Edit scripts Code filter Properties

1 DEFINITION 2 DATA 3 MAPPING 4 RESULT

Q Find in view

Field name	Type
Country Code	
Country Name	
Indicator Name	
NY.GDP.MKTP.PP.CD	
VALUE	
YEAR	

Q Find in view

Field source	node_label	conversion_script	assignment
KEYLOOKUP			
ECONOMICS	Country	Script: country=getValueImportArray(r... (key lookup)	
ECONOMICS	Gross Domestic Product - By Purchasing Power P...	Type	
ECONOMICS_ACCOUNT_VALUE			
LOOKUP			
YEAR	Date	Function: Today (lookup)	
YEAR	Year	Script: val_date= getValueImportArray(r... (lookup)	
VALUE	Value	Script: VALUE= getValueImportArray(r... = (if data)	
World Bank	Provider		

UNFCCC — Country Carbon Data

Introduction

The **UNFCCC** (United Nations Framework Convention on Climate Change) provides data on country-level greenhouse gas (GHG) emissions. The datasets include annual emissions reported by countries, covering various sectors, and are used to track national carbon footprints and monitor progress toward climate commitments.

This applies to both Annex I and Non-Annex I countries:

- **Annex I:** industrialized countries with binding emission reduction responsibilities.
- **Non-Annex I:** developing countries with reporting but no binding reduction commitments.

You can retrieve UNFCCC datasets from the UNFCCC Greenhouse Gas Inventory Data – Flexible Queries online tool: <https://di.unfccc.int>

Dataset Coverage

The UNFCCC Greenhouse Gas (GHG) Inventory dataset provides detailed country-level emissions data for Annex I and Non-Annex I countries.

- The **Annex I file** provides detailed sector-level and total GHG emissions data, with values expressed in kt CO₂ equivalent.
- The **Non-Annex I file** includes similar data but uses Gg CO₂ equivalent units and may have differences in reporting detail and format.

The key elements of the dataset are as follows:

Element	Description
Party	The reporting country (e.g. Australia)
Category \ Unit	The sector or emission category, including hierarchical subcategories (e.g., Energy, Fuel Combustion, Energy Industries, Public Electricity and Heat Production, Petroleum Refining, etc.) The categories follow the UNFCCC sector classification and can include aggregated totals such as “Total GHG emissions without LULUCF (Land Use, Land Use Change and Forestry)” and “Total GHG emissions with LULUCF.”
Units (Annex I)	kt CO ₂ equivalent (kilotons of CO ₂)
Units (Non-Annex I)	Gg CO ₂ equivalent (gigagrams of CO ₂) — equivalent to kt
Emissions Values	Both direct and indirect emissions may be reported depending on the category

Data Integration

Raw Data Model: `MxRawDataUnfcc`

The `MxRawDataUnfcc` class was introduced to capture and organize UNFCCC raw data.

PATH: HOMEPAGE > DATA DICTIONARY > EDIT DATA DICTIONARY MxRawDataUnfccc

Edit Data Dictionary MxRawDataUnfccc

Q Actions Edit Data Dictionary MxRawDataUnfccc

Fields

Grid view Find in view 13 Hidden columns Grouped by 1 column Sorted by 3 columns

Table	Key	Name	Short Name (En.)	Long Name (En.)	Type	Size	Reference	List
RAWD_UNFCCC (2)								
RAWD_UNFCCC	Key Level 1	COUNTRY	Country	Country	Integer / Reference		COUNTRY	
RAWD_UNFCCC	Key Level 2	ISSUER	Issuer	Issuer	Integer / Reference		AGENT	
RAWD_UNFCCC_SECTOR (5)								
RAWD_UNFCCC_SECTOR	Key Level 2	SE_CODE	Sector Code	Sector Code	Integer / Reference		SMARTLIST_ITEM	UNFCCC Sectors List
RAWD_UNFCCC_SECTOR		SE_END_DATE	End Date	End Date	Date			
RAWD_UNFCCC_SECTOR	Key Level 1	SE_START_DATE	Start Date	Start Date	Date			
RAWD_UNFCCC_SECTOR		SE_VALUE	Sector Value CO2	Sector Value CO2	String	200		
RAWD_UNFCCC_SECTOR		SE_VALUE_CO2_EQ	Sector Value CO2 Eq	Sector Value CO2 Eq	String	200		
RAWD_UNFCCC_TOT (10)								
RAWD_UNFCCC_TOT		TO_END_DATE	End Date	End Date	Date			
RAWD_UNFCCC_TOT		TO_GHG_W_LULUCF	GHG incl. LULUCF	Total GHG emissions ...	String	200		
RAWD_UNFCCC_TOT		TO_GHG_W_LULUCF_EQ	GHG incl. LULUCF (Eq.)	Total GHG emissions ...	String	200		
RAWD_UNFCCC_TOT		TO_GHG_W_LULUCF_INDIRECT	GHG incl. LULUCF incl. ...	Total GHG emissions ...	String	200		
RAWD_UNFCCC_TOT		TO_GHG_W_LULUCF_INDIRECT_EQ	GHG incl. LULUCF incl. ...	Total GHG emissions ...	String	200		
RAWD_UNFCCC_TOT		TO_GHG_WO_LULUCF	GHG excl. LULUCF	Total GHG emissions ...	String	200		
RAWD_UNFCCC_TOT		TO_GHG_WO_LULUCF_EQ	GHG excl. LULUCF (Eq.)	Total GHG emissions ...	String	200		
RAWD_UNFCCC_TOT		TO_GHG_WO_LULUCF_INDIRECT	GHG excl. LULUCF incl. ...	Total GHG emissions ...	String	200		
RAWD_UNFCCC_TOT		TO_GHG_WO_LULUCF_INDIRECT_EQ	GHG excl. LULUCF incl. ...	Total GHG emissions ...	String	200		
RAWD_UNFCCC_TOT	Key Level 1	TO_START_DATE	Start Date	Start Date	Date			

UNFCCC Sectors List

The **UNFCCC Sectors** List has been added as a reference dataset to standardize and classify greenhouse gas emission categories across all UNFCCC data imports.

PATH: HOMEPAGE > LISTS > LIST: UNFCCC SECTORS LIST UNFCCC_SECTORS_LIST

List: UNFCCC Sectors List UNFCCC_SECTORS_LIST

Q Actions

Identifications

Name (En.) UNFCCC Sectors List

Name (Fr.) Liste des secteurs UNFCCC

Name (Ch.)

Code UNFCCC_SECTORS_LIST

Definitions

Category ESG

Type Hierarchical

Privacy NeoXam

Feed Other

Sorting

Custom Sort

Type Complement

Not Hierarchical Sort

Values

Grid view Find in view Hidden columns Group by Sorted by 3 columns

Sort	Label - English	Label - French	Label - Chinese	Internal Code	Active	Free
1	Energy	Energie		ENERGY	Yes	
1.A.1	Energy Industries	Industries de l'énergie		ENERGY_INDUSTRIES	Yes	
1.A.1.a	Public Electricity and Heat Production	Production publique d'électricité et de chaleur		PUBLIC_ELEC_HEAT	Yes	
1.A.1.a.	Other	Autre		PUBLIC_ELEC_HEAT_OTHER	Yes	
1.A.1.b	Petroleum Refining	Raffinage du pétrole		PETROLEUM_REFINING	Yes	
1.A.1.c	Manufacture of Solid Fuels and Other Energy Industries	Fabrication de combustibles solides et autres industries énergétiques		SOLID_FUELS_OTHER_ENERGY	Yes	
1.A.1.c.	Oil and Gas Extraction	Extraction de pétrole et de gaz		OIL_GAS_EXTRACTION	Yes	
1.A.1.c.	Other Energy Industries	Autres industries de l'énergie		OTHER_ENERGY_INDUSTRIES	Yes	
1.A.1.c.	Manufacture of Solid Fuels	Fabrication de combustibles solides		SOLID_FUEL_MANUFACTURE	Yes	
1.A.2	Manufacturing Industries and Construction	Industries manufacturières et construction		MANUFACTURING_CONSTRUCTION	Yes	
1.A.2.a	Iron and Steel	Siderurgie		IRON_STEEL	Yes	
1.A.2.b	Non-Ferrous Metals	Métaux non ferreux		NON_FERROUS_METALS	Yes	
1.A.2.c	Chemicals	Produits chimiques		CHEMICALS	Yes	
1.A.2.d	Pulp, Paper and Print	Pâte, papier et imprimerie		PULP_PAPER_PRINT	Yes	
1.A.2.e	Food Processing, Beverages and Tobacco	Agroalimentaire, boissons et tabac		FOOD_BEVERAGE_TOBACCO	Yes	

Feed Procedures

Four feedprocs have been introduced:

©2026 NeoXam. All Rights Reserved. This document contains valuable, proprietary information. No portion of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, without prior written consent of NeoXam. The information in this document is believed to be accurate at the time of printing; however, NeoXam and its affiliates assume no responsibility or liability for errors or omissions that may appear in this document. The information in this document is subject to change without notice and has no contractual value.

This user guide is also available on line: https://datahub.neoxam.com/docs/Documentation_Welcome_Page/index.html

Feed Procedure	Description
Import UNFCCC Data By Sectors - Annex	Imports GHG inventory data for Annex I countries broken down by specific sectors.
Import UNFCCC Data By Sectors - Non Annex	Imports sector-level emissions data from Non-Annex I countries.
Import UNFCCC Data By Total GHG - Annex	Imports total GHG emissions data for Annex I countries.
Import UNFCCC Data By Total GHG - Non Annex	Imports total GHG emissions data for Non-Annex I countries.

Scheduled Task

The scheduled task automates the import of UNFCCC greenhouse gas emissions data from static CSV files. It consists of a sequence of four file import jobs, each targeting a specific data file related to UNFCCC annual net emissions and removals.

PATH: [HOMEPAGE](#) > [SCHEDULED TASKS](#) > [SCHEDULED TASK: IMPORT UNFCCC DATA](#)

Scheduled task: Import UNFCCC Data

Q Actions Run task Show task in job report s... Generate Default Transi...

1 First job

2 Jobs

3

4

Grid view Find in view 3 Hidden columns Group by Sorted by 1 column Create


Job co...	FeedProc	Name(En.)	Service	Parameters
1	Import UNFCCC Data By Sectors - Annex	Import UNFCCC Data By Sector- Annex	fileimport	"/data/testauto/NXDH/data/import/staticdatafiles/UNFCCC/Annual Net emissions_removals in kt CO ₂ equivalent (6).csv"
2	Import UNFCCC Data By Sectors - Non Annex	Import UNFCCC Data By Sector-Non-Ann...	fileimport	"/data/testauto/NXDH/data/import/staticdatafiles/UNFCCC/Annual Net emissions_removals in Gg CO ₂ equivalent.csv"
3	Import UNFCCC Data By Total GHC - Annex	Import UNFCCC Data By TOT- Annex	fileimport	"/data/testauto/NXDH/data/import/staticdatafiles/UNFCCC/Annual Net emissions_removals in kt CO ₂ equivalent (6).csv"
4	Import UNFCCC Data By Total GHG - Non Annex	Import UNFCCC Data By TOT- Non-Annex	fileimport	"/data/testauto/NXDH/data/import/staticdatafiles/UNFCCC/Annual Net emissions_removals in Gg CO ₂ equivalent.csv"

ICE Volatility Connector

Introduction

A new ICE connector is now available to import volatility curves for:

- Forex options
- Cap and Floor interest rates
- Swaption interest rates

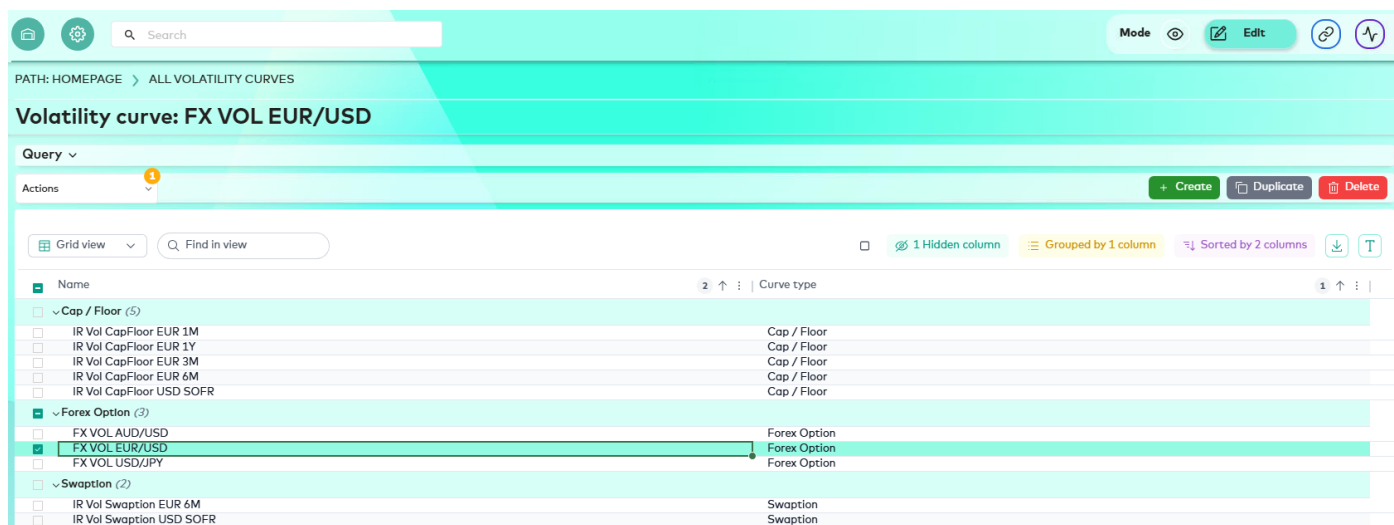

The screenshot shows the NeoXam ICE Volatility Connector interface. The top navigation bar includes a search bar, a 'Mode' dropdown, and buttons for 'Edit', 'Share', and 'Refresh'. The main header displays the path 'PATH: HOMEPAGE > ALL VOLATILITY CURVES' and the title 'Volatility curve: FX VOL EUR/USD'. Below the header, there is a 'Query' dropdown and an 'Actions' menu with '+ Create', 'Duplicate', and 'Delete' options. The main content area shows a table of volatility curves with columns for 'Name' and 'Curve type'. The table is filtered to show 'FX VOL EUR/USD' and includes a search bar 'Find in view'. The table is grouped by 1 column and sorted by 2 columns. The table content is as follows:

Name	Curve type
Cap / Floor (5)	
IR Vol CapFloor EUR 1M	Cap / Floor
IR Vol CapFloor EUR 1Y	Cap / Floor
IR Vol CapFloor EUR 3M	Cap / Floor
IR Vol CapFloor EUR 6M	Cap / Floor
IR Vol CapFloor USD SOFR	Cap / Floor
Forex Option (3)	
FX VOL AUD/USD	Forex Option
FX VOL EUR/USD	Forex Option
FX VOL USD/JPY	Forex Option
Swaption (2)	
IR Vol Swaption EUR 6M	Swaption
IR Vol Swaption USD SOFR	Swaption

IR Vol CapFloor EUR 1Y

Q Actions

1

Name and Description

2

Name

IR Vol CapFloor EUR 1Y

Code

CAPFLOOR_VOL_EUR_1Y

*

3

Curve type

Cap / Floor

*

Provider

ICE

*

4

Currencies

Currency

EUR

Codes C/P

Grid view

Find in view

Hidden columns

Group by

Sorted by 3 columns

+ Create

Source	Maturity	Delta (Pillar)	Code	Code Start Date	Code End Date
☐ ICE	2y	ATM	EUR_1Y_2Y_ATM	04/07/2026	04/09/2026
☐ ICE	2y	-2	EUR_1Y_2Y_-2	04/07/2026	04/09/2026
☐ ICE	2y	-1.75	EUR_1Y_2Y_-1.75	04/07/2026	04/09/2026
☐ ICE	2y	-1.5	EUR_1Y_2Y_-1.5	04/07/2026	04/09/2026
☐ ICE	2y	-1.25	EUR_1Y_2Y_-1.25	04/07/2026	04/09/2026
☐ ICE	2y	-1	EUR_1Y_2Y_-1	04/07/2026	04/09/2026
☐ ICE	2y	-0.75	EUR_1Y_2Y_-0.75	04/07/2026	04/09/2026
☐ ICE	2y	-0.5	EUR_1Y_2Y_-0.5	04/07/2026	04/09/2026
☐ ICE	2y	-0.25	EUR_1Y_2Y_-0.25	04/07/2026	04/09/2026
☐ ICE	2y	0	EUR_1Y_2Y_0	04/07/2026	04/09/2026
☐ ICE	2y	0.25	EUR_1Y_2Y_0.25	04/07/2026	04/09/2026
☐ ICE	2y	0.5	EUR_1Y_2Y_0.5	04/07/2026	04/09/2026
☐ ICE	2y	0.75	EUR_1Y_2Y_0.75	04/07/2026	04/09/2026
☐ ICE	2y	1	EUR_1Y_2Y_1	04/07/2026	04/09/2026

IR Vol Swaption USD SOFR

Q Actions

1

Name and Description

2

Name

IR Vol Swaption USD SOFR

Code

SWAPTION_VOL_USD_SOFR

*

3

Curve type

Swaption

*

Provider

ICE

*

4

Currencies

Currency

USD

Codes SW

Grid view

Find in view

Hidden columns

Group by

Sorted by 4 columns

+ Create

Provider	Option Maturity (Expiry)	Swap Tenor	Relative Strike (Pillar)	Code	Code Start Date
☐ ICE	1 m	1 y	-2.5	USD_1Mx1Y_-2.5	04/07/2026
☐ ICE	1 m	1 y	-2.25	USD_1Mx1Y_-2.25	04/07/2026
☐ ICE	1 m	1 y	-2	USD_1Mx1Y_-2	04/07/2026
☐ ICE	1 m	1 y	-1.75	USD_1Mx1Y_-1.75	04/07/2026
☐ ICE	1 m	1 y	-1.5	USD_1Mx1Y_-1.5	04/07/2026

Data Integration

Objects and Classes

Object	NeoXam Class	Table	Role
FX volatility curve	MxVolatCurve	VOLATCURVE	Static curve definition, provider, currency pair, smile grid keys
IR volatility curve	MxVolatCurve	VOLATCURVE	Static curve definition, provider, currency, cap/floor vs swaption type
Curve code / segment row	MxVolatCurve	VOLATCURVE_CODE	Per-tenor / per-strike-pillar keys under ICE code type
Volatility point	MxVolatCurveValu	VOLATCURVEVALU	Bid/mid/ask vols, strike, dates, smile type

Feed Procedures (MxFeedProcess)

The following curves and points feed procedures are run to create curves and points:

Code	Label (EN)	Parser	Import Map	Target Class
ICE_VOLAT_IN_FX_CURVES	Import - FX Volatility Curves - ICE	CSV	MAP_FX_VOL_CURVES	MxVolatCurve
ICE_VOLAT_IN_FX_POINT	Import - FX Volatility Option Point - ICE	CSV	MAP_FX_VOL_POINT	MxVolatCurveValu
ICE_VOLAT_IN_IR_CAPFLOOR	Import - IR Volatility Capfloor Curves - ICE	CSV	MAP_IR_VOL_CAPFLOOR_CURVES	MxVolatCurve
ICE_VOLAT_IN_IR_CAPFLOOR_POINT	Import - IR Volatility Capfloor	CSV	MAP_IR_VOL_CAPFLOOR	MxVolatCurveValu

	Point - ICE			
ICE_VOLAT_IN_IR_SWAPTION	Import - IR Volatility Swaption Curves - ICE	CSV	MAP_IR_VOL_SWAPTION_CURVES	MxVolatCurve
ICE_VOLAT_IN_IR_SWAPTION_POINT	Import - IR Volatility Swaption Point - ICE	CSV	MAP_IR_VOL_SWAPTION	MxVolatCurveValu

Execution Order and Dependencies

The entire process follows these steps:

1. The CSV file is retrieved from ICE using SFTP and saved locally.
Examples: DataX_FX_VolSurface_*.csv, DataX_IR_CapFloor_%D.csv, DataX_IR_Swaption_%D.csv
2. The **Curves import feedproc** is run first on the ICE CSV file to create or update volatility curve headers and curve dimension rows:
 - VOLATCURVE
 - VOLATCURVE_CODE
3. The **Points import feedproc** is then run on the same CSV file to create or update valuation points linked to the parent curve (VOLATCURVEVALU).

Example: For FX option, the first step will be the SFTP retrieval of the csv file, then running ICE_VOLAT_IN_FX_CURVES and ICE_VOLAT_IN_FX_POINT feedprocs on the same local CSV path.
