Payzaty Integration Guide

Version 2.3

This document explains how to integrate Payzaty payment services in your application.

Publishing date : June 08, 2023

Table of content

Introduction **2**
Hosted Payment Page **2**
How it works 2
Hosted Payment Page Integration **3**
Authentication 4
Create a secure payments page 4
Allowed payment methods 6
Payout 6
Subscription (Recurring Payments) 7
Saving Card Option (Tokenization) 8
What's next? 9
Retrieve checkout details 10
Test card numbers for testing purposes 16
Request a card payment **17**
What's next? 20
Request a token payment **21**
What's next? 23
Apple Pay Payments **24**
Prerequisites 24
Integration Steps 24
Create an Apple Pay transaction 24
Create a Subscription (Recurring Payments) transaction **30**
Cancel Subscription 34
Refund a payment **36**
Check card **38**

Introduction

Payzaty payment API, SDKs and Plugin means you can simply integrate the payment form with your website, system, store, or application, so you can quickly and securely accept payments from your customers.

They will be able to pay for products and services using cards, including Mada, Visa and Mastercard, and mobile payments including Apple Pay and STC Pay.

Hosted Payment Page

Once a customer is ready to complete a transaction, you can request a new secure payment page from Payzaty. A secure payment page is generated by Payzaty where you can redirect your customer to.

How it works

1. Customer chooses the product(s) or service(s) in the merchant's platform and clicks on the payment button.
2. Merchant’s platform requests a secure payment page by integrating with Payzaty API. Information will be provided with the request such as the customer’s name, phone number, the amount and the currency.
3. Payzaty generates a secure payment page that you will redirect your customer to.
4. The secure payment page is loaded and the customer fills in their card details (or use Apple Pay or STC Pay) and press pay.
5. Payzaty will handle the rest by processing the payment and then redirect the customer back to your website.

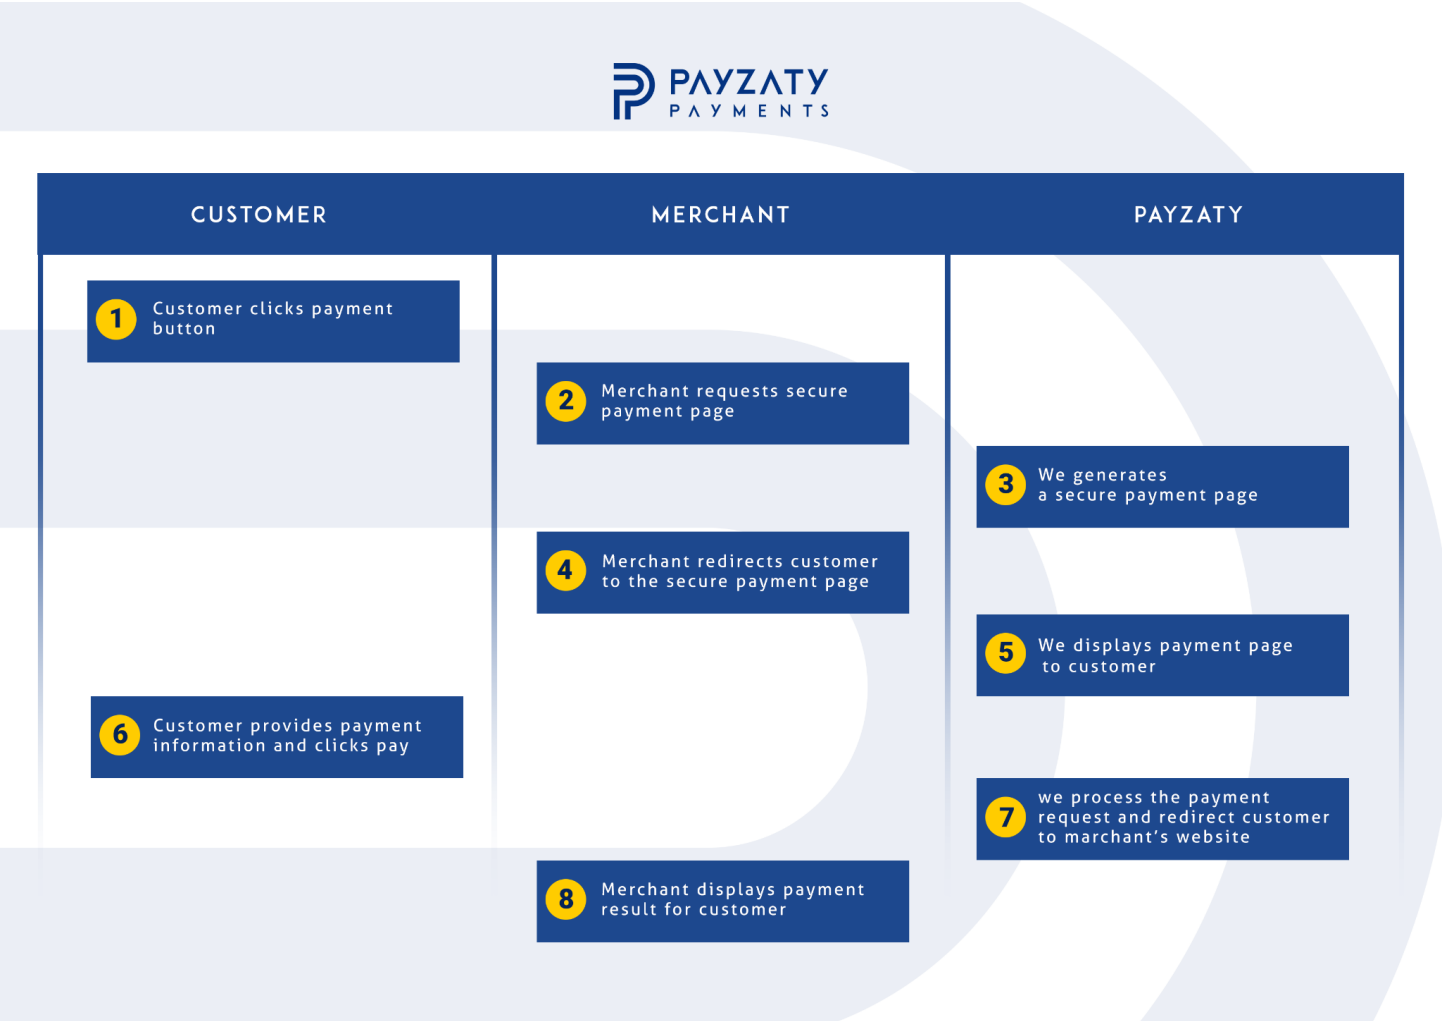

Hosted Payment Page Integration

You can use the sandbox application during your testing and development phase. Once you're ready you can switch over to the production environment.

Environment	Base Url
Production	https://api.payzaty.com
Sandbox	https://api.sandbox.payzaty.com

Authentication

In order to be able to consume the API, your system or application needs to be authenticated. Authentication in Payzaty API integration comes in the form of two headers, `X-AccountNo` and `X-SecretKey`.

Header	Description
X-AccountNo	The unique account number that belongs to you. You can retrieve yours from your dashboard.
X-SecretKey	The secret key that is associated with the account number. You can retrieve your secret key from the your dashboard

Create a secure payments page

To create a secure payment page, you need to integrate with the `checkout` API. You will find below more detailed information about it .

HTTP method	Endpoint URL
POST	{Base_URL}/checkout

As for the body, you will need to send a JSON body as the one shown below:

```
{
    "amount": 100,
    "currency": "SAR",
    "language": "en",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "response_url": "https://www.example.com/payment/result?id=1",
    "cancel_url": "https://www.example.com/payment/cancel?id=1"
}
```

Property	Description
amount	The amount that the customer is required to pay to complete the transaction.
currency	The string identifier for the fiat currency the customer will pay with.
language	A string value describing the language of the secure payment page. The possible values are ar, en.
reference	Reference property where you can map whatever value you require to be in the request. For example, you can put the order number or a transaction id for debugging purposes.
customer	This is an object that will include the information of your customer.
customer.name	Your customer's full name.
customer.email	Your customer's email address.
customer.phone	Your customer's mobile number. The expected format is +966 500000000 .
response_url	This is the URL that the Payzaty system will redirect to after the payment is completed, regardless of payment success or failure.
cancel_url	This is the URL that the Payzaty system will redirect to when canceled.

Allowed payment methods and card types

If your business requires you to specify allowed one or more payment methods and card types, you can include it in your request.

```
{
    ...
    "payment_methods": ["Card", "ApplePay", "STCPay"],
    "card_types": ["Mada", "Visa", "MasterCard"],
    ...
}
```

Property	Description
payment_methods	This is a list of strings to determine the allowed payment methods. possible values are Card, ApplePay, STCPay.This field is optional.
card_types	This is a list of strings to determine the allowed payment card types. possible values are Mada , Visa , MasterCard .This field is optional.

Payout

If you are subscribed with the Payout service, you can include payout information in your request. Payouts lets you transfer a subset amount of money from the original payment amount to a specified bank account.

```
{
    ...
    "payouts": [
        {
            "bank_code": "RJHISARI",
            "benificiary_name": "Beneficiary Name",
            "iban_number": "SA4180000203608010973522 1",
            "amount": 90,
            "value_date": "2022-03-31"
        }
    ],
    ...
}
```

Property	Description
payouts	This is a list of payout objects to determine the payouts of the payment. The payouts field is optional.
bank_code	SWIFT Code for the account receiving the payout. You can find a list of bank codes in the following link: http://www.thebankcodes.com/swift_code/Saudi_Arabia
beneficiary_name	Name of account holder who will receive payout.
iban_number	IBAN number of an account that will receive payout.
amount	Amount of money to be transferred in the payout. Note that the sum of all payouts should be less than the original payment amount
value_date	Date where the payout will be executed. Format: yyyy-MM-dd .

Subscription (Recurring Payments)

Recurring payment is an agreement where the customer authorizes you to process payments for recurring bills or invoices at agreed intervals (for example, weekly, monthly). To allow this, you need to provide the following fields in the initial checkout.

```
{
    ...
    "subscription": {
        "interval": "Monthly",
        "end_date": "2025-03-31"
    }
    ...
}
```

Property	Description
interval	This is a list of strings to determine the interval of subscription. possible values are Weekly , Monthly , Quarterly , Biannual , Annual.
end_date	Date where the subscription will be finished. Format: yyyy-MM-dd .

Saving Card Option (Tokenization)

If your business requires you to save card details for further payments, you can determine that using the following field in the initial checkout:

```
{
    ...
    "tokenization": true,
    ...
}
```

Property	Description
tokenization	Boolean value to determine if you need to tokenize card details.

Responses

The following is the expected responses from the API:

1. Successfully generated a secure payment page

In the case that your request was a success, you will receive the following example response with HTTP Status 200 OK:

```
{
    "checkout_id": "2ad8b6113a344",
    "checkout_url": "https://www.payzaty.com/pay/2ad8b6113a344"
}
```

Property	Description
checkout_id	The unique identifier for the checkout action.
checkout_url	The URL that you have to redirect your customer to.

When you redirect your customer to the checkout_url, your customer is going to see the secure payment page where they enter their card information (or use Apple Pay) and complete the transaction. If the transaction is completed, regardless of payment

success or failure, Payzaty system will redirect the customer to the `response_url` that was specified in the request body. If the transaction was canceled by the user, Payzaty will redirect your customer back to the URL that you specified in the `cancel_url` field.

2. Authentication Failed

In the case the authentication failed, as in you entered a wrong merchant no or a wrong secret key, you will receive a response with HTTP Status `401 Unauthorized`.

3. Invalid data was sent

In the case the request had a missing field or a field with an invalid value, you will receive a response with an HTTP Status `422 Unprocessable Entity` with the following response body:

```
{
    "error": "PE422",
    "error_text": "The field language is required"
}
```

Property	Description
error	Error code identifying the problem.
error_text	A string describing the invalid data that was sent.

4. Forbidden

In the case that you tried to execute a request for unsubscribed service, you will receive a response with an HTTP Status `403 Forbidden`.

What's next?

Once the customer is redirected to your website as described above, you should call the checkout details endpoint to check the status of payment and whether the payment was completed by the customer.

Retrieve checkout details

In order to check the status of the checkout transaction, you can use the following endpoint.

HTTP method	Endpoint URL
GET	{Base_URL}/checkout/{checkout_id}

You will need to append the `checkout_id` that you received from the **create a secure payments page** API earlier to check the status of the transaction.

Responses

The following is the expected responses from the API:

1. Successfully returned checkout details

In the case that your request was a success and the details were retrieved, you will receive a response with HTTP Status `200 OK`. You can expect the following responses

1.1. Payment pending

```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "language": "en",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": false,
    "status": "Pending"
}
```

Property	Description
id	The unique identifier for the checkout action.
paid	Value is false to indicate that the payment was not captured.
status	A string value describing the status of the checkout. In this case, the expected value is Pending

1.2. Payment captured

```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "language": "en",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": true,
    "status": "Paid",
    "payment_method": "Card",
    "card_type": "Mada",
    "card_last4": "5100",
    "card_expiry": "01/39"
}
```

Property	Description
paid	Value is true to indicate that the payment was captured.
status	A string value describing the status of the checkout. In this case, the possible values are Paid, Transferred
payment_method	The method used to pay. Possible values are Card, STCPay, ApplePay, GooglePay
card_type	The type of card used to pay. Possible values are Mada, Visa, MasterCard. The value will be null if the payment method is STCPay.
card_last4	The last 4 digits of the card number used to pay.
card_expiry	A string value describing the expiry date as shown on the card.

1.3. **Payment captured** (subscription transaction)


```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "language": "en",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": true,
    "status": "Paid",
    "subscription_id": "sub_7aa4cef2359d4e0f-b671af9b2e99c063",
    "payment_method": "Card",
    "card_type": "Mada",
    "card_last4": "5100",
    "card_expiry": "01/39"
}
```


Property	Description
subscription_id	Unique identifier for the subscription.

1.4. **Payment captured** (card tokenization)


```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "language": "en",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": true,
    "status": "Paid",
    "payment_method": "Card",
    "card_type": "Mada",
    "card_token": "tok_e4bce40df37dh4844ds830f09f487884",
    "card_last4": "5100",
    "card_expiry": "01/39"
}
```


Property	Description
card_token	Unique identifier for the tokenization.

1.5. Payment returned


```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "language": "en",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": false,
    "status": "Refuned",
    "payment_id": "607be9ba45174e20af5393f3deadd233",
    "payment_method": "Card",
    "card_type": "Mada",
    "card_last4": "5100",
    "card_expiry": "01/39"
}
```


Property	Description
paid	Value is false to indicate that the payment was captured and returned.
status	A string value describing the status of the checkout. In this case, the possible values are Voided, Refunded.

2. Authentication Failed

In the case the authentication failed, as in you entered a wrong account no or a wrong secret key, you will receive a response with HTTP Status `401 Unauthorized`.

3. Checkout does not exist

In case you tried to get the details using a `checkout_id` that does not exist, you will receive a response with HTTP Status `404 Not Found`.

Test card numbers for testing purposes

To be able to test out the payment page, you can use any of the below provided test card information.

Card type	Card Number	Expiry Date	CVV	Approved
Mada	4847 8320 4003 4972	12/2030	999	Yes
Visa	4012 0010 3714 1112	12/2030	999	Yes
MasterCard	5105 1051 0510 5100	12/2030	999	Yes
MasterCard	5105 1051 0510 5111	12/2030	999	No

Request a card payment

To request a card payment, you need to integrate with the `checkout/pay` API. You will find below more detailed information about it .

HTTP method	Endpoint URL
POST	{Base_URL}/checkout/pay

As for the body, you will need to send a JSON body as the one shown below:

```
{
    "amount": 100,
    "currency": "SAR",
    "payment_method": "Card",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "card": {
         "name": "Name on card",
         "number": "1111222233334444",
         "expiry": {
             "month": "12",
             "year": "30"
         },
         "cvv": "999",
    },
    "response_url": "https://www.example.com/payment/result?id=1"
}
```

Property	Description
amount	The amount that the customer is required to pay to complete the transaction.
currency	The string identifier for the fiat currency the customer will pay with.
payment_method	A string value describing the payment method of the transaction. Use `Card` to identify the card based transaction.
reference	Reference property where you can map whatever value you require to be in the request. For example, you can put the order number or a transaction id for debugging purposes.
customer	This is an object that will include the information of your customer.
customer.name	Your customer's full name.
customer.email	Your customer's email address.
customer.phone	Your customer's mobile number. The expected format is `+966 500000000`.
card	An object describing the payment data of the card based transaction.
card.name	The cardholder's name, as printed on the card.
card.number	The card number, as shown on the card.
card.expiry	An object describing the expiry date as shown on the card.
card.expiry.month	The month of expiry date, as shown on the card.
card.expiry.year	The year of expiry date, as shown on the card.
cvv	Card verification code, as shown on the back or front of the card.
response_url	This is the URL that the Payzaty system will redirect to after the payment is completed, regardless of payment success or failure.

Responses

The following is the expected responses from the API:

1. Successfully generated a 3D Secure page

In the case that your request was a success, you will receive the following example response with HTTP Status `200 OK`:

```
{
    "checkout_id": "2ad8b6113a344",
    "authentication_url": "https://www.payzaty.com/3d/2ad8b6113a344"
}
```

Property	Description
checkout_id	The unique identifier for the checkout action.
authentication_url	The URL that you have to redirect your customer to.

When you redirect your customer to the `authentication_url`, your customer is going to see the 3D Secure page where they enter OTP information and complete the transaction. If the transaction is completed, regardless of payment success or failure, Payzaty system will redirect the customer to the `response_url` that was specified in the request body.

2. Authentication Failed

In the case the authentication failed, as in you entered a wrong merchant no or a wrong secret key, you will receive a response with HTTP Status `401 Unauthorized`.

3. Invalid data was sent

In the case the request had a missing field or a field with an invalid value, you will receive a response with an HTTP Status `422 Unprocessable Entity` with the following response body:

```
{
    "error": "PE422",
    "error_text": "The field language is required"
}
```

Property	Description
error	Error code identifying the problem.
error_text	A string describing the invalid data that was sent.

4. Forbidden

In the case that you tried to execute a request for unsubscribed service, you will receive a response with an HTTP Status `403 Forbidden`.

What's next?

Once the customer is redirected to your website as described above, you should call the checkout details endpoint to check the status of payment and whether the payment was completed by the customer.

Request a token payment

To request a token payment, you need to integrate with the `checkout/pay` API. You will find below more detailed information about it .

HTTP method	Endpoint URL
POST	{Base_URL}/checkout/pay

As for the body, you will need to send a JSON body as the one shown below:

```
{
    "amount": 100,
    "currency": "SAR",
    "payment_method": "Token",
    "token": "tok_6d832d777b1b4b8490dfd30f7f786951",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "response_url": "https://www.example.com/payment/result?id=1"
}
```

Property	Description
payment_method	A string value describing the payment method of the transaction. Use `Token` to identify the token based transaction.
token	A string value describing the card details by tokenization

Responses

The following is the expected responses from the API:

5. Successfully generated a 3D Secure page

In the case that your request was a success, you will receive the following example response with HTTP Status `200 OK`:

```
{
    "checkout_id": "2ad8b6113a344",
    "authentication_url": "https://www.payzaty.com/3d/2ad8b6113a344"
}
```

Property	Description
checkout_id	The unique identifier for the checkout action.
authentication_url	The URL that you have to redirect your customer to.

When you redirect your customer to the `authentication_url`, your customer is going to see the 3D Secure page where they enter OTP information and complete the transaction. If the transaction is completed, regardless of payment success or failure, Payzaty system will redirect the customer to the `response_url` that was specified in the request body.

6. Authentication Failed

In the case the authentication failed, as in you entered a wrong merchant no or a wrong secret key, you will receive a response with HTTP Status `401 Unauthorized`.

7. Invalid data was sent

In the case the request had a missing field or a field with an invalid value, you will receive a response with an HTTP Status `422 Unprocessable Entity` with the following response body:

```
{
    "error": "PE422",
    "error_text": "The field language is required"
}
```

Property	Description
error	Error code identifying the problem.
error_text	A string describing the invalid data that was sent.

8. Token does not exist

In case you tried to perform a payment transaction using a `token` that does not exist, you will receive a response with HTTP Status `404 Not Found`.

9. Forbidden

In the case that you tried to execute a request for unsubscribed service, you will receive a response with an HTTP Status `403 Forbidden`.

What's next?

Once the customer is redirected to your website as described above, you should call the checkout details endpoint to check the status of payment and whether the payment was completed by the customer.

Apple Pay Payments

Apple Pay is a mobile payment and digital wallet service by Apple Inc. that allows customers to make payments with supported iOS and macOS devices. Apple Pay is a supported device payment in Payzaty.

Prerequisites

To accept Apple Pay payments:

- You must sign up with Apple and create your merchant id.
- Integrate your IOS platform with Apple Pay Mobile SDK.
- Decrypt the payment token on your server using your private key.

Integration Steps

1. Integrate your IOS platform with Apple Pay Mobile SDK.
   https://developer.apple.com/apple-pay/implementation
2. On payment confirmation, submit the encrypted payment token returned by Apple Pay to your server.
3. Decrypt the payment token on your server using your private key.
   https://developer.apple.com/library/archive/documentation/PassKit/Reference/PaymentTokenJSON/PaymentTokenJSON.html
4. Create an Apple Pay transaction and provide the payment data keys from the decrypted token in the request.

Create an Apple Pay transaction

To create an Apple Pay payment, you need to integrate with the `checkout/pay` API. You will find below more detailed information about it .

HTTP method	Endpoint URL
POST	{Base_URL}/checkout/pay

As for the body, you will need to send a JSON body as the one shown below:


```
{
    "amount": 100,
    "currency": "SAR",
    "payment_method": "ApplePay",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "apple_pay": {
         "payment_data": {
              "application_primary_account_number": "5069681523351009",
              "application_expiration_date": "241031",
              "cardholder_name": "cardholder name",
              "currency_code": "682",
              "transaction_amount": 10000,
              "device_manufacturer_identifier": "049510030273",
              "payment_data_type": "3DSecure",
              "online_payment_cryptogram": "BQFItmznAC4rnpdGZAnqJQACAAA=",
              "eci_indicator": "02"
         },
         "payment_method": {
              "display_name": "mada 7221",
              "network": "mada",
              "type": "debit"
         },
        "transaction_identifier": "F6A7FB5DA676E2EB50C4991A0FFA5109A0"
    }
}
```

Property	Description
amount	The amount that the customer is required to pay to complete the transaction.
currency	The string identifier for the fiat currency the customer will pay with.
payment_method	A string value describing the payment method of the transaction. Use ApplePay to identify the Apple based transaction.
reference	Reference property where you can map whatever value you require to be in the request. For example, you can put the order number or a transaction id for debugging purposes.
customer	This is an object that will include the information of your customer.
customer.name	Your customer's full name.
customer.email	Your customer's email address.
customer.phone	Your customer's mobile number. The expected format is +966 500000000 .
apple_pay	An object describing the payment data of the Apple based transaction.

Responses

The following is the expected responses from the API:

1. Successfully processed an Apple Pay transaction

In the case that your request was a success and the details were retrieved, you will receive a response with HTTP Status 200 OK . You can expect the following responses

1.1. Payment captured

```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "payment_method": "ApplePay",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": true,
    "status": "Captured",
    "payment_id": "607be9ba45174e20af5393f3deadd233",
    "card_type": "Mada"
}
```

Property	Description
id	The unique identifier for the checkout action.
paid	Value is true to indicate that the payment was captured.
status	A string value describing the status of the transaction. In this case, the possible value is Captured.
payment_id	Unique identifier for the captured payment.
card_type	The type of card used to pay. Possible values are Mada, Visa, MasterCard.

1.2. Payment not captured

```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "payment_method": "ApplePay",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": false,
    "status": "Not Captured",
    "error": "PE400",
    "error_text": "The transaction data is invalid"
}
```

Property	Description
id	The unique identifier for the checkout action.
paid	Value is false to indicate that the payment was not captured.
status	A string value describing the status of the transaction. In this case, the expected value is Not Captured
error	Error code identifying the problem.
error_text	A string describing the invalid data that was sent.

2. Authentication Failed

In the case the authentication failed, as in you entered a wrong merchant no or a wrong secret key, you will receive a response with HTTP Status `401 Unauthorized`.

3. Invalid data was sent

In the case the request had a missing field or a field with an invalid value, you will receive a response with an HTTP Status `422 Unprocessable Entity` with the following response body:

```
{
    "error": "PE422",
    "error_text": "The field apple_pay is required"
}
```

Property	Description
error	Error code identifying the problem.
error_text	A string describing the invalid data that was sent.

4. Forbidden

In the case that you tried to execute a request for unsubscribed service, you will receive a response with an HTTP Status `403 Forbidden`.

Create a Subscription (Recurring Payments) transaction

To create a subscription payment, you need to integrate with the subscription/pay API. You will find below more detailed information about it .

HTTP method	Endpoint URL
POST	{Base_URL}/subscription/{subscription_id}/pay

As for the body, you will need to send a JSON body as the one shown below:

```
{
    "amount": 100,
    "currency": "SAR",
    "reference": "ORD-1000001"
}
```

Property	Description
amount	The amount that the customer is required to pay to complete the transaction.
currency	The string identifier for the fiat currency the customer will pay with.
reference	Reference property where you can map whatever value you require to be in the request. For example, you can put the order number or a transaction id for debugging purposes.

Responses

The following is the expected responses from the API:

1. Successfully processed a subscription transaction

In the case that your request was a success and the details were retrieved, you will receive a response with HTTP Status `200 OK`. You can expect the following responses

1.1. Payment captured

```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": true,
    "status": "Captured",
}
```

Property	Description
id	The unique identifier for the checkout action.
paid	Value is true to indicate that the payment was captured.
status	A string value describing the status of the transaction. In this case, the possible value is Captured.

1.2. Payment not captured

```
{
    "id": "2ad8b6113a344",
    "amount": 100,
    "currency": "SAR",
    "payment_method": "ApplePay",
    "reference": "ORD-1000001",
    "customer": {
        "name": "Customer name",
        "email": "customer@mail.com",
        "phone": "+966 53000000"
    },
    "paid": false,
    "status": "Not Captured",
    "error": "PE400",
    "error_text": "The transaction data is invalid"
}
```

Property	Description
id	The unique identifier for the checkout action.
paid	Value is false to indicate that the payment was not captured.
status	A string value describing the status of the transaction. In this case, the expected value is Not Captured
error	Error code identifying the problem.
error_text	A string describing the invalid data that was sent.

2. Authentication Failed

In the case the authentication failed, as in you entered a wrong merchant no or a wrong secret key, you will receive a response with HTTP Status `401 Unauthorized`.

3. SubscriptionID does not exist

In case you tried to invoke the endpoint using a `subscription_id` that does not exist, you will receive a response with HTTP Status `404 Not Found`.

4. Invalid data was sent

In the case the request had a missing field or a field with an invalid value, you will receive a response with an HTTP Status `422 Unprocessable Entity` with the following response body:

```
{
    "error": "PE422",
    "error_text": "The field amount is required"
}
```

Property	Description
error	Error code identifying the problem.
error_text	A string describing the invalid data that was sent.

5. Forbidden

In the case that you tried to execute a request for unsubscribed service, you will receive a response with an HTTP Status `403 Forbidden`.

Cancel Subscription

In order to cancel a subscription transaction, you can use the following endpoint.

HTTP method	Endpoint URL
POST	{Base_URL}/subscription/{subscription_id}/cancel

Responses

The following is the expected responses from the API:

1. Successfully cancel subscription

In the case that your request was a success and the subscription was canceled, you will receive a response with HTTP Status `200 OK`. You can expect the following responses

```
{
    "success": true,
    "msg": "The subscription has been cancelled successfully"
}
```

2. Authentication Failed

In the case the authentication failed, as in you entered a wrong account no or a wrong secret key, you will receive a response with HTTP Status `401 Unauthorized`.

3. Subscription does not exist

In case you tried to invoke the endpoint using a `subscription_id` that does not exist, you will receive a response with HTTP Status `404 Not Found`.

4. Subscription is already cancelled

In the case the subscription is already cancelled, you will receive a response with an HTTP Status `400 Bad Request` with the following response body:

```
{
    "error": "PE400",
    "error_text": "The subscription is already cancelled"
}
```

Property	Description
error	Error code identifying the problem.
error_text	A string describing the invalid data that was sent.

Refund a payment

In order to refund a payment to a customer, you can use the following endpoints. There are two types of refunds you might need to process:

- **Full refund**: A full refund returns the total amount of the payment to the customer; it can only be performed once.

HTTP method	Endpoint URL
POST	{Base_URL}/checkout/{checkout_id}/refund

Note: There is no body request for the above full refund endpoint.

- **Partial refund**: A partial refund returns an amount less than the total amount of the payment. A checkout can be refunded multiple times, but cannot exceed the total amount of the payment.

HTTP method	Endpoint URL
POST	{Base_URL}/checkout/{checkout_id}/refund/partial

As for the body, you will need to send a JSON body as the one shown below:

```
{
    "amount": 50,
    "reference": "Refund-1000001"
}
```

Property	Description
amount	The amount that will be refunded to the customer.
reference	Reference property where you can map whatever value you require to be in the request. For example, you can put the refund number or a refund transaction id for debugging purposes.

Responses

The following is the expected responses from the API:

1. Successfully refund a payment

In the case that your request was a success and the payment was refunded, you will receive a response with HTTP Status `200 OK`. You can expect the following responses

```
{
    "success": true,
    "msg": "The checkout has been refunded successfully"
}
```

2. Refund was not processed

In the case that your refund request was not processed and the payment was not refunded, you will receive a response with HTTP Status `200 OK`. You can expect the following responses

```
{
    "success": false,
    "msg": "Refund is not available for this checkout"
}
```

3. Authentication Failed

In the case the authentication failed, as in you entered a wrong account no or a wrong secret key, you will receive a response with HTTP Status `401 Unauthorized`.

4. Checkout does not exist

In case you tried to invoke the endpoint using a `checkout_id` that does not exist, you will receive a response with HTTP Status `404 Not Found`.

Check card

In order to check the card, you can use the following endpoints and send card bin number, which is the first 6 digits of the card, and you will respond with card issuer details (country, bank, and card type).

HTTP method	Endpoint URL
POST	{Base_URL}/card/check/{bin}

Note: There is no body request for the above full refund endpoint.

Responses

The following is the expected responses from the API:

1. **Successfully refund a payment**

   In the case that your request was a success, you will receive a response with HTTP Status 200 OK. You can expect the following responses

```
{
    "country": "SAUDI ARABIA",
    "country_code": "SAU",
    "Bank": "INMA Bank",
    "card_type": "Mada"
}
```

2. **Authentication Failed**

   In the case the authentication failed, as in you entered a wrong account no or a wrong secret key, you will receive a response with HTTP Status 401 Unauthorized.

3. Invalid data was sent

In the case the request had a missing field or a field with an invalid value, you will receive a response with an HTTP Status `422 Unprocessable Entity` with the following response body:

```
{
    "error": "PE422",
    "error_text": "Bin number should be of 6 digits"
}
```