


Question 4Not yet
answeredMarked out of
1.00[Flag question](#)

The following UML design shows Student class. Assume that the attributes have declared as private and the methods as public. The get methods return the value of the attributes and the calculateAge() returns the Student age. Which of the following would not raise an error when you run this program?

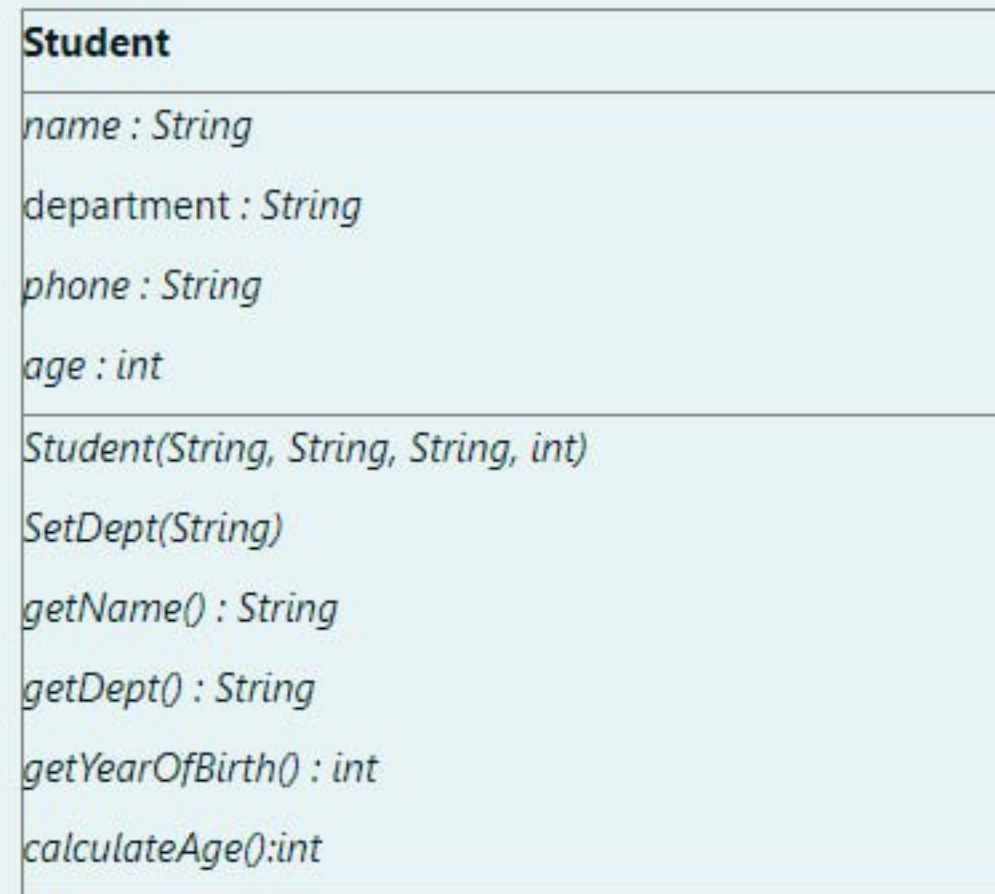

- ☐ a. Student st1 = new Student ("John","CS","0913222222","25");
- ☐ b. Student st1 = new Student ("John","SE","0913222222",20);
- ☐ c. st1 Student = new Student ("John","CS","02085332455", 23);
- ☐ d. Student st1 = new Student ("John","IT","2000");