

Time left 2:21

Which one of the following is not true about fan trap in Entity Relationship Diagram?

- ☐ a. Highly likely exit when more than two one-to-many relationships fan out from an entity
- ☐ b. When there is ambiguous pathway between some entity occurrences in related entity types
- ☒ c. It occurs when there is no pathway between related entities
- ☐ d. It can be resolved by readjusting the model so that no one-to-many relationships fanning out from an entity

Next question

question

Navigation

	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50

Which one of the following is false about String in Java?

- ☐ a. We can create a String object using array of characters
- ☐ b. In Java a string is treated as object
- ☒ c. Content of a string can be changed once the string is created
- ☐ d. We can create a String object using String literal

1
Which one of the following is false about String in Java?

- ☐ a. We can create a String object using array of characters
- ☒ b. In Java a string is treated as object
- ☐ c. Content of a string can be changed once the string is created
- ☐ d. We can create a String object using String literal

Clear my choice



MoEEE

Model Exam

Question 46

Not yet
answered

Marked out of
1.00

Flag question

In a tree data structure, if a node has no parent node, then the node is _____.

- ☐ a. Parent node
- ☐ b. Internal node
- ☐ c. External node
- ☒ d. Root node

Clear my choice

Time left 1:32:16

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

Finish exam



MoEEE

Model Exam

2023/24

Question 62

Not yet
answered

Marked out of
1.00

Flag question

Assume you have a weighted graph G with a set of vertices V and set of edges E . Which one of the following problem is an optimization problem on the graph?

- ☒ a. How many cycles are there in graph G
- ☐ b. Is vertex peV reachable from vertex qeV in graph G
- ☐ c. Traverse all vertices in graph G
- ☐ d. Find minimum spanning tree from graph G

Clear my choice

Time left 1:00:42

Next question

Exam navigation

1	2	3	4	5	6	7	8	9
10	11	12	13	14	15	16	17	18
19	20	21	22	23	24	25	26	27
28	29	30	31	32	33	34	35	36
37	38	39	40	41	42	43	44	45
46	47	48	49	50	51	52	53	54
55	56	57	58	59	60	61	62	63
64	65	66	67	68	69	70	71	72
73	74	75	76	77	78	79	80	81
82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99
100								

Previous question

Option (d): Find minimum spanning tree from graph G .
This is an optimization problem because it seeks the spanning tree with the minimum total edge weight, which connects all vertices without any cycles. The other options are not optimization problems but rather queries about the properties or elements of the graph. If you need further clarification or have more questions, feel free to ask!



MoEEE

Mid - End Exam

Question 56

Not yet
answered

Marked out of
1.00

Flag question

What is the output of the following C++ fragment code?

```
int a, b;
```

```
a = 13;
```

```
b = 9;
```

```
while( (20 && 0) && (a > b) )
```

```
{
```

```
    cout << "Plants are our life";
```

```
}
```

Option (d): No message will be displayed.

The condition `(20 && 0)` in the while loop will always evaluate to false because the logical AND operator (`&&`) requires both operands to be true (non-zero). Since 0 is considered false, the loop will not execute, and no message will be displayed. If you have any more questions or need further explanation, feel free to ask!

- ☐ a. It displays message "Plants are our life" 20 times
- ☐ b. It displays message "Plants are Our Life" 4 times
- ☐ c. It displays message "Plants are our life" infinitely
- ☐ d. No message will be displayed

Time left 1:19:14

Next question

Previous question

ENG

0:10 min

W19720



Back

Time left 1:23:07

Question 52

Not yet answered

Marked out of 1.00

Flag question

If you plan a software test to be done by clients to demonstrate that the system satisfies their requirements, which phase of software testing is appropriate?

- ☐ a. Integration testing
- ☐ b. Unit testing
- ☒ c. Acceptance testing
- ☐ d. System testing

Clear my choice

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50



Back

Total: 1/20/25

Question 49

Answer saved

Marked out of 1.00

Flag question

Which quantifier can be used for some portion of the universe?

- ☒ a. $\forall$
- ☐ b. $\exists$
- ☐ c. $\rightarrow$
- ☐ d. $\wedge$

Clear my choice

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60

Back

Question 56

Not yet
answered

Marked out of
1.00

Flag question

Time left: 1:20:21

What is the output of the following C++ fragment code?

```
int a, b;  
a = 13;  
b = 9;  
while( (20 && 0) && (a > b) )  
{  
    cout << "Plants are our life";  
}
```

- ☐ a. It displays message "Plants are our life" 20 times
- ☐ b. It displays message "Plants are Our Life" 4 times
- ☐ c. It displays message "Plants are our life" infinitely
- ☒ d. No message will be displayed

Refd

Back

Question 50

Not yet
answeredMarked out of
1.00

Flag question

Time left 1:27:20

Which phase of compiling process is considered as the final phase in the process?

- ☐ a. Code generation
- ☐ b. Semantic analysis
- ☐ c. Intermediate code generation
- ☐ d. Code optimization ✓

Option (d): Code optimization.
Code optimization is considered the final phase in the compiling process. It involves improving the code to make it run more efficiently and effectively.

Previous question

Next question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75



MoEEE

MoE - Test Exam

Question 47

Not yet
answered

Marked out of
1.00

Flag question

Consider the following fragment of C++ code:

```
const int x = 8;  
const int y = 16;  
if (x > y)  
{  
    int z = x + y;  
}
```

For codes like the above one, which technique of code optimization is appropriate?

- ☒ a. Arithmetic simplification
- ☐ b. Dead code elimination
- ☐ c. Code motion
- ☐ d. Compile time evaluation

Clear my choice

Time left 1:31:16

Next question

Previous question

Exam Navigation



ENG

2:10 PM



V0972a

Back

Time left 0:5

Question 64

Not yet
answered

Marked out of
1.00

Flag question

Given the schemas: BOOK (Book_id, Title, Publisher_name) BOOK_AUTHOR (Book_id, Author_name) PUBLISHER (Name, Address, Phone) Which one of the following SQL is correct to delete the publisher named as 'XWZ' from the PUBLISHER table

- ☐ a. DELETE FROM PUBLISHER WHERE Name = 'XWZ'
- ☐ b. DELETE FROM BOOK WHERE Name = 'XWZ'
- ☒ c. DELETE FROM BOOK_AUTHOR WHERE Address = 'XWZ'
- ☐ d. DELETE FROM PUBLISHER WHERE Address = 'XWZ'

Clear my choice

Previous question

Next question

Back

Question 63

Not yet
answered

Marked out of
1.00

Flag question

Previous question

_____ is set of attributes that can be seen by a program and can have direct impact on the logical execution of a program.

- ☒ a. Flow control
- ☐ b. Arrangement
- ☐ c. Organization
- ☐ d. Architecture

Clear my choice

Time left 0:59:10

Exam Navigation

1	2	3	4
10	11	12	13
19	20	21	22
28	29	30	31
37	38	39	40
46	47	48	49
55	56	57	58
64	65	66	67
73	74	75	76
82	83	84	85

The image shows a multiple-choice question related to a concept in programming or computer science. The question is partially obscured, but it mentions a set of attributes that can be seen by a program and have a direct impact on the logical execution of a program. The options given are:

- a. Flow control
- b. Arrangement
- c. Organization
- d. Architecture

Without the full context of the question, it's challenging to provide the correct answer. However, if the question is referring to the overall structure and design of a program that affects its execution, then the most likely answer would be:

Option (d): Architecture.

Architecture in computer science typically refers to the conceptual structure and logical organization of a computer or computer-based system, which indeed has a direct impact on the execution of a program. If you can provide the full question or more context, I would be able to confirm the answer with greater certainty.

Computer Science

Back

Question 63

Not yet
answered

Marked out of
1.00

Flag question

_____ is set of attributes that can be seen by a program and can have direct impact on the logical execution of a program.

- ☒ a. Flow control
- ☐ b. Arrangement
- ☐ c. Organization
- ☐ d. Architecture

Clear my choice

Previous question

Time left 0:59:42

Exam Navigation

1	2	3	4	5
10	11	12	13	14
19	20	21	22	23
28	29	30	31	32
37	38	39	40	41
46	47	48	49	50
55	56	57	58	59
64	65	66	67	68
73	74	75	76	77
82	83	84	85	86

Next question



MoEEE

Mid - Exam

Computer Science

Back

Time left 1:03:22

Question 60

Not yet
answered

Marked out of
1.00

Flag question

Which statement is true about pop() operation of Stack data structures?

- ☒ a. pop() removes the end/top element from stack ✓
- ☐ b. pop() inserts new element at the middle of stack
- ☐ c. pop() inserts new element at the beginning/bottom of stack
- ☐ d. pop() returns the end/top element but it doesn't delete that element

Clear my choice

Previous question

Next question

Exam 1

1	2
10	11
19	20
28	29
37	38
46	47
55	56
64	65
73	74
82	83



MoEEE

Model Exam

Question 50

Not yet
answered

Marked out of
1.00

Flag question

Which phase of compiling process is considered as the final phase in the process?

- ☐ a. Code generation
- ☐ b. Semantic analysis
- ☒ c. Intermediate code generation
- ☐ d. Code optimization

Clear my choice

Time left 1:24:55

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

Finish exam

W1972a

Computer Science

Back

Time left 1:33:47

Question 44

Not yet
answered

Marked out of
1.00

Flag question

Which one is a method used to obtain the meaning of encrypted information without access to secret key?

- ☐ a. Encryption
- ☐ b. Crypto-analysis
- ☒ c. Decryption
- ☐ d. Cryptography

Clear my choice

The correct answer to the multiple-choice question regarding the method used to obtain the meaning of encrypted information without access to the secret key is:

Option (b): Crypto-analysis.
Crypto-analysis is the study of analyzing information systems in order to understand hidden aspects of the systems. It is used to breach cryptographic security systems and gain access to the contents of encrypted messages, without having access to the secret key.

Next question

Previous question

Exam Navigation



ENG 3:36 PM

W1972a

Back

Time left: 1:34:23

Question 43

Answer saved

Marked out of
1.00

Flag question

Which one of the following is not correct for the figure shown in Question 27?

- ☐ a. P0 is waiting for a resource held by P1
- ☐ b. P3 cannot be executed until P4 finishes
- ☒ c. P1 is waiting for a resource held by P2
- ☐ d. P2 cannot be executed until P1 finishes

Clear my choice

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75



W1972a

Back

Question 42

Not yet
answered

Marked out of
1.00

Flag question


What is the output of the following Java fragment code?

```
int n = 6, m = 15, p = 3;
n -= m;
n *= p;
System.out.println(n);
```

- ☐ a. 24
- ☐ b. 3
- ☐ c. 27
- ☐ d. -27

Previous question

Exam Navigation



Based on the Java code provided in the image, the correct output should be -204. However, this option is not listed among the multiple-choice answers. It seems there might be an error in the question or the options provided. Here's the breakdown of the code execution:

Initial values: $n = 6$, $p = 15$, $q = 34$

After $n *= -q$, n becomes -204 (since $6 * -34 = -204$)

The operation $q += p$; changes the value of q but does not affect n . Finally, `System.out.println(n);` prints out the value of n , which is -204

None of the given options (A) 0, (B) 3, (C) 27, (D) -27 match the correct output. If this is a question from an exercise or test, it would be advisable to bring this discrepancy to the attention of the instructor or the source of the question

Find question

[Back](#)

Time left: 1:24:39

Question 51Not yet
answeredMarked out of
1.00[Flag question](#)

_____ is a network architecture characteristics that states a network can expand quickly to address needs of new users and application without having impact on the services delivered to existing users.

- ☐ a. Fault tolerance
- ☐ b. Scalability
- ☐ c. Quality of service
- ☐ d. Security

Based on the information provided in the image, the correct answer to the question about network architecture characteristics is option b, Scalability. This is because scalability refers to the ability of a network to expand and accommodate more users and applications without negatively impacting the service provided to existing users.

Please note that the question text was partially obscured, so if there is additional context that was not visible in the image, it could potentially alter the answer. However, with the given information, scalability is the characteristic that best fits the description in the question.

[Next question](#)[Previous question](#)**Exam Navigation**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75

ENG

4:08 PM

W1972a



MoEEE

Mod - Exit Exam

Question 58

Not yet answered

Marked out of 1.00

Flag question

What is the output of the following Java fragment code?

```
int[] list = new int[4];
int sum = 0;
for(int i = 0; i < list.length; i++)
{
    list[i] = i*3;
    sum += list[i];
}
System.out.print(sum);
```

- ☐ a. 6
- ☐ b. 3
- ☐ c. 18
- ☒ d. 36

Clear my choice

Based on the Java code provided in the image, the correct answer is option c, -18. Here's the breakdown of the code execution:

An integer array list is created with 4 elements.

A variable sum is initialized to 0.

A for loop runs 4 times (since list.length is 4), each time setting list[i] to -3 and adding it to sum.

Therefore, sum becomes -3 - 3 - 3 - 3, which equals -12.

However, there seems to be a discrepancy because the correct calculation of sum should be -12, but the options provided do not include this value. The closest option to the correct answer is c, -18, but it is still not the accurate result based on the code. If this is an exercise or test question, it would be advisable to discuss this issue with the instructor or the source of the question. Please double-check the code and the options provided to ensure accuracy. If there is additional context or a different interpretation of the code, it could potentially change the answer.

Time left 1:15:47

Next question

Previous question

Exam Navigation

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25

W1972a

Computer Science

Back

Question 59

Answer saved

Marked out of
1.00

Flag question

Time left 1:03:47

Let a Grammar $G = (\{S\}, \{a, b\}, S, P)$, where $\{S\}$ is set of variables, $\{a, b\}$ is set of terminal symbols, S is start variable and P is set of productions. Then which one of the following is not an element of the language (L) which is generated from G . Given:

$$P : S \rightarrow aSb,$$

$$S \rightarrow \lambda$$

☐ a. aabb

☐ b. λ

☐ c. a

☒ d. ab

Clear my choice

Exam

1

2

10

11

19

20

28

29

37

38

46

47

55

56

57

64

65

66

73

74

75

82

83

84

Question 57

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is correct way creating String object?

- ☐ a. `String m = new String("Exit Exam");`
- ☐ b. `String m = 'H', 'e', 'l', 'l', 'o';`
- ☐ c. `String m = new String('Technology');`
- ☒ d. `String m = 'Computer Science';`

Clear my choice

The correct answer to the Java string creation question is Option A: `String m = new String("Exit Exam");`. The other options are incorrect because:

Option B uses single quotes for multiple characters, which is not allowed in Java.

Option C lacks double quotes around Technology, making it a variable rather than a string literal.

Option D uses single quotes for a string, which should use double quotes in Java.

Remember, in Java, strings are created with double quotes, like this: `String variable Name = "StringValue";`. Single quotes are used for single characters, like `char c = 'a';`.

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

Back

Question 48

Not yet
answered

Marked out of
1.00

Flag question

Time left 1:29:28

An interface that has multiple lines connecting input/output module and peripheral device and assures multiple bits to be transferred at the same time is:

- ☐ a. Bus interface
- ☐ b. Serial interface
- ☐ c. One line interface
- ☒ d. Parallel interface

Clear my choice

The correct answer to the question is Option D: Parallel interface. A parallel interface allows multiple bits to be transferred simultaneously over several channels or wires, which matches the description given in the question. This type of interface is commonly used in situations where high data transfer rates are required, such as in the connection between a computer and a printer. Remember, a serial interface, in contrast, transfers data bit by bit over a single wire or channel.

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50

Question 65

Not yet
answeredMarked out of
1.00

Flag question

Which deadlock prevention mechanisms don't require timestamp?

- ☐ a. Wait-die
- ☒ b. No-wait
- ☐ c. Wait-wait
- ☐ d. Wound-wait

Clear my choice

The correct answer to the question on deadlock prevention mechanisms that don't require a timestamp is Option B: No-wait. This mechanism does not involve the use of timestamps to prevent deadlocks, unlike other methods such as wait-die and wound-wait, which do use timestamps to order the transactions and avoid deadlock situations. Remember, in deadlock prevention, the goal is to ensure that at least one of the necessary conditions for a deadlock cannot occur.

Time left 0:56:42

Previous question

Next question

CADUI / 100

1	2	3
10	11	12
19	20	21
28	29	30
37	38	39
46	47	48
55	56	57
64	65	66
73	74	75
82	83	84
91	92	93
100		

Question 58

Not yet
answered

Marked out of
1.00

Flag question

What is the output of the following Java fragment code?

```
int[] list = new int[] {1, 2, 3, 4};
int sum = 0;
for (int i = 0; i < list.length; i++) {
    sum += list[i];
}
System.out.print(sum);
```

- ☐ a. 6
- ☐ b. 3
- ☒ c. 18
- ☐ d. 36

An integer array list is initialized with the values {1,2,3,4}. A variable sum is initialized to 0. A for loop iterates over each element in the array, adding each element's value to sum. After the loop, sum contains the total sum of the array's elements.

The output will be the sum of the array's elements: 10.

However, the options provided in the image do not include '10'. It seems there might be an error with the question or the options given. The correct answer based on the code should be '10', which is not listed among the options a, b, c, or d. Please double-check the question or the provided options for any discrepancies.

Previous question

Next question

Exam Navigation



a question about algorithms used to extract a Minimum Spanning Tree (MST) from an input graph. Here's an explanation of each choice and the correct answer:

Option A: Dijkstra's Algorithm

Used for finding the shortest path between nodes in a graph.

Not suitable for extracting MST.

Option B: Merge-Sort Algorithm

A sorting algorithm.

Not related to MST extraction.

Option C: Prim's Algorithm

Specifically designed to find the MST in a weighted undirected graph.

Correct choice for extracting MST.

Option D: Huffman Encoding Algorithm

Used for data compression.

Not related to MST extraction.

The correct answer is Option C: Prim's Algorithm, as it is the only algorithm among the options that is used to extract a Minimum Spanning Tree from a graph.

The other options are used for different purposes and do not apply to the context of MST.

Question 54

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following algorithms can be used to extract Minimum Spanning Tree from an input graph?

- ☐ a. Dijkstra's algorithm
- ☐ b. Merge sort algorithm
- ☒ c. Prim's algorithm
- ☐ d. Huffman encoding algorithm

Clear my choice

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75

ENG

4:00 PM

W972n

Question 41

Not yet
answered

Marked out of
1.00

Flag question

Assume you make modification to your software. Then you want to make sure that the modification has not had introduced new errors. Which software testing level is required?

- ☒ a. Regression testing
- ☐ b. Dynamic testing
- ☐ c. Beta testing
- ☐ d. Static testing

Clear my choice

Previous question

Exam Navigation

Time left 1:27:25

Next question

Option A: Regression Testing

Ensures that new code changes do not break existing functionality.
Correct answer for the given scenario.

Option B: Dynamic Testing

Involves executing the software and validating the output against expected results.

Not specifically for checking the impact of new changes on existing features.

Option C: Beta Testing

Allows end-users to evaluate the software in a real-world environment.

More about gathering user feedback than checking for errors due to modifications.

Option D: Static Testing

Involves reviewing the code, requirements, or documentation without executing the program.

Does not directly test the impact of code changes on the software's operation.

Therefore, the most appropriate type of testing to ensure that modifications have not introduced new errors is regression testing.



MoEEE

Mock - Exam

Computer Science

Back

Time left 1:37:45

Question 41

Not yet answered

Marked out of 1.00

Flag question

Assume you make modification to your software. Then you want to make sure that the modification has not had introduced new errors. Which software testing level is required?

- ☐ a. Regression testing
- ☐ b. Dynamic testing
- ☐ c. Beta testing
- ☐ d. Static testing

Ref

Next question

Previous question

Exam Navigation

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25

ENG

3:02 PM

W1972a



Computer Science

Back

Option A: Processing documents is not the primary function of a DBMS.
Option B: While a DBMS can store image data, processing images is not its main role.
Option C: Correct - A DBMS is indeed responsible for creating and maintaining databases.
Option D: Managing a computer's activity is not a function of a DBMS.

Time left 1:42:20

Question 38

Not yet
answered

Marked out of
1.00

Flag question

Among the following, which one best describes a database management system (DBMS)?

- ☐ a. It can assist you to process document
- ☐ b. It can assist process images
- ☐ c. It is responsible for creating and maintaining a database
- ☐ d. It can help users to manage computer's activity

Next question

Previous question

Exam Navigation





MoELL

Model Exam

Question 35

Not yet
answered

Marked out of
1.00

Flag question

What is the output of the following fragment C++ code?

```
for(int n = 1; n <= 10; n = n + 2)
{
    if(n % 7 != 0)
        cout << n << " ";
    else
        break;
}
```

- ☐ a. 1 3 5 7 9 11 13 15 17
- ☐ b. 1 2 3 4 5 6
- ☐ c. 3 5 7
- ☐ d. 1 3 5

What is the output of the following fragment C++ code?

```
for(int i = 1; i <= 10; i = i + 2)
{
    if(i % 3 == 1)
        continue;
    else
        break;
}
```

Answers to questions

Exam Navigation



MoEEE

MoE - Exit Exam

GO BACK

General

Computer Science

Question 61

Not yet
answered

Marked out of
1.00

Flag question

Previous question

Time left 1:02:39

Which one of the following is not correct about POP3 and SMTP?

- ☐ a. A sender can send email using SMTP
- ☐ b. Both are network layer protocols
- ☐ c. Both are application layer protocols
- ☐ d. A sender can receive emails using POP3

Next question

- 4
- 55
- 64
- 73
- 83
- 91
- 100

Question 34

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following lists of environments is the hardest for an agent?

- ☐ a. Sequential, non-deterministic, dynamic
- ☐ b. Fully observable, sequential, deterministic
- ☐ c. Deterministic, fully observable, static
- ☒ d. Partially observable, static, continuous

Clear my choice

Previous question

Next question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75

Option A: A sender can send email using SMTP - True, SMTP is used for sending emails.

Option B: Both are network layer protocols - False, they are application layer protocols.

Option C: Both are application layer protocols - True, this is their correct classification.

Option D: A sender can receive emails using POP3 - True, POP3 is used for receiving emails.

Question 36

Answer saved

Marked out of 10

Flag question

Which asymptotic notation describes worst case analysis?

- ☒ a. $f(n) = \text{little-oh}$
- ☐ b. $f(n) = \text{little-}\omega(\text{little omega})$
- ☐ c. $f(n) = \theta(\text{thetha})$
- ☐ d. $f(n) = \Omega(\text{Big omega})$

[Clear my choice](#)

Option A: ($f(n) = o$) (little-o)

Describes an upper bound that is not tight.
Not suitable for worst-case analysis.

Option B: ($f(n) = \omega$) (little omega)

Describes a lower bound that is not tight.
Also not suitable for worst-case analysis.

Option C: ($f(n) = \theta$) (theta)

Describes a tight bound, meaning the function grows at the same rate as the bound.

Represents average-case complexity.

Option D: ($f(n) = \Omega$) (Big Omega)

Describes a tight lower bound.

Correct for worst-case analysis.

[Next question](#)[Previous question](#)

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50

Question: Which one of the following environments is the hardest for an agent to operate in?

- A) Sequential non-deterministic, dynamic B) Fully observable, sequential, deterministic C) Deterministic, fully observable, static D) Partially observable, static, continuous

Correct Answer: The hardest environment for an agent to operate in would typically be D) Partially observable, static, continuous, as it presents the most challenges in terms of observability and predictability. However, the specific answer may vary depending on the context and the capabilities of the agent in question.

Question 34

Not yet answered

Marked out of 1.00

Flag question

Which one of the following lists of environments is the hardest for an agent?

- ☐ a. Sequential, non-deterministic, dynamic
☐ b. Fully observable, sequential, deterministic
☐ c. Deterministic, fully observable, static
☐ d. Partially observable, static, continuous

Previous question

Next question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75



17W720

1:18 PM



Computer Science

Time left 2:13:09

12

d

out of

question

Which one of the following is correct for the statement below? When two transactions that access the same database items have their operations interleaved in a way that makes the value of some database item incorrect?


- ☐ a. It is a dirty read problem
- ☐ b. It is a lost update problem
- ☐ c. It is a temporary read problem
- ☐ d. It is an incorrect summary problem

Correct Answer: b. It is a lost update problem.

Next question

Previous question

Exam Navigation

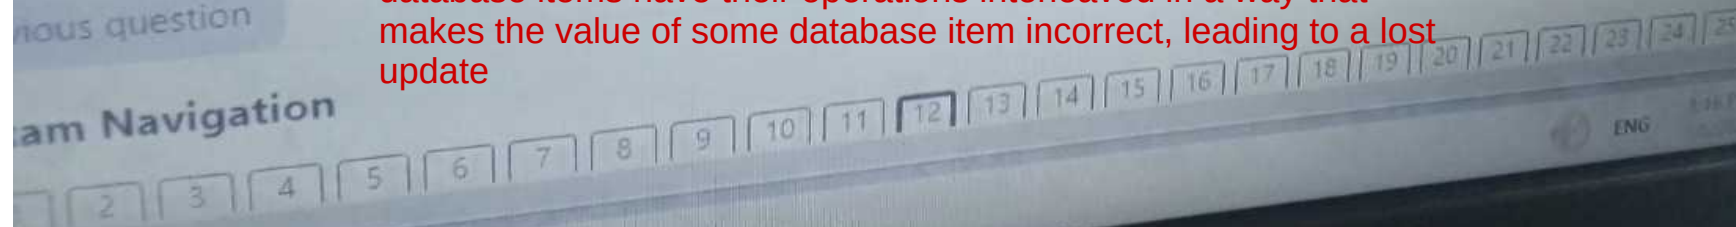

ENG 8:16 PM

WT972a

Question 10

Not yet
answered

Marked out of
1.00

Flag question

What will be the output of the following JavaScript statement? `Math.sqrt(36)`

- ☒ a. 6
- ☐ b. 30
- ☐ c. 1
- ☐ d. 36

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49
56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74					

Question 31

Not yet
answered

Marked out of
1.00

Flag question

A database management system (DBMS) has _____ to control locks.

- ☐ a. Lock manager
- ☐ b. Query optimizer
- ☐ c. Query processor
- ☐ d. Lock table

A) Lock manager

The lock manager is responsible for controlling locks within a database management system to manage access to data in a concurrent environment.

Time left 1:53:22

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

Finish exam

Computer Science

Time left 2:11:28

on 14

Given input Alphabet $\Sigma = \{a, b, c, d\}$ and empty string λ . Then, which one of the following is equivalent to Σ^0 ??

☐ a. Σ^+

☐ b. Σ^*

☐ c. Σ

☒ d. $\{\lambda\}$


A) +

This represents one or more concatenations of elements in the set , which includes all strings of any length that can be formed from the alphabet set

Next question

Previous question

Exam Navigation

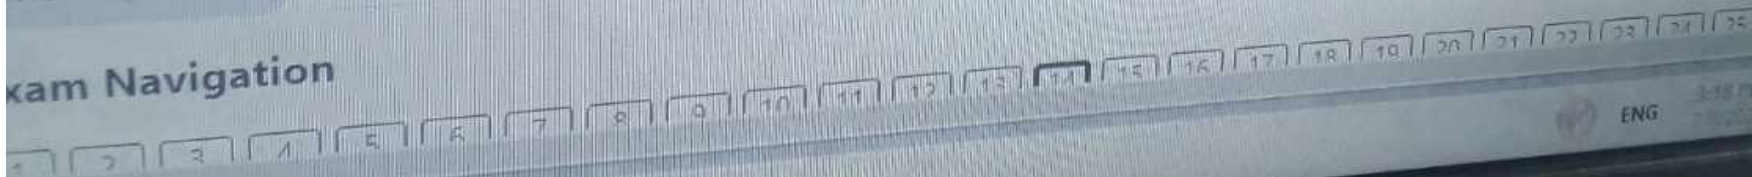

Which one of the following best explains attackers who are motivated by financial gain and perform sabotage, an IP theft and secrets of a rival company?

Time left 2:16:26

- ☐ a. Activist
- ☐ b. Stealer
- ☒ c. Competitor
- ☐ d. Hacktivist

[Clear my choice](#)

C) Competitor

This option best fits the description of attackers who are motivated by financial gain and are involved in corporate espionage activities against rival companies.

[Next question](#)

[Previous question](#)

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100				

Computer Science

Back

Question 21

Not yet
answered

Marked out of
1.00

Flag question

Which branch of study deals with whether a problem can be solved at all or not, regardless of the resources required?

- ☐ a. Set theory
- ☐ b. Complexity theory
- ☒ c. Computability theory
- ☐ d. Automata theory

Clear my choice

Time left 2:02:57

Next question

Previous question

Exam Navigation

c) Computability theory. This branch of study focuses on determining whether a problem can be solved at all, without considering the resources required to solve it.

Set theory deals with collections of elements (sets).
Complexity theory analyzes algorithm efficiency.
Automata theory studies abstract computational models.



W1972a

Question 20

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is responsible for separating some machines from the rest to shield them from possible attacks?

- ☐ a. Switch
- ☒ b. Firewall
- ☐ c. Network operating system
- ☐ d. Router


Clear my choice

b) Firewall. A firewall is responsible for separating some machines from the rest to protect them from possible attacks by monitoring and controlling incoming and outgoing network traffic based on predetermined security rules.

Previous question

Next question

Exam Navigation

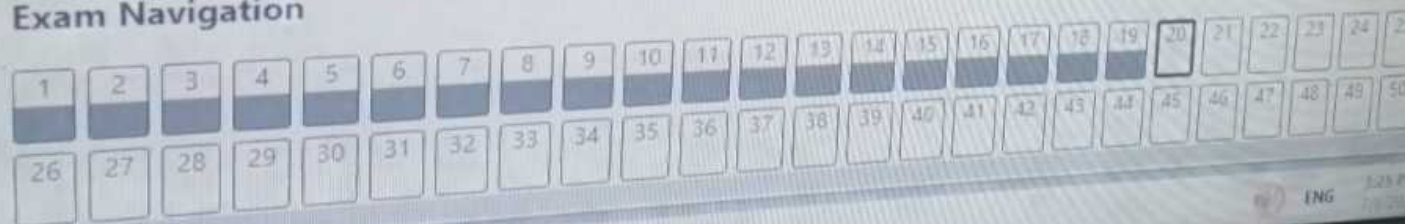

ENG 3:25 PM 7/8/2013

W1972a



MoEEE

MOE - Exam System

Back

Time left 2:06:38

Question 18

Not yet
answered

Marked out of
1.00

Flag question

Which type of Turing machine has two tapes, one tape read-only and the other read-write tape?

- ☐ a. Multi-head Turing machine
- ☐ b. Non-deterministic Turing machine
- ☐ c. Multi-dimensional Turing machine
- ☐ d. Off-line Turing machine

d) Off-line Turing machine. An off-line Turing machine is a theoretical model of computation that has two tapes: one tape is read-only and the other is read-write. This allows the machine to read input without altering it, while still being able to perform computations and store results on the second tape.

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75

ENG

W19720

Computer Science

Back

Question 17

Not yet
answered

1 out of 1

Question: "Which one of the following is a measure taken to ensure information and information systems availability, integrity, authentication, and confidentiality?"

Time left 2:07:01

Which one of the following is a measure taken, to ensure information and information systems' availability, integrity, authentication and confidentiality?

- ☐ a. Interception
- ☐ b. Information security
- ☐ c. Wiretapping
- ☒ d. Information assurance

Clear my choice

a) Interception b) Information security
c) Wiretapping d) Information assurance

The correct answer is: b) Information security.

Next question



ENG

8:57 PM
10/10/2020



W09720

Question 19

Not yet
answered

Marked out of
1.00

Flag question

What will be the output of the following JavaScript statement? `Math.floor(5.9)`

Time left: 2:05:34

- ☐ a. 5
- ☐ b. 9
- ☐ c. 6
- ☐ d. 11.8

a) 5

This is because the `Math.floor()` function rounds down to the nearest whole number, so `Math.floor(5.9)` will result in 5.

Previous question

Next question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

Finish exam ...

Question 6

A process is terminated by the operating system due to a reference to non-existing memory. Which one of the following best explains the process termination?

- ☐ a. Terminated by another process
- ☐ b. Fatal exit
- ☐ c. Error exit
- ☐ d. Normal exit

This is because the process was terminated due to a reference to non-existing memory, which is an error condition, not a normal or intentional termination. Hence, the best explanation for the process termination is an error exit.

[Next question](#)[Previous question](#)

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75

Back

Question 33

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is evaluating the degrees of success of an agent?

- ☒ a. Performance measure
- ☐ b. Knowledge
- ☐ c. Action
- ☐ d. Perception

Clear my choice

a) Performance measure

This evaluates the degrees of success of an agent in artificial intelligence by measuring how well it performs its tasks and achieves its goals.

Time left 1:51:01

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75

ENG 3:18 PM 1/6/2023

W1972a

Back

Question 9

Not yet
answered

Marked out of
1.00

Flag question

Which asymptotic notation describes average case analysis?

- ☐ a. $f(n) = \text{little-}\omega(\text{ little omega })$
- ☒ b. $f(n) = \theta(\text{thetha})$ ✓ b) $f(n) = (\text{theta})$
- ☐ c. $f(n) = \text{Big-Oh}$
- ☐ d. $f(n) = \Omega(\text{ Big omega })$

Clear my choice

Theta notation accurately represents the average case complexity of an algorithm, where the upper and lower bounds are the same up to constant factors.

Previous question

Exam Navigation





MoEEE

Mod - Exam

Time left 1:51:55

Question 32

Not yet answered

Marked out of 1.00

Flag question

Which one of the following is a step in problem solving that lists the actions and states that the agent has to consider provided a goal?

- ☐ a. Execute
- ☐ b. Goal formulation
- ☐ c. Search
- ☒ d. Problem formulation

Clear my choice

Question: "Which one of the following is a step in problem solving that fixes the actions and states that the agent has to consider provided a goal?"

Options: a) Execute b) Goal formulation c) Search d) Problem formulation

The correct answer is: b) Goal formulation.

Goal formulation is the step where the agent determines the specific goals to be achieved, which guides the subsequent actions and states to consider in the problem-solving process.

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100					



MoEEE

MoE - Exit Exam

Computer Science

Back

Time left 1:54:42

Question 29

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is different from the other based on its role in computer network?

- ☐ a. Wireless access point
- ☐ b. Hubs
- ☐ c. Routers
- ☒ d. Network printer

Clear my choice

d) Network printer

It serves a different function compared to the other devices listed, which are involved in directing traffic in a network. Network printers are designed to accept print jobs from multiple users on a network.

Next question

Previous question

Exam Navigation



ENG

3:35 PM
1/1/2023



W1972a

Back

Time left 2:12:01

Question 13

Not yet
answered

Marked out of
1.00

Flag question

A computer expert would like to know the number of processes that are completed per hour to assess the performance of a machine. Therefore, which one of the following best describes the expert's assessment?

- ☐ a. Waiting time
- ☐ b. Turnaround time
- ☒ c. System throughput
- ☐ d. Response time

Clear my choice

c) System throughput

This term describes the number of processes completed per hour, which is used to assess the performance of a machine.

Next question

Previous question

Exam Navigation

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50

ENG

1:17 PM

W1972a

Computer Science

ck

Question 7

Not yet
answered

Marked out of
1.00

Flag question

Previous question

Exam Navigation

Time left 2:18:00

Which one of the following is not an example of scripting languages?

- ☐ a. PHP
- ☐ b. C++
- ☐ c. Python
- ☒ d. Perl

Clear my choice

b) C++
C++ is not an example of a scripting language; it is a compiled language, unlike PHP, Python, and Perl, which are commonly used as scripting languages.

Next question

W1972a

Computer Science

Back

Time left 2:07:53

Question 17

Not yet answered
Marked out of 1.00
Flag question

Which one of the following is a measure taken, to ensure information and information systems' availability, integrity, authentication and confidentiality?

- ☐ a. Interception
- ☐ b. Information security
- ☐ c. Wiretapping
- ☐ d. Information assurance

Next question

Previous question

Exam Navigation

- 12345678910111213141516171819202122232425
- ENG 3:21 PM 1/10/2023

WI9720

Computer Science

Back

Time left 0:29:00

Question 98

Not yet
answered

Marked out of
1.00

Flag question

At which layer of the OSI model devices such as bridges, switches and Network Interface cards are used?

- ☐ a. Physical layer
- ☐ b. Application layer
- ☐ c. Data link layer
- ☐ d. Network layer

c) Data link layer

Bridges, switches, and Network Interface Cards (NICs) operate at this layer to handle physical addressing and frame management.

Previous question

Next question

Computer Science

Back

Time left 0:35:52

Question 87

Not yet
answered

Marked out of
1.00

Flag question

Suppose you have developed a self-driving car equipped with relevant sensors and camera that helps it to see the road and drive sensing traffic lights, pedestrians and signs. Its sensors are able to detect the environment but not all the aspects. Hence, in which environment is your car acting?

- ☒ a. Partially observable
- ☐ b. Fully observable
- ☐ c. Discrete
- ☐ d. Stochastic

Clear my choice

Previous question

The correct answer to the question regarding the environment in which a self-driving car with sensors and cameras is acting, given that not all aspects of the environment can be detected, is:

a) Partially observable

This is because the car's sensors cannot detect every aspect of the environment, making it only partially observable.

Computer Science

Back

Question 86

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following registers hold the address of the next pair of instructions to be fetched from memory?

- ☐ a. Instruction buffer register
- ☐ b. Memory buffer register
- ☐ c. Program counter
- ☐ d. Memory address register

c) Program counter

The program counter register holds the address of the next pair of instructions to be fetched from memory in a computer system.

Previous question

Time left 0:36:35

Next question

Exam N

1	2
10	11
19	20
28	29
37	38
46	47
55	56
64	65
73	74
82	83

Back

Question 85

Not yet
answered

Marked out of
1.00

Flag question

Linked list data structure is _____ type of data structure.

- ☒ a. Dynamic data structure
- ☐ b. Fixed size data structure
- ☐ c. Non-linear data structure
- ☐ d. Static data structure

Clear my choice

a) Dynamic data structure

A linked list is a dynamic data structure because it can grow and shrink in size during the execution of a program. It allows for efficient insertion and deletion of elements without reallocating or reorganizing the entire structure

Time left 0:37:05

Exam

1	
10	11
19	20
28	29
37	38
46	47
55	56
64	65
73	74
82	83

Next question

Previous question

Computer Science

Back

Question 84

Not yet
answered

Marked out of
1.00

Flag question

Previous question

Time left 0:37:37

Which one of the following is not delimiter of PHP code?

- ☐ a. `<? ..... ?>`
- ☐ b. `<?php ..... ?>`
- ☒ c. `<caption> ..... </caption>`
- ☐ d. `<script language="PHP"> ..... </script>`

Clear my choice

Next question

c) `<caption> ..... </caption>`

This is an HTML tag used to define a table caption and is not used as a delimiter in PHP code. The other options are actual delimiters used in PHP programming languages like PHP, delimiters are used to indicate the start and end of code blocks or variables. Common delimiters include commas, semicolons, and parentheses. They play a crucial role in structuring and organizing data within a program

Computer Science

Back

Time left 0:38:13

Question 83

Not yet
answered

Marked out of
1.00

Flag question

Assume you have a universe of Key U . Which one is false statement regarding Direct Address table and Hash Table data structures?

- ☐ a. Hash table allocates one separate memory slot for each key in the universe U
- ☐ b. There is one to one correspondence between keys in the universe U and memory slots in the Direct Address table
- ☒ c. Direct Address table doesn't use hash function to map keys
- ☐ d. If universe U is very large, Hash table is better than Direct Address table

Clear my choice

Next question

Previous question

a) Hash table allocates one separate memory slot for each key in the universe U

This statement is false because a hash table does not allocate a separate memory slot for each key; instead, it uses a hash function to map a large universe of keys to a smaller range of index values, which correspond to memory slots.

Question 82

Not yet
answered

Marked out of
1.00

Flag question

Time left 0:39:08

Size of large data files can be reduced to save storage disk space. Which algorithm is appropriate to reduce size of large files?

- ☐ a. Merge sort algorithm
- ☐ b. Prim's algorithm
- ☐ c. Huffman encoding algorithm
- ☐ d. Heap sort algorithm

c) Huffman encoding algorithm

This algorithm is used for data compression, which helps reduce the size of large files by encoding data using fewer bits

Previous question

Next question



MoEEE

MoE - Exit Exam

Back

Time left 0:40:39

Question 81

Not yet
answeredMarked out of
1.00

Flag question

If you want to allow subclasses to access data fields or methods defined in the super-class, but not to allow non-subclasses to access these data fields and methods, which access modifier is appropriate?

- ☒ a. private
☐ b. protected
☐ c. public
☐ d. default

Clear my choice

Next question

Previous question

b) protected

This access modifier allows subclasses to access data fields or methods defined in the superclass, but does not allow non-subclasses to access these data fields and methods.

Computer Science

Back

Time left 0:41:38

Question 80

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is not correct about packet and circuit switching?

- ☐ a. In circuit switching a channel is dedicatedly used
- ☐ b. In packets switching messages are sent in small blocks
- ☐ c. In Packet switching and end-to-end connection has to be established
- ☐ d. Packet switching is more efficient than circuit switching

c) In Packet switching an end-to-end connection has to be established

This statement is not correct because packet switching does not require an end-to-end dedicated connection; instead, packets are sent individually and can take different paths through the network.

Previous question

Next question

Exam

1

10

19

28

37

46

55

64

73

82

91

100

Computer Science

Back

Question 79

Answer saved

Marked out of
1.00

Flag question

Time left 0:42:39

For an input graph, Depth First Traversal algorithm uses _____ data structure to traverse.

- ☐ a. Tree
- ☐ b. Queue
- ☒ c. Stack
- ☐ d. Priority queue

Clear my choice

Previous question

Next question

c) Stack

DFT uses a stack data structure to keep track of the vertices as it traverses through the graph.

Time left 0:44:45

Question 78

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is a security service enforced to protect disclosure of information, which can be stored in file or being on transmission, from unauthorized entities?

- ☐ a. Integrity
- ☐ b. Authentication
- ☐ c. Availability
- ☒ d. Confidentiality

Next question

Previous question

Computer Science

Back

Time left 0:45:53

Question 77

Not yet
answered

Marked out of
1.00

Flag question

Which one of data updates best describes the following statement? "All modified data items in the cache is written either after transaction ends its execution or after a pre-determined number of transactions have concluded their execution"

- ☐ a. In-place update
- ☒ b. Deferred update
- ☐ c. Shadow update
- ☐ d. Immediate update

Clear my choice

b) Deferred update

This describes the process where all modified data items in the cache are written either after a transaction ends its execution or after a pre-determined number of transactions have concluded their execution.

Previous question

Next question



MoEEE

MOU - Exit Exam

Computer Science

Back

Computer Science

Question 77

Not yet
answered

Marked out of
1.00

Flag question

Which one of data updates best describes the following statement? "All modified data items in the cache is written either after transaction ends its execution or after a pre-determined number of transactions have concluded their execution"

- ☐ a. In-place update
- ☐ b. Deferred update
- ☐ c. Shadow update
- ☐ d. Immediate update

Previous question

Time left 0:46:11

Exam Navigation

1	2	3	4	5
10	11	12	13	14
19	20	21	22	23
28	29	30	31	32
37	38	39	40	41
46	47	48	49	50
55	56	57	58	59
64	65	66	67	68
73	74	75	76	77
82	83	84	85	86

Next question

Ref

Computer Science

b) Both are object-oriented languages

Back

Both Java and JavaScript support object-oriented programming paradigms, allowing for the creation and manipulation of objects within the code. However, it's important to note that they are distinct languages with different syntax, features, and use cases. Java is a statically typed, compiled language often used for building server-side applications, while JavaScript is dynamically typed and primarily used for scripting web pages on the client side.

Question 95

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is true about java and javascript?

- ☐ a. Javascript can be used in extremely sophisticated applications
- ☒ b. Both are object oriented languages
- ☐ c. There are more features in javascript than java
- ☐ d. Javascript is compiled and interpreted in source code form

Clear my choice

Previous question

Next question



MoEEE

MoE - Exit Exam

ODLK

Time left 0:31:00

Question 93

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is true about functions in JavaScript?

- ☒ a. There is no limit to the number of function parameters that a function may contain
- ☐ b. Function names can contain spaces
- ☐ c. Function names are not case-sensitive
- ☐ d. Function names can begin with digits

Clear my choice

Previous question

Next question

a) There is no limit to the number of function parameters that a function may contain

In JavaScript, functions can be defined with any number of parameters, and additional arguments can be accessed using the arguments object within the function. Options b, c, and d are incorrect because function names cannot contain spaces, they are case-sensitive, and they cannot begin with digits

Time left 0:47:39

Question 75

What does the program data independence in the database approach entails for?

- ☐ a. The application may be affected when data changes
- ☐ b. Both program and data are defined together
- ☒ c. Programs can create redundant data independently
- ☐ d. Data and applications are defined separately

[Clear my choice](#)[Next question](#)

d) Data and applications are defined separately

Program data independence means that the data is independent of the applications that access it, allowing the data to be changed without affecting the applications. This separation of data and applications is a key principle in the design of modern database systems

Back

Computer Science

Time left 0:49:00

Question 74

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is a two-level cache having an internal and external caches?

- ☐ a. Multilevel cache
- ☒ b. Split cache
- ☐ c. Single level cache
- ☐ d. Unified cache

Clear my choice

Next question

Previous question

b) Split cache

A split cache refers to a cache organization where there are separate caches for instructions and data, which can be considered as internal and external caches in a two-level cache system

Computer Science

Back

Time left 0:29:18

Question 97

Not yet
answered

Marked out of
1.00

Flag question

Which phase of software development process refers to modification of software to reflect changing customer and market requirements?

- ☐ a. Development
- ☐ b. Specification
- ☒ c. Evolution
- ☐ d. Validation

Clear my choice

c) Evolution

Evolution refers to the phase where software is modified to reflect changing customer and market requirements. This is a key aspect of maintaining and updating software over time¹

Previous question

Next question



MOEE

MOEE - MOE

Question 100

Not yet
answered

Marked out of
1.00

Flag question

Previous question

Time left 0:27:56

Which one of the following is false about arrays in C++?

- ☐ a. An array is a collection of similar data objects
- ☐ b. We can access elements of arrays without using index number
- ☐ c. Size of an array should be constant at the time of array declaration
- ☐ d. We use [] square bracket at the time of array declaration

b) We can access elements of arrays without using index number

This statement is false because in C++, accessing elements of an array requires using an index number. Arrays are a collection of similar data objects, and each element is accessed by its index within the array. The size of an array should be constant at the time of declaration, and square brackets are used to declare an array.

Finish exam



MoEEE

MoE - Exit Exam

Back

Time left 0:28:18

Question 99

Not yet
answered

Marked out of
1.00

Flag question

Given input Alphabet $\Sigma = \{a, b, c, d\}$ and empty string λ . Then, which one of the following is true about Σ^* ?

- ☐ a. $\Sigma^* = \Sigma^1 U \Sigma^2 U \Sigma^3 U \Sigma^4$
- ☐ b. $\Sigma^* = \Sigma^+$
- ☒ c. $\Sigma^* = \Sigma^+ U \{\lambda\}$
- ☐ d. $\Sigma^* = \{\lambda\}$

Clear my choice

Previous question

Next question

The answer to the question in the image is option c: " $\Sigma^* = \Sigma^+ U \{\lambda\}$ ". This is because the Kleene star operation on a set includes all possible strings, including the empty string, that can be formed from the set. Therefore, it contains all elements of the original set plus the empty string. Remember, $*$ represents the set of all strings (including the empty string) that can be made using the alphabet any number of times, including zero.

Back

Time left 0:29

Question 96

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is correct about human role in system administration?

- ☐ a. Ethics is not a requirement to manage computers
- ☐ b. It doesn't need organizational skills
- ☐ c. System administrator is not expected to have skills and confidence
- ☒ d. It requires patience, understanding and knowledge

Clear my choice

Previous question

Next question

Computer Science

Back

Time left

Question 92

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is not *correct* about threads?

- ☐ a. It is a group of processes
- ☒ b. Treads are the entities *schedule* for execution on the CPU
- ☐ c. Treads have registers to hold its working memory
- ☐ d. Treads have program counters

[Clear my choice](#)

[Previous question](#)

The answer to the question in the image is option a: "It is a group of processes." Threads are not groups of processes; they are smaller units of a process that can be managed and scheduled for execution by the operating system. Each thread within a process shares the process resources but operates independently. Remember, threads are designed to allow multiple operations within a single process to be performed simultaneously.



MoEEE

Computer Science

Back

Time left 0:32:57

Question 91

Not yet
answered

Marked out of
1.00

Flag question

Suppose you are administering a network and would like to know whether a computer in the upstairs is connected to the network or not. Therefore, which command would you use?

- ☐ a. traceroute
- ☐ b. nslookup
- ☐ c. DHCP discover
- ☒ d. ping

Clear my choice

Previous question

Exam Na

1 2

10 11

19 20 21

28 29 30

37 38 39

46 47 48

55 56 57

64 65 66

82 83 84

The correct answer to the question in the image is option d: "ping." The ping command is used to test the reachability of a host on an Internet Protocol (IP) network and measures the round-trip time for messages sent from the originating host to a destination computer. It's a common tool used in network administration to check if a computer is connected to the network.

Back

Question 89

Not yet
answered

Marked out of
1.00

Flag question

Time left 0:34:48

Which concept refers to extending specialized classes from generalized classes in object-oriented programming?

- ☐ a. Overloading
- ☐ b. Data field Encapsulation
- ☒ c. Inheritance
- ☐ d. Overriding

Clear my choice

Previous question

Next question

Back

Time left 0:35:12

Question 88

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is false about project planning stage?

- ☒ a. Risk analysis is done during project planning
- ☐ b. Project planning is a one-time task in software development life cycle
- ☐ c. Cost estimation is done during project planning
- ☐ d. Preparing time schedule is done during project planning

Clear my choice

Previous question

The correct answer to select from the image is option b: "Project planning is a one-time task in software development life cycle." This statement is false because project planning is an iterative process that may be revisited and revised throughout the software development life cycle as needed. It involves ongoing risk analysis, cost estimation, and schedule preparation to adapt to changes and ensure the project's success.

Computer Science

Back

Time left 0:51:19

Question 73

Not yet

answered

Marked out of

1.00

Flag question

Which statement is false about programming language generations?

- ☐ a. Fifth generation programming languages need very powerful hardware and software
- ☒ b. Assembly language should be translated to machine language before execution
- ☐ c. Assembly language is machine independent
- ☐ d. Machine language can be executed without translation

Clear my choice

Next question

Previous question

The correct answer to the question in the image is option c) Assembly language is machine-independent. This statement is false because assembly languages are specific to processor types and are not independent of the machines they run on; they need to be translated into machine code that the processor can execute.

Computer Science

General

Computer Science

Back

Time left 0:49:31

Question 74

Not yet answered

Marked out of 1.00

Flag question

Which one of the following is a two-level cache having an internal and external caches?

- ☒ a. Multilevel cache
- ☐ b. Split cache
- ☐ c. Single level cache
- ☐ d. Unified cache

Clear my choice

Previous question

Next question

Exa

1

10

19

28

37

46

55

64

73

82

10

19

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

37

46

55

64

73

82

19

28

37

46

55

64

73

82

28

option c: "Single fixed hash function is better than universal hashing in terms of collision reduction." This statement is false because universal hashing is designed to minimize the probability of collisions by using a randomly selected hash function from a family of hash functions for each key, which is more effective in reducing collisions compared to using a single fixed hash function.

Question 69

Not yet
answered

Marked out of
1.00

Flag question

Which statement is false about universal hashing technique?

- ☒ a. In universal hashing a hash function is selected from set of hash functions independent of keys.
- ☐ b. Universal hashing reduces the chance of data collision
- ☐ c. Single fixed hash function technique is better than universal hashing technique in terms of collision reduction
- ☐ d. In universal hashing a hash function is selected randomly from set of hash functions for each key

Clear my choice

Previous question

Next question

Exam Hall

1	2	
10	11	12
19	20	21
28	29	30
37	38	39
46	47	48
55	56	57
64	65	66
73	74	75
82	83	84

Computer Science

The correct answer to the question in the image is option d: Local Area Network (LAN). This term best describes the University's network, which consists of private local area and wide area networks for access by its academic staff, students, and administrative workers. LANs are networks that cover a small geographic area, typically a single building or campus, making it the appropriate choice for the university setting described in the question.

Question 70

Not yet
answered

Marked out of
1.00

Flag question

A university owns a number of private local area and wide area networks, which are designed for an access by its academic staff, students and administrative workers. Which term best describes the University's network?

- ☐ a. Wide Area Network
- ☐ b. Metropolitan Area Network
- ☐ c. The Internet
- ☒ d. Local Area Network

Clear my choice

Previous question

Next question

Exam Navigation

1	2	3	4
10	11	12	13
19	20	21	22
28	29	30	31
37	38	39	40
46	47	48	49
55	56	57	58
64	65	66	67
73	74	75	76
82	83	84	85



Time left 0:55:25

Question 68

Not yet
answeredMarked out of
1.00

Flag question

What is the time complexity order of Quick sort algorithm?

- ☐ a. $O(n^2)$
- ☐ b. $O(n)$
- ☒ c. $O(n \log_2 n)$
- ☐ d. $O(2^n)$

Clear my choice

he correct answer to the question regarding the time complexity order of the Quick sort algorithm is option c: $O(n \log n)$. Quick sort is a divide-and-conquer algorithm that, on average, makes $O(n \log n)$ comparisons to sort n items. In the worst case, it makes $O(n^2)$ comparisons, though this behavior is rare.

Next question

Previous question

Question 07

Answer saved

Marked out of
1.00

Flag question

What is the output of the following C++ fragment code?

```
int a = 6, b = 8;
```

```
int x = 2, y = 4;
```

```
int c = (x > y ? (a--, x) : (b--, y));
```

```
cout << "a = " << a;
```

```
cout << "    b = " << b;
```

```
cout << "    c = " << c;
```

- ☐ a. a = 5 b = 7 c = 2
- ☒ b. a = 5 b = 8 c = 4
- ☐ c. a = 6 b = 7 c = 4
- ☐ d. a = 6 b = 8 c = 4

Clear my choice

Previous question

Next question

Based on the C++ code snippet you provided, the correct output would be:

Output: 2 4

Variable 'a': Remains 5 because $(x > y ? a : (a, x))$ evaluates to (a, x) which results in x being printed, not affecting a.

Variable 'b': Decreases by 1 to 7 due to the post-decrement operator $b--$.

Variable 'c': There is no variable c declared in the code, so any reference to c would cause a compilation error.

Therefore, the correct answer is not listed among the provided multiple-choice options. The output is simply 2 4, and the values of a and b after the code execution are 5 and 7, respectively. There is no c variable in the given code

Computer Science

General

Computer Science

Back

Left

Time left 0:55:05

Question 69

Not yet
answered

Marked out of
1.00

Flag question

Which statement is false about universal hashing technique?

- ☐ a. In universal hashing a hash function is selected from set of hash functions independent of keys.
- ☒ b. Universal hashing reduces the chance of data collision
- ☐ c. Single fixed hash function technique is better than universal hashing technique in terms of collision reduction
- ☐ d. In universal hashing a hash function is selected randomly from set of hash functions for each key

Clear my choice

Previous question

Next question



Question 7

Answer saved

Marked out of
1.00

Flag question

What is the output of the following C++ fragment code?

```
int a = 6, b = 8;
```

```
int x = 2, y = 4;
```

```
int c = (x > y ? (a--, x) : (b--, y));
```

```
cout << "a = " << a;
```

```
cout << "    b = " << b;
```

```
cout << "    c = " << c;
```

- ☐ a. a = 5 b = 7 c = 2
- ☒ b. a = 5 b = 8 c = 4
- ☐ c. a = 6 b = 7 c = 4
- ☐ d. a = 6 b = 8 c = 4

[Clear my choice](#)[Previous question](#)[Next question](#)

Computer Science

General

Computer Science

Back

Correct Answer:

D. Dirty read - This term describes the exact scenario mentioned in the question, where a transaction reads data that has not yet been committed and may still be rolled back.

Time left 0:52:35

Question 71

Not yet answered

Marked out of 1.00

Flag question

Which one of the following is correct for the statement below? "A problem that occurs when one transaction updates a database item and then the transaction fails for some reason and the updated item is accessed by another transaction before it is changed back to its original value"

- ☒ a. It is a lost update problem
- ☐ b. It is a temporary read problem
- ☐ c. It is an incorrect summary problem
- ☐ d. It is dirty read

Clear my choice

Next question

Previous question

Question 67

Not yet
answered

Marked out of
1.00

Flag question

What is the output of the following C++ fragment code?

```
int a = 6, b = 8;
```

```
int x = 2, y = 4;
```

```
int c = (x > y ? (a--, x) : (b--, y));
```

```
cout << "a = " << a;
```

```
cout << "    b = " << b;
```

```
cout << "    c = " << c;
```

- ☐ a. a = 5 b = 7 c = 2
- ☐ b. a = 5 b = 8 c = 4
- ☐ c. a = 6 b = 7 c = 4
- ☐ d. a = 6 b = 8 c = 4

Previous question

Next question

Computer Science

Back

Time left 0:49:46

Question 74

Not yet
answered

Marked out of
1.00

Flag question

Which one of the following is a two-level cache having an internal and external caches?

- ☐ a. Multilevel cache
- ☒ b. Split cache
- ☐ c. Single level cache
- ☐ d. Unified cache

Previous question

Next question

Question 73

Not yet
answered

Marked out of
1.00

Flag question

Time left 0:50:07

Which statement is false about programming language generations?

- ☐ a. Fifth generation programming languages need very powerful hardware and software
- ☐ b. Assembly language should be translated to machine language before execution
- ☐ c. Assembly language is machine independent
- ☒ d. Machine language can be executed without translation

[Clear my choice](#)

[Next question](#)

[Previous question](#)

Exam

1	2
10	11
19	20
28	29
37	38
46	47
55	56
64	65
73	74
82	83