


Solving analytical queries on Redshift Cluster

Here, you have to write the query used for solving the question and the screenshots of the table which is outputted after the query is run on the AWS Redshift Query editor UI.

1. Top 10 ATMs where most transactions are in the 'inactive' state


```
select a.atm_number, a.atm_manufacturer, l.location,
count(trans_id) as total_transaction_count,
sum(case when atm_status = 'Inactive' then 1 else 0 end) as
inactive_count,
(inactive_count/total_transaction_count)*100 as count_percent
from data_atm.atm_trans_fact f, data_atm.atm_dim a, data_atm.location_dim l
where f.atm_id = a.atm_id and a.atm_location_id = l.location_id
group by a.atm_number, a.atm_manufacturer, l.location
having count_percent > 50
order by inactive_count desc
limit 10;
```

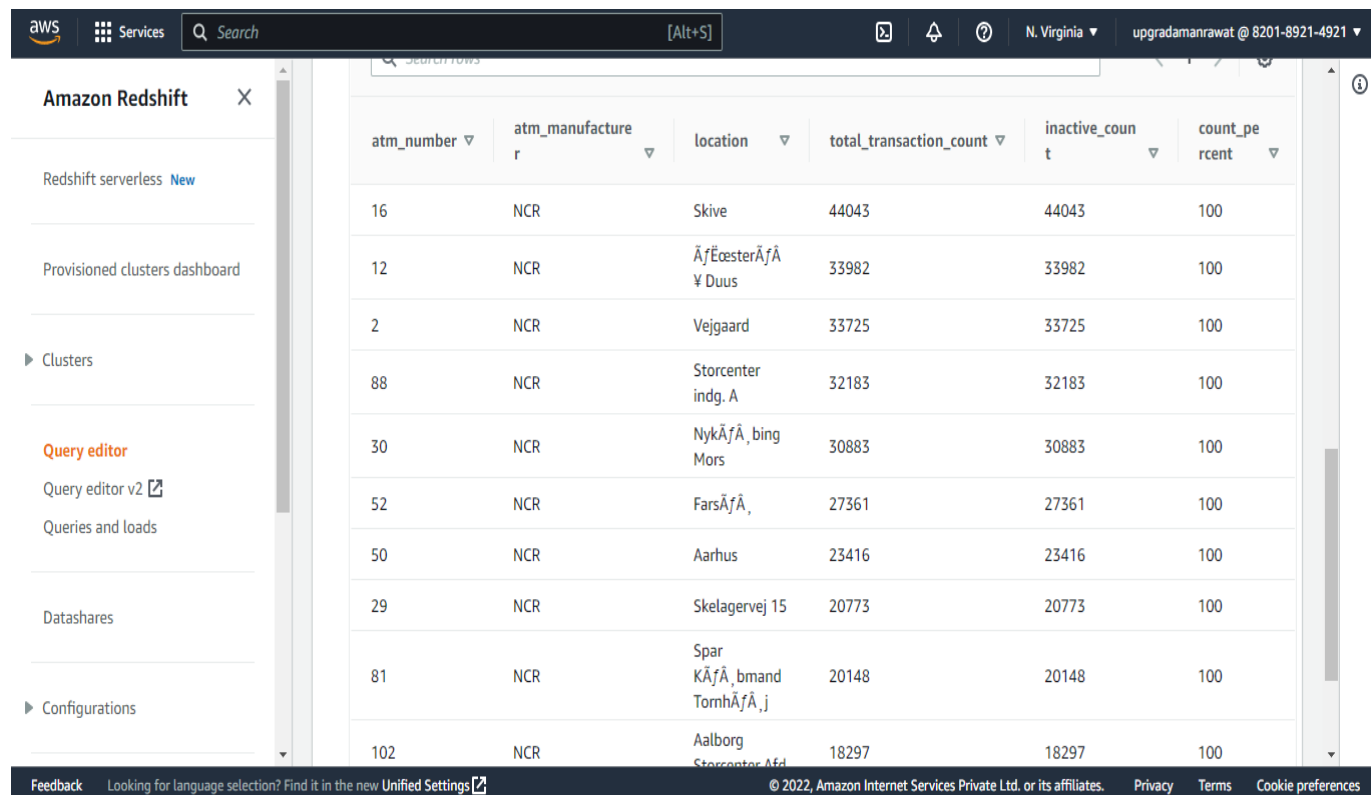

atm_number	atm_manufacturer	location	total_transaction_count	inactive_count	count_percent
16	NCR	Skive	44043	44043	100
12	NCR	Århus	33982	33982	100
2	NCR	Vejgaard	33725	33725	100
88	NCR	Storcenter indg. A	32183	32183	100
30	NCR	Nykøbing Mors	30883	30883	100
52	NCR	Farsø	27361	27361	100
50	NCR	Aarhus	23416	23416	100
29	NCR	Skelagervej 15	20773	20773	100
81	NCR	Spar København	20148	20148	100
102	NCR	Aalborg	18297	18297	100

2. Number of ATM failures corresponding to the different weather conditions recorded at the time of the transactions

```
select f.weather_main,
count(trans_id) as total_transaction_count,
sum(case when atm_status = 'Inactive' then 1 else 0 end) as inactive_count,
case when coalesce(inactive_count, 0) = 0 then 0.0000
else trunc((cast(inactive_count as
numeric(10,4))/total_transaction_count)*100, 2)
end as inactive_count_percent
from data_atm.atm_trans_fact f
where f.weather_main != ''
group by f.weather_main
order by inactive_count_percent desc
limit 10;
```

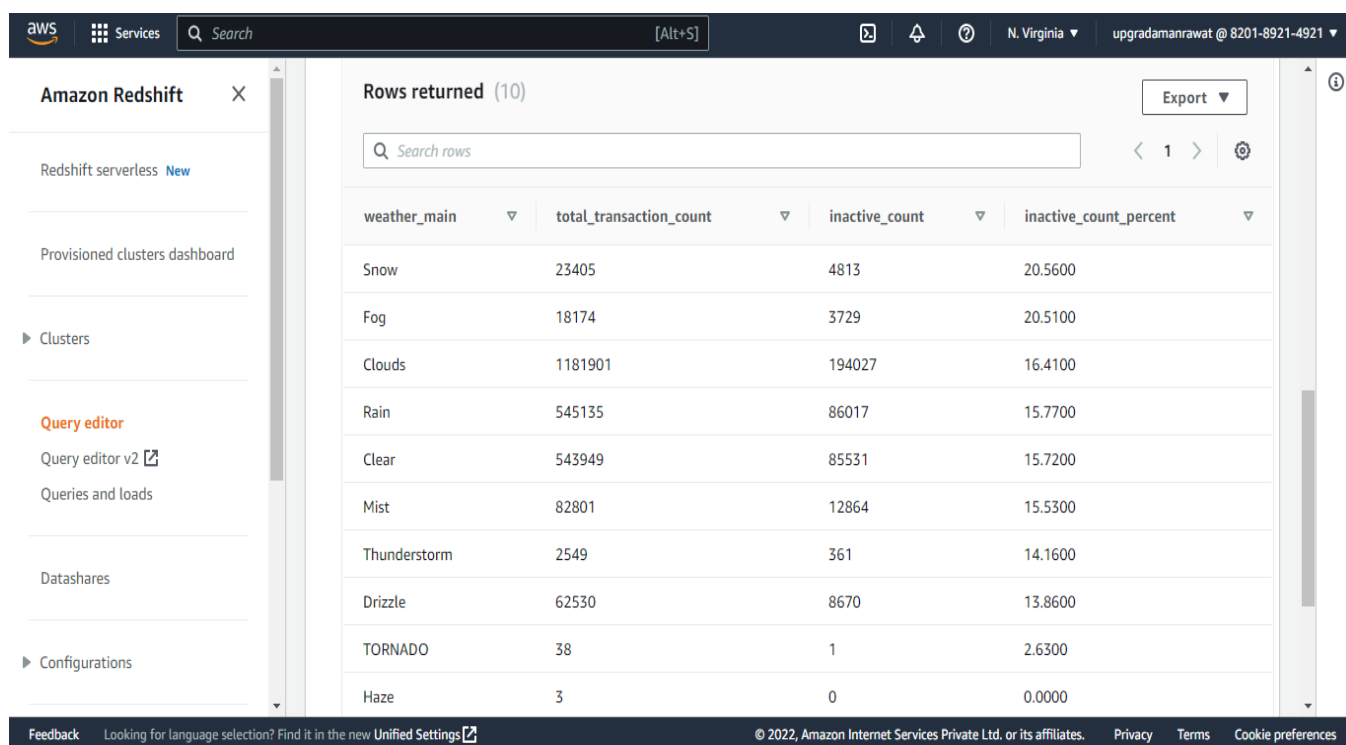


The screenshot shows the Amazon Redshift console interface. On the left, there is a navigation menu with options like 'Amazon Redshift', 'Redshift serverless', 'Provisioned clusters dashboard', 'Clusters', 'Query editor', 'Query editor v2', 'Queries and loads', 'Datashares', and 'Configurations'. The main area displays the results of a query, titled 'Rows returned (10)'. The results are shown in a table with the following columns: 'weather_main', 'total_transaction_count', 'inactive_count', and 'inactive_count_percent'. The table lists 10 rows of data, sorted by 'inactive_count_percent' in descending order. The data is as follows:

weather_main	total_transaction_count	inactive_count	inactive_count_percent
Snow	23405	4813	20.5600
Fog	18174	3729	20.5100
Clouds	1181901	194027	16.4100
Rain	545135	86017	15.7700
Clear	543949	85531	15.7200
Mist	82801	12864	15.5300
Thunderstorm	2549	361	14.1600
Drizzle	62530	8670	13.8600
TORNADO	38	1	2.6300
Haze	3	0	0.0000

At the bottom of the console, there is a footer with 'Feedback', 'Looking for language selection? Find it in the new Unified Settings', '© 2022, Amazon Internet Services Private Ltd. or its affiliates.', 'Privacy', 'Terms', and 'Cookie preferences'.

3. Top 10 ATMs with the most number of transactions throughout the year

```
select a.atm_number, a.atm_manufacturer, l.location,
count(trans_id) as total_transaction_count
from data_atm.atm_trans_fact f, data_atm.atm_dim a, data_atm.location_dim l
where f.atm_id = a.atm_id and a.atm_location_id = l.location_id
group by a.atm_number, a.atm_manufacturer, l.location
order by total_transaction_count desc
limit 10;
```

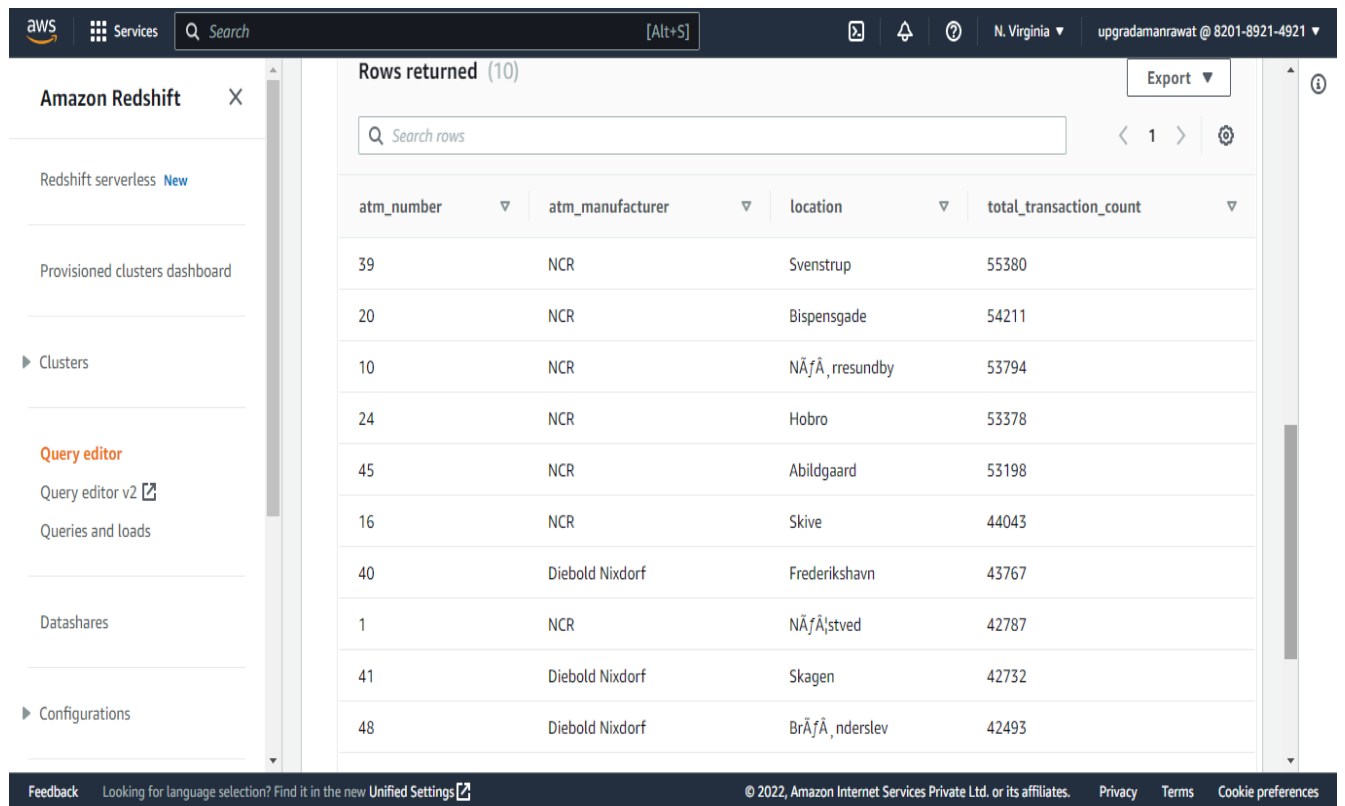


The screenshot shows the Amazon Redshift console interface. On the left, there is a sidebar with navigation options: Amazon Redshift, Redshift serverless, Provisioned clusters dashboard, Clusters, Query editor (highlighted), Query editor v2, Queries and loads, Datashares, and Configurations. The main area displays the results of a query, showing 10 rows returned. The table has four columns: atm_number, atm_manufacturer, location, and total_transaction_count. The data is sorted by total_transaction_count in descending order.

atm_number	atm_manufacturer	location	total_transaction_count
39	NCR	Svenstrup	55380
20	NCR	Bispensgade	54211
10	NCR	NÃfÃ, rresundby	53794
24	NCR	Hobro	53378
45	NCR	Abildgaard	53198
16	NCR	Skive	44043
40	Diebold Nixdorf	Frederikshavn	43767
1	NCR	NÃfÃ'stved	42787
41	Diebold Nixdorf	Skagen	42732
48	Diebold Nixdorf	BrÃfÃ, nderslev	42493

The footer of the console shows: Feedback, Looking for language selection? Find it in the new Unified Settings, © 2022, Amazon Internet Services Private Ltd. or its affiliates, Privacy, Terms, and Cookie preferences.

4. Number of overall ATM transactions going inactive per month for each month

```
select d.year, d.month,
count(trans_id) as total_transaction_count,
sum(case when atm_status = 'Inactive' then 1 else 0 end) as inactive_count,
case when coalesce(inactive_count, 0) = 0 then 0.0000
else trunc((cast(inactive_count as
numeric(10,4))/total_transaction_count)*100, 2)
end as inactive_count_percent
from data_atm.atm_trans_fact f inner join data_atm.date_dim d on f.date_id =
d.date_id
group by d.year, d.month
order by d.year, d.month
```

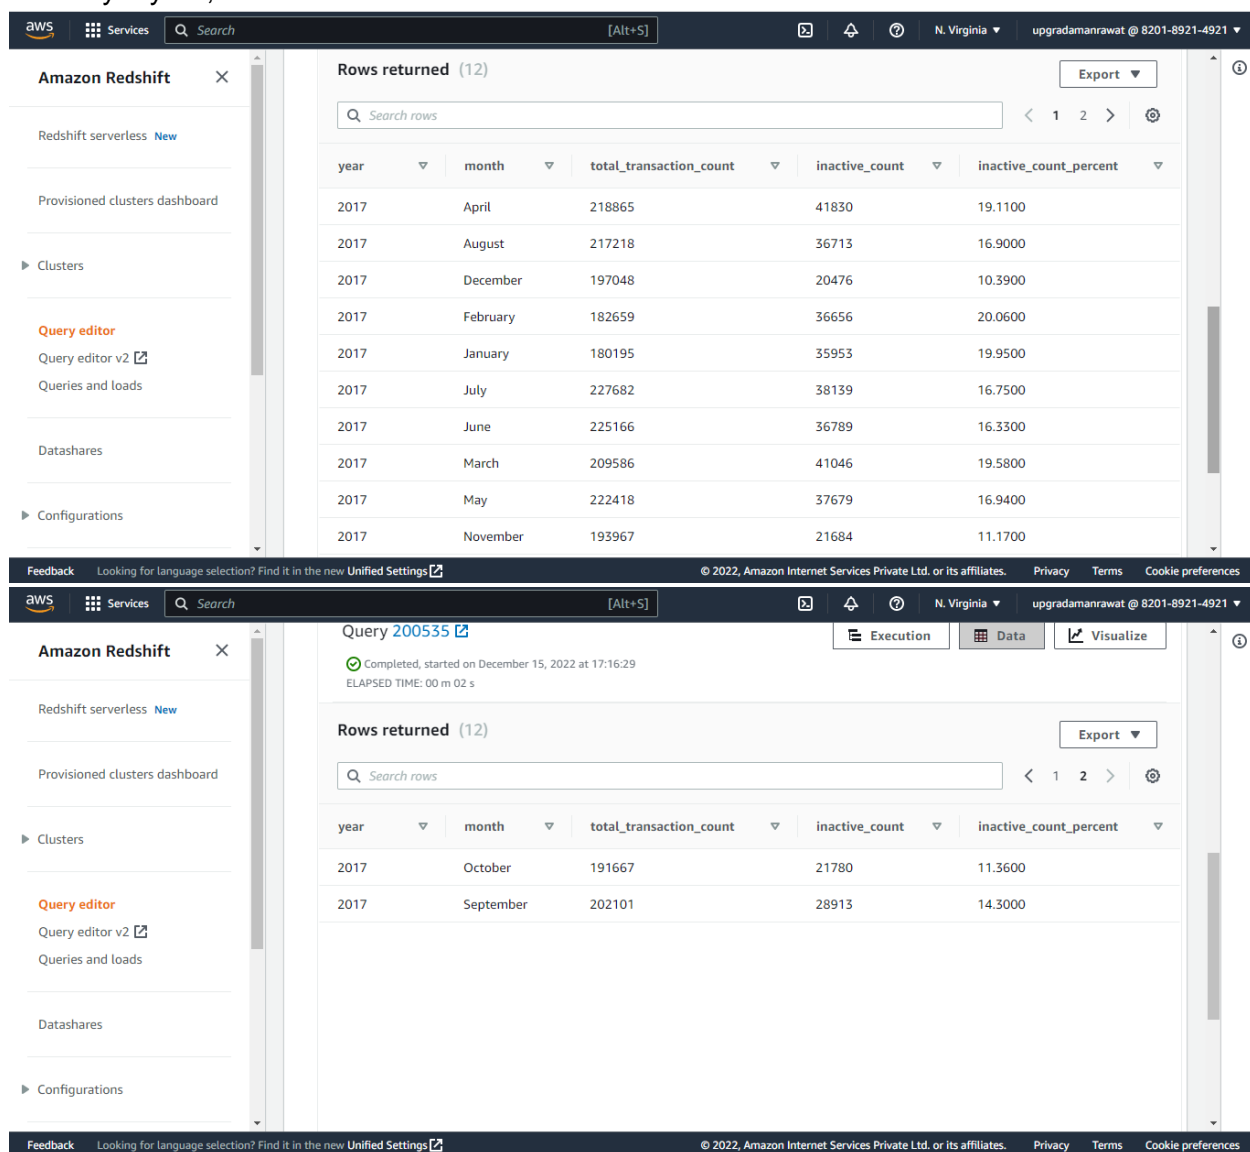


The screenshot displays the Amazon Redshift Query Editor interface. The left sidebar shows the navigation menu with options like 'Redshift serverless', 'Provisioned clusters dashboard', 'Clusters', 'Query editor', 'Query editor v2', 'Queries and loads', 'Datashares', and 'Configurations'. The main area shows the query results for a query titled 'Query 200535'. The query is completed, started on December 15, 2022 at 17:16:29, with an elapsed time of 00 m 02 s. The results are displayed in a table with 12 rows returned. The table has columns: year, month, total_transaction_count, inactive_count, and inactive_count_percent. The data shows transactions for the year 2017 across various months, with the highest total transaction count in October (191667) and the highest inactive count in September (28913).

year	month	total_transaction_count	inactive_count	inactive_count_percent
2017	April	218865	41830	19.1100
2017	August	217218	36713	16.9000
2017	December	197048	20476	10.3900
2017	February	182659	36656	20.0600
2017	January	180195	35953	19.9500
2017	July	227682	38139	16.7500
2017	June	225166	36789	16.3300
2017	March	209586	41046	19.5800
2017	May	222418	37679	16.9400
2017	November	193967	21684	11.1700
2017	October	191667	21780	11.3600
2017	September	202101	28913	14.3000

5. Top 10 ATMs with the highest total withdrawn amount throughout the year


```
select a.atm_number, a.atm_manufacturer, l.location,
sum(transaction_amount) as total_transaction_amount
from data_atm.atm_trans_fact f, data_atm.atm_dim a, data_atm.location_dim l
where f.atm_id = a.atm_id and a.atm_location_id = l.location_id
group by a.atm_number, a.atm_manufacturer, l.location
order by total_transaction_amount desc
limit 10;
```

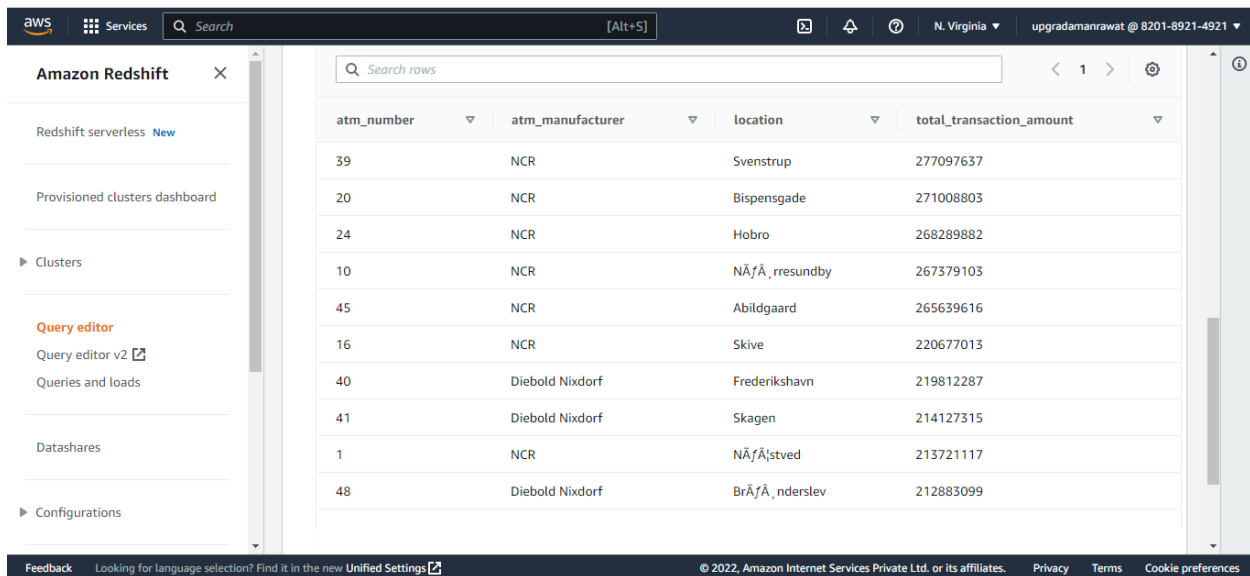

atm_number	atm_manufacturer	location	total_transaction_amount
39	NCR	Svenstrup	277097637
20	NCR	Bispensgade	271008803
24	NCR	Hobro	268289882
10	NCR	NÅfÅ, resundby	267379103
45	NCR	Abildgaard	265639616
16	NCR	Skive	220677013
40	Diebold Nixdorf	Frederikshavn	219812287
41	Diebold Nixdorf	Skagen	214127315
1	NCR	NÅfÅ, stved	213721117
48	Diebold Nixdorf	BrÅfÅ, nderslev	212883099

6. Number of failed ATM transactions across various card types

```
select ct.card_type,
count(trans_id) as total_transaction_count,
sum(case when atm_status = 'Inactive' then 1 else 0 end) as inactive_count,
case when coalesce(inactive_count, 0) = 0 then 0.0000
else trunc((cast(inactive_count as
numeric(10,4))/total_transaction_count)*100, 2)
end as inactive_count_percent
from data_atm.atm_trans_fact f, data_atm.card_type_dim ct
where f.card_type_id = ct.card_type_id
group by ct.card_type
order by inactive_count_percent desc
limit 10;
```

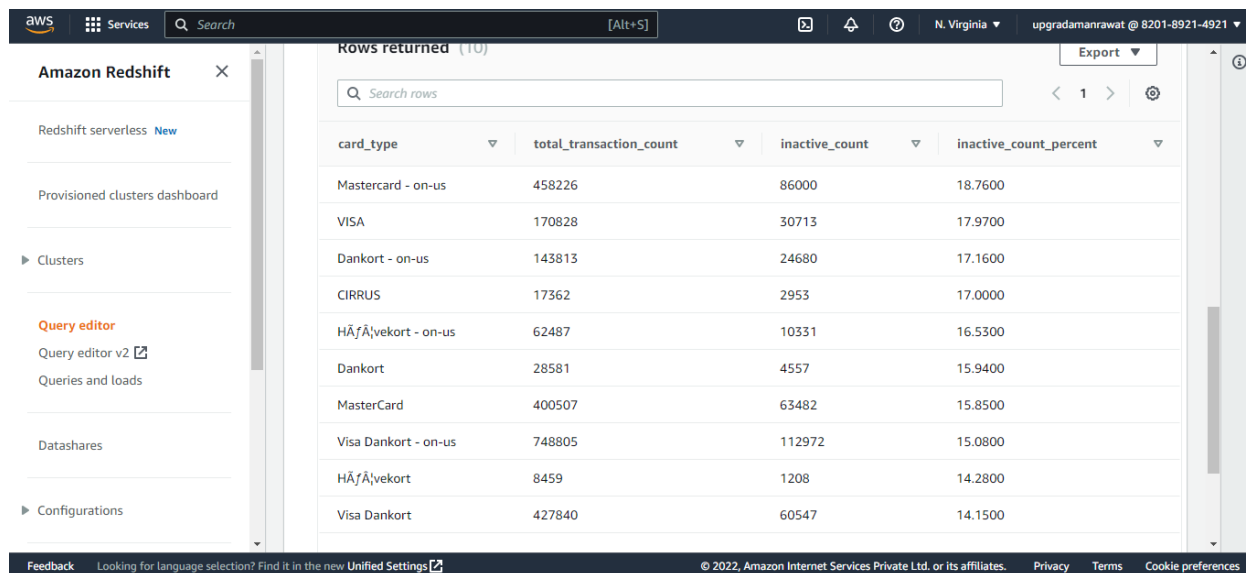


Rows returned (10)

card_type	total_transaction_count	inactive_count	inactive_count_percent
Mastercard - on-us	458226	86000	18.7600
VISA	170828	30713	17.9700
Dankort - on-us	143813	24680	17.1600
CIRRUS	17362	2953	17.0000
HÃ¶fÃ¶vekort - on-us	62487	10331	16.5300
Dankort	28581	4557	15.9400
MasterCard	400507	63482	15.8500
Visa Dankort - on-us	748805	112972	15.0800
HÃ¶fÃ¶vekort	8459	1208	14.2800
Visa Dankort	427840	60547	14.1500

7. Number of transactions happening on an ATM on weekdays and on weekends throughout the year. Order this by the ATM_number, ATM_manufacturer, location, weekend_flag and then total_transaction_count

```
select a.atm_number, a.atm_manufacturer, l.location,
case when d.weekday in ('Saturday','Sunday') then 1 else 0 end as
weekend_flag,
count(trans_id) as total_transaction_count
from data_atm.atm_trans_fact f, data_atm.atm_dim a, data_atm.location_dim l,
data_atm.date_dim d
where f.atm_id = a.atm_id and a.atm_location_id = l.location_id and f.date_id
= d.date_id
group by a.atm_number, a.atm_manufacturer, l.location, weekend_flag
order by a.atm_number, a.atm_manufacturer, l.location, weekend_flag,
total_transaction_count
limit 10;
```

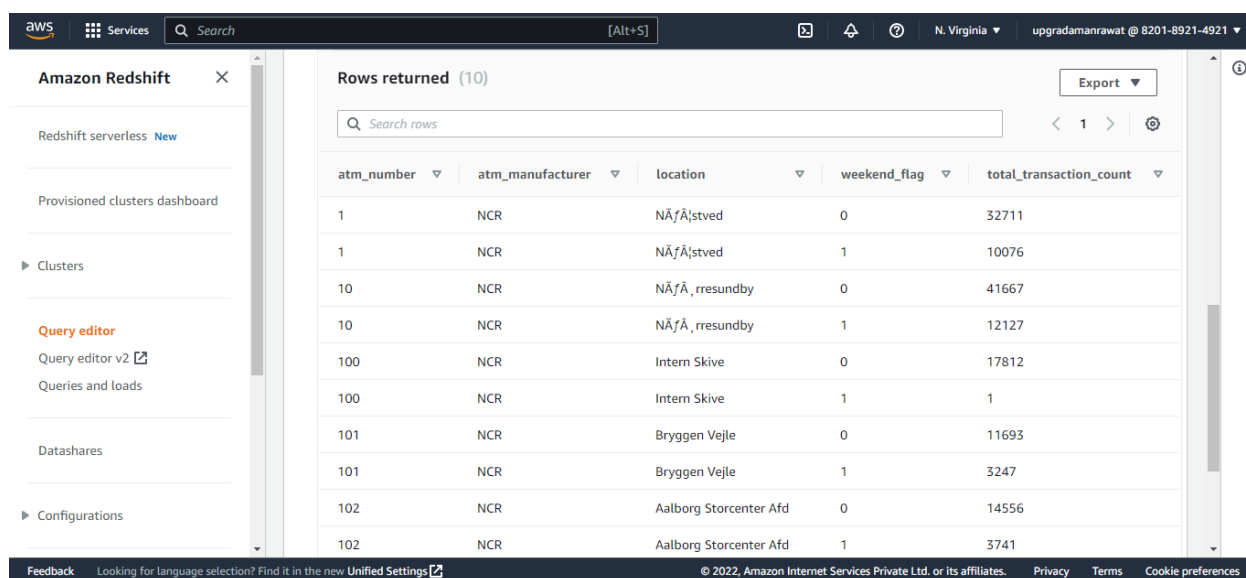


Rows returned (10)

atm_number	atm_manufacturer	location	weekend_flag	total_transaction_count
1	NCR	NÃfÃstved	0	32711
1	NCR	NÃfÃstved	1	10076
10	NCR	NÃfÃ, rresundby	0	41667
10	NCR	NÃfÃ, rresundby	1	12127
100	NCR	Intern Skive	0	17812
100	NCR	Intern Skive	1	1
101	NCR	Bryggen Vejle	0	11693
101	NCR	Bryggen Vejle	1	3247
102	NCR	Aalborg Storcenter Afd	0	14556
102	NCR	Aalborg Storcenter Afd	1	3741

8. Most active day in each ATMs from location "Vejgaard"

```
select a.atm_number, a.atm_manufacturer, l.location, d.weekday,
count(trans_id) as total_transaction_count
from data_atm.fact_atm_trans f inner join data_atm.dim_atm a on f.atm_id =
a.atm_id
inner join data_atm.location_dim l on a.atm_location_id = l.location_id
inner join data_atm.date_dim d on f.date_id = d.date_id
where l.location = 'Vejgaard' and d.weekday in
( select d.weekday
from data_atm.fact_atm_trans f inner join data_atm.date_dim d
on f.date_id = d.date_id
inner join data_atm.location_dim l on f.location_id = l.location_id
where l.location = 'Vejgaard'
group by d.weekday
order by count(f.trans_id) desc
limit 1 )
group by a.atm_number, a.atm_manufacturer, l.location, d.weekday
order by total_transaction_count
```

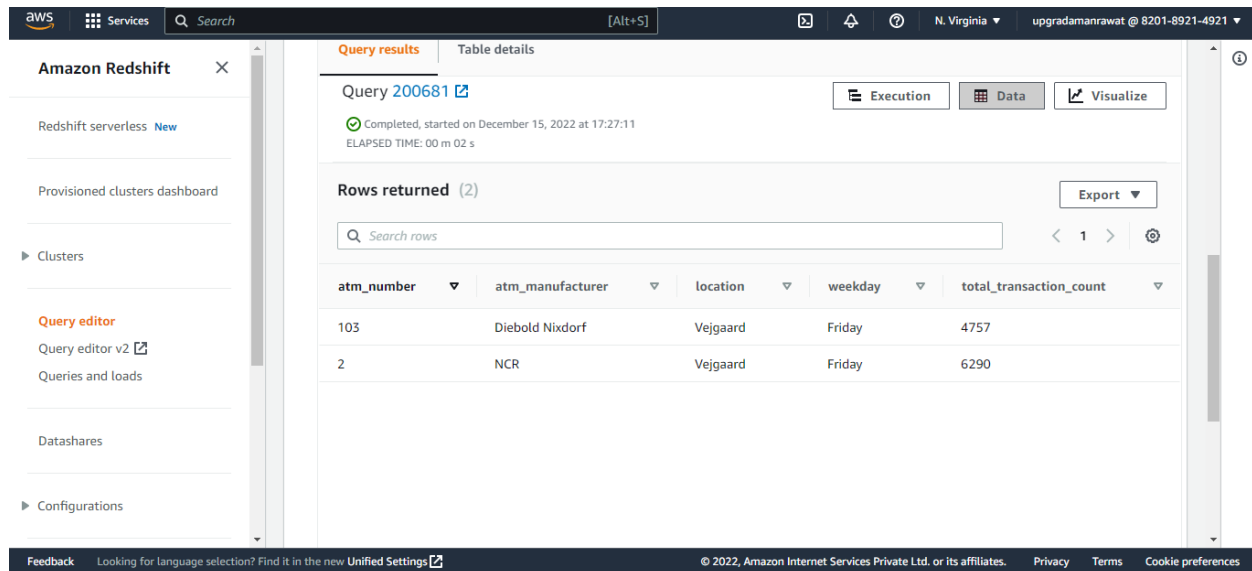

The screenshot shows the Amazon Redshift Query Results interface. The query is identified as 200681 and is completed. The results are displayed in a table with 5 columns: atm_number, atm_manufacturer, location, weekday, and total_transaction_count. Two rows are returned, both for the location 'Vejgaard' on Friday. The first row has atm_number 103 and a total_transaction_count of 4757. The second row has atm_number 2 and a total_transaction_count of 6290.

atm_number	atm_manufacturer	location	weekday	total_transaction_count
103	Diebold Nixdorf	Vejgaard	Friday	4757
2	NCR	Vejgaard	Friday	6290