

CS150A Database

Wenjie Wang

School of Information Science and Technology

ShanghaiTech University

Sept. 27, 2024

Today:

- DML in Multiple Tables
 - Set Operations
 - Nested Queries
 - Join
- Null Values

Readings:

- Database Management Systems (DBMS), Chapter 5
- Lecture note SQL II

Conclusion

- **Relational Terminology**

- Database
- Relation:
 - Schema:
 - Instance:
- Attribute

- **DDL**

- CREATE TABLE
- Primary Key
- Foreign Key

- **DML in a Single Table**

```
SELECT [DISTINCT] <column expression list>
FROM <single table>
[WHERE <predicate>]
[GROUP BY <column list>]
[HAVING <predicate>] ]
[ORDER BY <column list>]
[LIMIT <integer>];
```

- **DML in Multiple Tables**

- Aliases
- Boolean logic vs Traditional Set

The SQL DDL: Foreign Keys Pt. 2

- Foreign key references a table
 - Via the primary key of that table
- Need not share the name of the referenced primary key


```
CREATE TABLE Reserves (  
  sid INTEGER,  
  bid INTEGER,  
  day DATE,  
  PRIMARY KEY (sid, bid, day),  
  FOREIGN KEY (sid)  
  REFERENCES Sailors,  
  FOREIGN KEY (bid)  
  REFERENCES Boats);
```

| <u>sid</u> | sname | rating | age |
|------------|-------|--------|-----|
| 1 | Fred | 7 | 22 |
| 2 | Jim | 2 | 39 |
| 3 | Nancy | 8 | 27 |

| <u>bid</u> | bname | color |
|------------|-------------|-------|
| 101 | Nina | red |
| 102 | Pinta | blue |
| 103 | Santa Maria | red |

| <u>sid</u> | <u>bid</u> | <u>day</u> |
|------------|------------|------------|
| 1 | 102 | 9/12 |
| 2 | 102 | 9/13 |


Conceptual SQL Evaluation

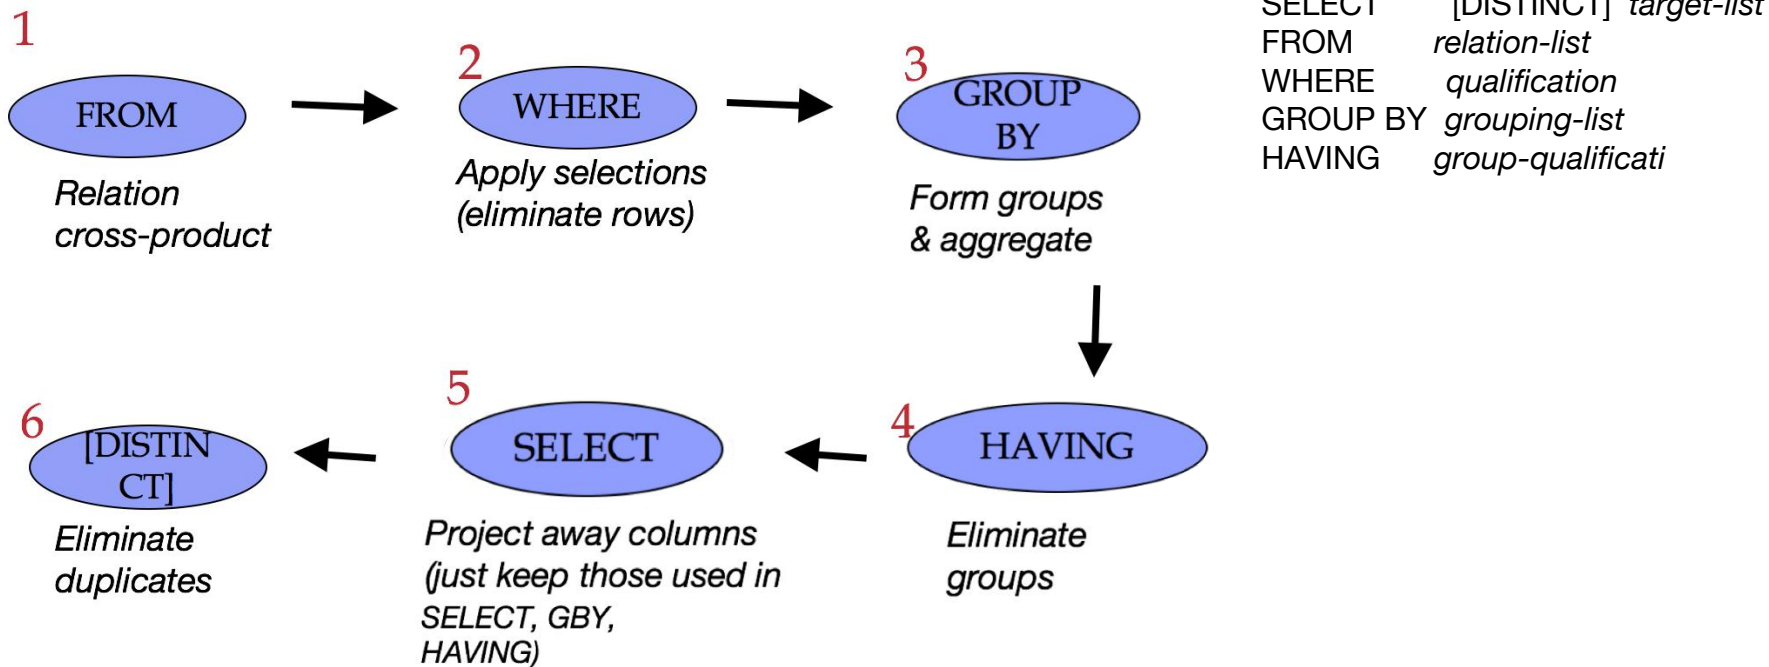

Join Queries

- SELECT [DISTINCT] *<column expression list>*
FROM *<table1 [AS t1], ... , tableN [AS tn]>*
[WHERE *<predicate>*]
[GROUP BY *<column list>*[HAVING *<predicate>*]]
[ORDER BY *<column list>*];

Conceptual SQL Evaluation, cont

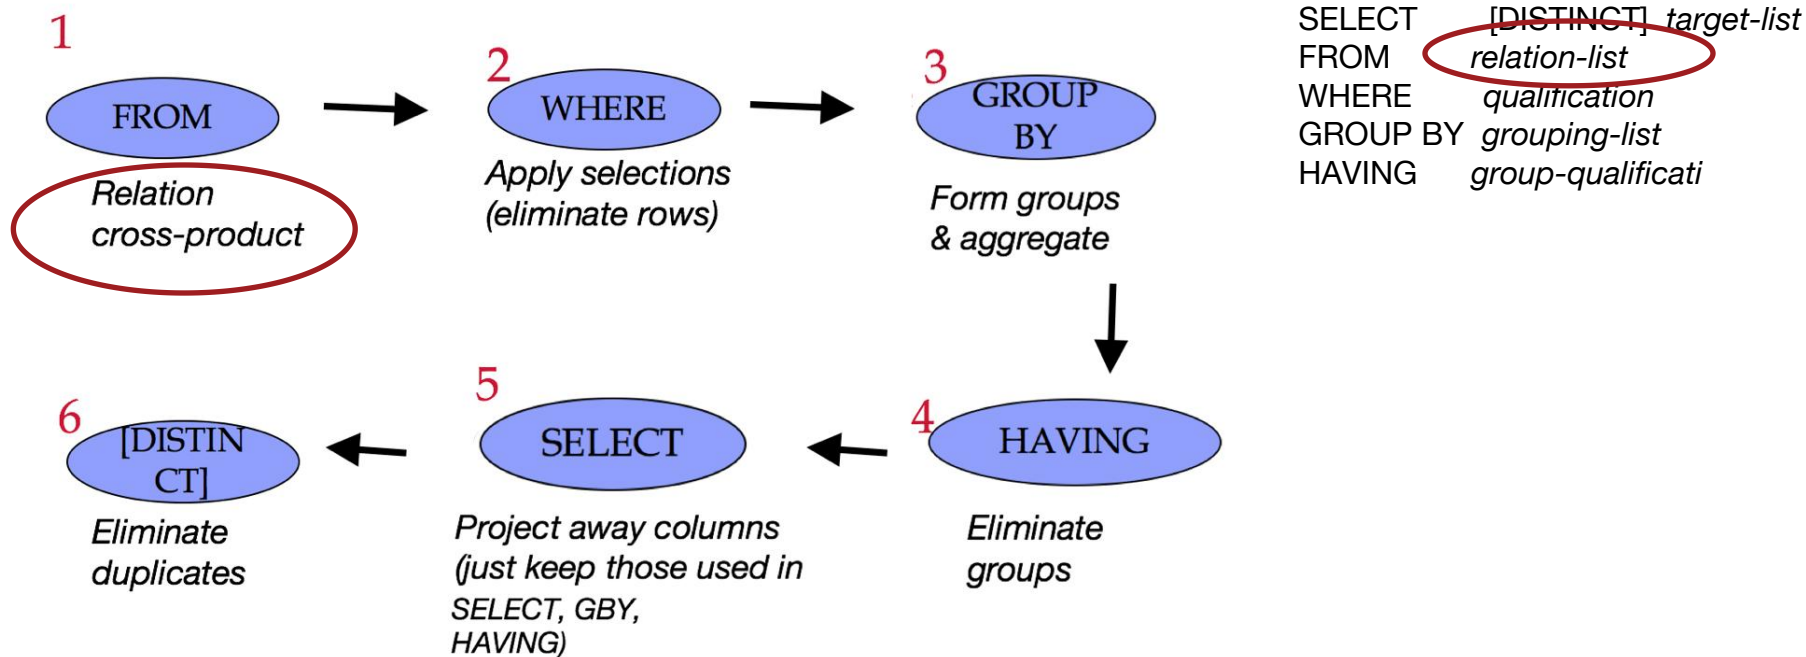

Cross (Cartesian) Product

- All pairs of tuples, concatenated

Sailors

| sid | sname | rating | age |
|-----|----------|--------|-----|
| 1 | Popeye | 10 | 22 |
| 2 | OliveOyl | 11 | 39 |
| 3 | Garfield | 1 | 27 |
| 4 | Bob | 5 | 19 |

Reserves

| sid | bid | day |
|-----|-----|-------|
| 1 | 102 | 9/12 |
| 2 | 102 | 9/13 |
| 1 | 101 | 10/01 |

| sid | sname | rating | age | sid | bid | day |
|-----|----------|--------|-----|-----|-----|-------|
| 1 | Popeye | 10 | 22 | 1 | 102 | 9/12 |
| 1 | Popeye | 10 | 22 | 2 | 102 | 9/13 |
| 1 | Popeye | 10 | 22 | 1 | 101 | 10/01 |
| 2 | OliveOyl | 11 | 39 | 1 | 102 | 9/12 |
| ... | ... | ... | ... | ... | ... | ... |

Find sailors who've reserved a boat

```
SELECT S.sid, S.sname, R.bid
FROM Sailors AS S, Reserves AS R
WHERE S.sid=R.sid
```

| sid | sname | rating | age |
|-----|----------|--------|-----|
| 1 | Popeye | 10 | 22 |
| 2 | OliveOyl | 11 | 39 |
| 3 | Garfield | 1 | 27 |
| 4 | Bob | 5 | 19 |

| sid | bid | day |
|-----|-----|-------|
| 1 | 102 | 9/12 |
| 2 | 102 | 9/13 |
| 1 | 101 | 10/01 |

| sid | sname | rating | age | sid | bid | day |
|-----|----------|--------|-----|-----|-----|-------|
| 1 | Popeye | 10 | 22 | 1 | 102 | 9/12 |
| 1 | Popeye | 10 | 22 | 2 | 102 | 9/13 |
| 1 | Popeye | 10 | 22 | 1 | 101 | 10/01 |
| 2 | OliveOyl | 11 | 39 | 1 | 102 | 9/12 |
| ... | ... | ... | ... | ... | ... | ... |

Find sailors who've reserved a boat cont

```
SELECT S.sid, S.sname, R.bid  
FROM Sailors AS S, Reserves AS R  
WHERE S.sid=R.sid
```

| sid | sname | rating | age |
|-----|----------|--------|-----|
| 1 | Popeye | 10 | 22 |
| 2 | OliveOyl | 11 | 39 |
| 3 | Garfield | 1 | 27 |
| 4 | Bob | 5 | 19 |

| sid | bid | day |
|-----|-----|-------|
| 1 | 102 | 9/12 |
| 2 | 102 | 9/13 |
| 1 | 101 | 10/01 |

| sid | sname | bid |
|-----|----------|-----|
| 1 | Popeye | 102 |
| 1 | Popeye | 101 |
| 2 | OliveOyl | 102 |

Column Names and Table Aliases

```
SELECT Sailors.sid, sname, bid  
FROM Sailors, Reserves  
WHERE Sailors.sid = Reserves.sid
```

```
SELECT S.sid, sname, bid  
FROM Sailors AS S, Reserves AS R  
WHERE S.sid = R.sid
```

More Aliases

```
SELECT x.sname, x.age,  
       y.sname AS sname2,  
       y.age AS age2  
FROM Sailors AS x, Sailors AS y  
WHERE x.age > y.age
```

| sname | age | sname2 | age2 |
|----------|-----|----------|------|
| Popeye | 22 | Bob | 19 |
| OliveOyl | 39 | Popeye | 22 |
| OliveOyl | 39 | Garfield | 27 |
| OliveOyl | 39 | Bob | 19 |
| Garfield | 27 | Popeye | 22 |
| Garfield | 27 | Bob | 19 |

- Table aliases in the FROM clause
 - Needed when the same table used multiple times (“self-join”)
- Column aliases in the SELECT clause

Arithmetic Expressions

- **SELECT S.age, S.age-5 AS age1, 2*S.age AS age2**
FROM Sailors AS S
WHERE S.sname = 'Popeye'
- **SELECT S1.sname AS name1, S2.sname AS name2**
FROM Sailors AS S1, Sailors AS S2
WHERE **2*S1.rating = S2.rating - 1**

SQL Calculator!

```
SELECT
```

```
    log(1000) as three,
```

```
    exp(ln(2)) as two,
```

```
    cos(0) as one,
```

```
    ln(2*3) = ln(2) + ln(3) as sanity;
```

String Comparisons

- Old School SQL

```
SELECT S.sname  
FROM   Sailors S  
WHERE  S.sname LIKE 'B_%'
```

- Standard Regular Expressions

```
SELECT S.sname  
FROM   Sailors S  
WHERE  S.sname ~ 'B.*'
```

Combining Predicates

- Subtle connections between:
 - Boolean logic in WHERE (i.e., AND, OR)
 - Traditional Set operations (i.e. INTERSECT, UNION)
- Let's see some examples...

Sid's of sailors who reserved a red **OR** a green boat

```
SELECT R.sid  
FROM   Boats B, Reserves R  
WHERE  R.bid=B.bid AND  
        (B.color='red' OR B.color='green')
```


Sid's of sailors who reserved a red **OR** a green boat Pt 2

```
SELECT R.sid
FROM Boats B,Reserves R
WHERE R.bid=B.bid AND
      (B.color='red' OR B.color='green')
```

VS...

```
SELECT R.sid
FROM Boats B, Reserves R
WHERE R.bid=B.bid AND B.color='red'
```

UNION ALL

```
SELECT R.sid
FROM Boats B, Reserves R
WHERE R.bid=B.bid AND B.color='green'
```

Sid's of sailors who reserved a red **AND** a green boat Pt 3

```
SELECT R.sid
FROM Boats B,Reserves R
WHERE R.bid=B.bid AND
      (B.color='red' AND B.color='green')
```

VS...

```
SELECT R.sid
FROM Boats B, Reserves R
WHERE R.bid=B.bid AND B.color='red'
```

INTERSECT

```
SELECT R.sid
FROM Boats B, Reserves R
WHERE R.bid=B.bid AND B.color='green'
```

Find sailors who have **not** reserved a boat

```
SELECT S.sid  
FROM   Sailors S
```

EXCEPT

```
SELECT S.sid  
FROM   Sailors S, Reserves R  
WHERE  S.sid=R.sid
```

Set Semantics

- Set: a collection of *distinct* elements
- Standard ways of manipulating/combining sets
 - Union
 - Intersect
 - Except
- Treat tuples within a relation as elements of a set

Default: Set Semantics

Note: R and S are relations. They are not sets, since they have duplicates.

$R = \{A, A, A, A, B, B, C, D\}$

$S = \{A, A, B, B, B, C, E\}$

- UNION

$\{A, B, C, D, E\}$

- INTERSECT

$\{A, B, C\}$

- EXCEPT

$\{D\}$

Note: Think of each letter as being a **tuple** in **relation**.

ex:

A: (Jim, 18, English, 4.0)

B: (Marcela, 20, CS, 3.8)

C: (Gail, 19, Statistics, 3.74)

D: (Goddard, 20, Math, 3.8)

“ALL”: Multiset Semantics

$R = \{A, A, A, A, B, B, C, D\} = \{A(4), B(2), C(1), D(1)\}$

$S = \{A, A, B, B, B, C, E\} = \{A(2), B(3), C(1), E(1)\}$

“UNION ALL”: Multiset Semantics

$R = \{A, A, A, A, B, B, C, D\} = \{A(4), B(2), C(1), D(1)\}$

$S = \{A, A, B, B, B, C, E\} = \{A(2), B(3), C(1), E(1)\}$

- UNION ALL: sum of cardinalities

$\{A(4+2), B(2+3), C(1+1), D(1+0), E(0+1)\}$

$= \{A, A, A, A, A, A, B, B, B, B, B, C, C, D, E\}$

“INTERSECT ALL”: Multiset Semantics

$R = \{A, A, A, A, B, B, C, D\} = \{A(4), B(2), C(1), D(1)\}$

$S = \{A, A, B, B, B, C, E\} = \{A(2), B(3), C(1), E(1)\}$

- INTERSECT ALL: min of cardinalities
 $\{A(\min(4,2)), B(\min(2,3)), C(\min(1,1)),$
 $D(\min(1,0)), E(\min(0,1))\}$
 $= \{A, A, B, B, C\}$

“EXCEPT ALL”: Multiset Semantics

$R = \{A, A, A, A, B, B, C, D\} = \{A(4), B(2), C(1), D(1)\}$

$S = \{A, A, B, B, B, C, E\} = \{A(2), B(3), C(1), E(1)\}$

- EXCEPT ALL: difference of cardinalities
 $\{A(4-2), B(2-3), C(1-1), D(1-0), E(0-1)\}$
 $= \{A, A, D, \}$

Nested Queries: IN

- *Names of sailors who've reserved boat #102:*

```
SELECT S.sname
FROM   Sailors S
WHERE  S.sid IN
      (SELECT R.sid
       FROM   Reserves R
       WHERE  R.bid=102)
```

subquery



- The subquery retrieves all sailor IDs (R.sid) from the Reserves table where R.bid = 102.
- The IN clause checks if S.sid exists in the list of sailor IDs (R.sid) returned by the subquery.

Nested Queries: NOT IN

- *Names of sailors who've not reserved boat #103:*

```
SELECT  S.sname
FROM    Sailors S
WHERE   S.sid NOT IN
        (SELECT  R.sid
         FROM    Reserves R
         WHERE   R.bid=103)
```

Nested Queries: EXISTS

- *This is a bit odd, but it is legal:*

```
SELECT  S.sname
FROM    Sailors S
WHERE   EXISTS
        (SELECT  R.sid
         FROM    Reserves R
         WHERE   R.bid=102)
```

Nested Queries

- *Names of sailors who've reserved boat #102:*

```
SELECT S.sname
FROM Sailors S
WHERE EXISTS (
    SELECT *
    FROM Reserves R
    WHERE R.bid = 102 AND S.sid = R.sid
);
```

- For each row in the Sailors table (aliased as S), the subquery checks if there is a matching reservation in the Reserves table where R.bid = 102 and S.sid = R.sid.
- If such a reservation exists, the sailor's name (S.sname) is included in the result.

Nested Queries with Correlation

- *Names of sailors who've reserved boat #102:*

```
SELECT S.sname
FROM Sailors S
WHERE EXISTS (
    SELECT *
    FROM Reserves R
    WHERE R.bid = 102 AND S.sid = R.sid
);
```

Nested Query with
correlation: subquery
depends on the outer query
for its evaluation

```
SELECT S.sname
FROM Sailors S
WHERE S.sid IN (
    SELECT R.sid
    FROM Reserves R
    WHERE R.bid = 102
);
```

In a non-correlated subquery, the subquery is independent of the outer query, meaning it can be run on its own and produces a result set that the outer query can use without referencing any of the outer query's columns.

Summary of Differences

- **Mechanism:**

- EXISTS checks for the existence of rows that satisfy the condition and stops as soon as it finds one match.
- IN retrieves all values in the subquery and then compares them with the outer query.

- **Performance:**

- EXISTS can be more efficient for large subquery result sets, as it can stop searching as soon as a match is found.
- IN may be less efficient for large lists because it has to build a full list of values and check each one.

More on Set-Comparison Operators

- We've seen: IN, EXISTS
- Can also have: NOT IN, NOT EXISTS
- Other forms: op ANY, op ALL

Find sailors whose rating is greater than that of *some* sailor called Popeye:

```
SELECT *
FROM   Sailors S
WHERE  S.rating > ANY
      (SELECT S2.rating
       FROM   Sailors S2
       WHERE  S2.sname='Popeye')
```


A Tough One: “Division”

- Relational Division: “Find sailors who’ve reserved all boats.”

| <u>sid</u> | sname | rating | age |
|------------|-------|--------|-----|
| 1 | Fred | 7 | 22 |
| 2 | Jim | 2 | 39 |
| 3 | Nancy | 8 | 27 |

| <u>bid</u> | bname | color |
|------------|-------------|-------|
| 101 | Nina | red |
| 102 | Pinta | blue |
| 103 | Santa Maria | red |

| <u>sid</u> | bid | day |
|------------|-----|-----------|
| 1 | 102 | 9/12/2015 |
| 2 | 102 | 9/13/2015 |

A Tough One: “Division”

- Relational Division: “Find sailors who’ve reserved all boats.”
Said differently: “sailors with no counterexample missing boats”

```
SELECT S.sname
FROM Sailors S
WHERE NOT EXISTS
  (SELECT B.bid
   FROM Boats B
   WHERE NOT EXISTS (SELECT R.bid
                     FROM Reserves R
                     WHERE R.bid=B.bid
                           AND R.sid=S.sid ))
```

A Tough One: “Division”

- Relational Division: “Find sailors who’ve reserved all boats.”
Said differently: “sailors with no counterexample missing boats”

```
SELECT S.sname
FROM Sailors S
WHERE NOT EXISTS (
    SELECT B.bid
    FROM Boats B
    WHERE NOT EXISTS (
        SELECT R.sid
        FROM Reserves R
        WHERE R.bid = B.bid AND R.sid = S.sid
    )
);
```

- Outer Query:
 - We are selecting sailor names (S.sname) from the Sailors table.
- First NOT EXISTS Subquery:
 - We are checking for boats (B.bid) that have not been reserved by a given sailor (S.sid).
- Second NOT EXISTS Subquery:
 - This inner subquery checks whether a particular boat (B.bid) has been reserved by the current sailor (R.sid = S.sid).

Division-like operation

- A division-like operation in SQL is used to solve queries where you need to find entities (such as sailors, customers, or students) that are related to all items in another set (such as boats, products, or courses). It's often described as answering the question: "Who has done all of X?"
 - You have two sets: a dividend (the larger set you want to filter) and a divisor (the smaller set of required items).
 - The goal is to find all items in the dividend that match all items in the divisor.

https://blog.csdn.net/qq_37813928/article/details/79778272

ARGMAX? Pt 1

- The sailor with the highest rating
- Correct or Incorrect?

```
SELECT MAX(S.rating)  
FROM Sailors S;
```

VS

```
SELECT S.*, MAX(S.rating)  
FROM Sailors S;
```

ARGMAX? Pt 2

- The sailor with the highest rating
- Correct or Incorrect? Same or different?

```
SELECT *  
FROM   Sailors S  
WHERE  S.rating >= ALL  
      (SELECT S2.rating  
       FROM   Sailors S2)
```

VS

```
SELECT *  
FROM   Sailors S  
WHERE  S.rating =  
      (SELECT MAX(S2.rating)  
       FROM   Sailors S2)
```

ARGMAX? Pt 3

- The sailor with the highest rating
- Correct or Incorrect? Same or different?

```
SELECT *  
FROM   Sailors S  
WHERE  S.rating >= ALL  
      (SELECT S2.rating  
       FROM   Sailors S2)
```

VS

```
SELECT *  
FROM   Sailors S  
ORDER BY rating DESC  
LIMIT 1;
```

“Inner” Joins: Another Syntax

```
SELECT s.*, r.bid  
FROM Sailors s, Reserves r  
WHERE s.sid = r.sid  
AND ...
```

```
SELECT s.*, r.bid  
FROM Sailors s INNER JOIN Reserves r  
ON s.sid = r.sid  
WHERE ...
```


Join Variants

```
SELECT <column expression list>
FROM table_name
    [INNER | NATURAL
      | {LEFT | RIGHT | FULL } {OUTER}] JOIN
    table_name
ON <qualification_list>
WHERE ...
```

- INNER is default
- Inner join what we've learned so far
 - Same thing, just with different syntax.

Inner/Natural Joins

```
SELECT s.sid, s.sname, r.bid  
FROM Sailors s, Reserves r  
WHERE s.sid = r.sid  
    AND s.age > 20;
```

```
SELECT s.sid, s.sname, r.bid  
FROM Sailors s INNER JOIN Reserves r  
ON s.sid = r.sid  
WHERE s.age > 20;
```

```
SELECT s.sid, s.sname, r.bid  
FROM Sailors s NATURAL JOIN Reserves r  
WHERE s.age > 20;
```

- **ALL 3 ARE EQUIVALENT!**
- “NATURAL” means equi-join for pairs of attributes with the same name

Left Outer Join

- Returns all matched rows, and preserves all unmatched rows from the table on the left of the join clause
 - (use nulls in fields of non-matching tuples)

```
SELECT s.sid, s.sname, r.bid  
FROM Sailors2 s LEFT OUTER JOIN Reserves2 r  
ON s.sid = r.sid;
```

Returns all sailors & bid for boat in any
of their reservations

Note: no match for s.sid? r.bid IS NULL!

Right Outer Join

- Returns all matched rows, and preserves all unmatched rows from the table on the right of the join clause
 - (use nulls in fields of non-matching tuples)

```
SELECT r.sid, b.bid, b.bname  
FROM Reserves2 r RIGHT OUTER JOIN Boats2 b  
ON r.bid = b.bid
```

Returns all boats and sid for any sailor associated with the reservation.

Note: no match for b.bid? r.sid IS NULL!

Full Outer Join

- Returns all (matched or unmatched) rows from the tables on both sides of the join clause

```
SELECT r.sid, b.bid, b.bname  
FROM Reserves2 r FULL OUTER JOIN Boats2 b  
ON r.bid = b.bid
```

- Returns all boats & all information on reservations
- No match for r.bid?
 - b.bid IS NULL AND b.bname IS NULL!
- No match for b.bid?
 - r.sid IS NULL!

Views: Named Queries

```
CREATE VIEW  view_name  
AS select_statement
```

- Makes development simpler
- Often used for security
- Not “materialized”

```
CREATE VIEW Redcount
```

```
AS SELECT B.bid, COUNT(*) AS scount  
      FROM Boats2 B, Reserves2 R  
      WHERE R.bid=B.bid AND B.color='red'  
      GROUP BY B.bid
```

Views Instead of Relations in Queries

```
CREATE VIEW Redcount
AS SELECT B.bid, COUNT(*) AS scount
   FROM Boats2 B, Reserves2 R
   WHERE R.bid=B.bid AND B.color='red'
   GROUP BY B.bid;
```

```
SELECT * from redcount;
```

| bid | scount |
|-----|--------|
| 102 | 1 |

```
SELECT bname, scount
FROM Redcount R, Boats2 B
WHERE R.bid=B.bid
AND scount < 10;
```

Subqueries in FROM

Like a “view on the fly”!

```
SELECT  bname, scout
FROM    Boats2 B,
        (SELECT B.bid, COUNT (*)
          FROM  Boats2 B, Reserves2 R
          WHERE R.bid = B.bid AND B.color = 'red'
          GROUP BY B.bid) AS Reds(bid, scout)

WHERE   Reds.bid=B.bid
        AND scout < 10
```

```
SELECT bname, scount
FROM   Redcount R, Boats2 B
WHERE  R.bid=B.bid
AND    scount < 10;
```


WITH a.k.a. common table expression (CTE)

Another “view on the fly” syntax:

```
WITH Reds(bid, scout) AS  
  (SELECT B.bid, COUNT (*)  
   FROM Boats2 B, Reserves2 R  
   WHERE R.bid = B.bid AND B.color = 'red'  
   GROUP BY B.bid)
```

```
SELECT bname, scout  
FROM Boats2 B, Reds  
WHERE Reds.bid=B.bid  
AND scout < 10
```

```
SELECT bname, scout  
FROM Redcount R, Boats2 B  
WHERE R.bid=B.bid  
AND scout < 10;
```

Can have many queries in WITH

Another “view on the fly” syntax:

```
WITH Reds(bid, scout) AS  
  (SELECT B.bid, COUNT (*)  
   FROM Boats2 B, Reserves2 R  
   WHERE R.bid = B.bid AND B.color = 'red'  
   GROUP BY B.bid),
```

```
UnpopularReds AS  
  (SELECT bname, scout  
   FROM Boats2 B, Reds  
   WHERE Reds.bid=B.bid  
   AND scout < 10)
```

```
SELECT * FROM UnpopularReds;
```

ARGMAX GROUP BY?

- The sailor with the highest rating per age

```
WITH maxratings(age, maxrating) AS  
  (SELECT age, max(rating)  
   FROM Sailors  
   GROUP BY age)
```

```
SELECT S.*  
  FROM Sailors S, maxratings m  
 WHERE S.age = m.age  
       AND S.rating = m.maxrating;
```

Brief Detour: Null Values

- Field values are sometimes unknown
 - SQL provides a special value NULL for such situations.
 - Every data type can be NULL
- The presence of null complicates many issues. E.g.:
 - Selection predicates (WHERE)
 - Aggregation
- But NULLs comes naturally from Outer joins

NULL in the WHERE clause

- Consider a tuple where rating IS NULL.

```
INSERT INTO sailors VALUES  
(11, 'Jack Sparrow', NULL, 35);
```

```
SELECT * FROM sailors  
WHERE rating > 8;
```

Is Jack Sparrow in the output?

NULL in comparators

- Rule: (x op NULL) evaluates to ... NULL!

```
SELECT 100 = NULL;
```

```
SELECT 100 < NULL;
```

```
SELECT 100 >= NULL;
```

Explicit NULL Checks

```
SELECT * FROM sailors WHERE rating IS NULL;
```

```
SELECT * FROM sailors WHERE rating IS NOT NULL;
```

NULL at top of WHERE

- Rule: Do not output a tuple WHERE NULL

```
SELECT * FROM sailors;
```

```
SELECT * FROM sailors WHERE rating > 8;
```

```
SELECT * FROM sailors WHERE rating <= 8;
```


NULL in Boolean Logic

Three-valued logic:

```
SELECT * FROM sailors WHERE rating > 8 AND TRUE;
```

```
SELECT * FROM sailors WHERE rating > 8 OR TRUE;
```

```
SELECT * FROM sailors WHERE NOT (rating > 8);
```

General rule: NULL can take on either 'TRUE' or 'FALSE', so answers need to accommodate either value.

NULL in Boolean Logic

Three-valued logic:

```
SELECT * FROM sailors WHERE rating > 8 AND TRUE;
```

```
SELECT * FROM sailors WHERE rating > 8 OR TRUE;
```

```
SELECT * FROM sailors WHERE NOT (rating > 8);
```

General rule: NULL can take on either 'TRUE' or 'FALSE', so answers need to accommodate either value.

| AND | T | F | N |
|-----|---|---|---|
| T | T | F | |
| F | F | F | |
| N | | | |

| OR | T | F | N |
|----|---|---|---|
| T | T | T | |
| F | T | F | |
| N | | | |

| NOT | T | F | N |
|-----|---|---|---|
| | F | T | |

NULL in Boolean Logic

Three-valued logic:

```
SELECT * FROM sailors WHERE rating > 8 AND TRUE;
```

```
SELECT * FROM sailors WHERE rating > 8 OR TRUE;
```

```
SELECT * FROM sailors WHERE NOT (rating > 8);
```

General rule: NULL can take on either 'TRUE' or 'FALSE', so answers need to accommodate either value.

| AND | T | F | N |
|-----|---|---|---|
| T | T | F | N |
| F | F | F | F |
| N | N | F | N |

| OR | T | F | N |
|----|---|---|---|
| T | T | T | T |
| F | T | F | N |
| N | T | N | N |

| NOT | T | F | N |
|-----|---|---|---|
| | F | T | N |

NULL and Aggregation

```
SELECT count(*) FROM sailors;
```

```
SELECT count(rating) FROM sailors;
```

```
SELECT sum(rating) FROM sailors;
```

```
SELECT avg(rating) FROM sailors;
```

General rule: NULL **column values
are ignored by aggregate functions**

NULLs: Summary

- $x \text{ op } \text{NULL}$ is NULL
- WHERE NULL: do not send to output
- Boolean connectives: 3-valued logic
- Aggregates ignore NULL-valued inputs

Testing SQL Queries

SQL Fiddle

Welcome to SQL Fiddle, an online SQL compiler that lets you write, edit, and execute any SQL query.

Choose which SQL language you would like to practice today:

[SQL Server](#)

[SQLite](#)

[PostgreSQL](#)

[MySQL](#)

[MariaDB](#)

[Oracle](#)

[Oracle PLSQL](#)

- SQL Fiddle pages <http://sqlfiddle.com/> will typically help you answer the questions in the worksheets and quizzes.
- But in real life:
 - not every database instance will reveal every bug in your query.
 - Eg: database instance without any rows in it!
 - Need to debug your queries
 - reasoning about them carefully
 - constructing test data.

Tips for Generating Test Data

- Generate **random data**
 - e.g. using a service like <https://mockaroo.com/>
- Try to construct data that could check for the following potential errors:
 - Incorrect output schema
 - Output may be missing rows from the correct answer (false negatives)
 - Output may contain incorrect rows (false positives)
 - Output may have the wrong number of duplicates.
 - Output may not be ordered properly.

Conclusion

- **Relational Terminology**

- Database
- Relation:
 - Schema:
 - Instance:
- Attribute

- **DDL**

- CREATE TABLE
- Primary Key
- Foreign Key

- **DML in a Single Table**

```
SELECT [DISTINCT] <column expression list>
FROM <single table>
[WHERE <predicate>]
[GROUP BY <column list>]
[HAVING <predicate>] ]
[ORDER BY <column list>]
[LIMIT <integer>];
```

- **DML in Multiple Tables**

- Aliases
- Boolean logic vs Traditional Set

Summary

- DML in Multiple Tables
 - Cross Product
 - Boolean logic vs Traditional Set
 - Set Operations: Set vs. Multiset
 - Nested Queries
 - Nested Queries w/ w/o Correlation
 - IN/NOT IN
 - EXIST/NOT EXIST
 - ANY, ALL
 - Divison-like Opreation
 - ARGMAX/MAX
 - Join Variants
 - INNER/NATURAL/LEFT/RIGHT/OURTER JOIN
- Null Values
 - x op NULL is NULL
 - WHERE NULL: do not send to output
 - Boolean connectives: 3-valued logic
 - Aggregates ignore NULL-valued inputs

Summary

- You've now seen SQL—you are armed.
- A declarative language
 - Somebody has to translate to algorithms though...
 - The RDBMS implementer ... i.e. you!
- We skirted questions of good database (schema) design
 - a topic we'll consider in greater depth later

Next

- First Quiz
- How is a SQL query executed?
- DBMS's Architecture
- Disks and Buffers
 - Storage Media: Disk&SSD
 - Disk Space Management

