

BFS Traversal

Step 1: Start at E

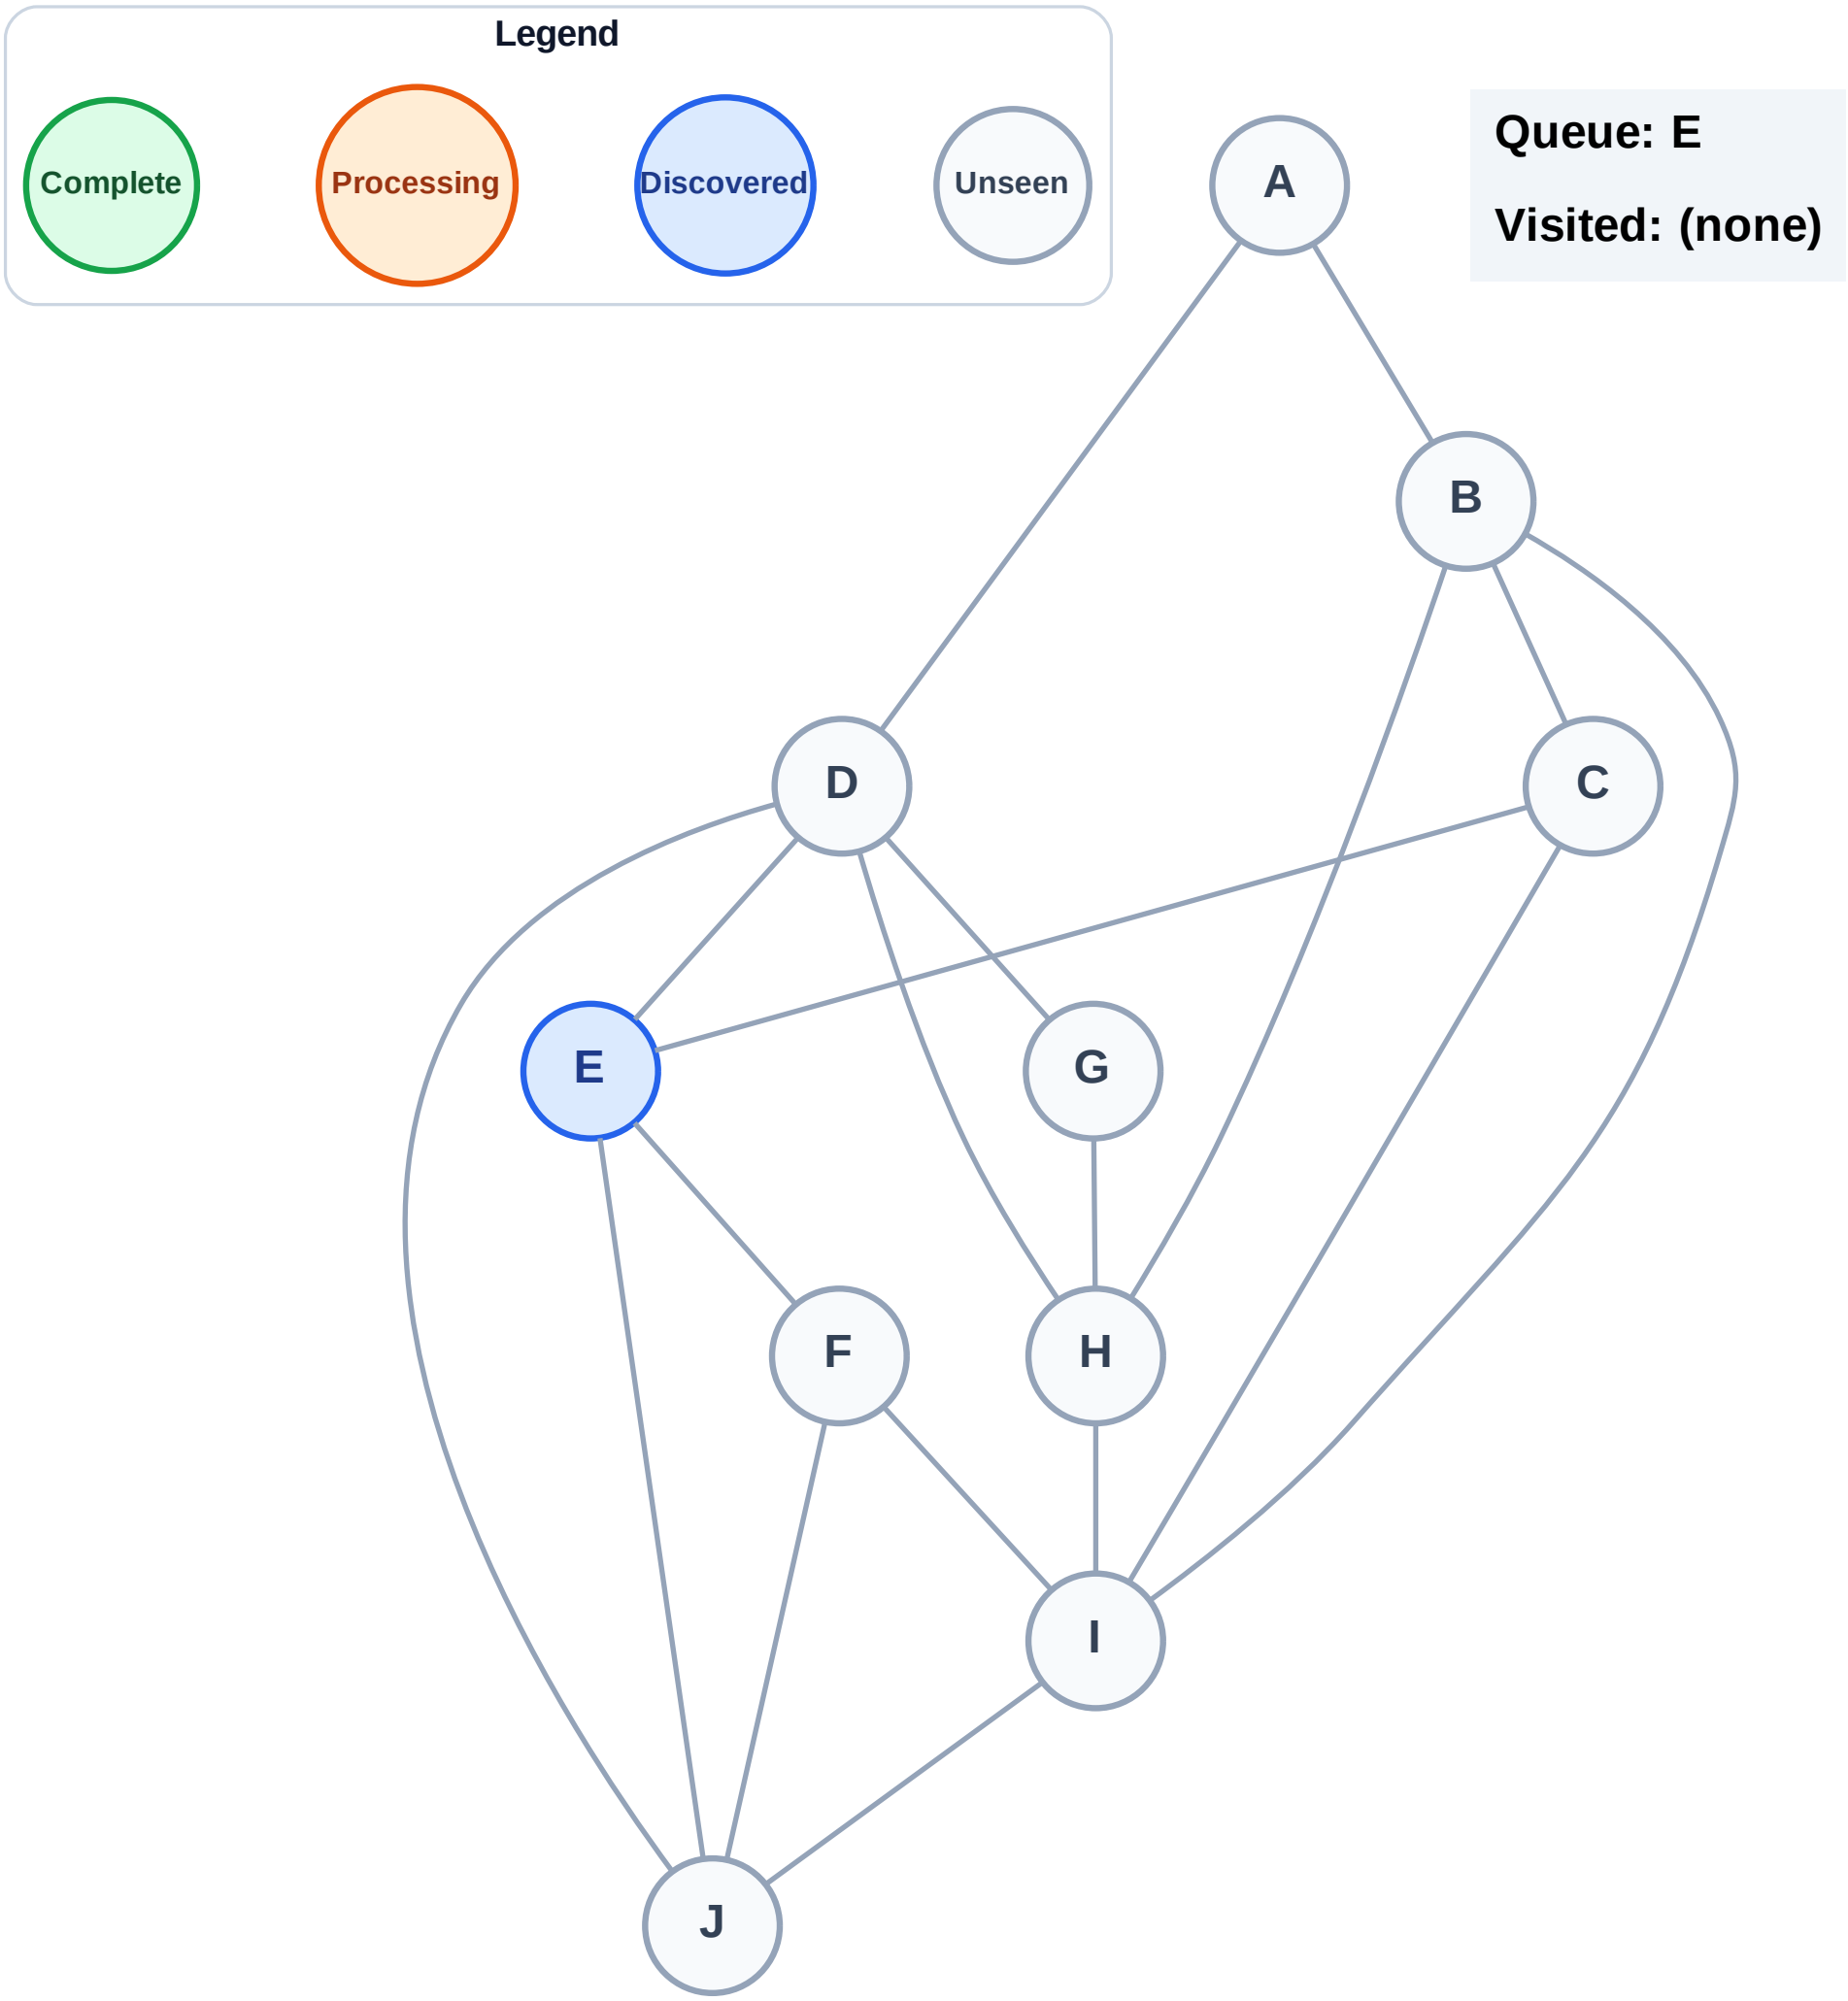


BFS Traversal

Step 2: Process node E

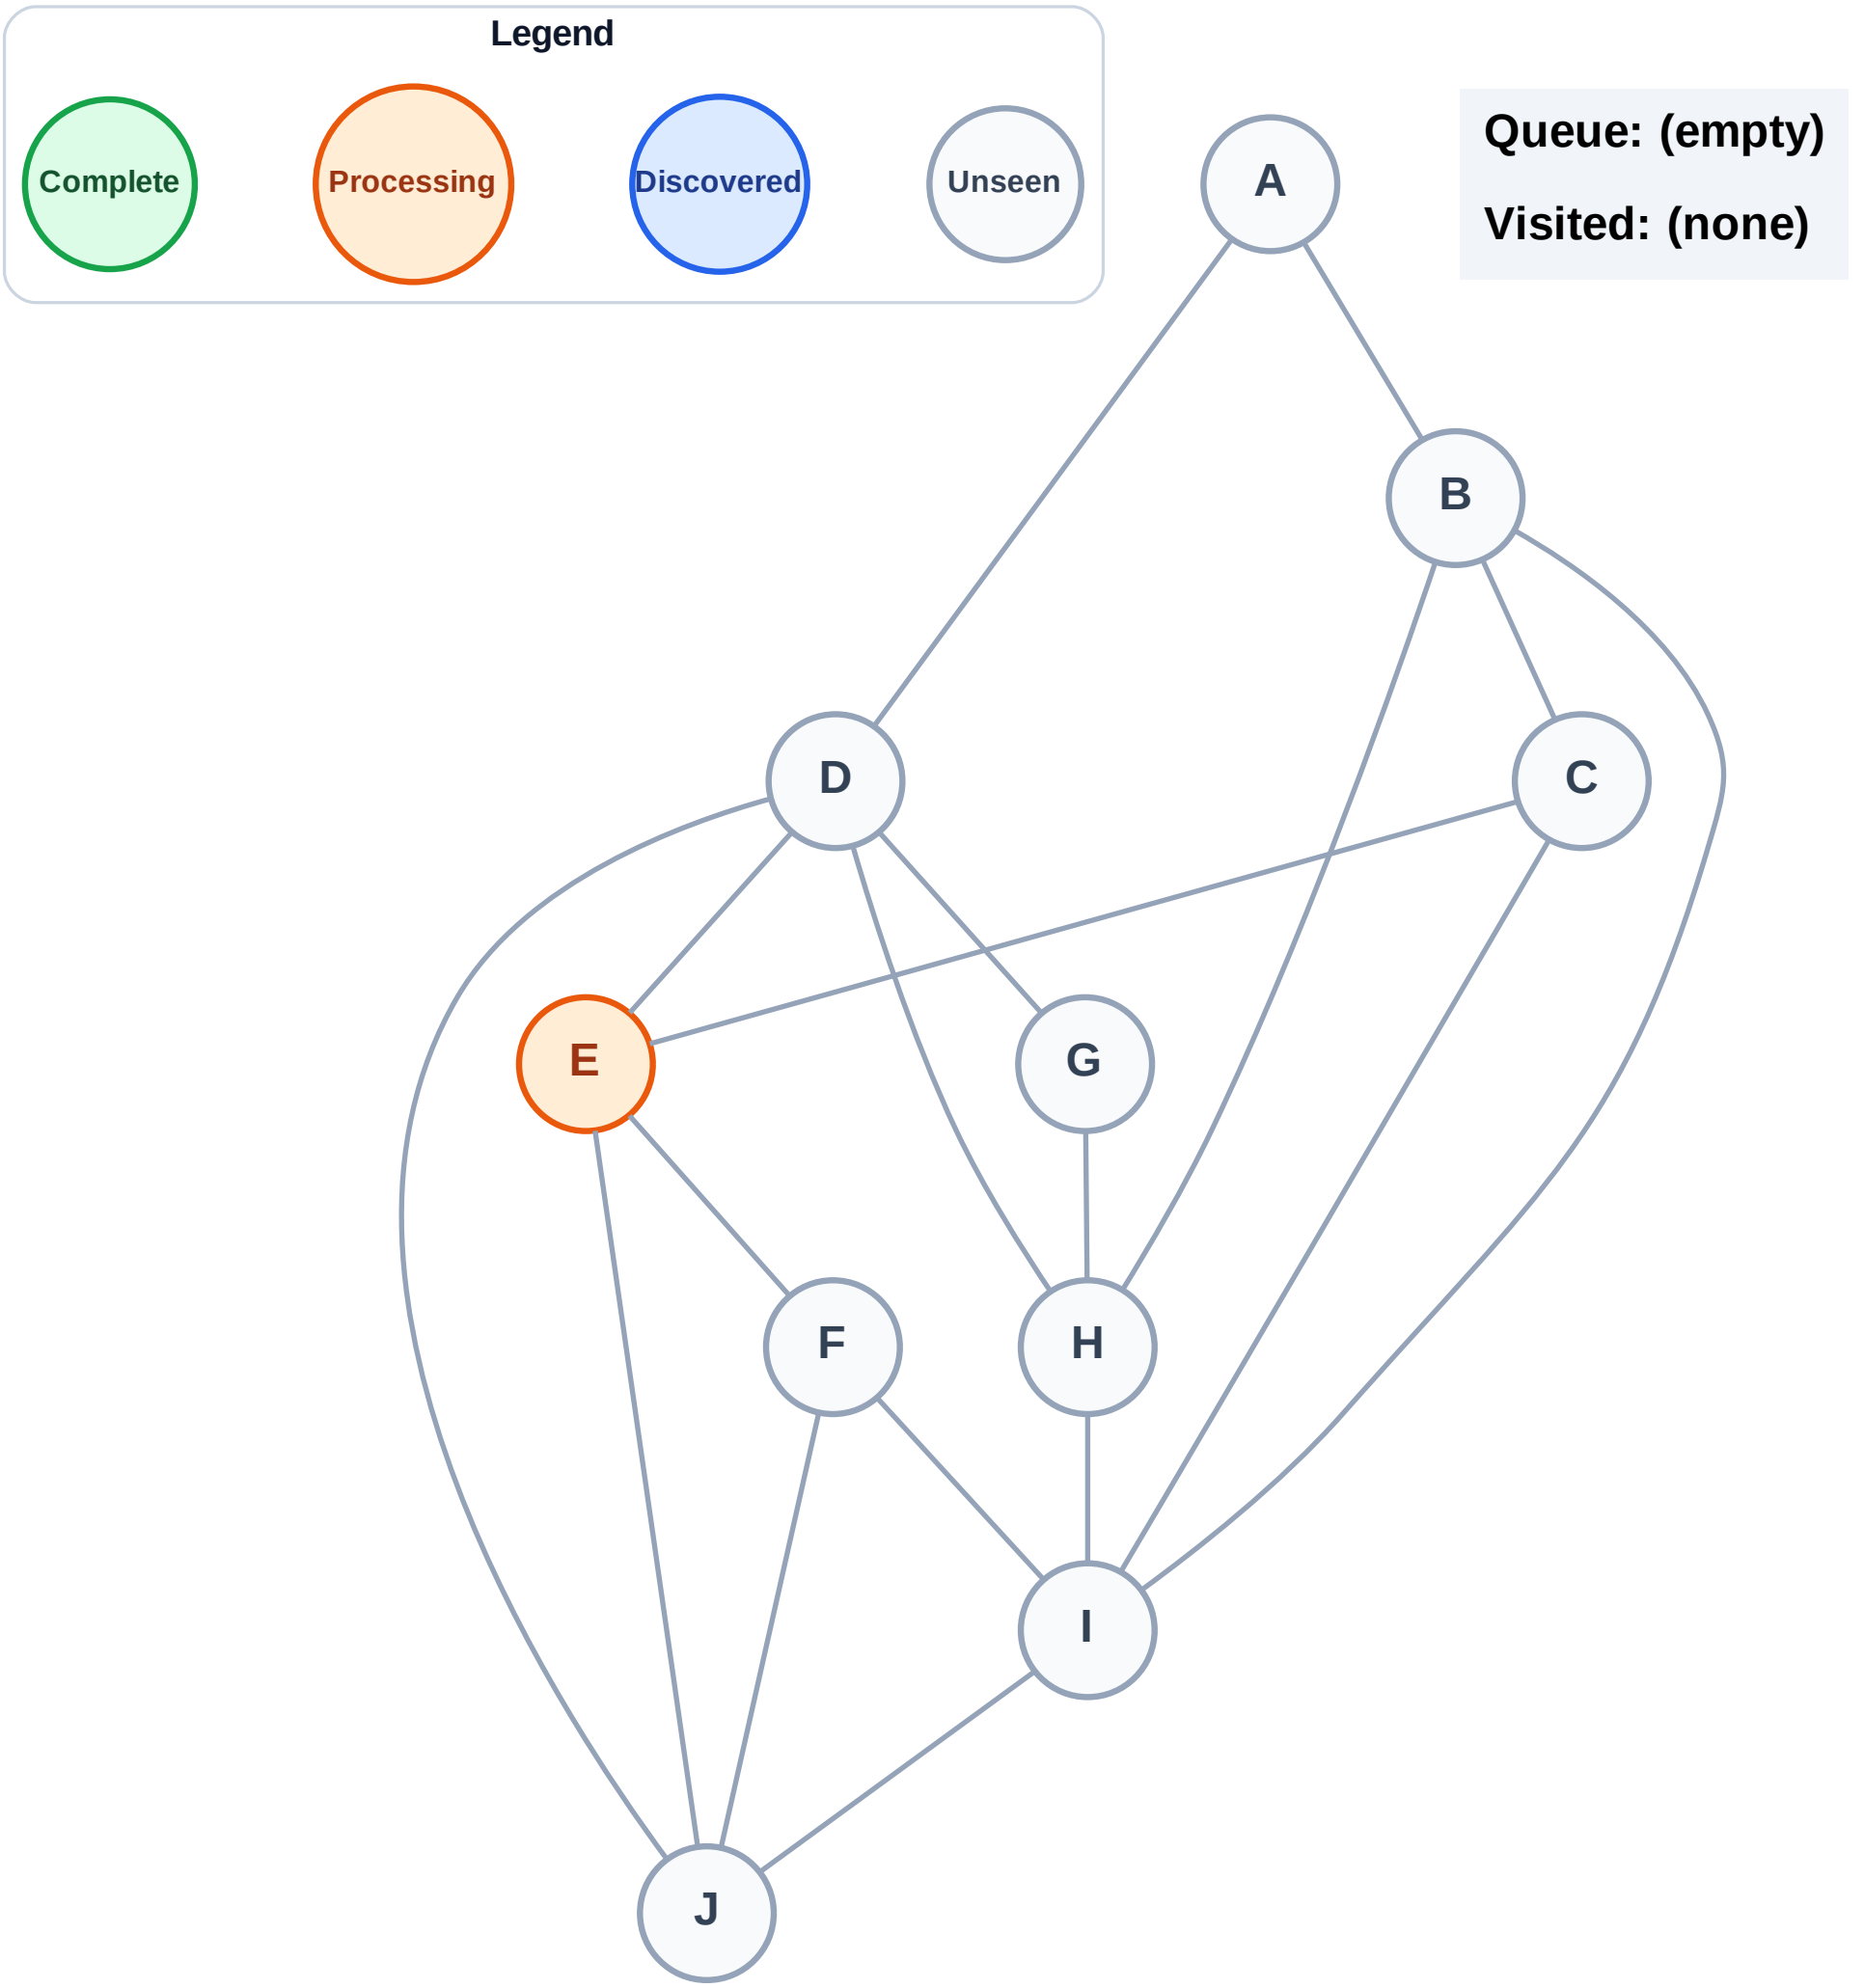

BFS Traversal

Step 3: Discover C, D, F, J from E

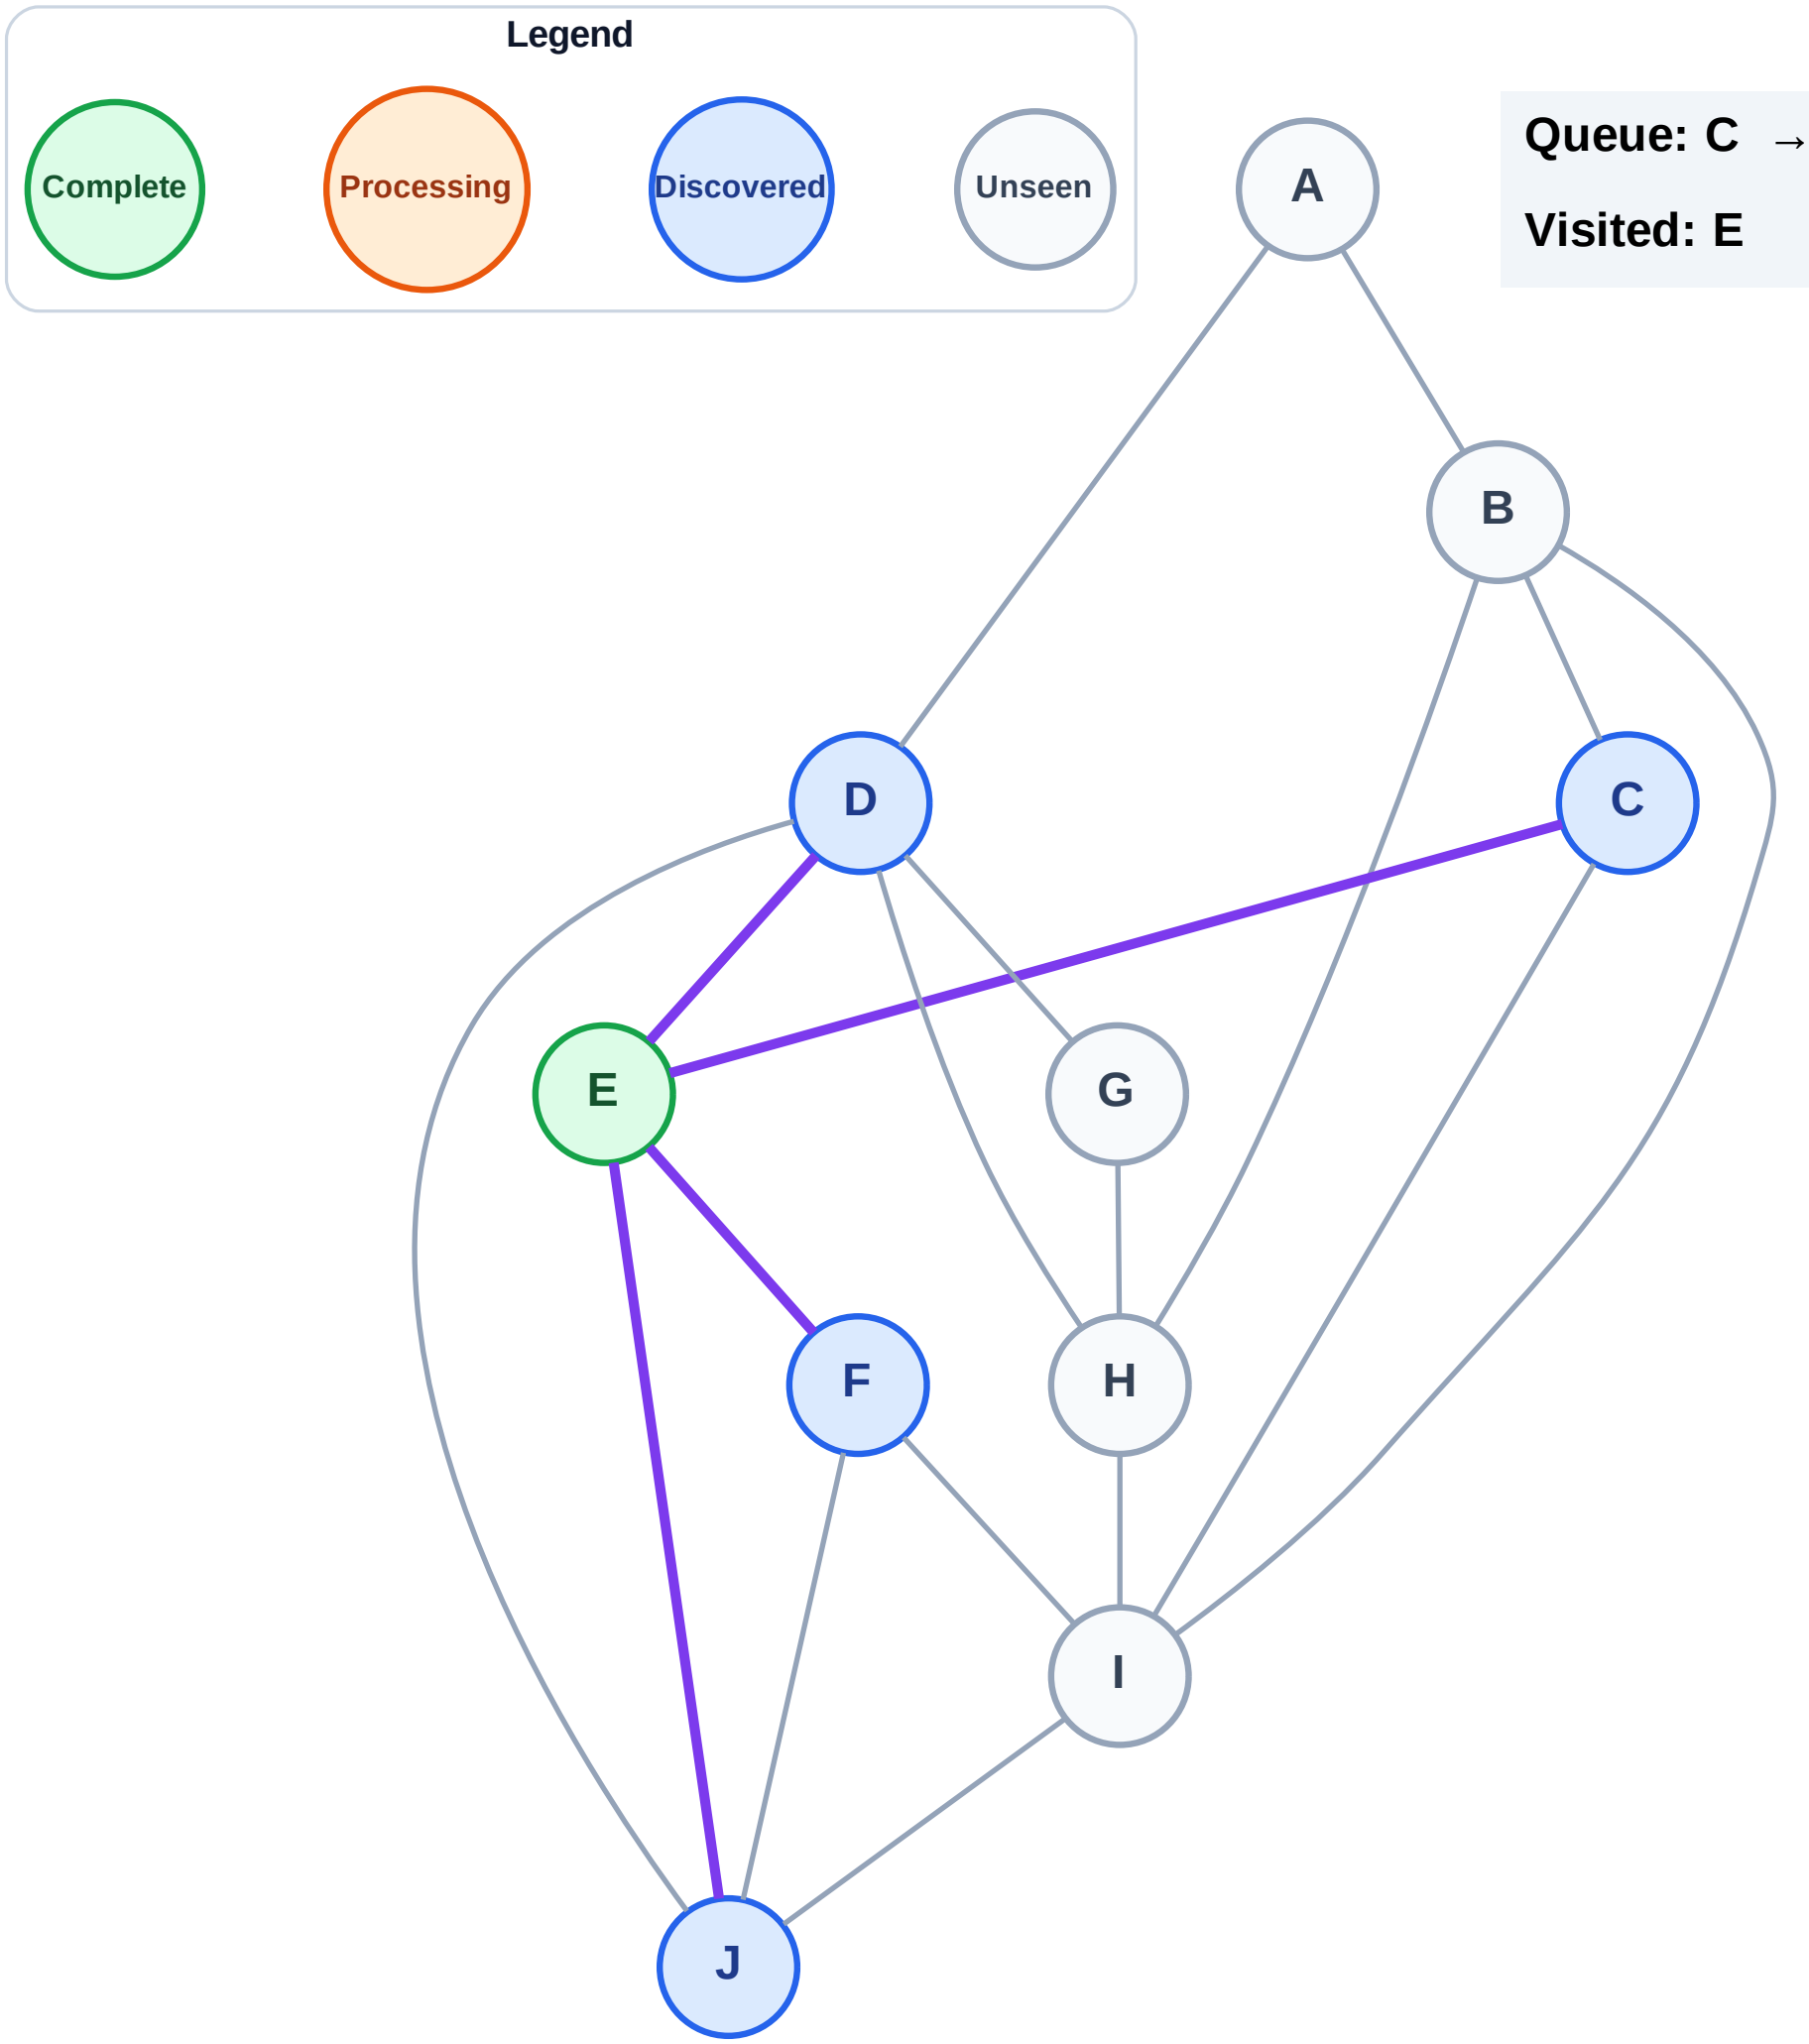


Queue: C → D → F → J

Visited: E


BFS Traversal

Step 4: Process node C

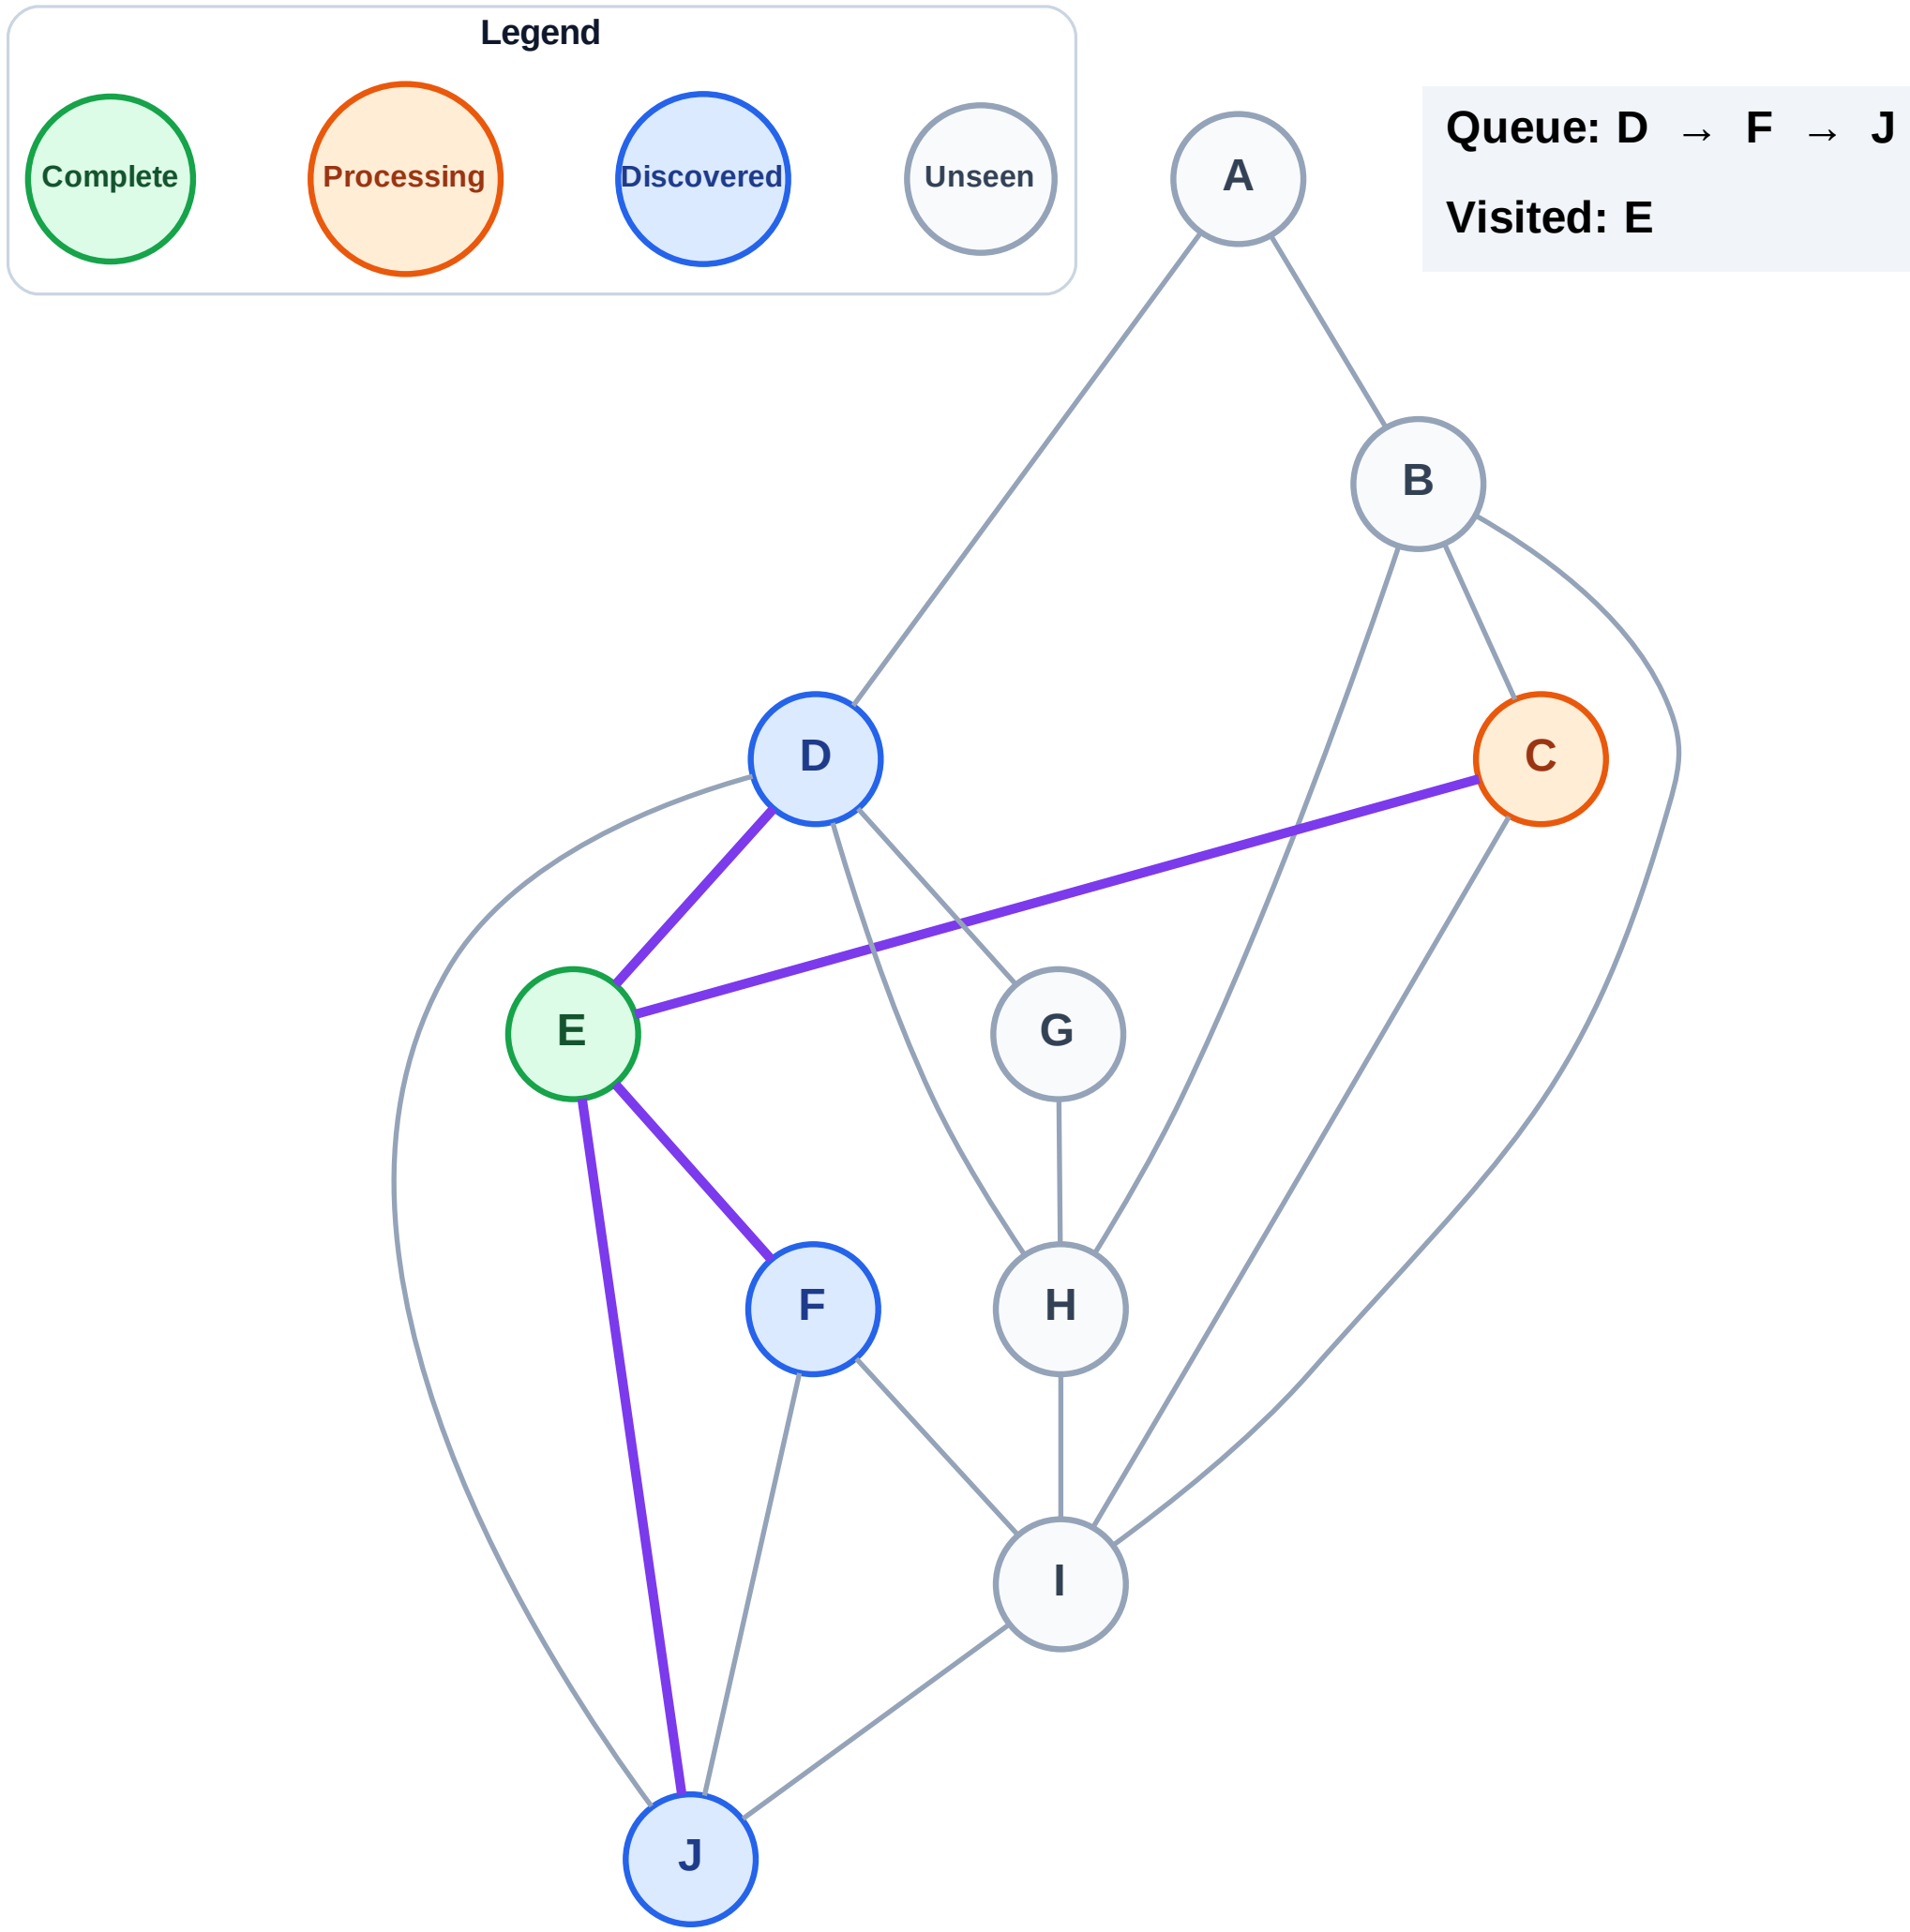

BFS Traversal

Step 5: Discover B, I from C

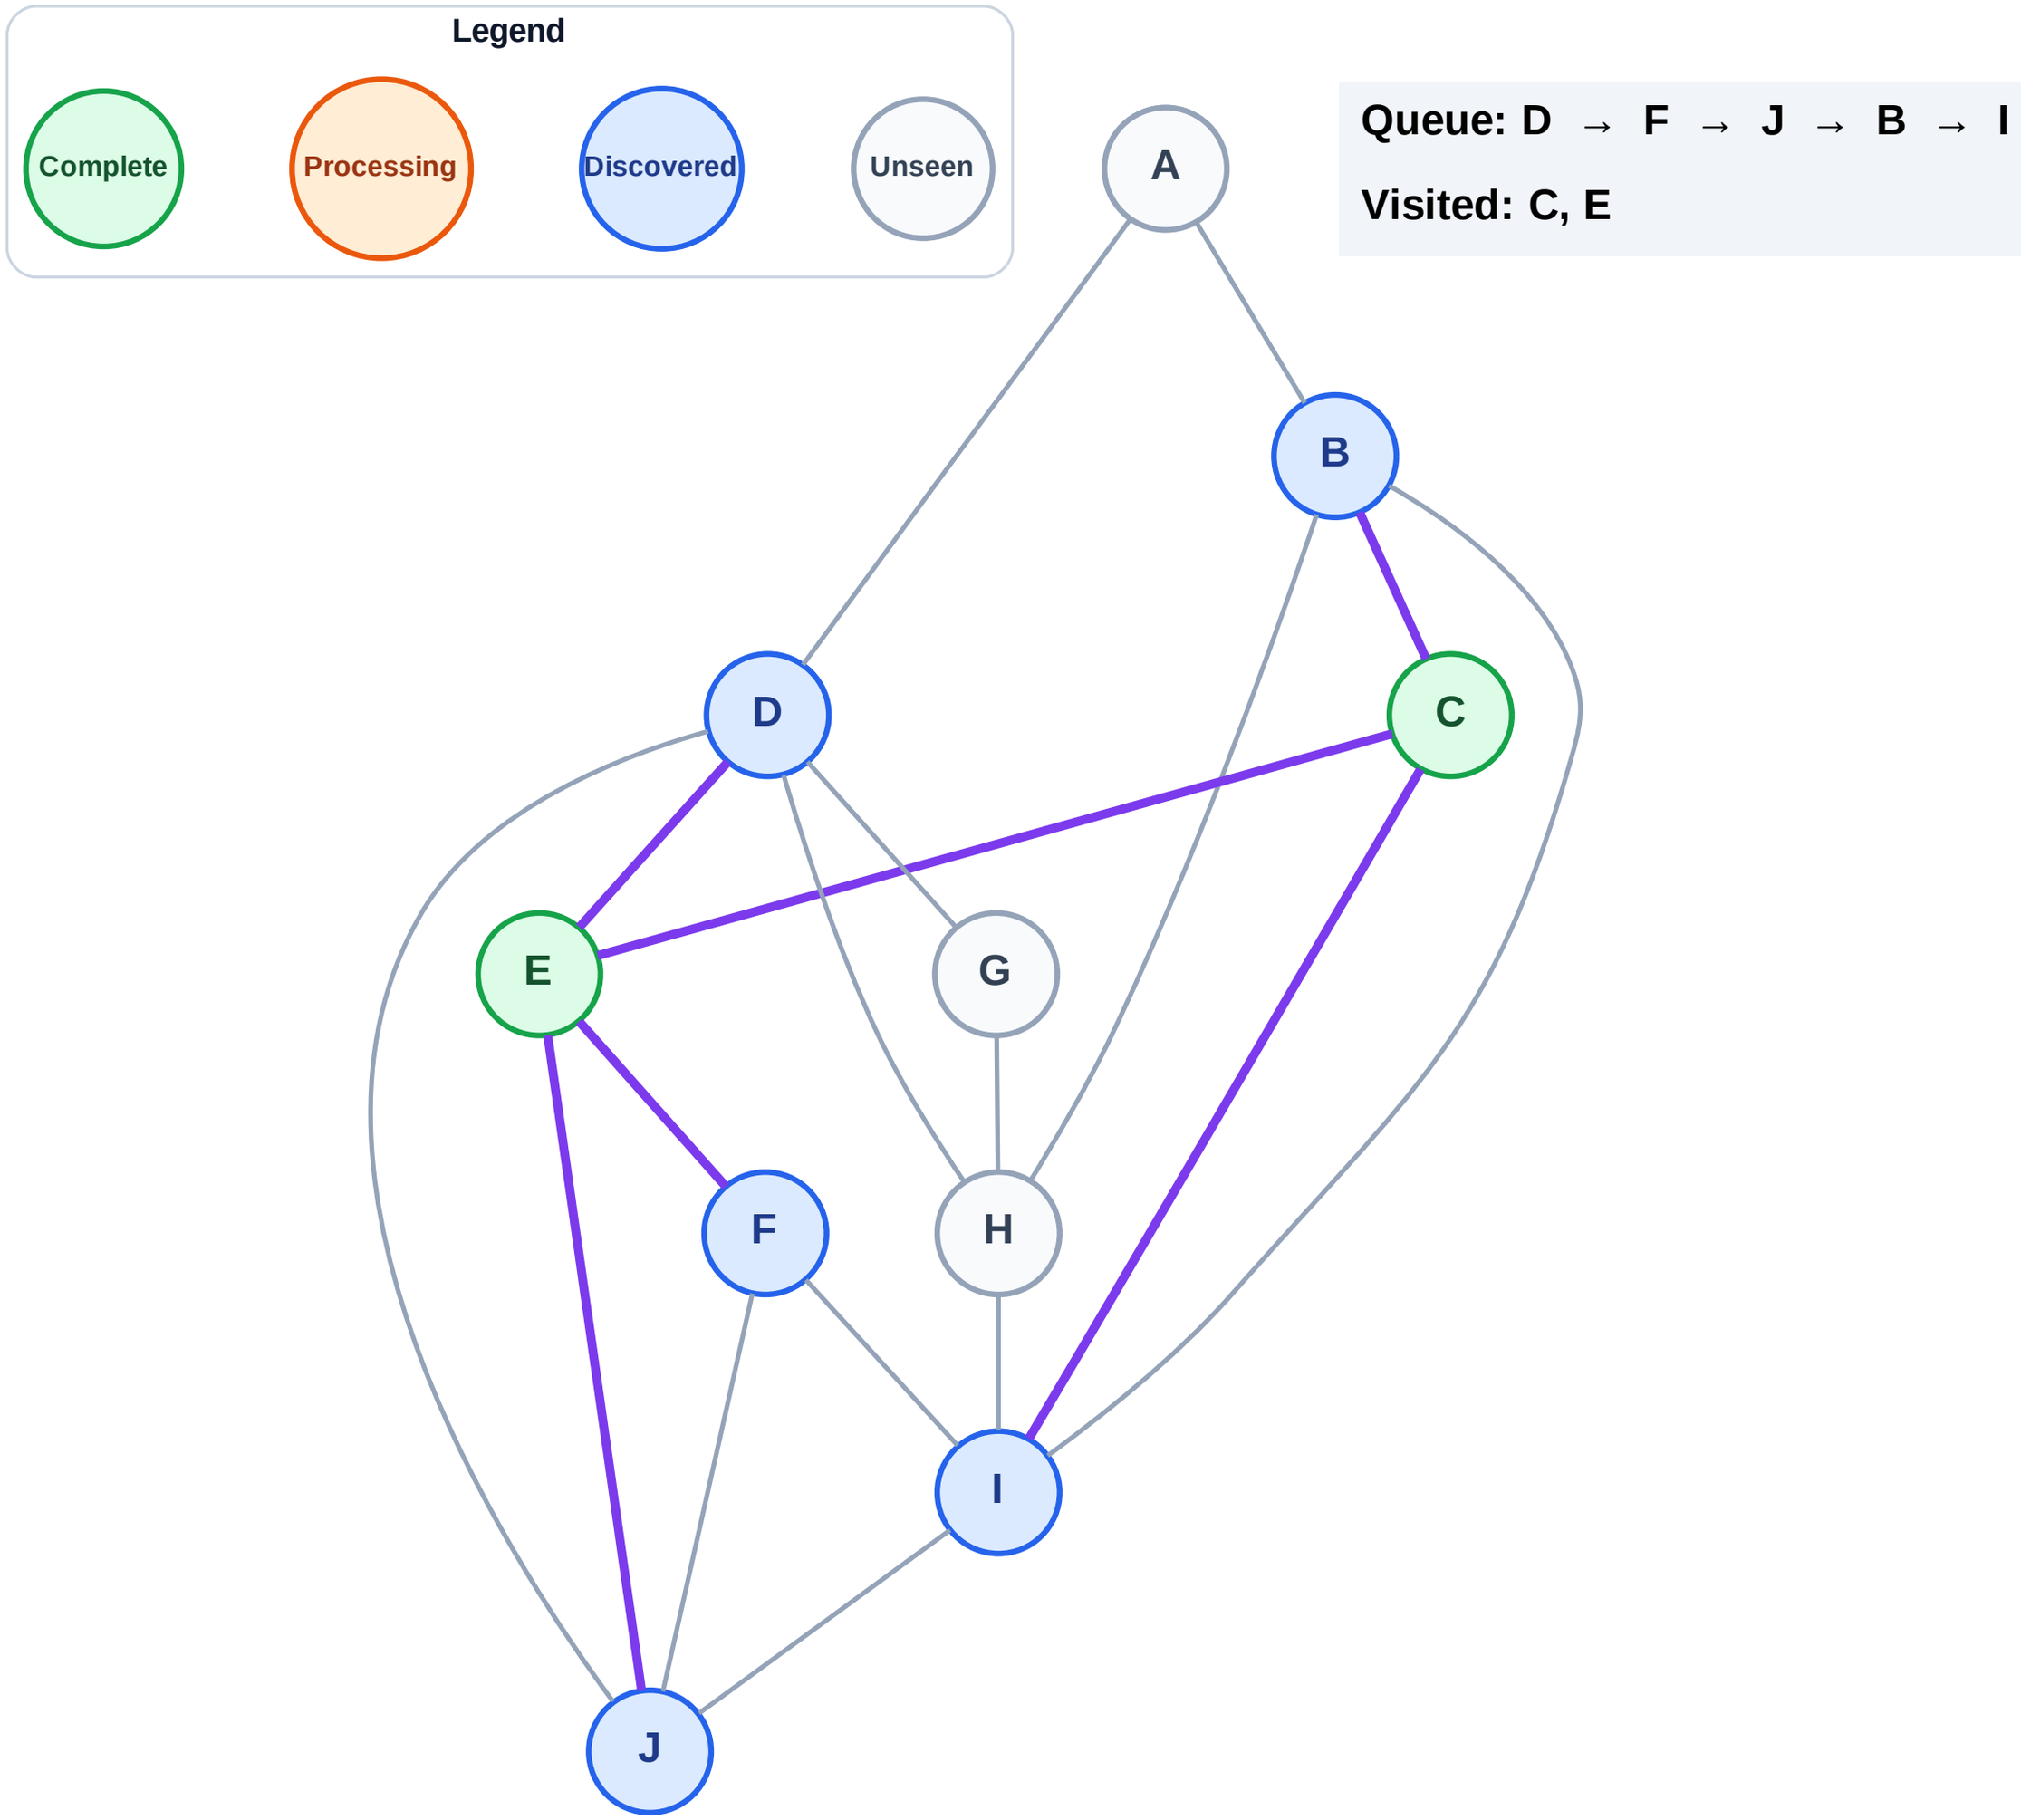


Queue: D → F → J → B → I

Visited: C, E


BFS Traversal

Step 6: Process node D

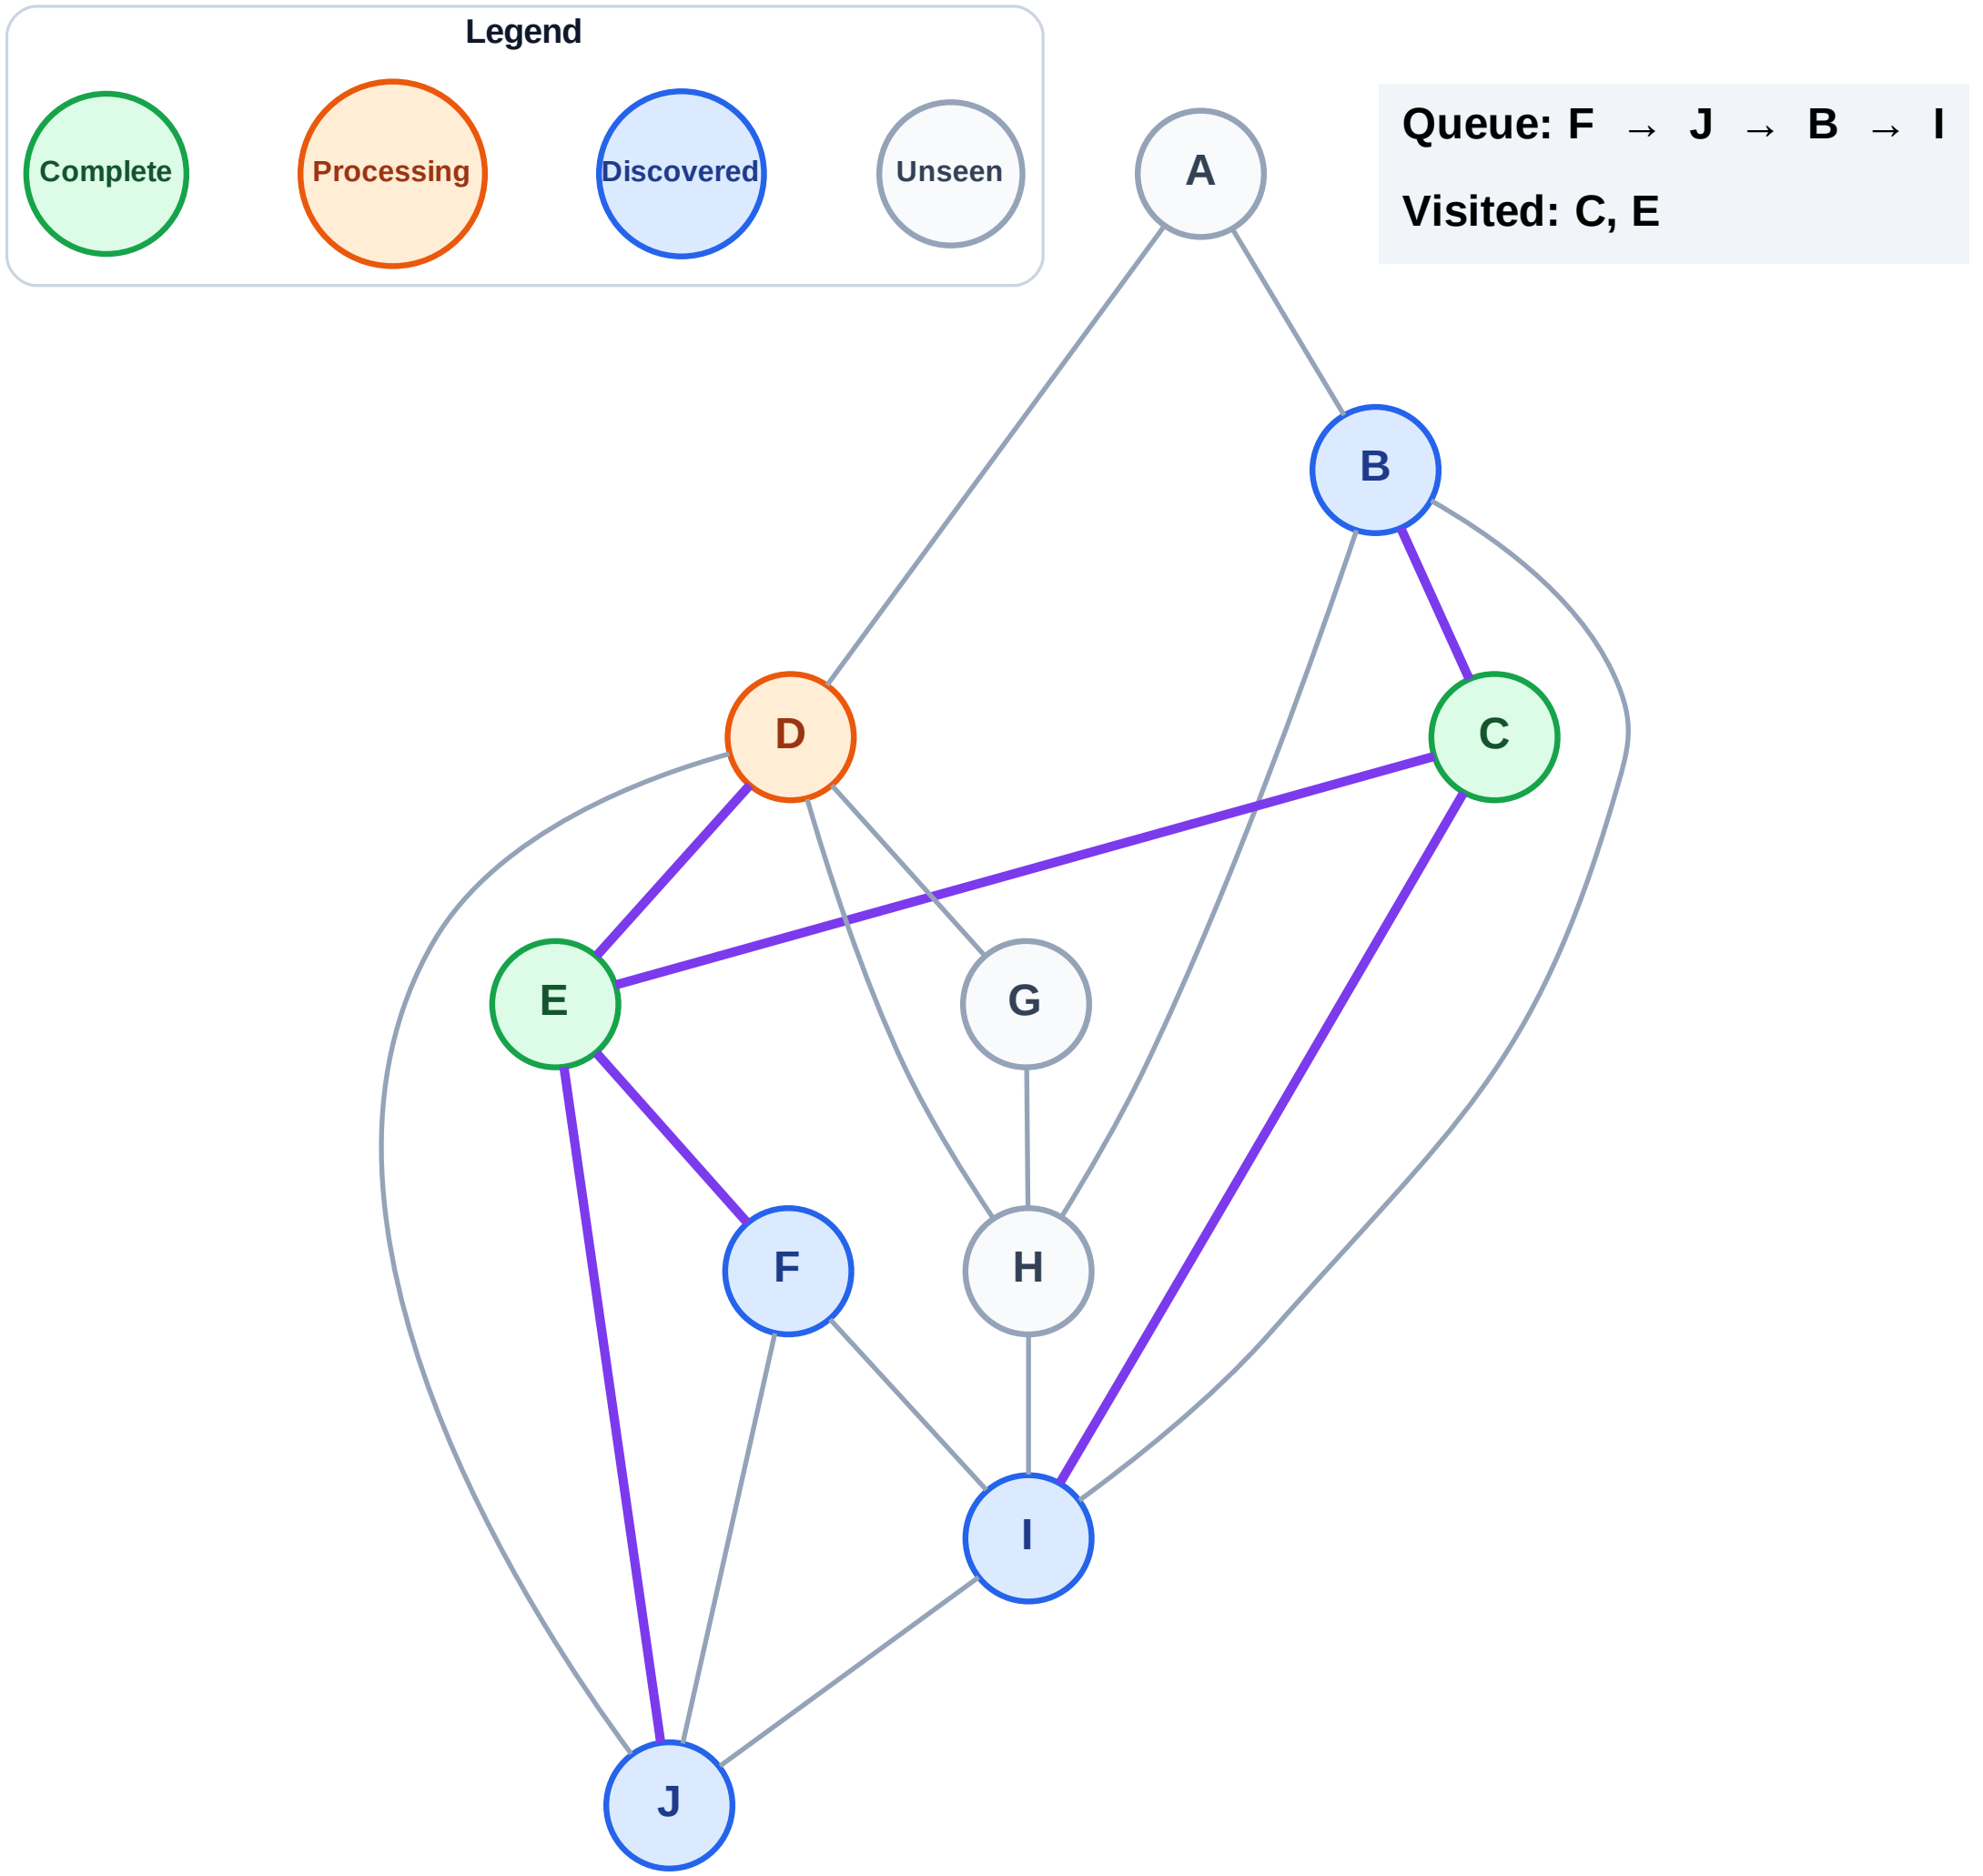

BFS Traversal

Step 7: Discover A, G, H from D

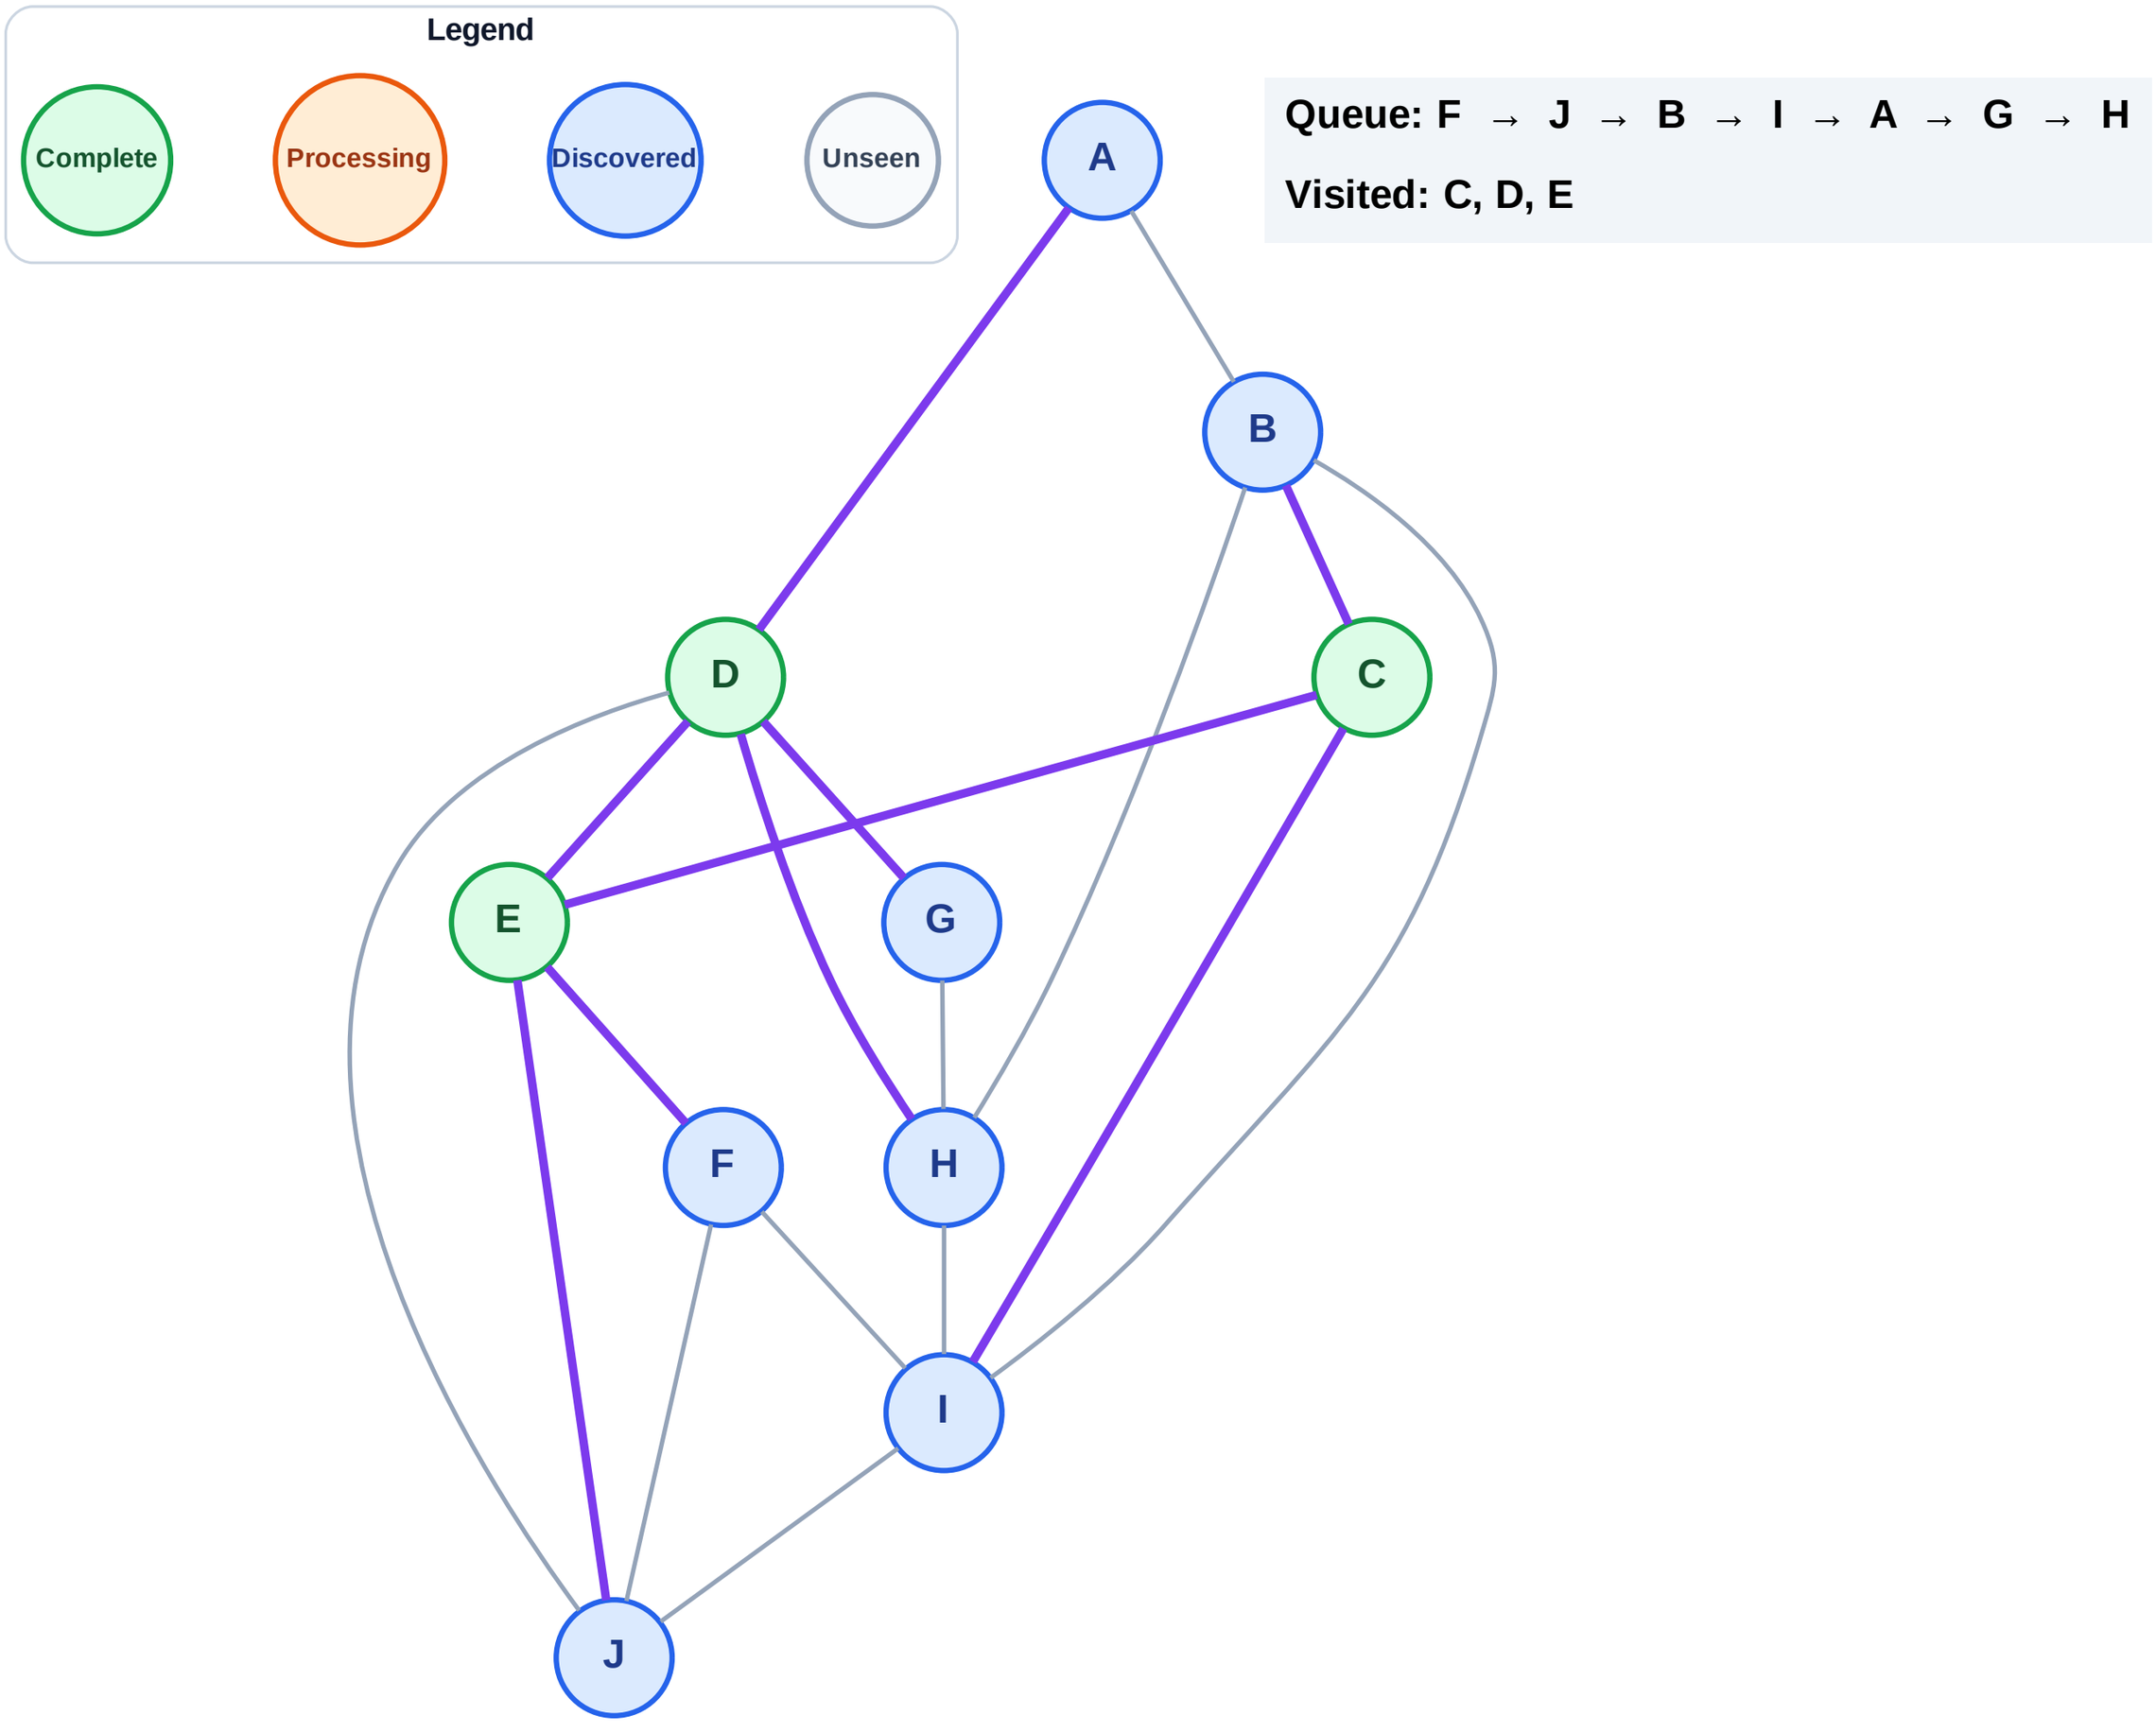


Queue: F → J → B → I → A → G → H

Visited: C, D, E

BFS Traversal

Step 8: Process node F

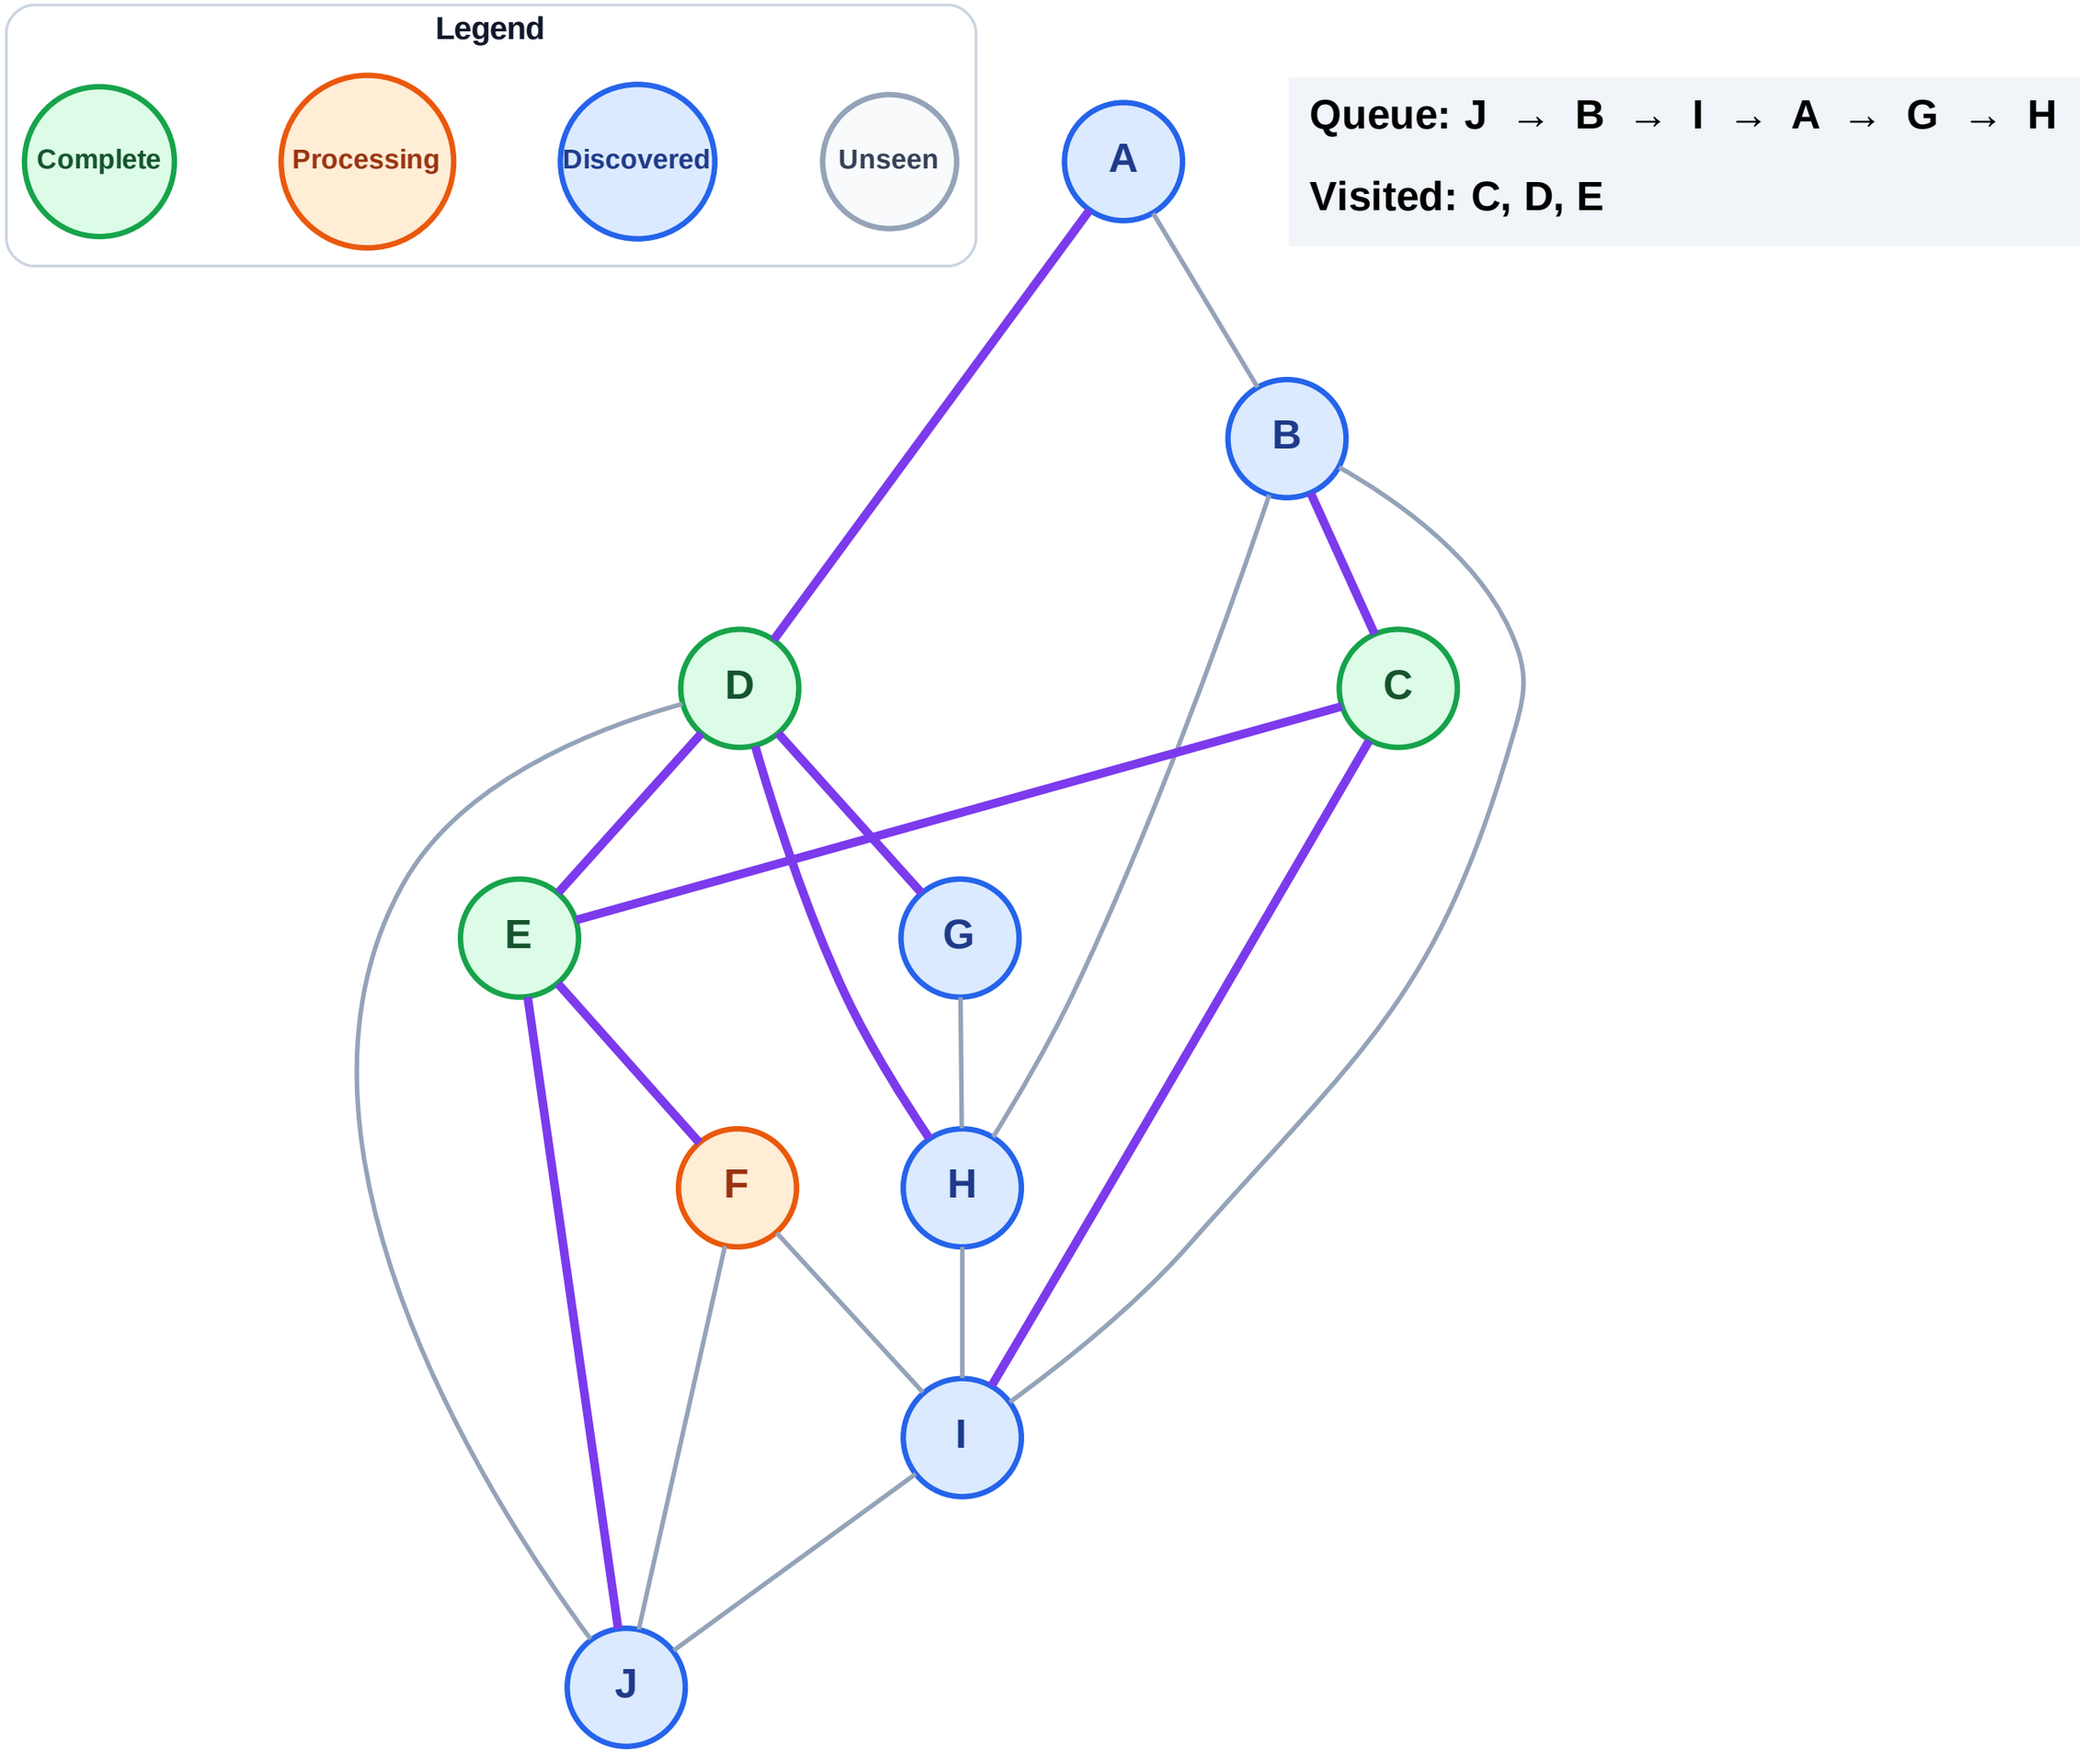


Queue: J → B → I → A → G → H

Visited: C, D, E

BFS Traversal

Step 9: No new neighbors from F

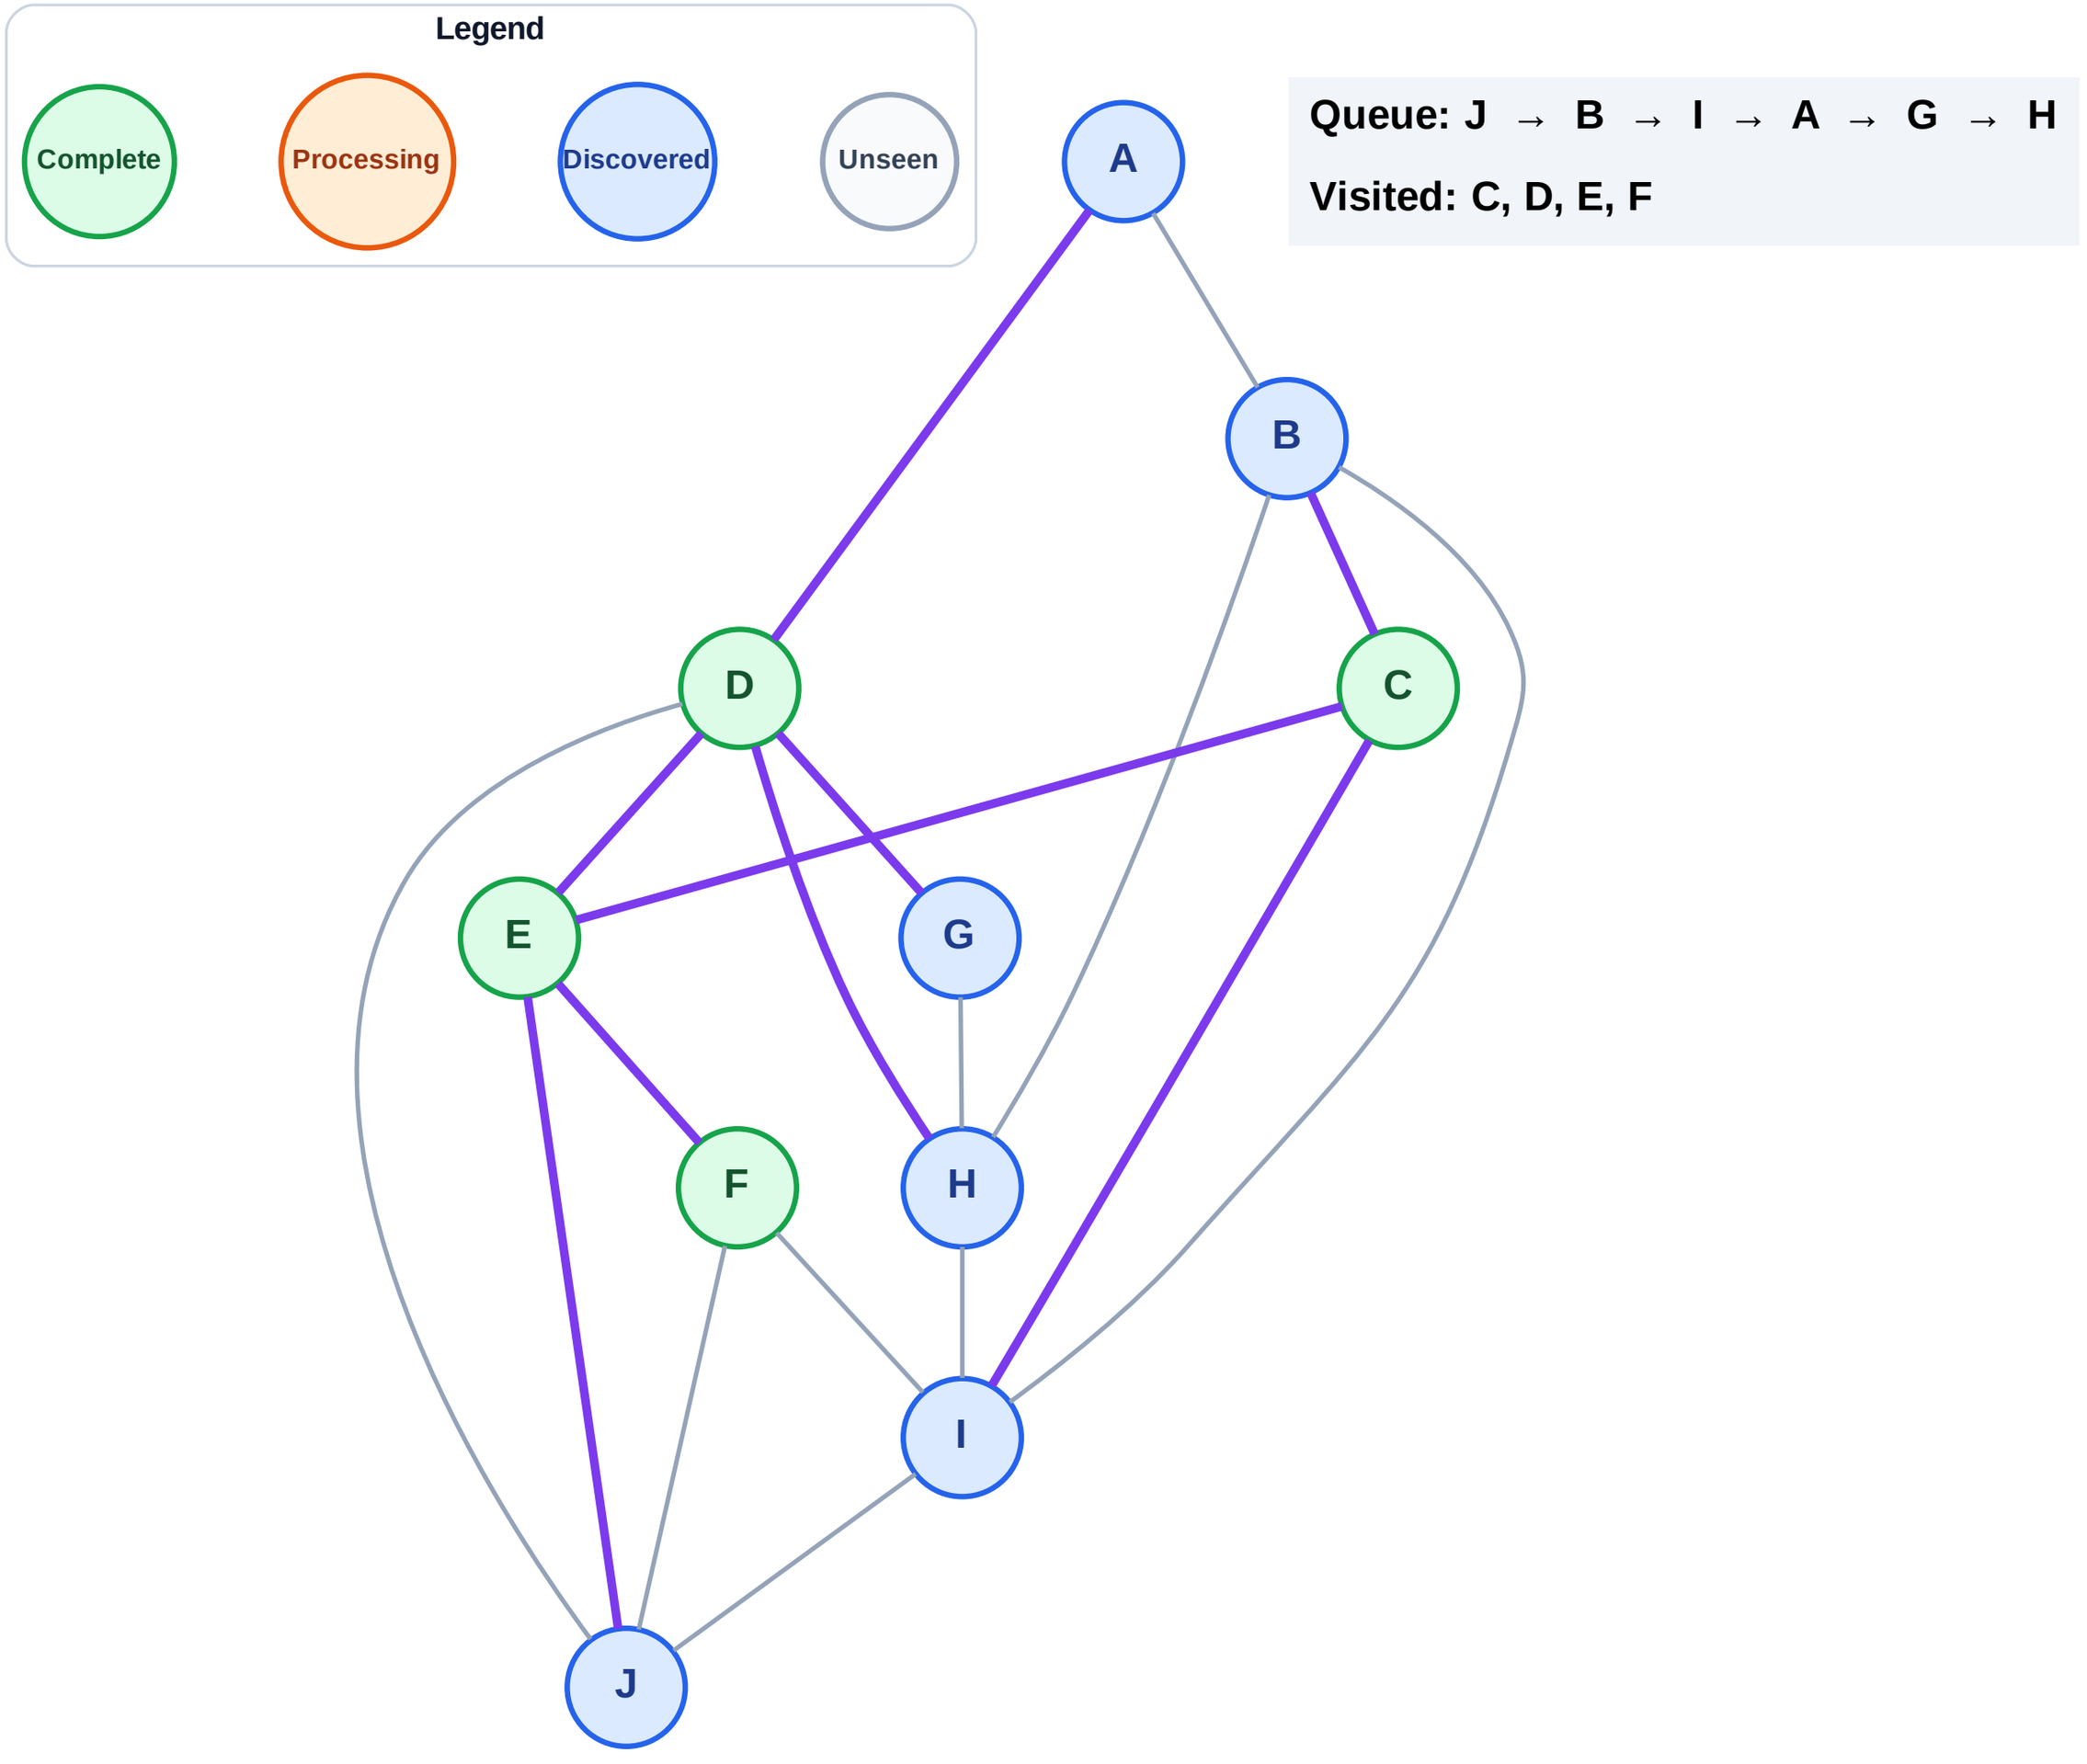


Queue: J → B → I → A → G → H

Visited: C, D, E, F


BFS Traversal

Step 10: Process node J

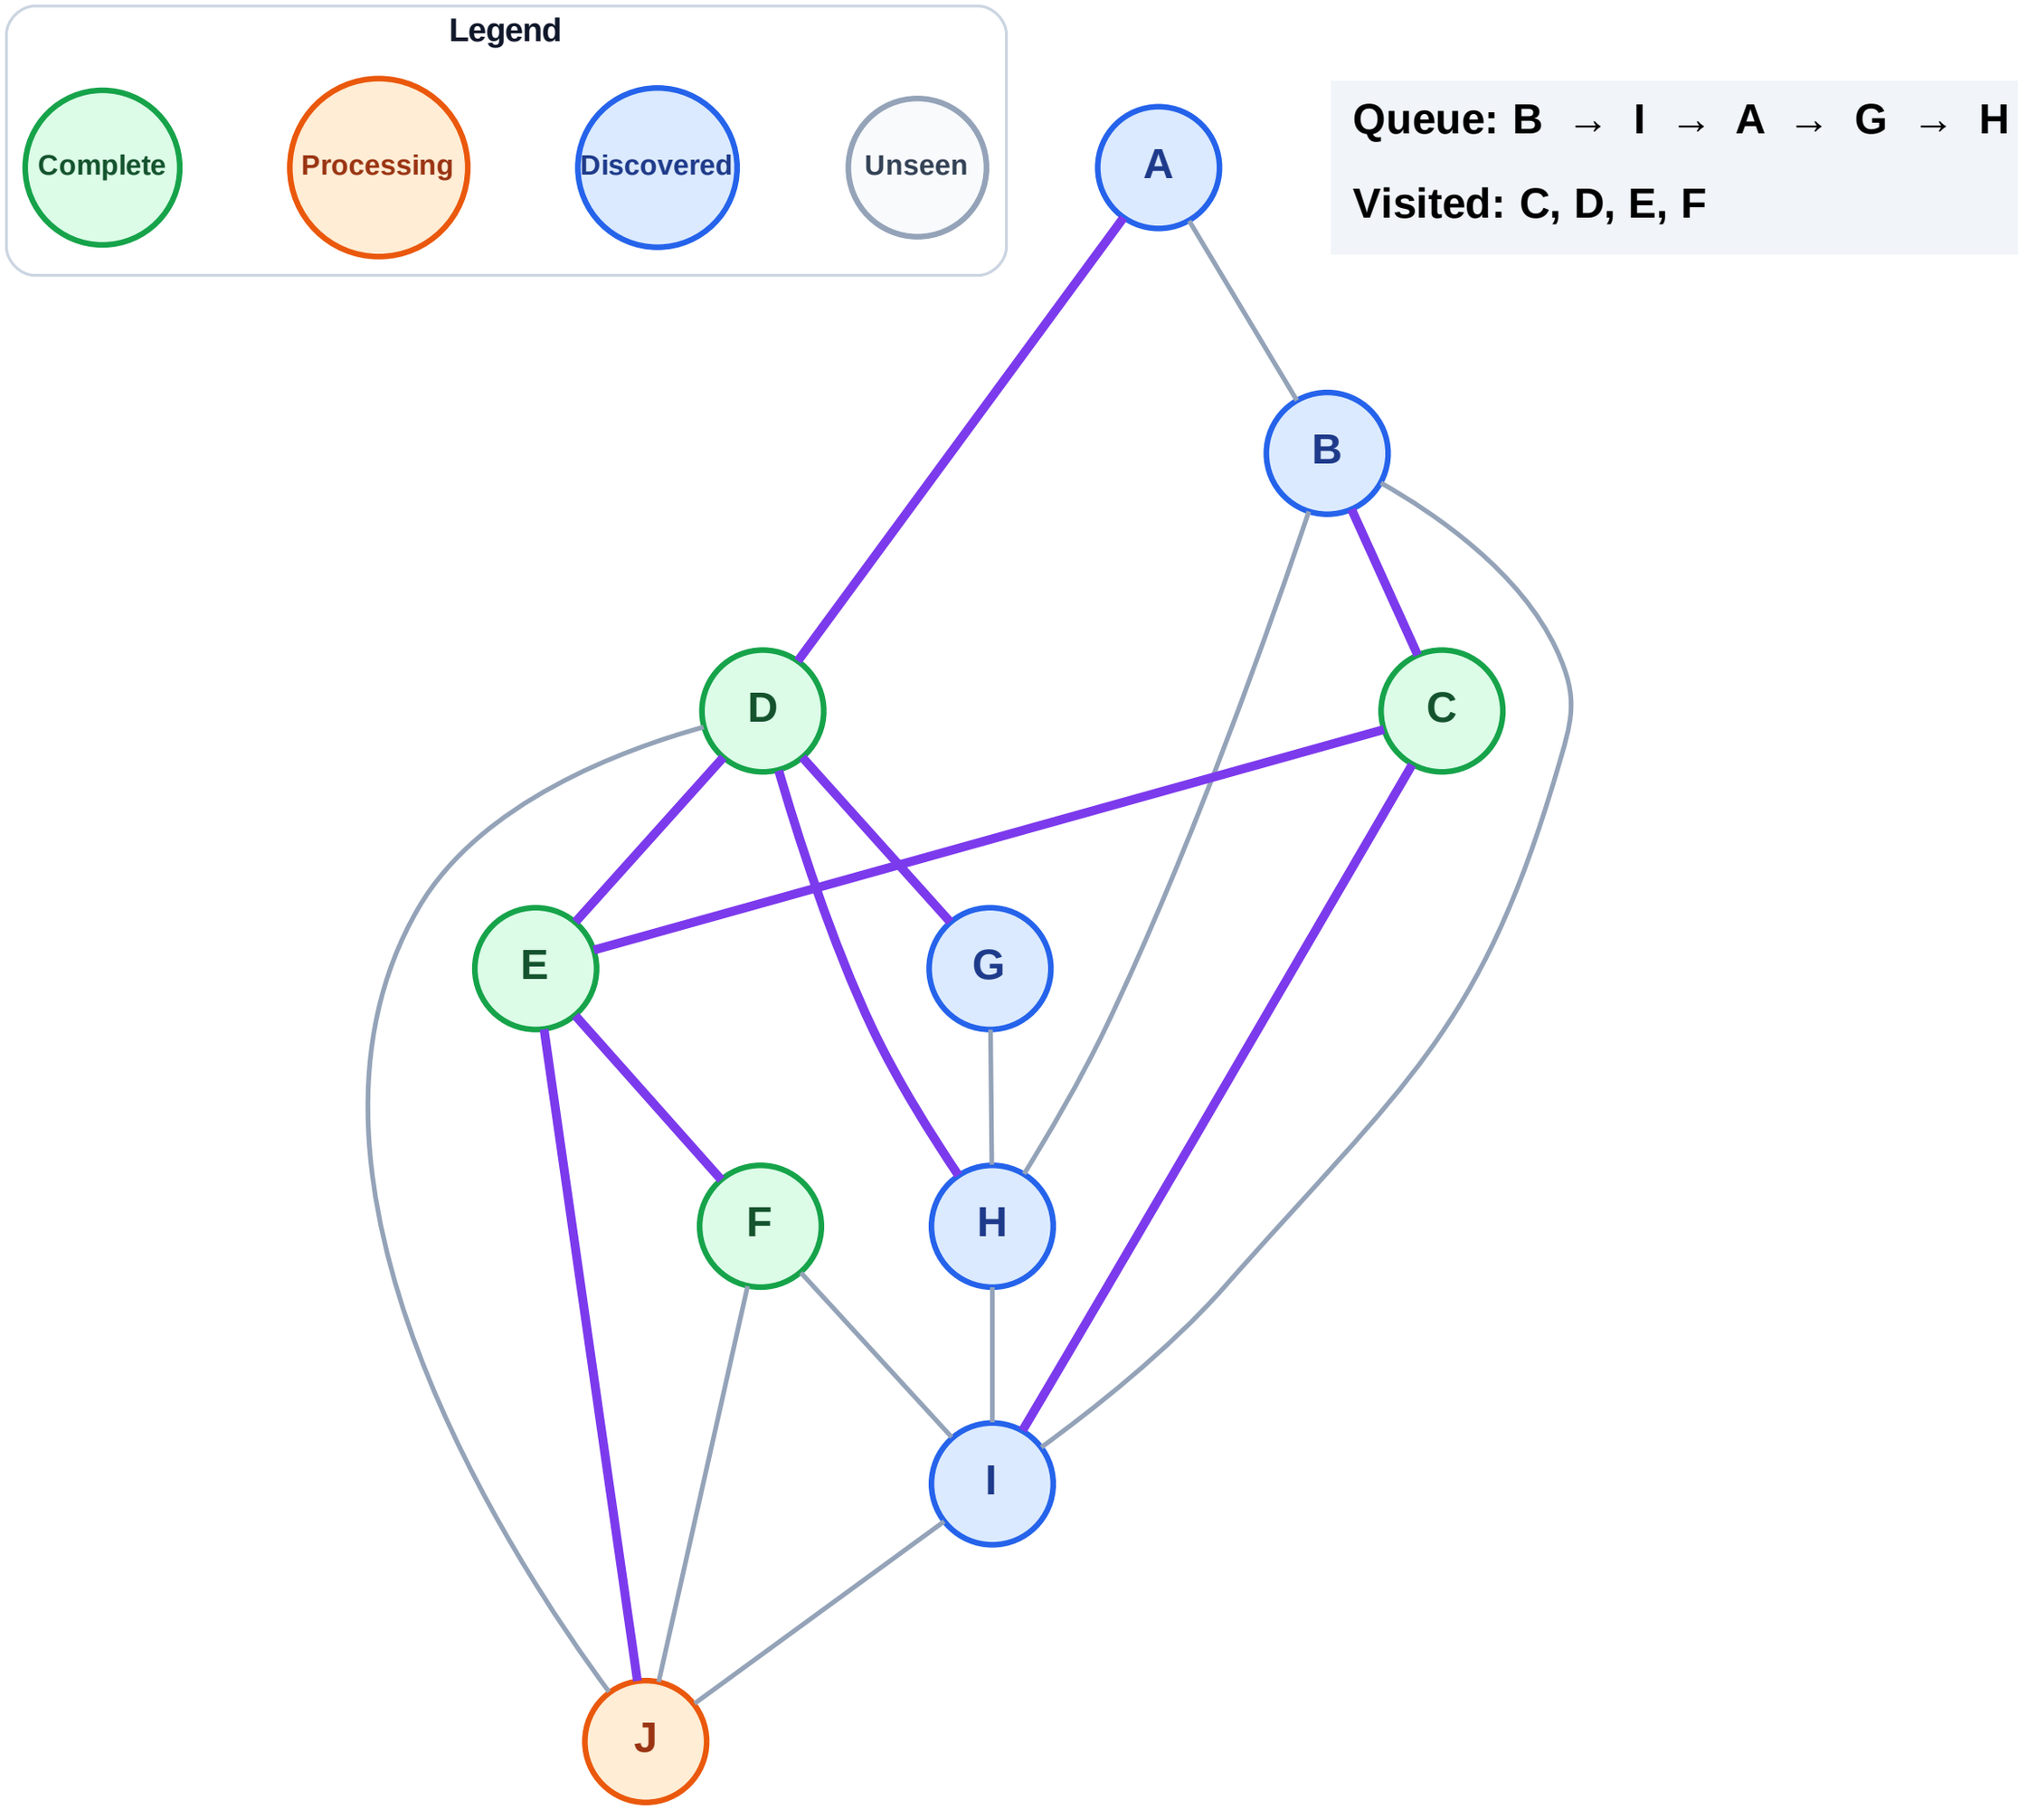

BFS Traversal

Step 11: No new neighbors from J

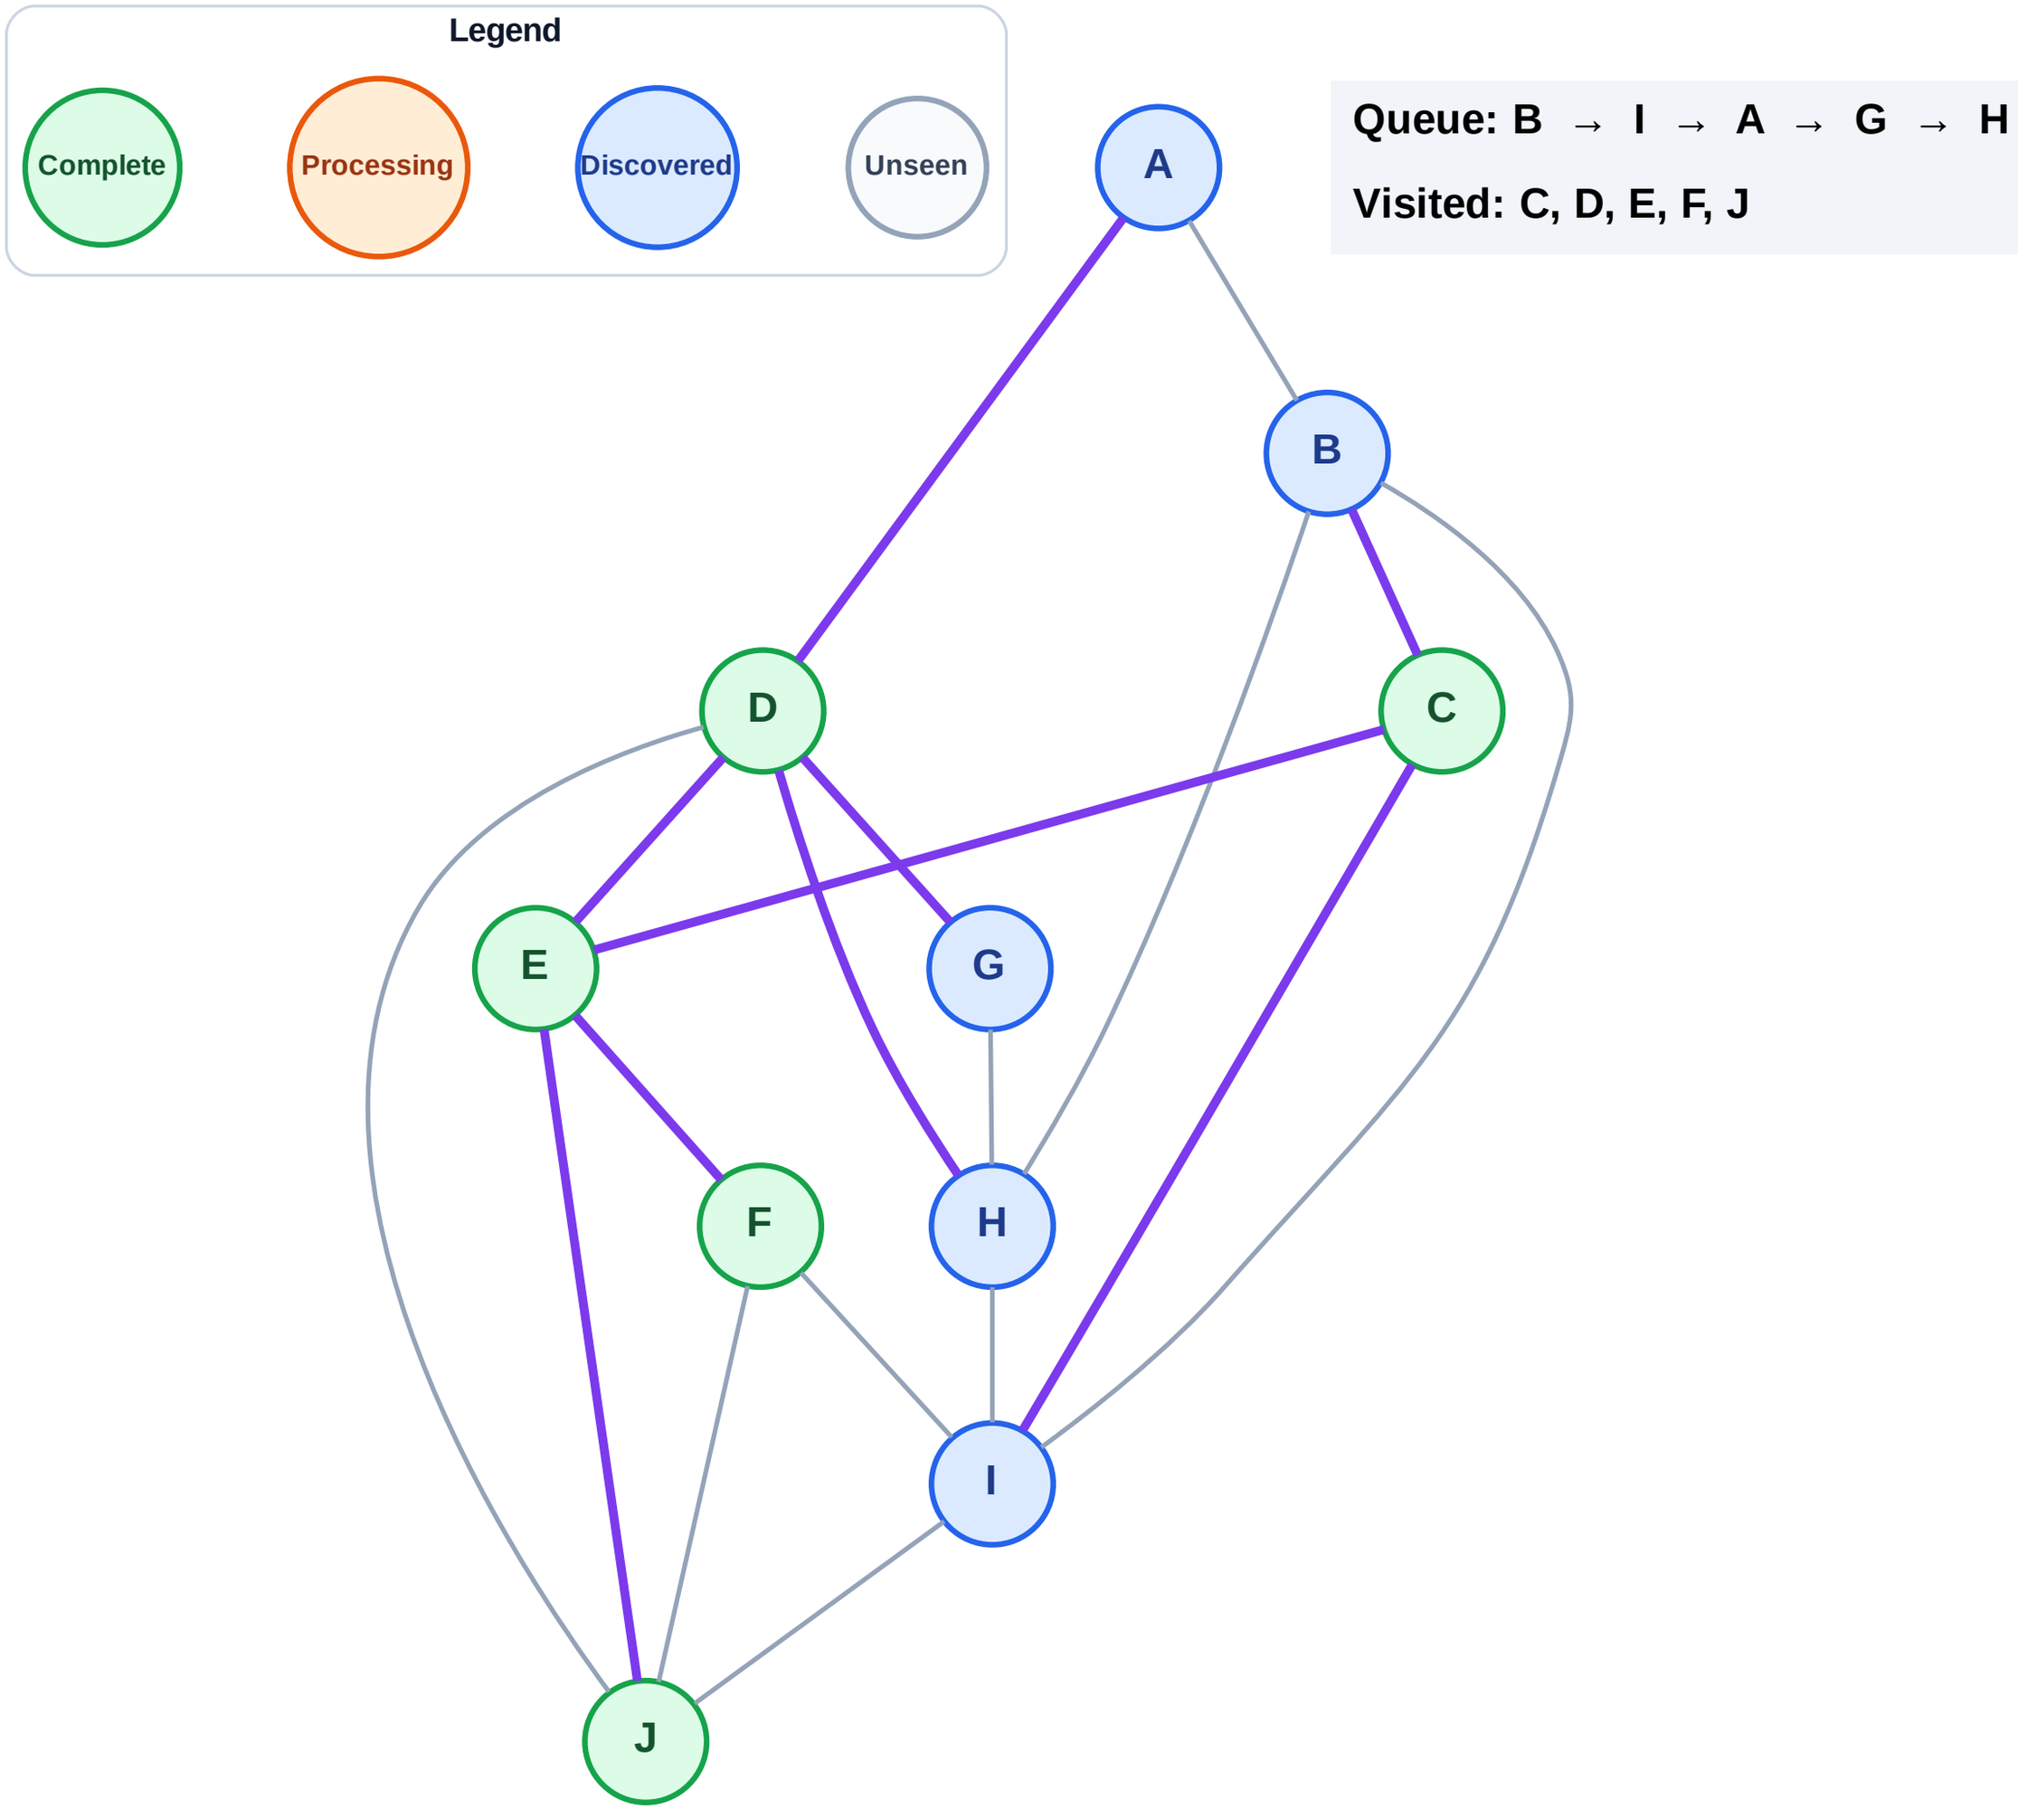


Queue: B → I → A → G → H

Visited: C, D, E, F, J

BFS Traversal

Step 12: Process node B

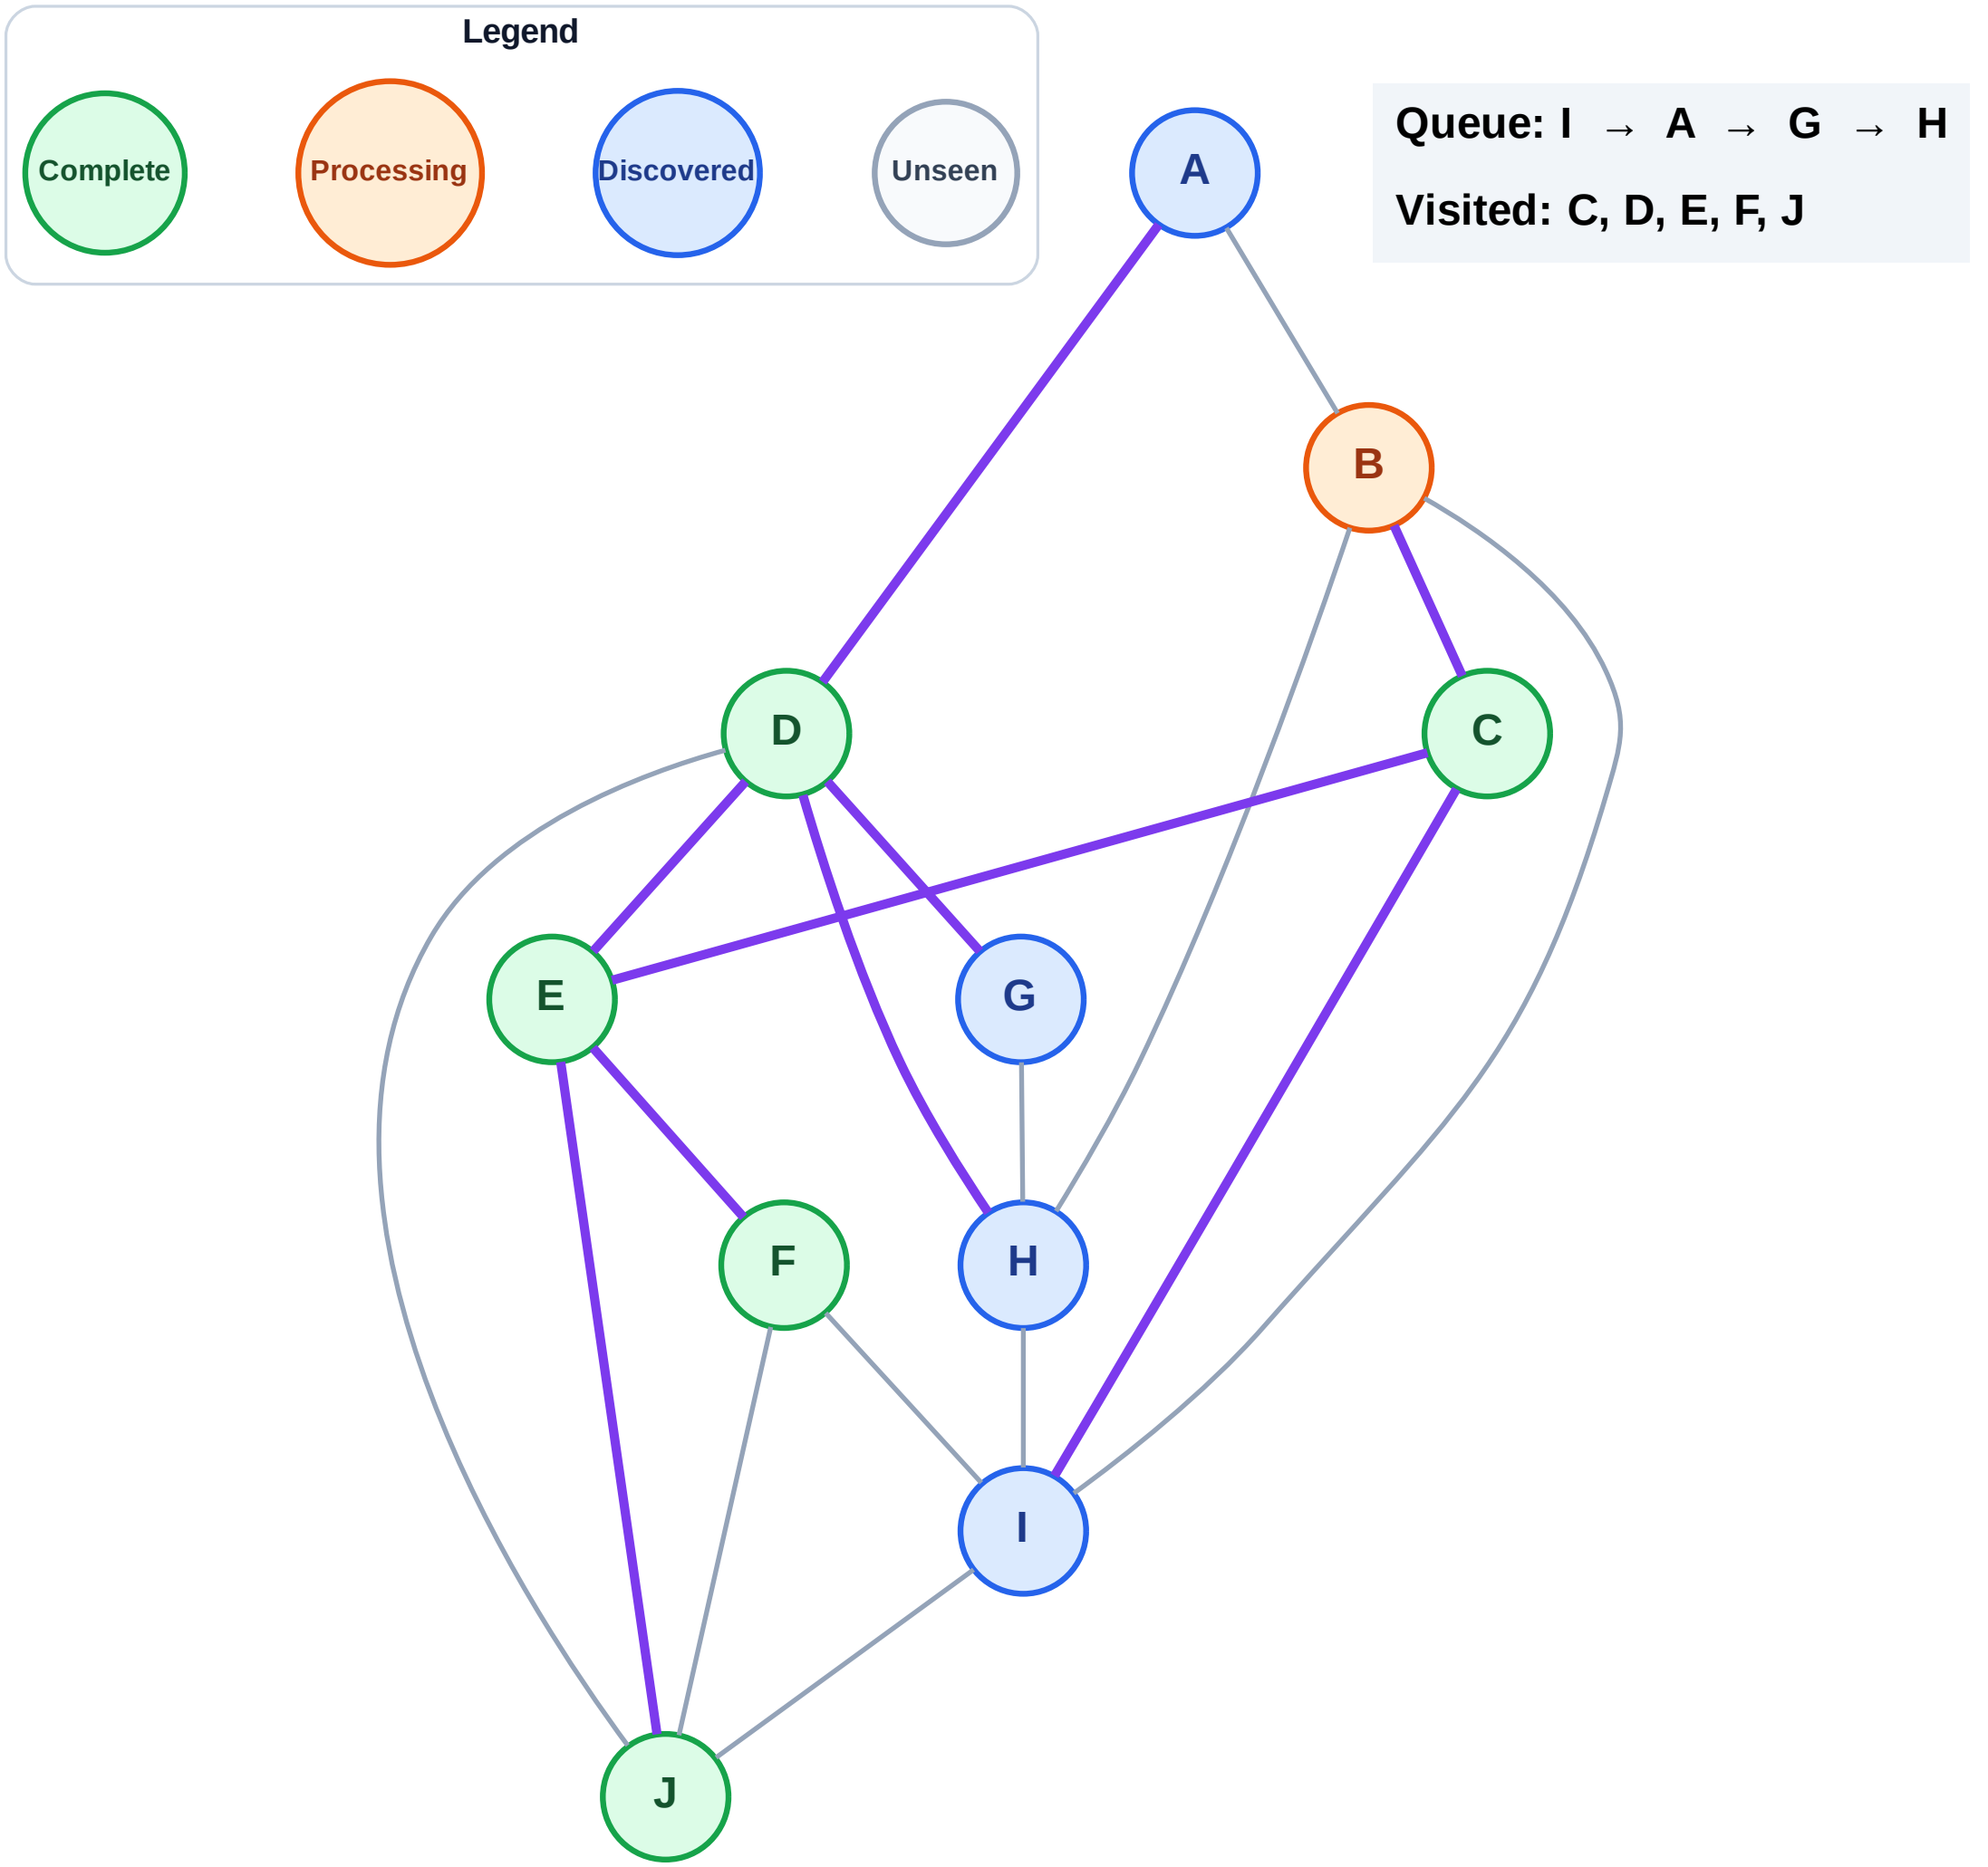


Queue: I → A → G → H

Visited: C, D, E, F, J


BFS Traversal

Step 13: No new neighbors from B

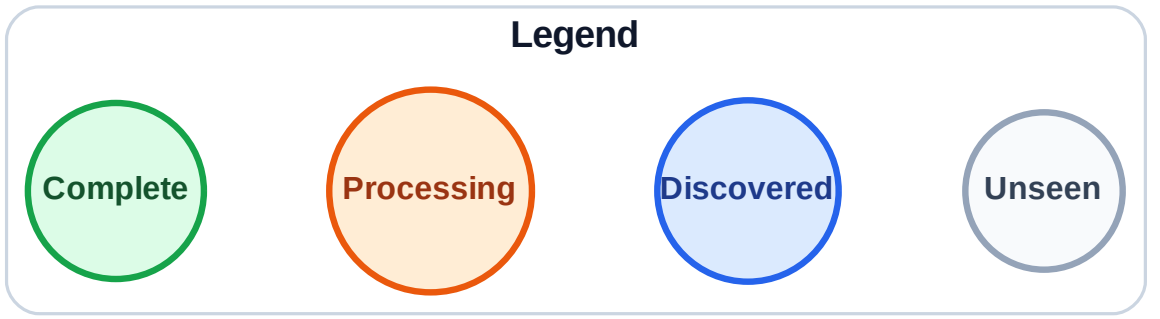


Queue: I → A → G → H

Visited: B, C, D, E, F, J

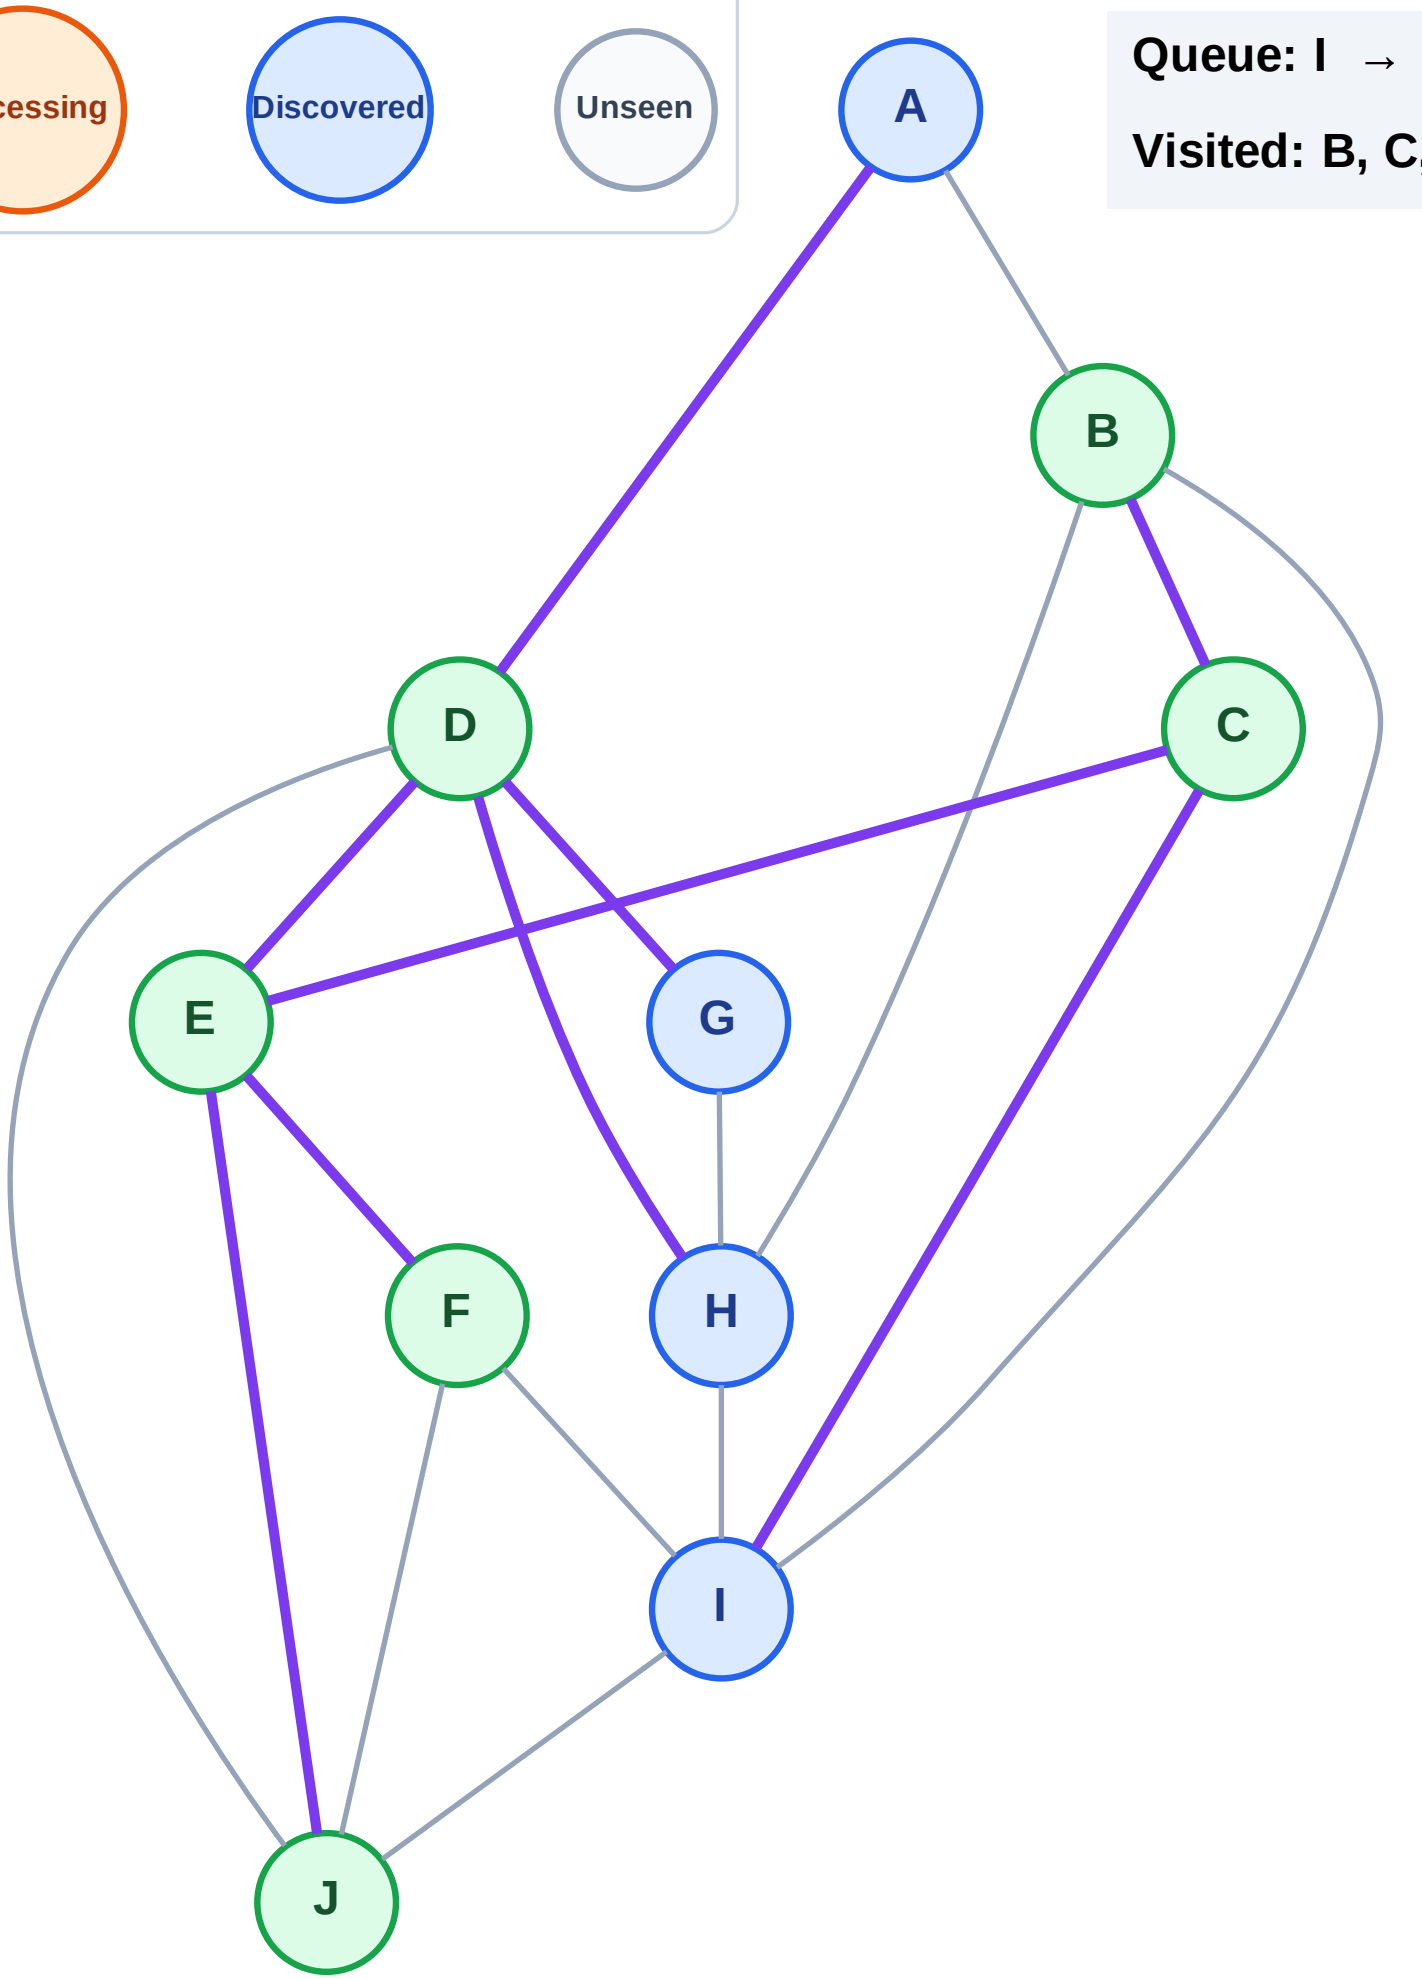


BFS Traversal

Step 14: Process node I

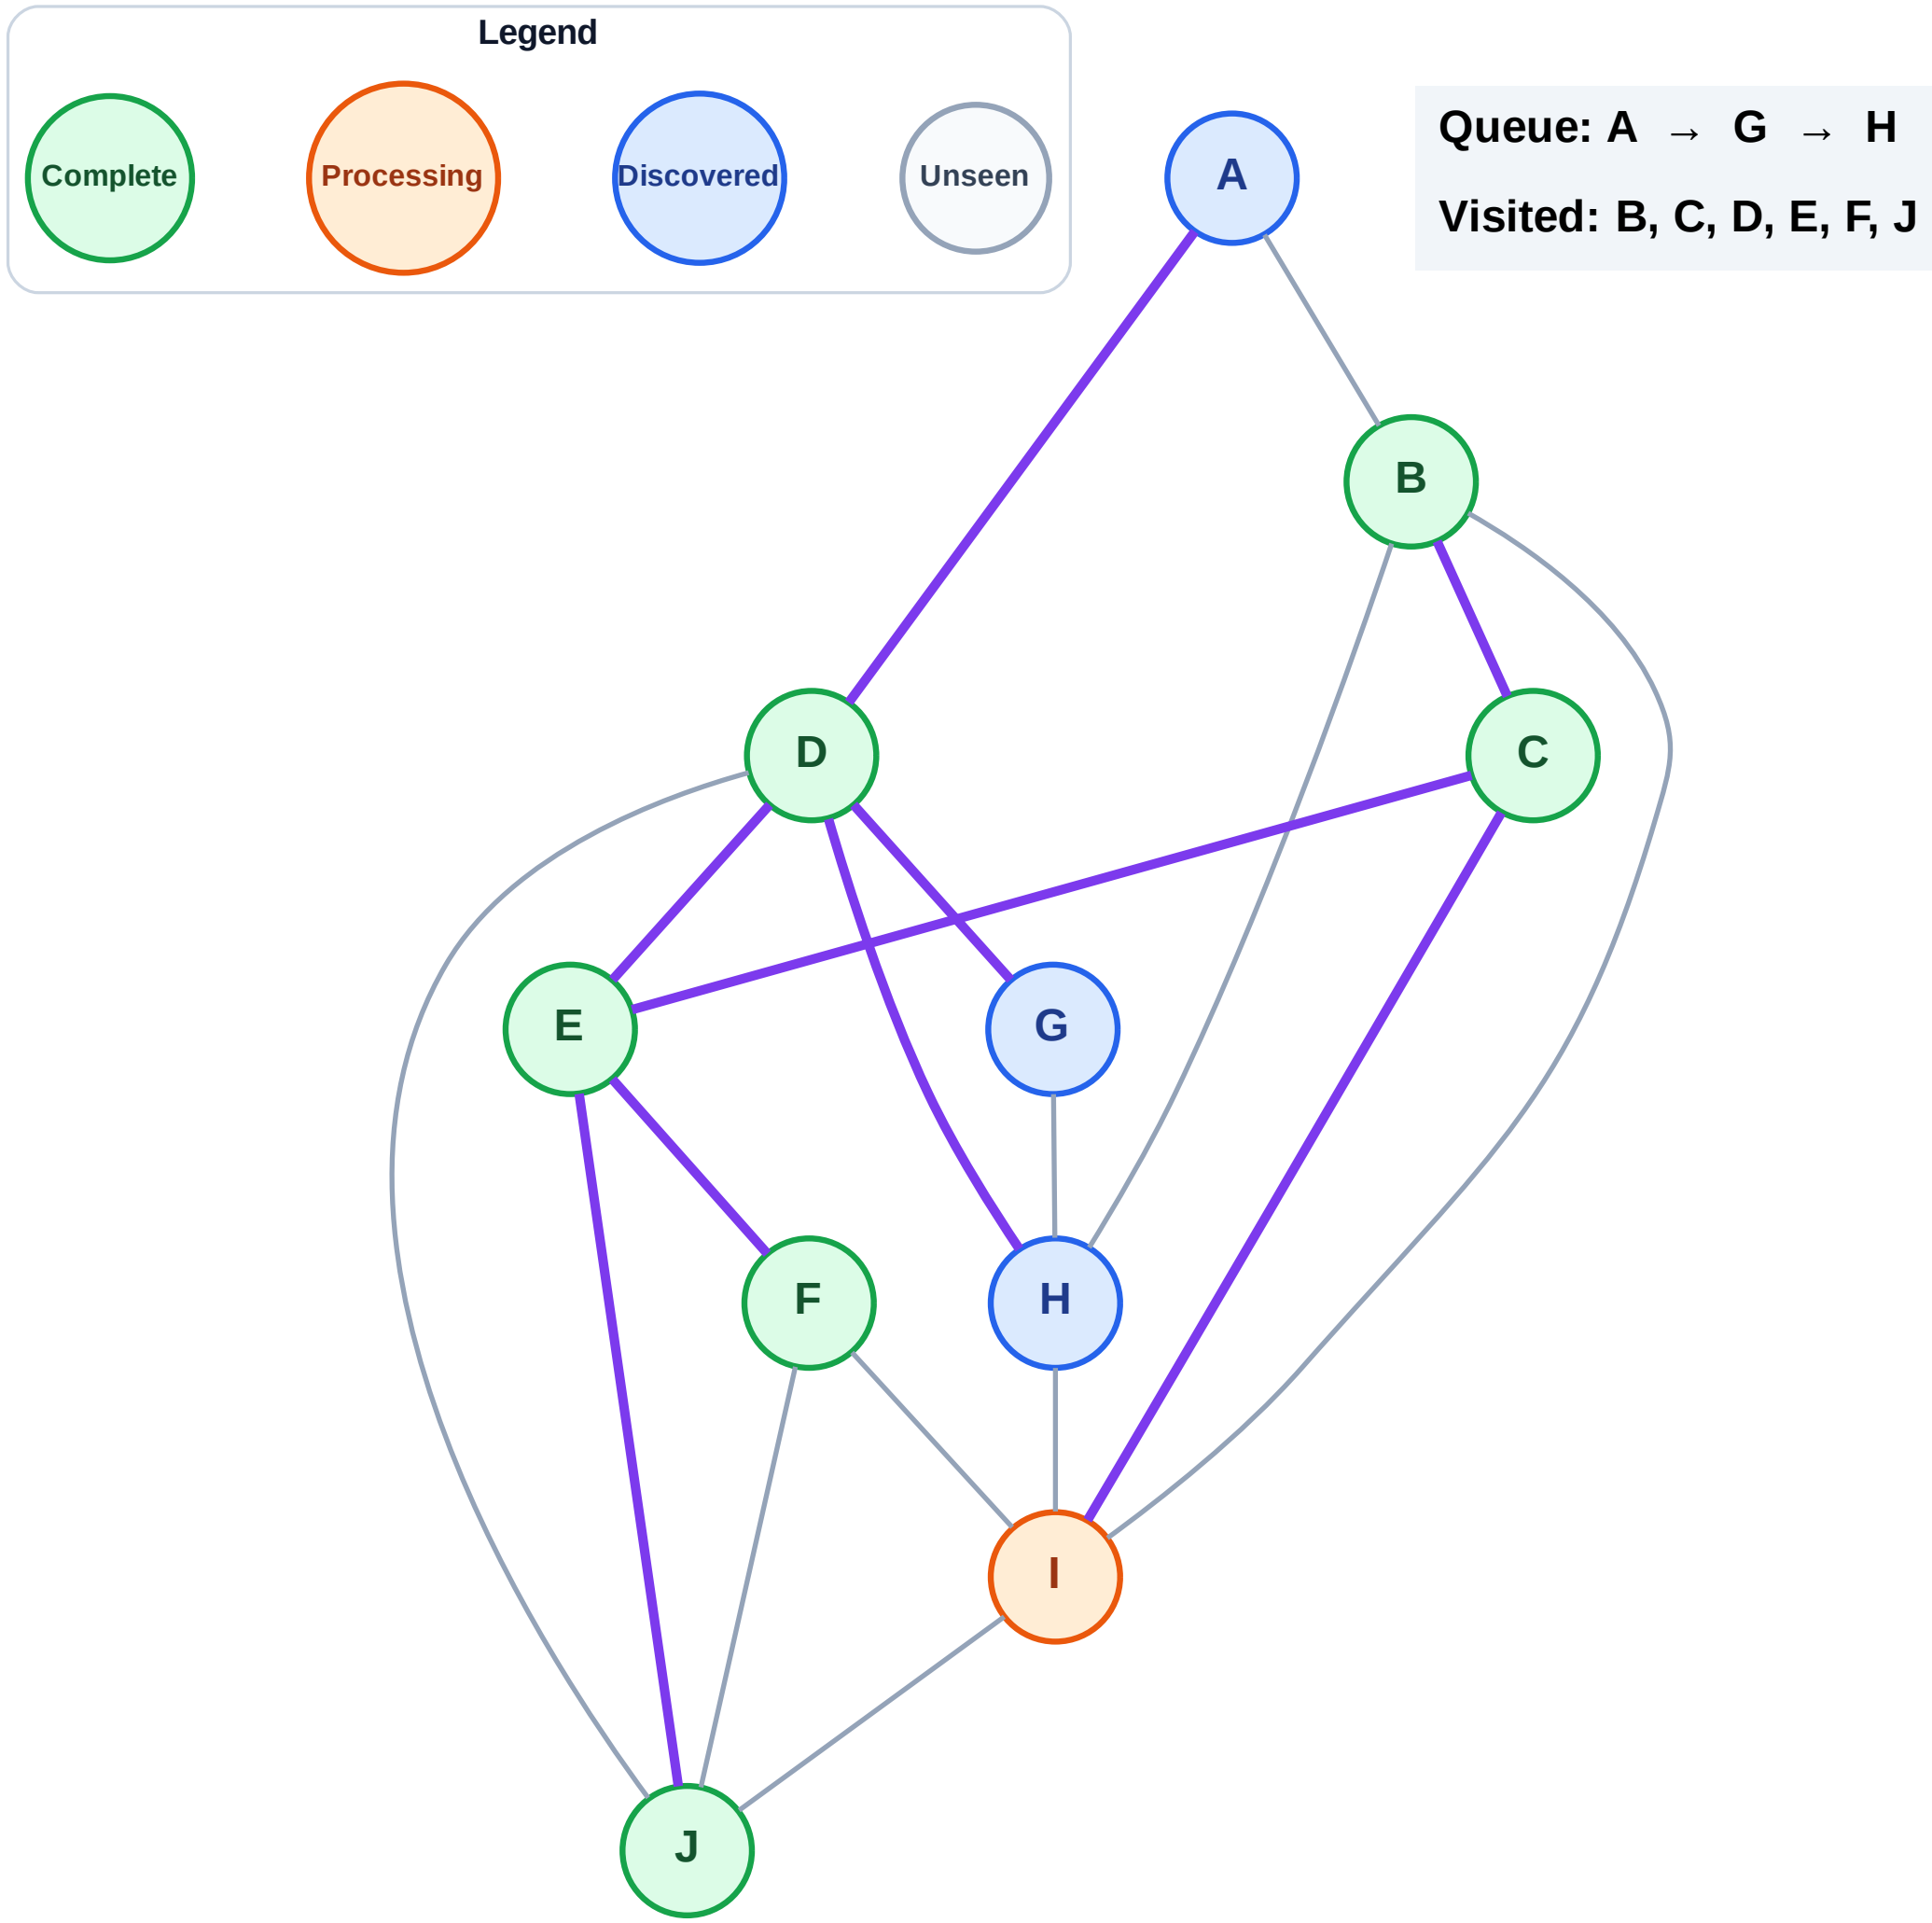


BFS Traversal

Step 15: No new neighbors from I

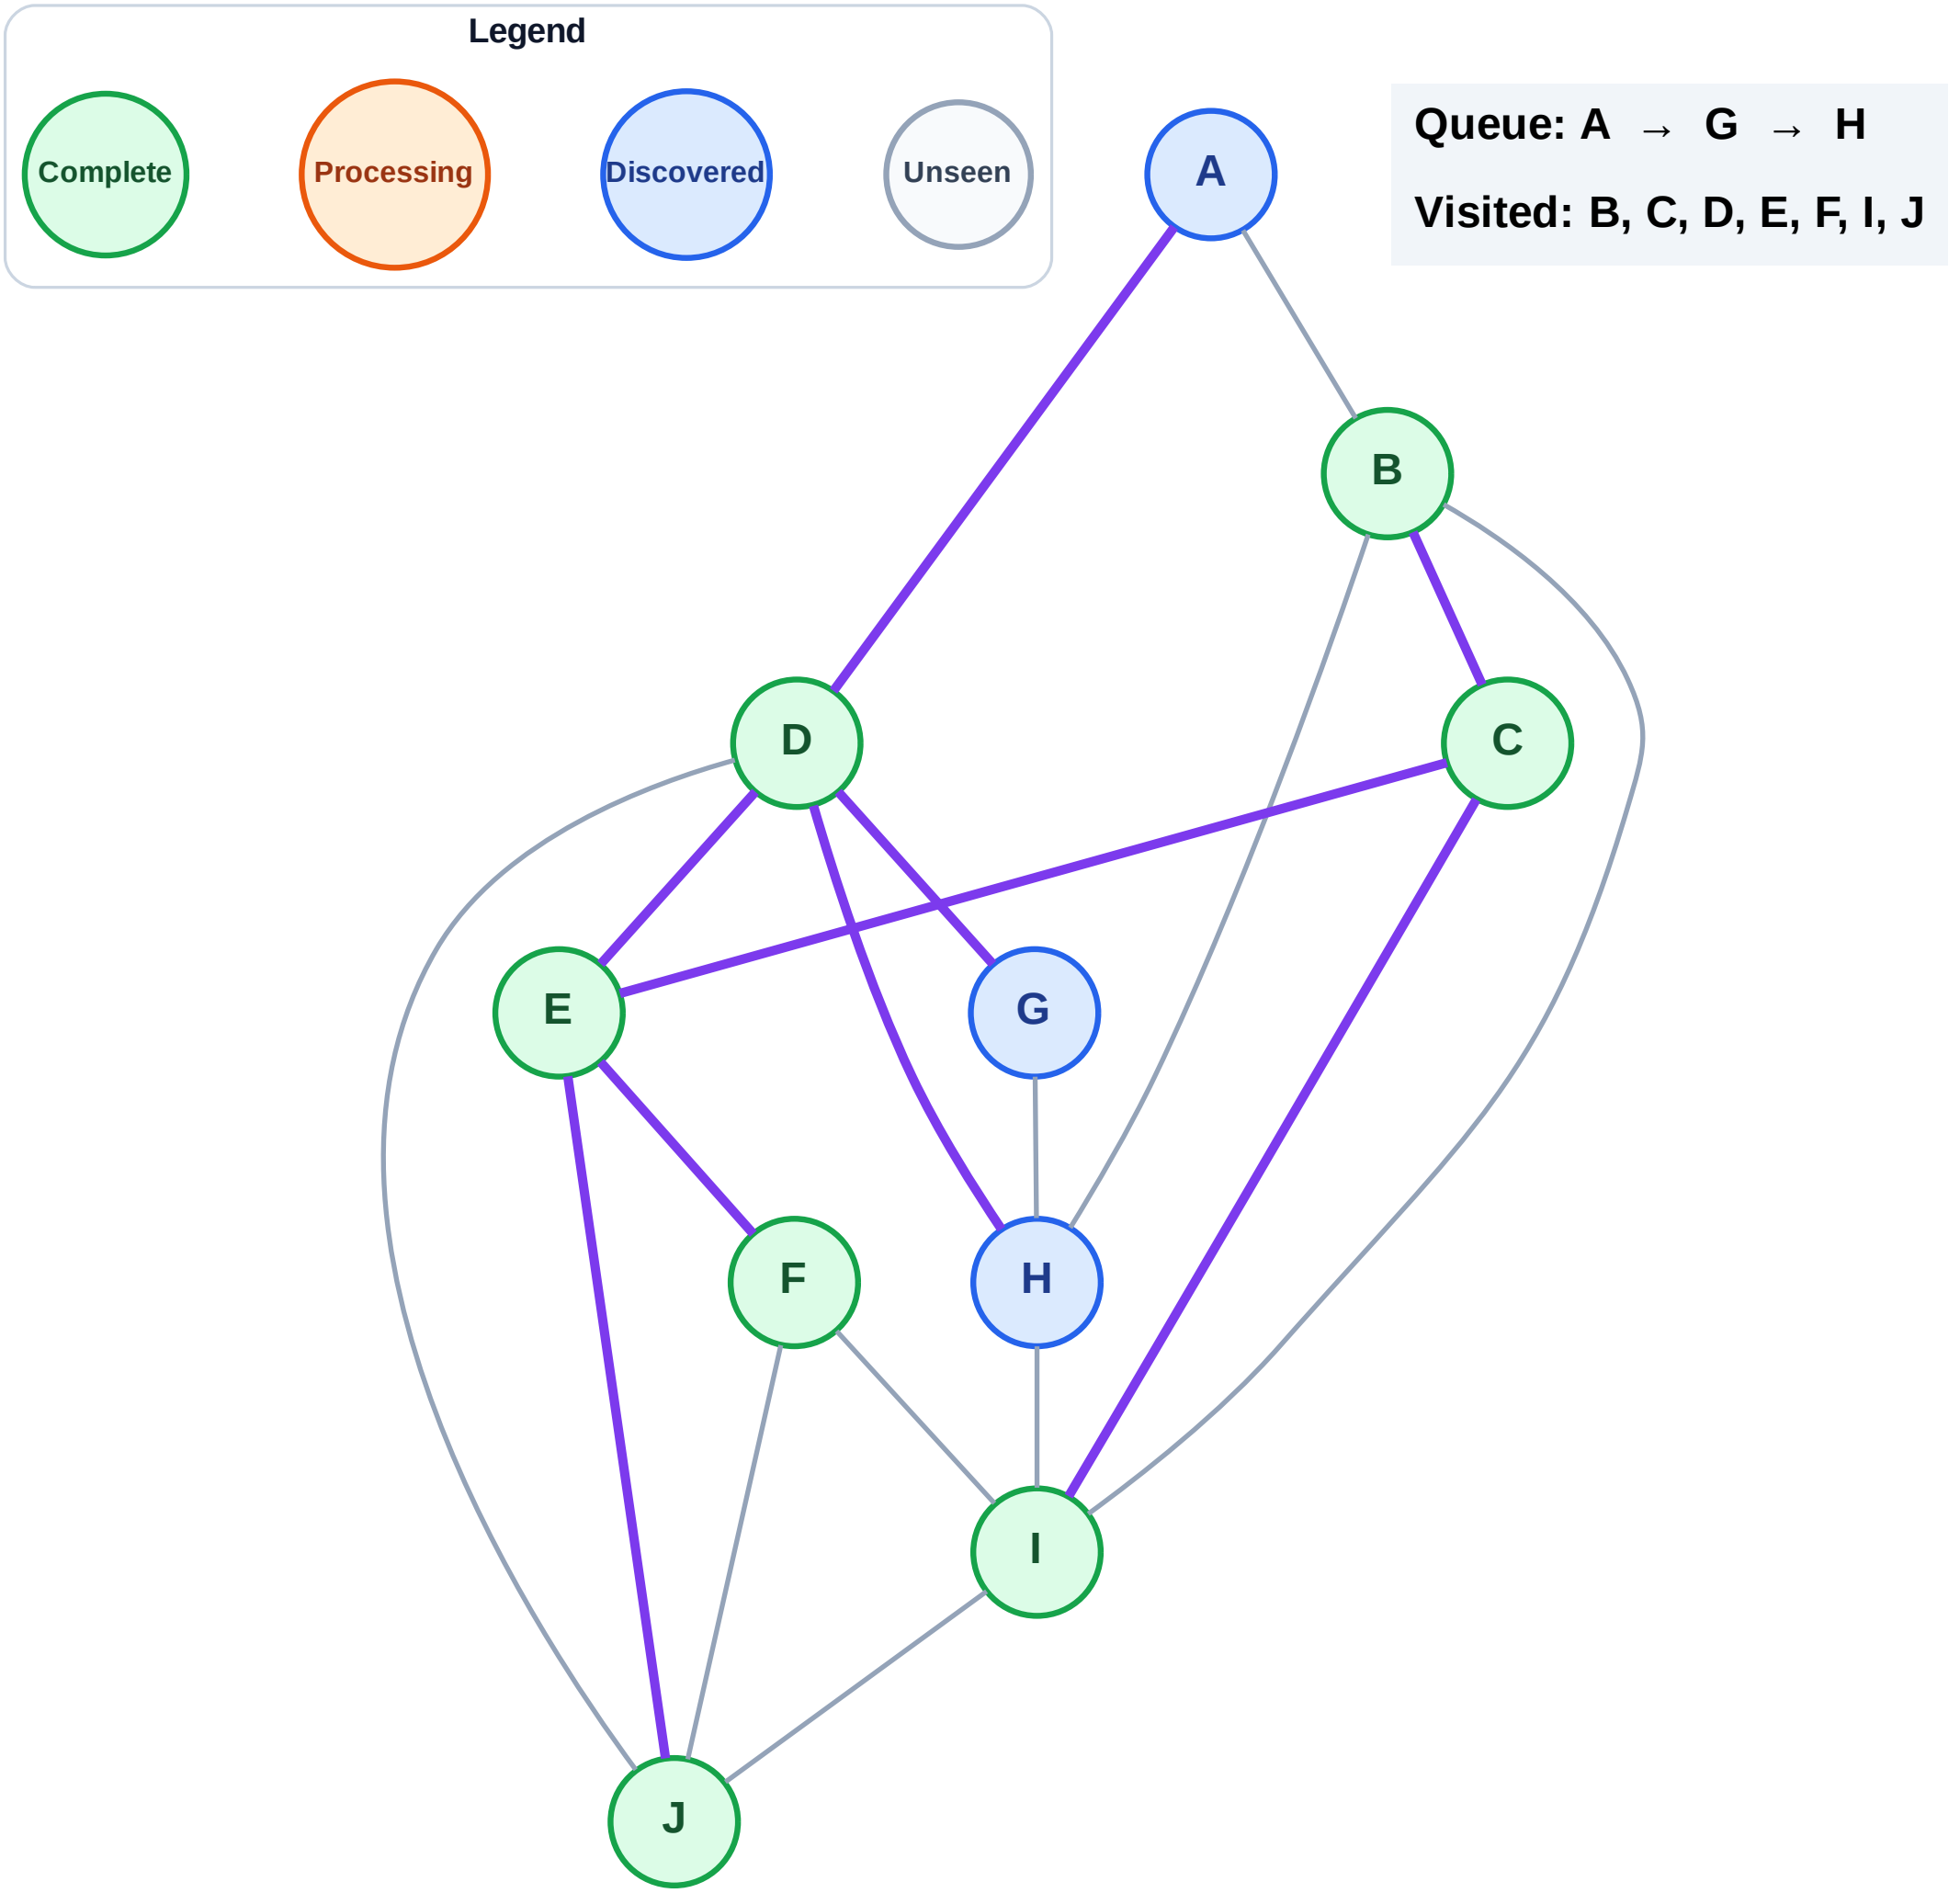


BFS Traversal

Step 16: Process node A

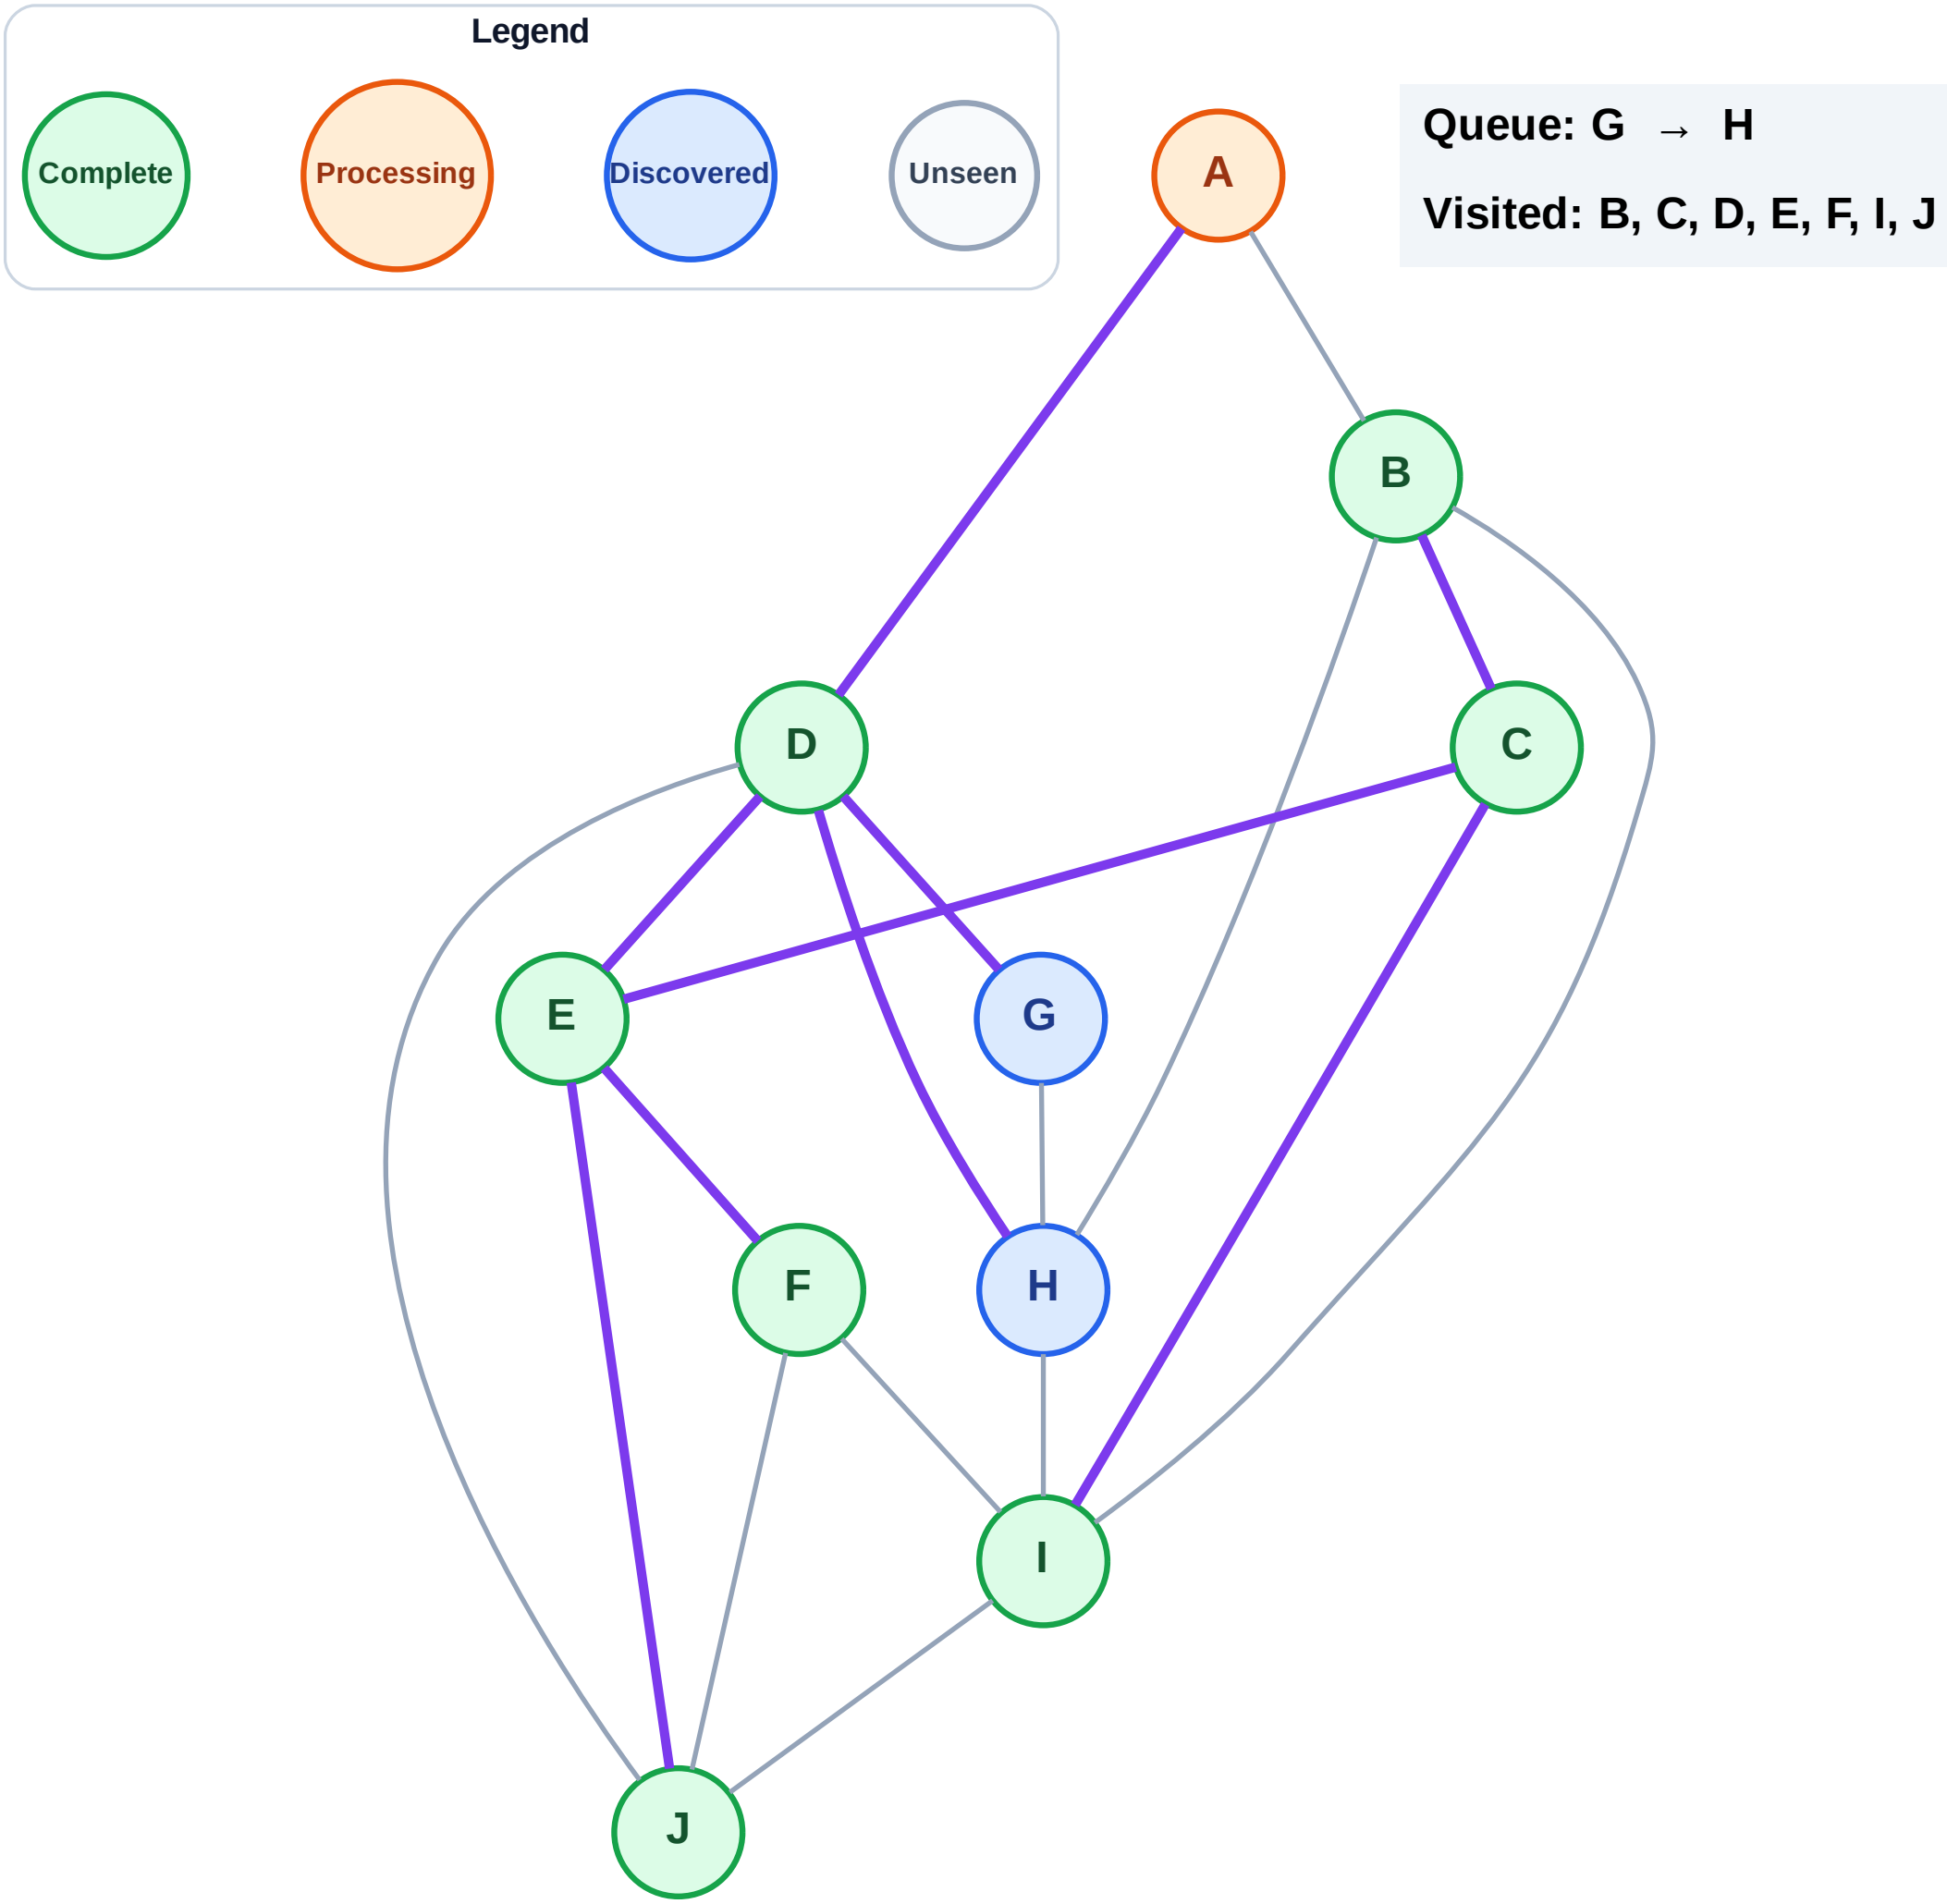


BFS Traversal

Step 17: No new neighbors from A

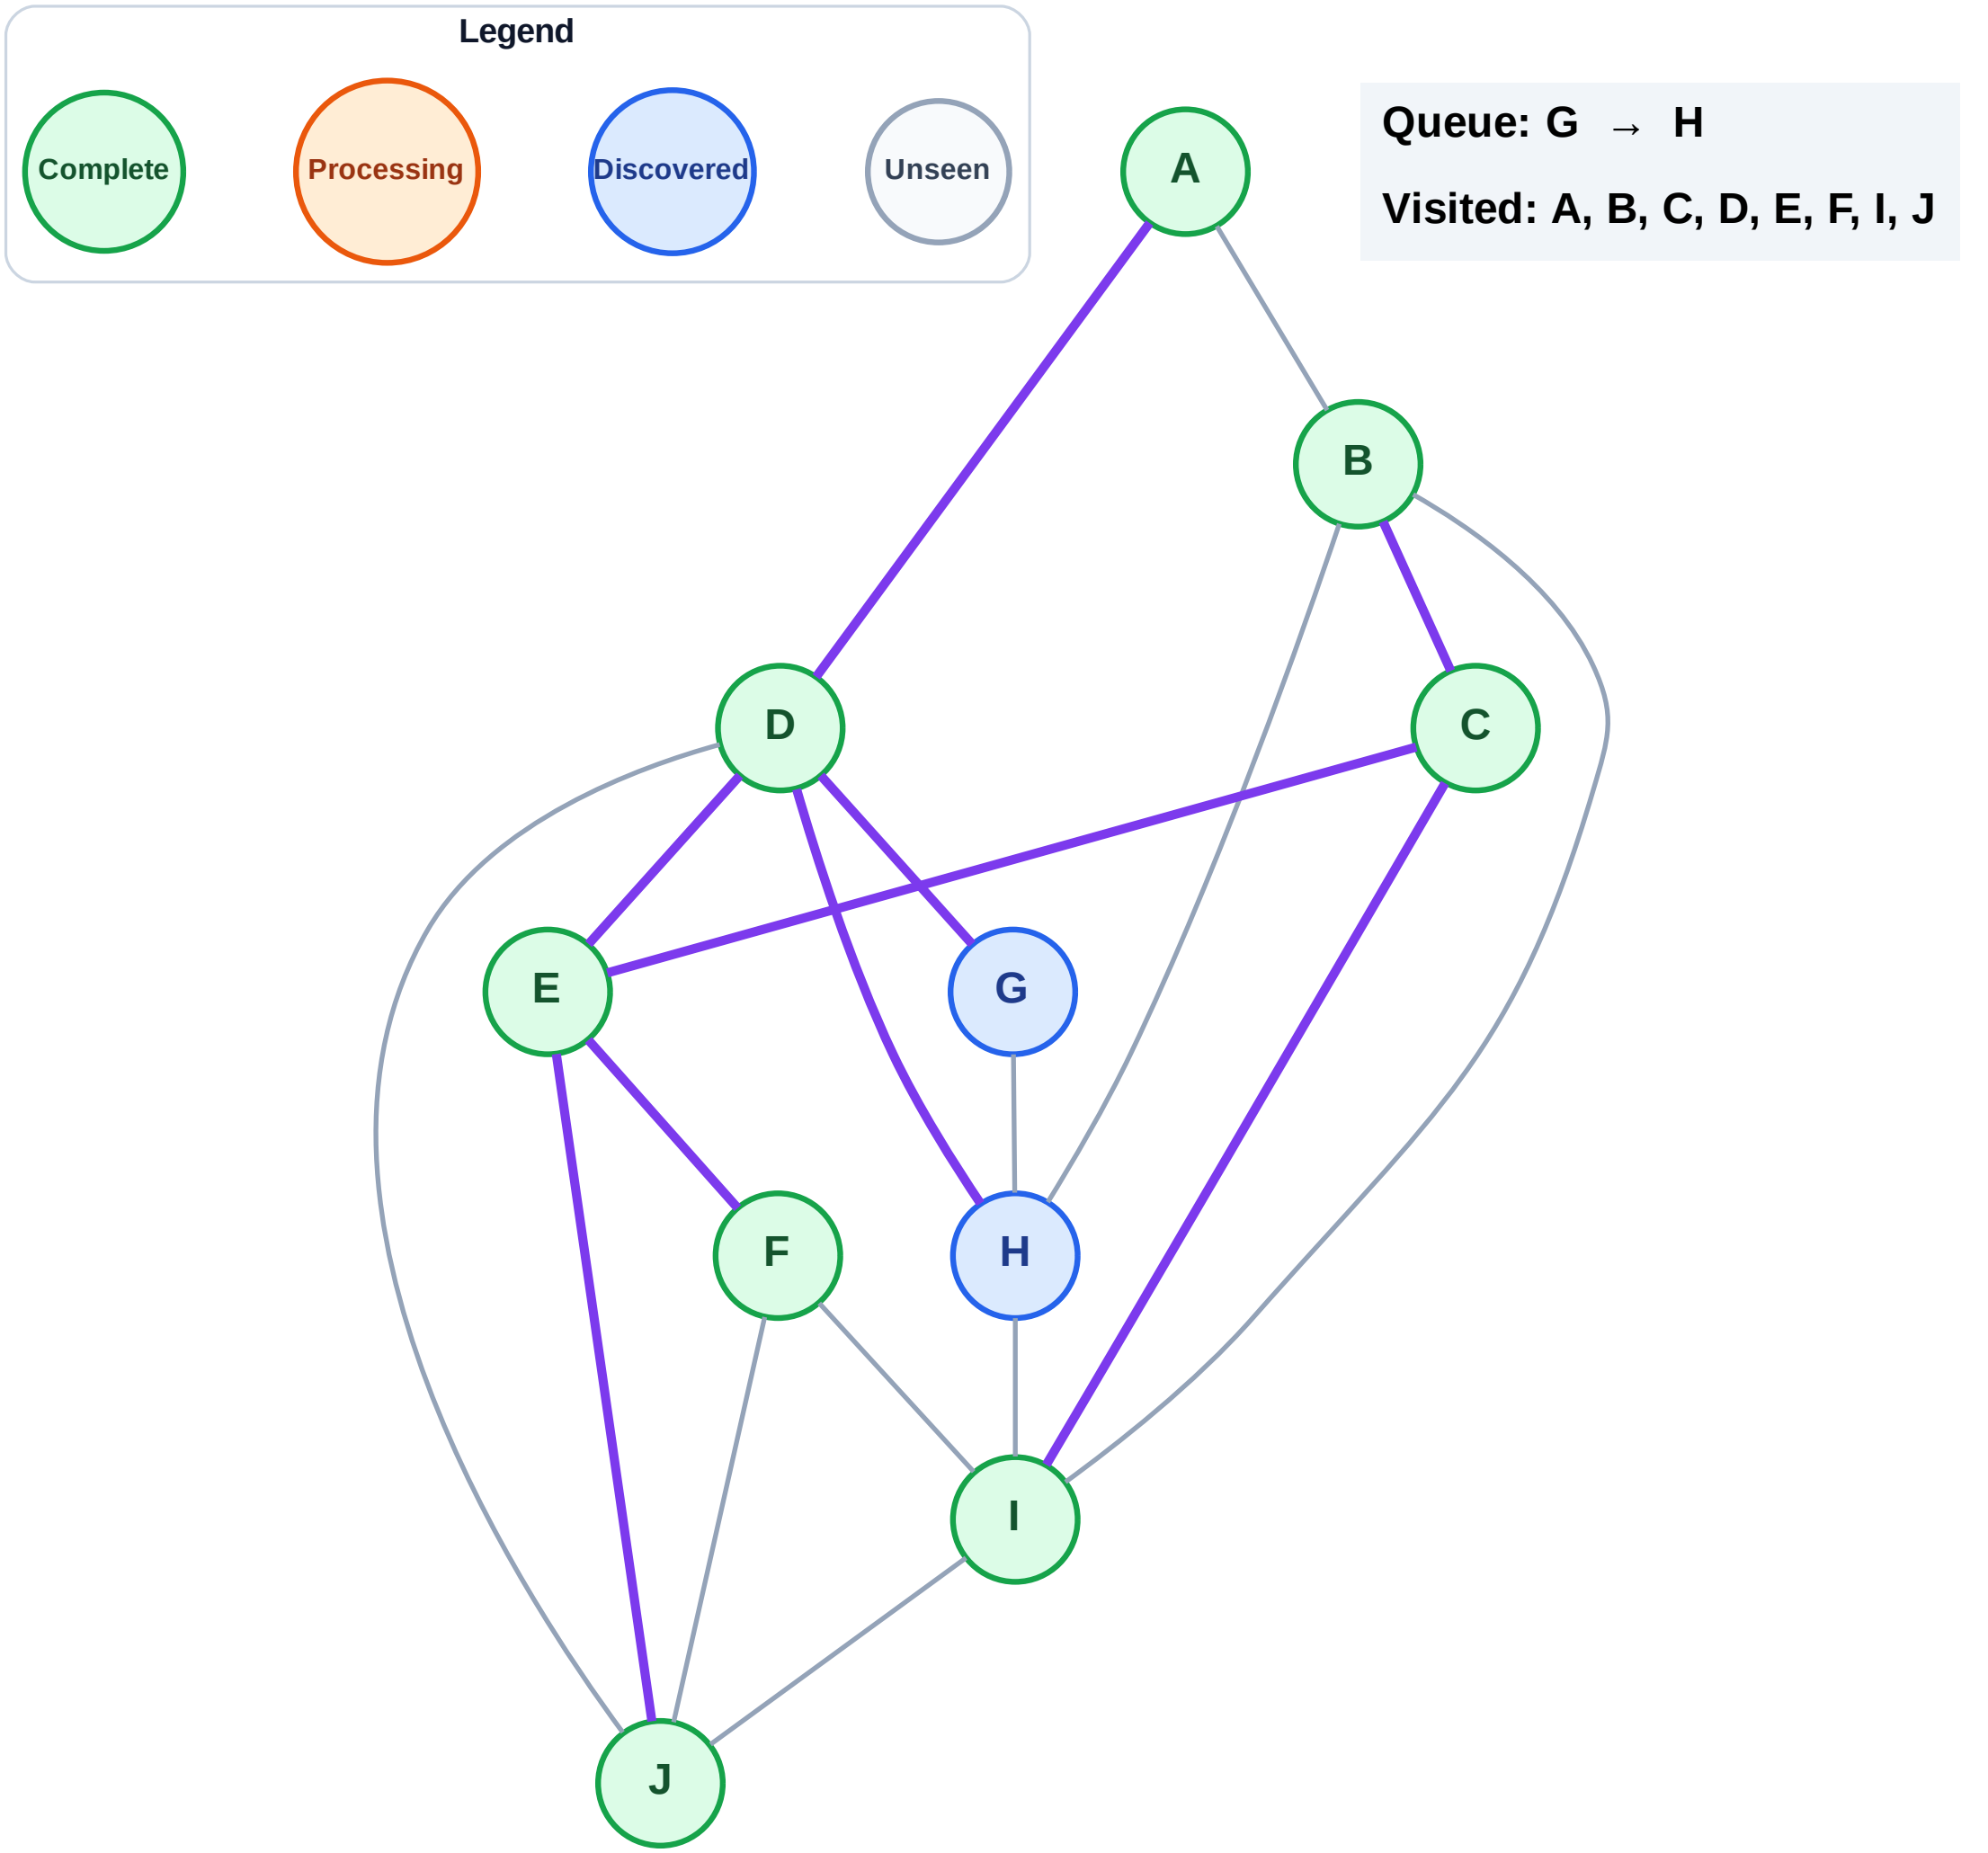

BFS Traversal

Step 18: Process node G

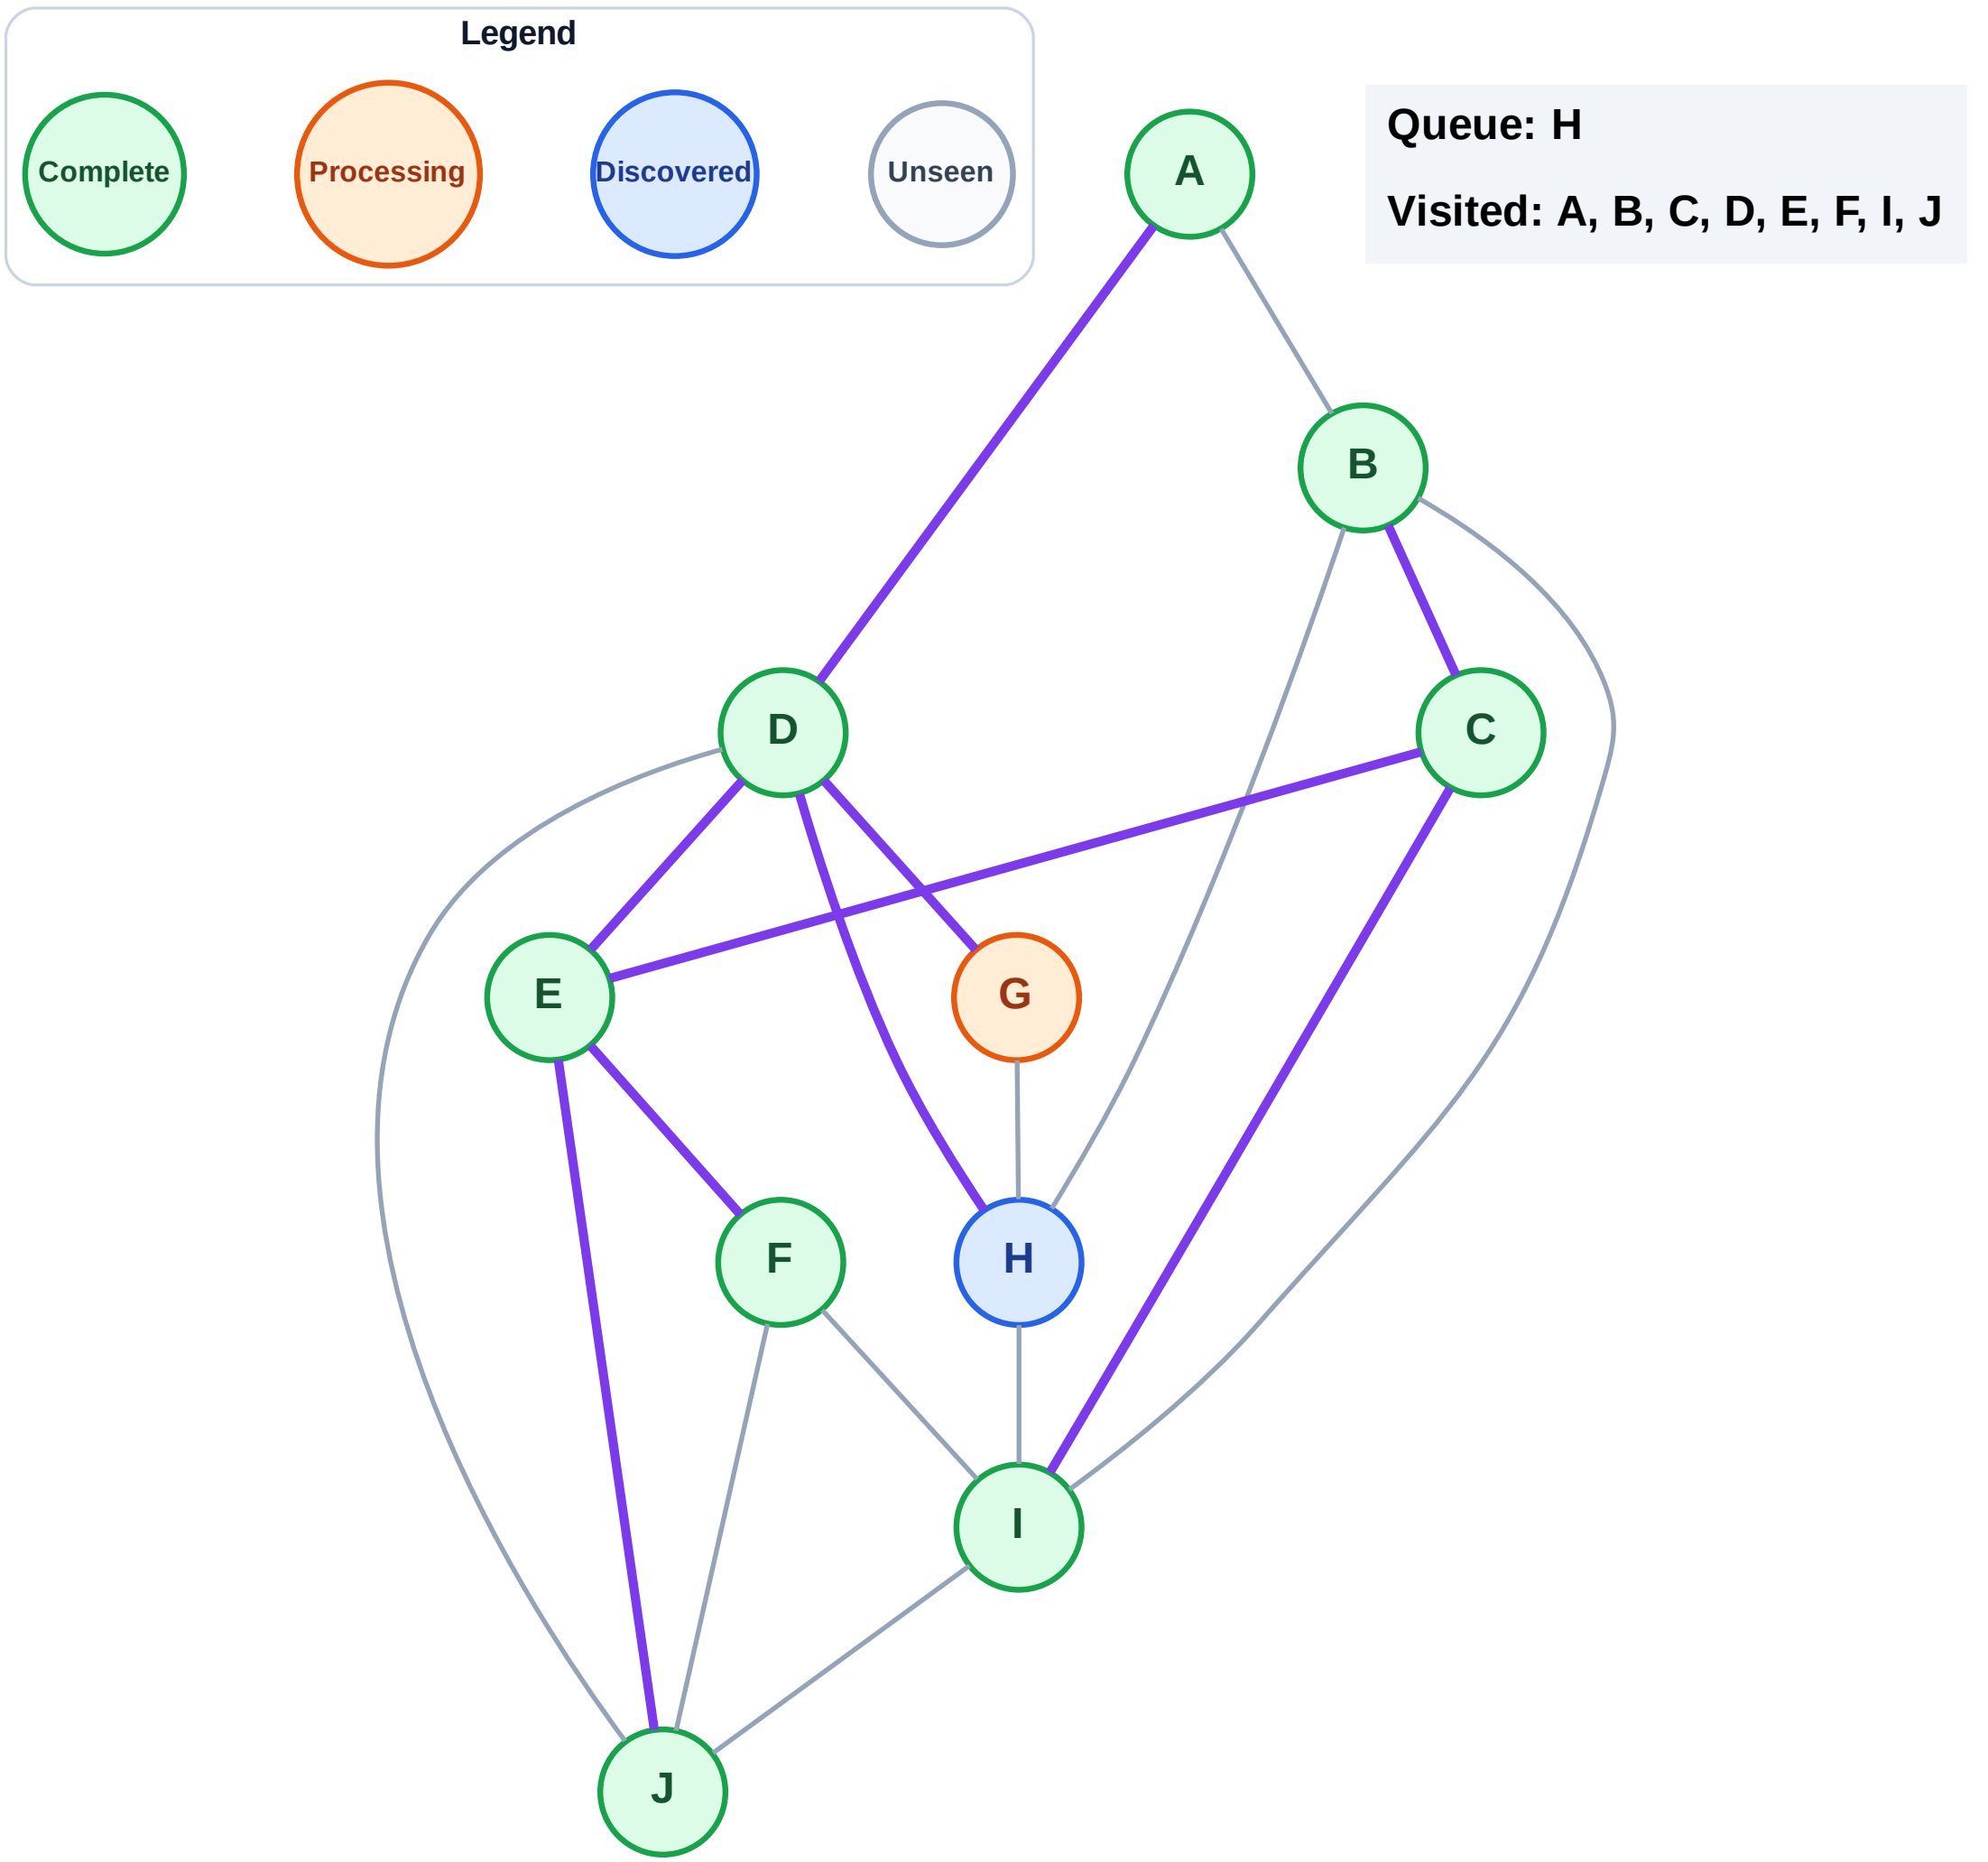


Queue: H

Visited: A, B, C, D, E, F, I, J


BFS Traversal

Step 19: No new neighbors from G

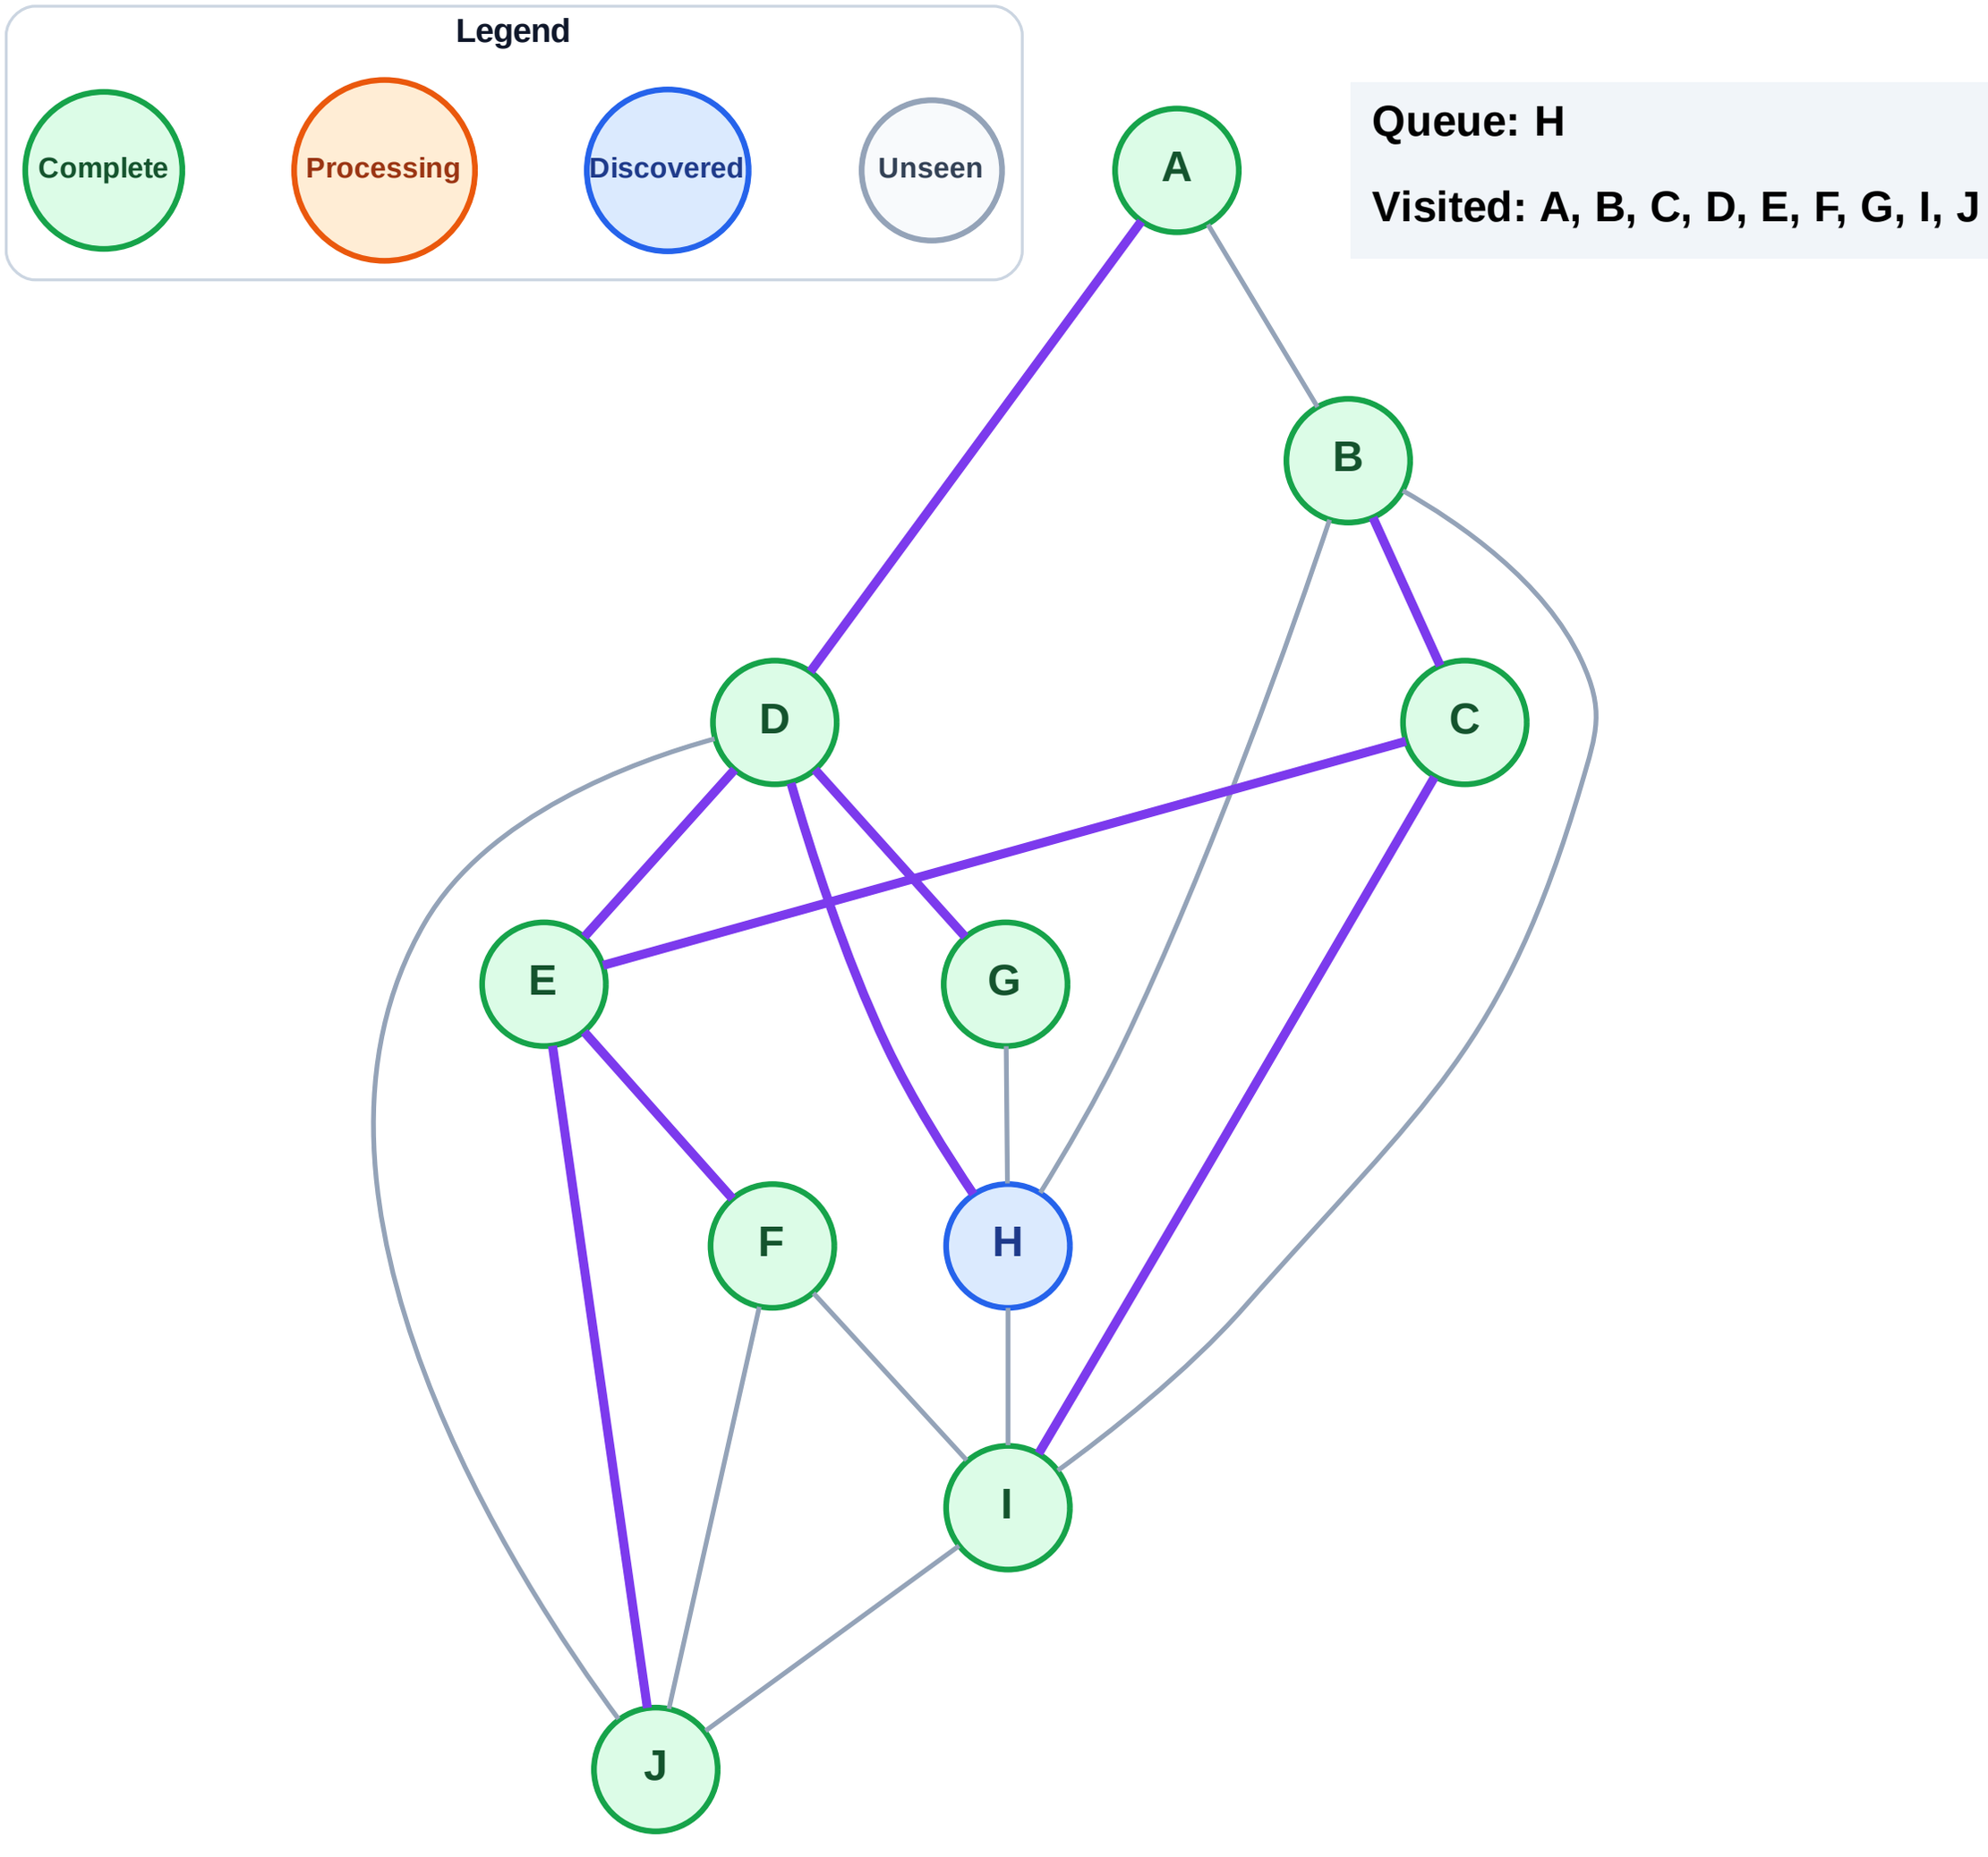

BFS Traversal

Step 20: Process node H

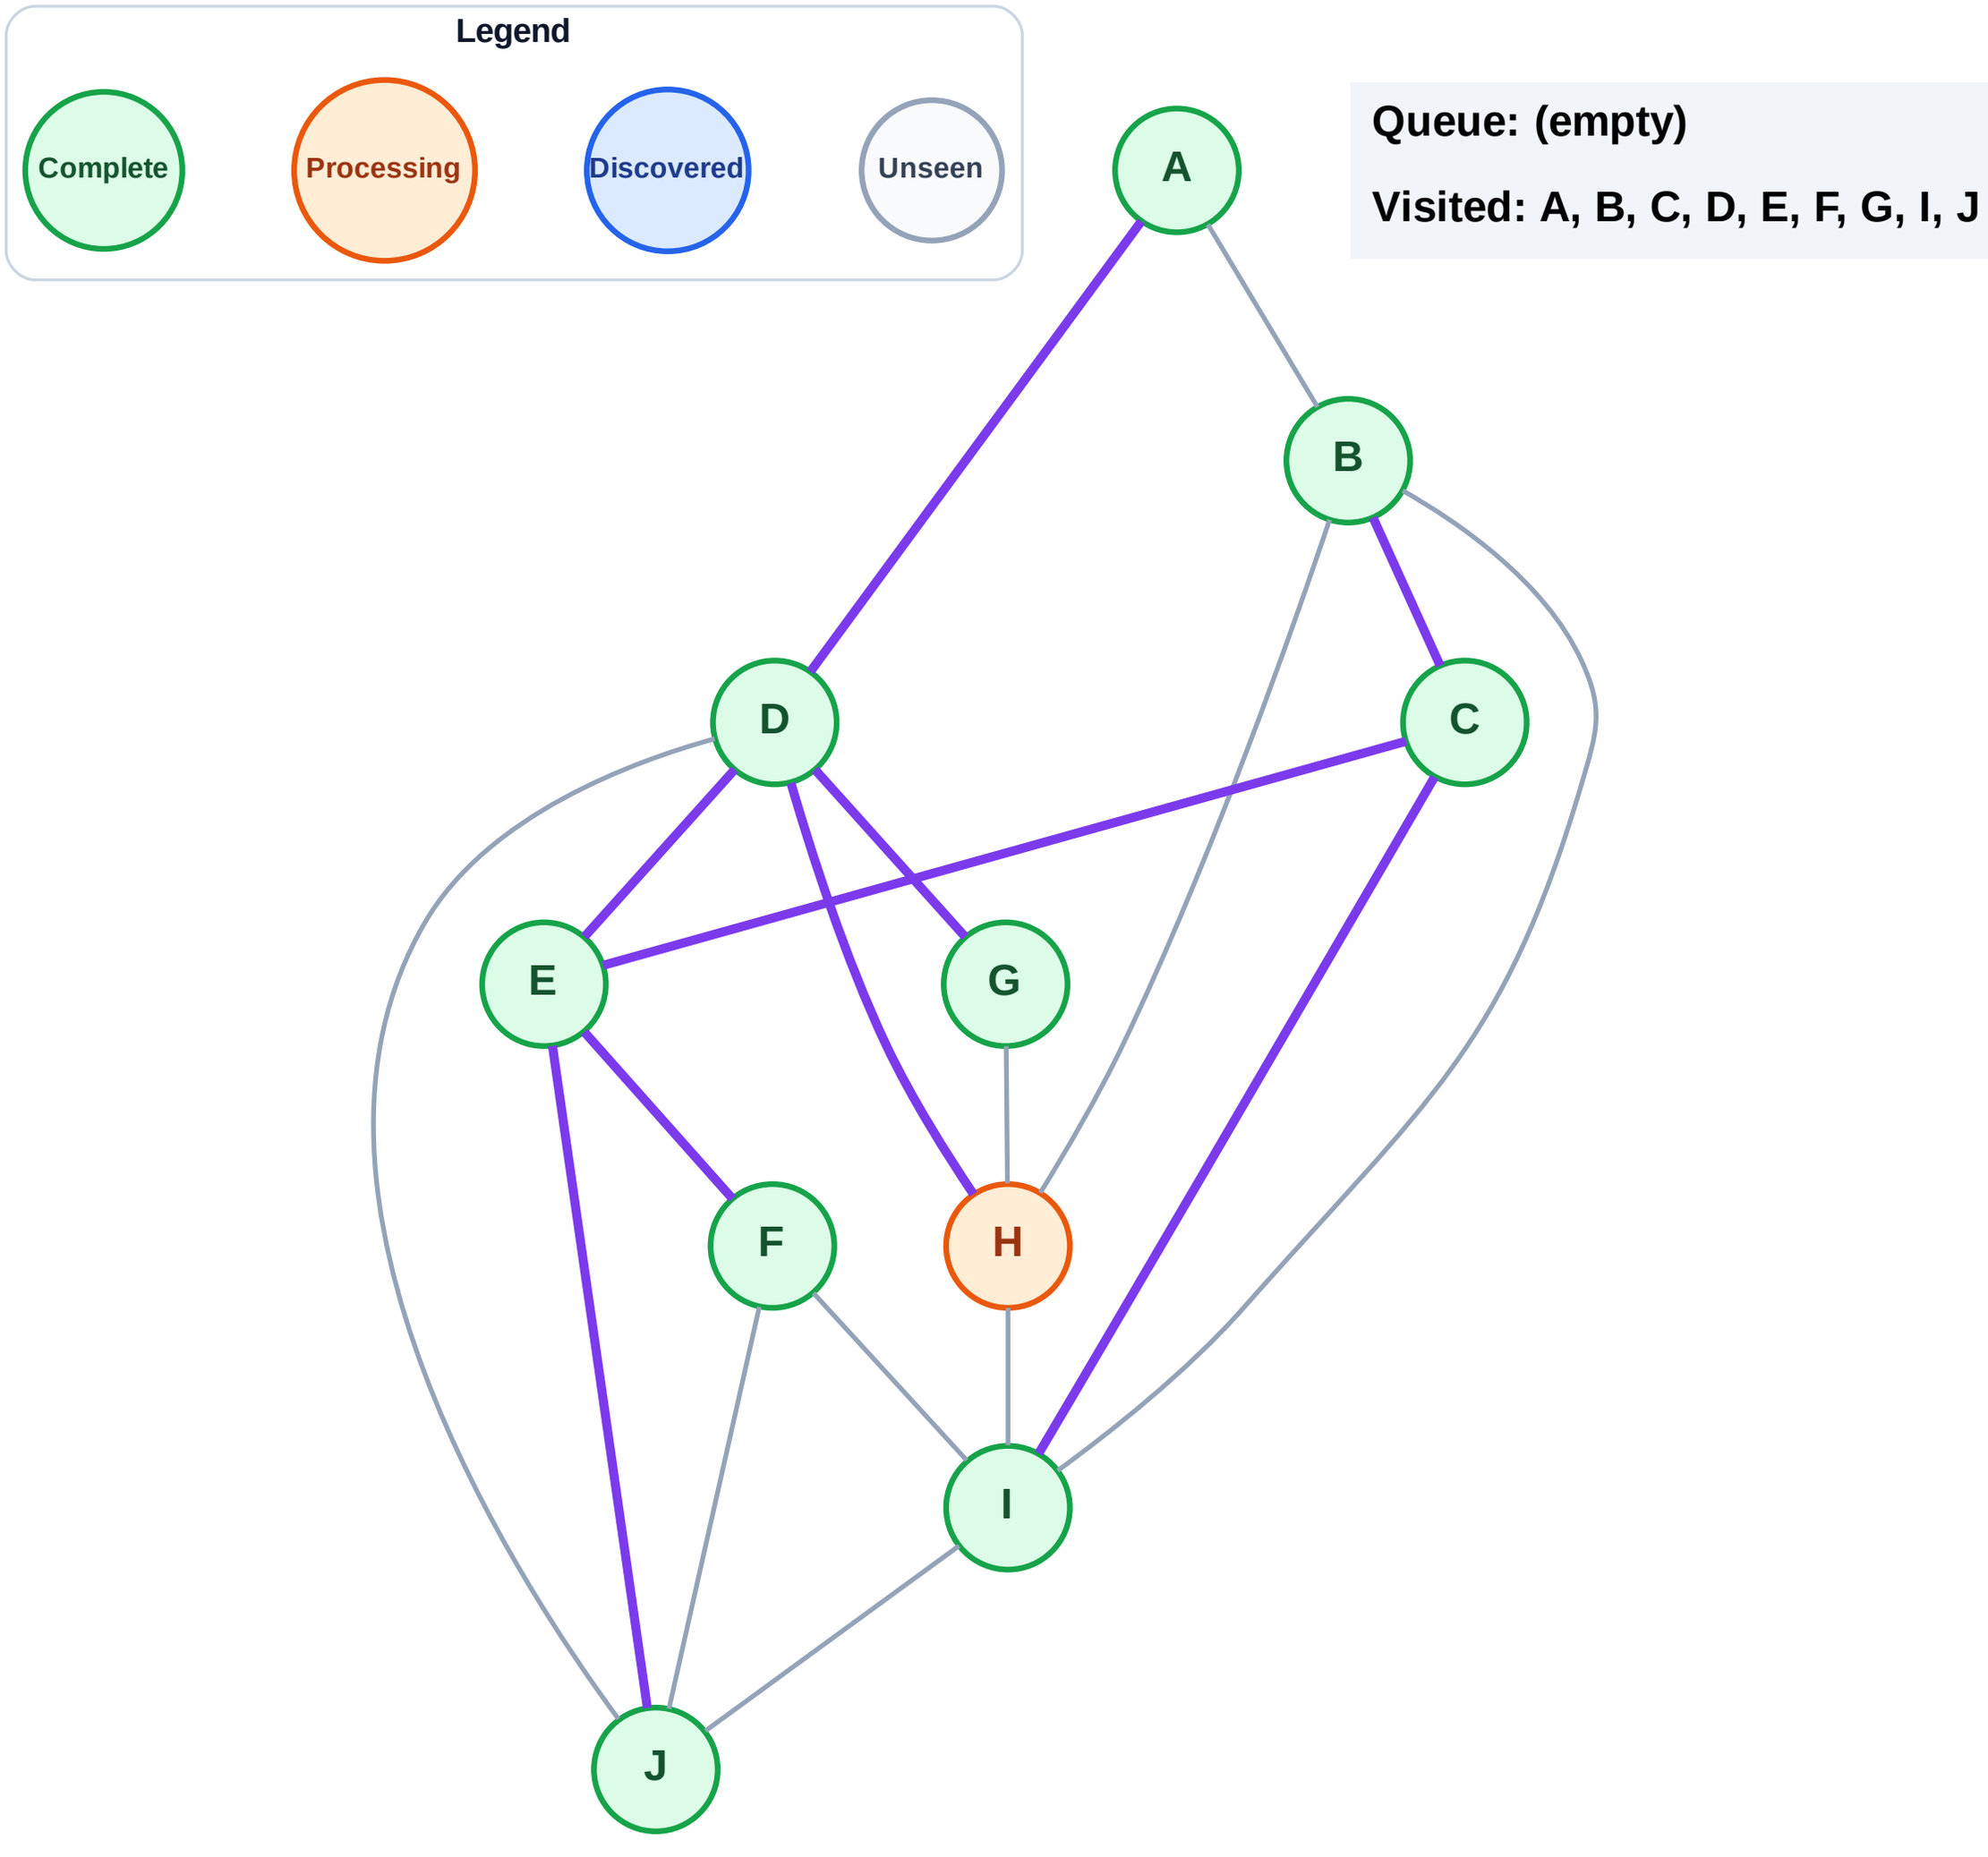


Queue: (empty)

Visited: A, B, C, D, E, F, G, I, J

BFS Traversal

Step 21: No new neighbors from H

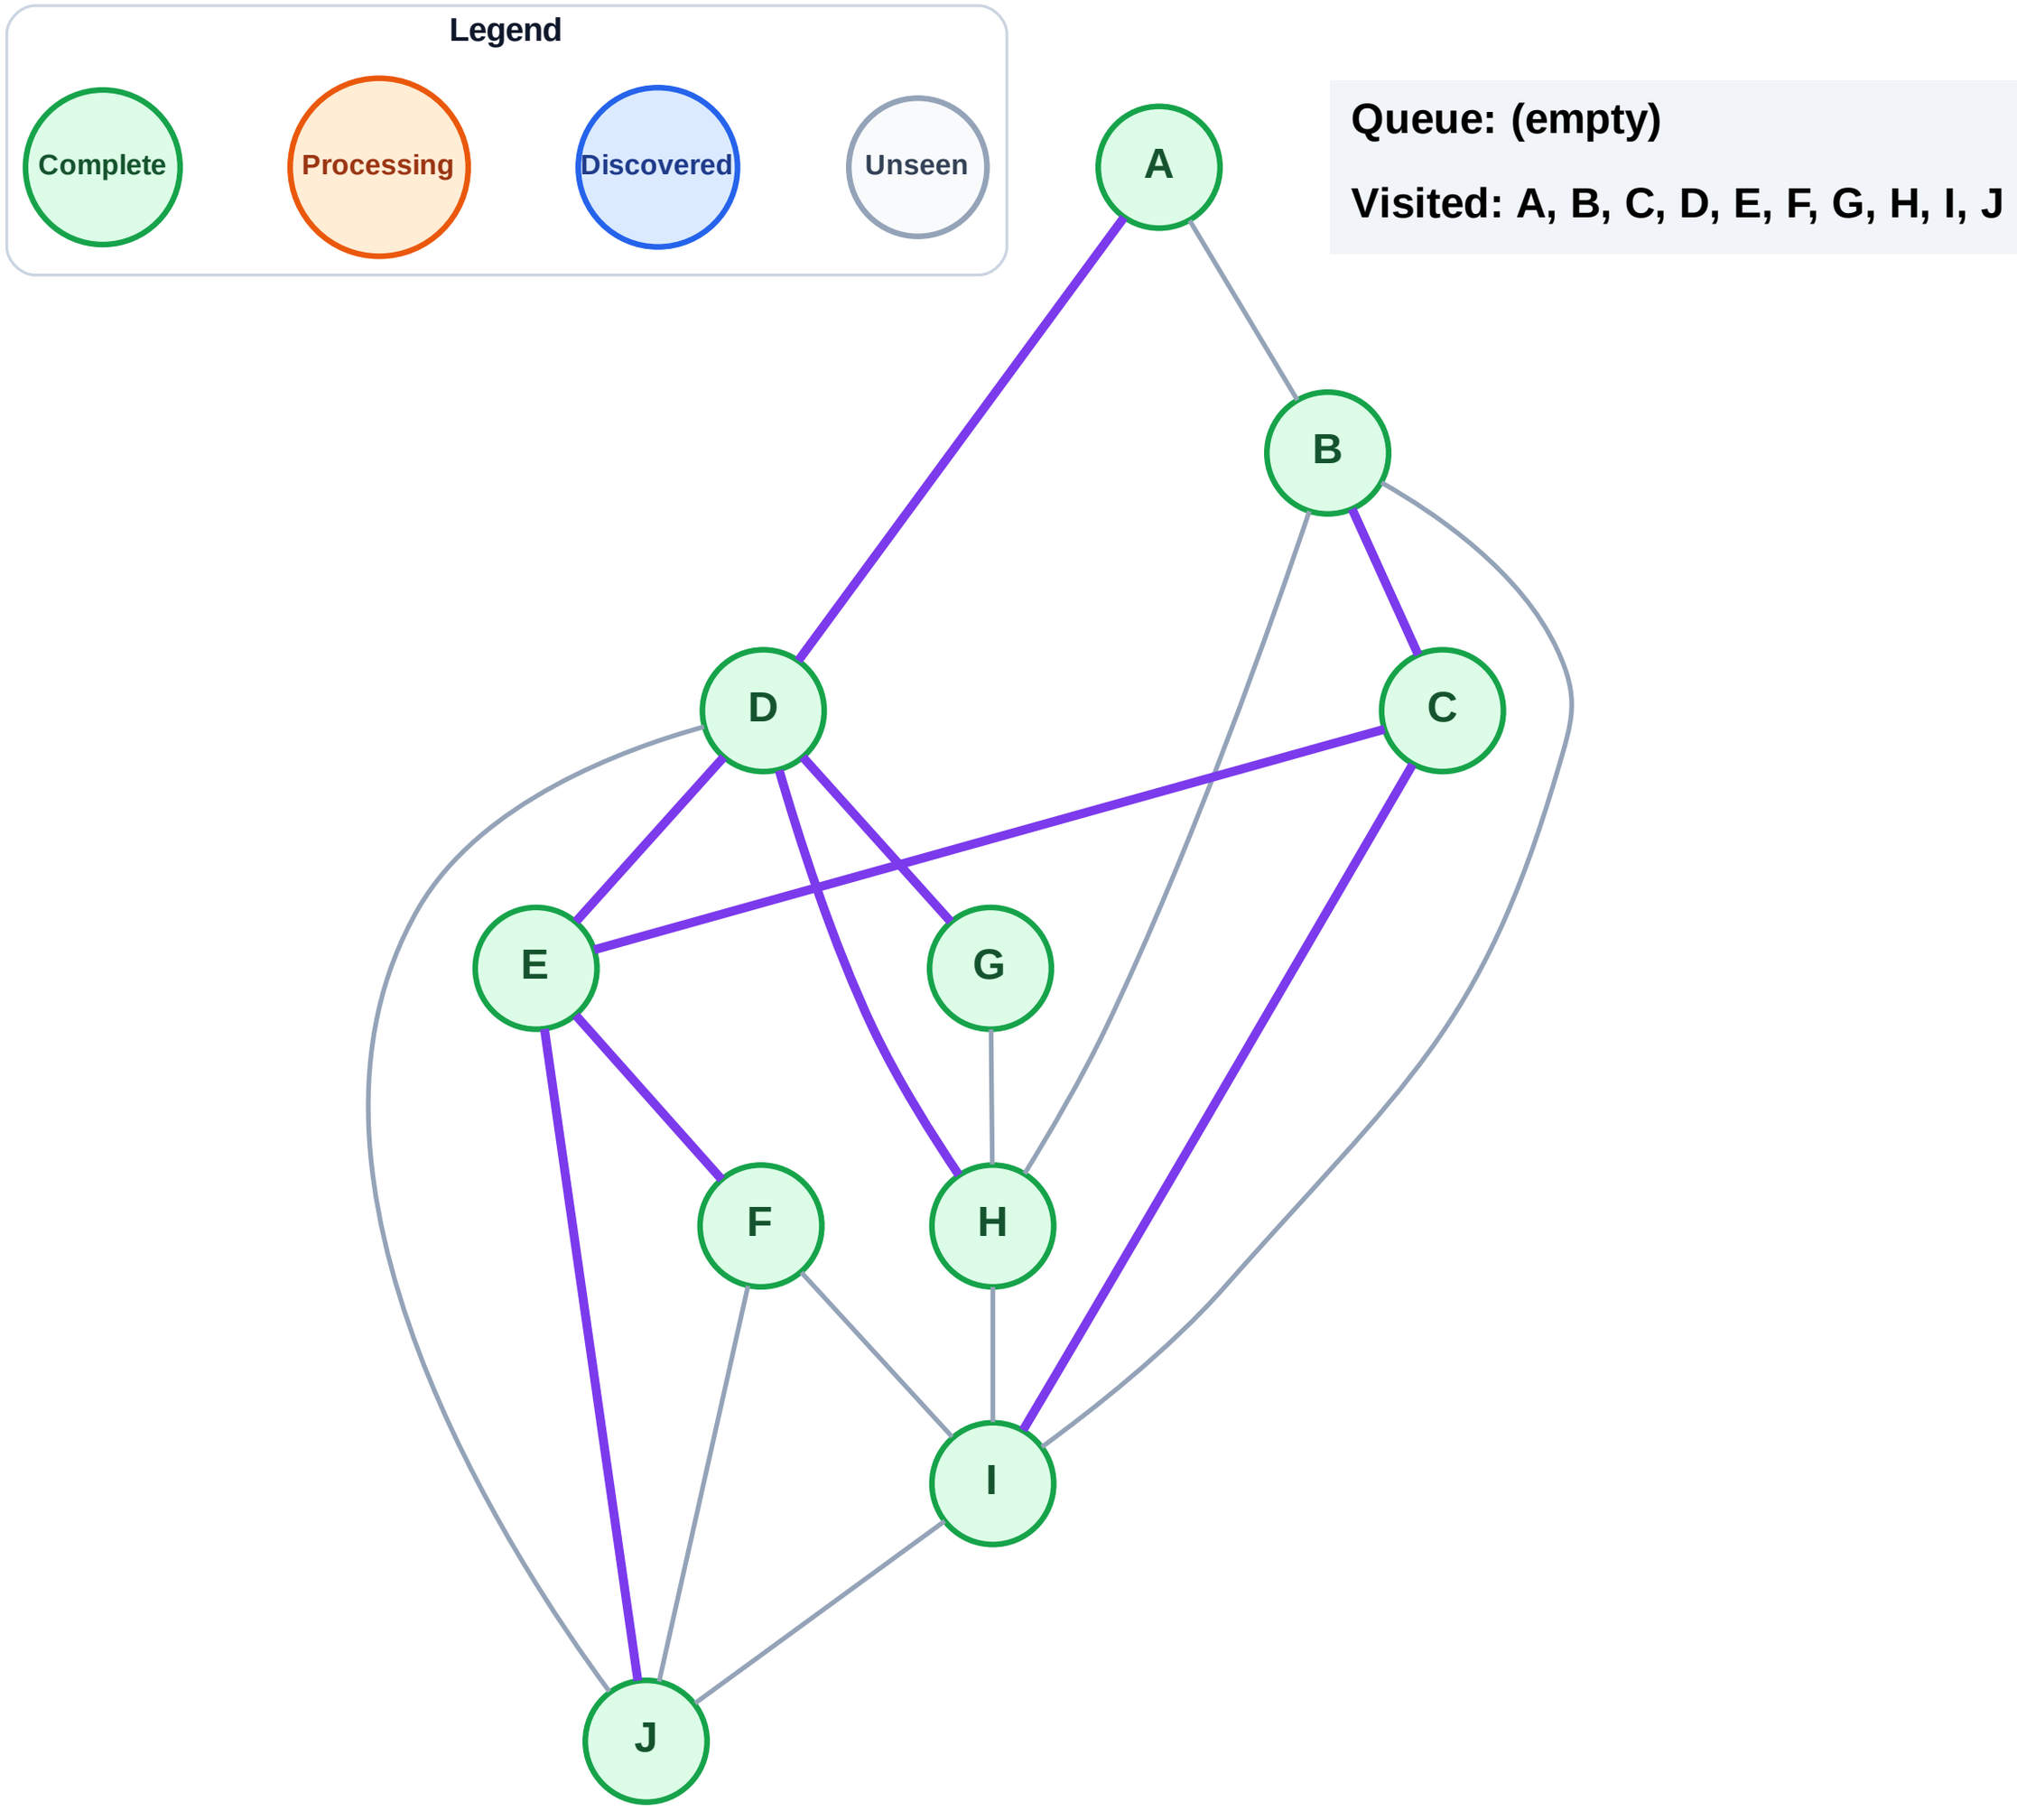


Queue: (empty)

Visited: A, B, C, D, E, F, G, H, I, J


DFS Traversal

Step 1: Start at E

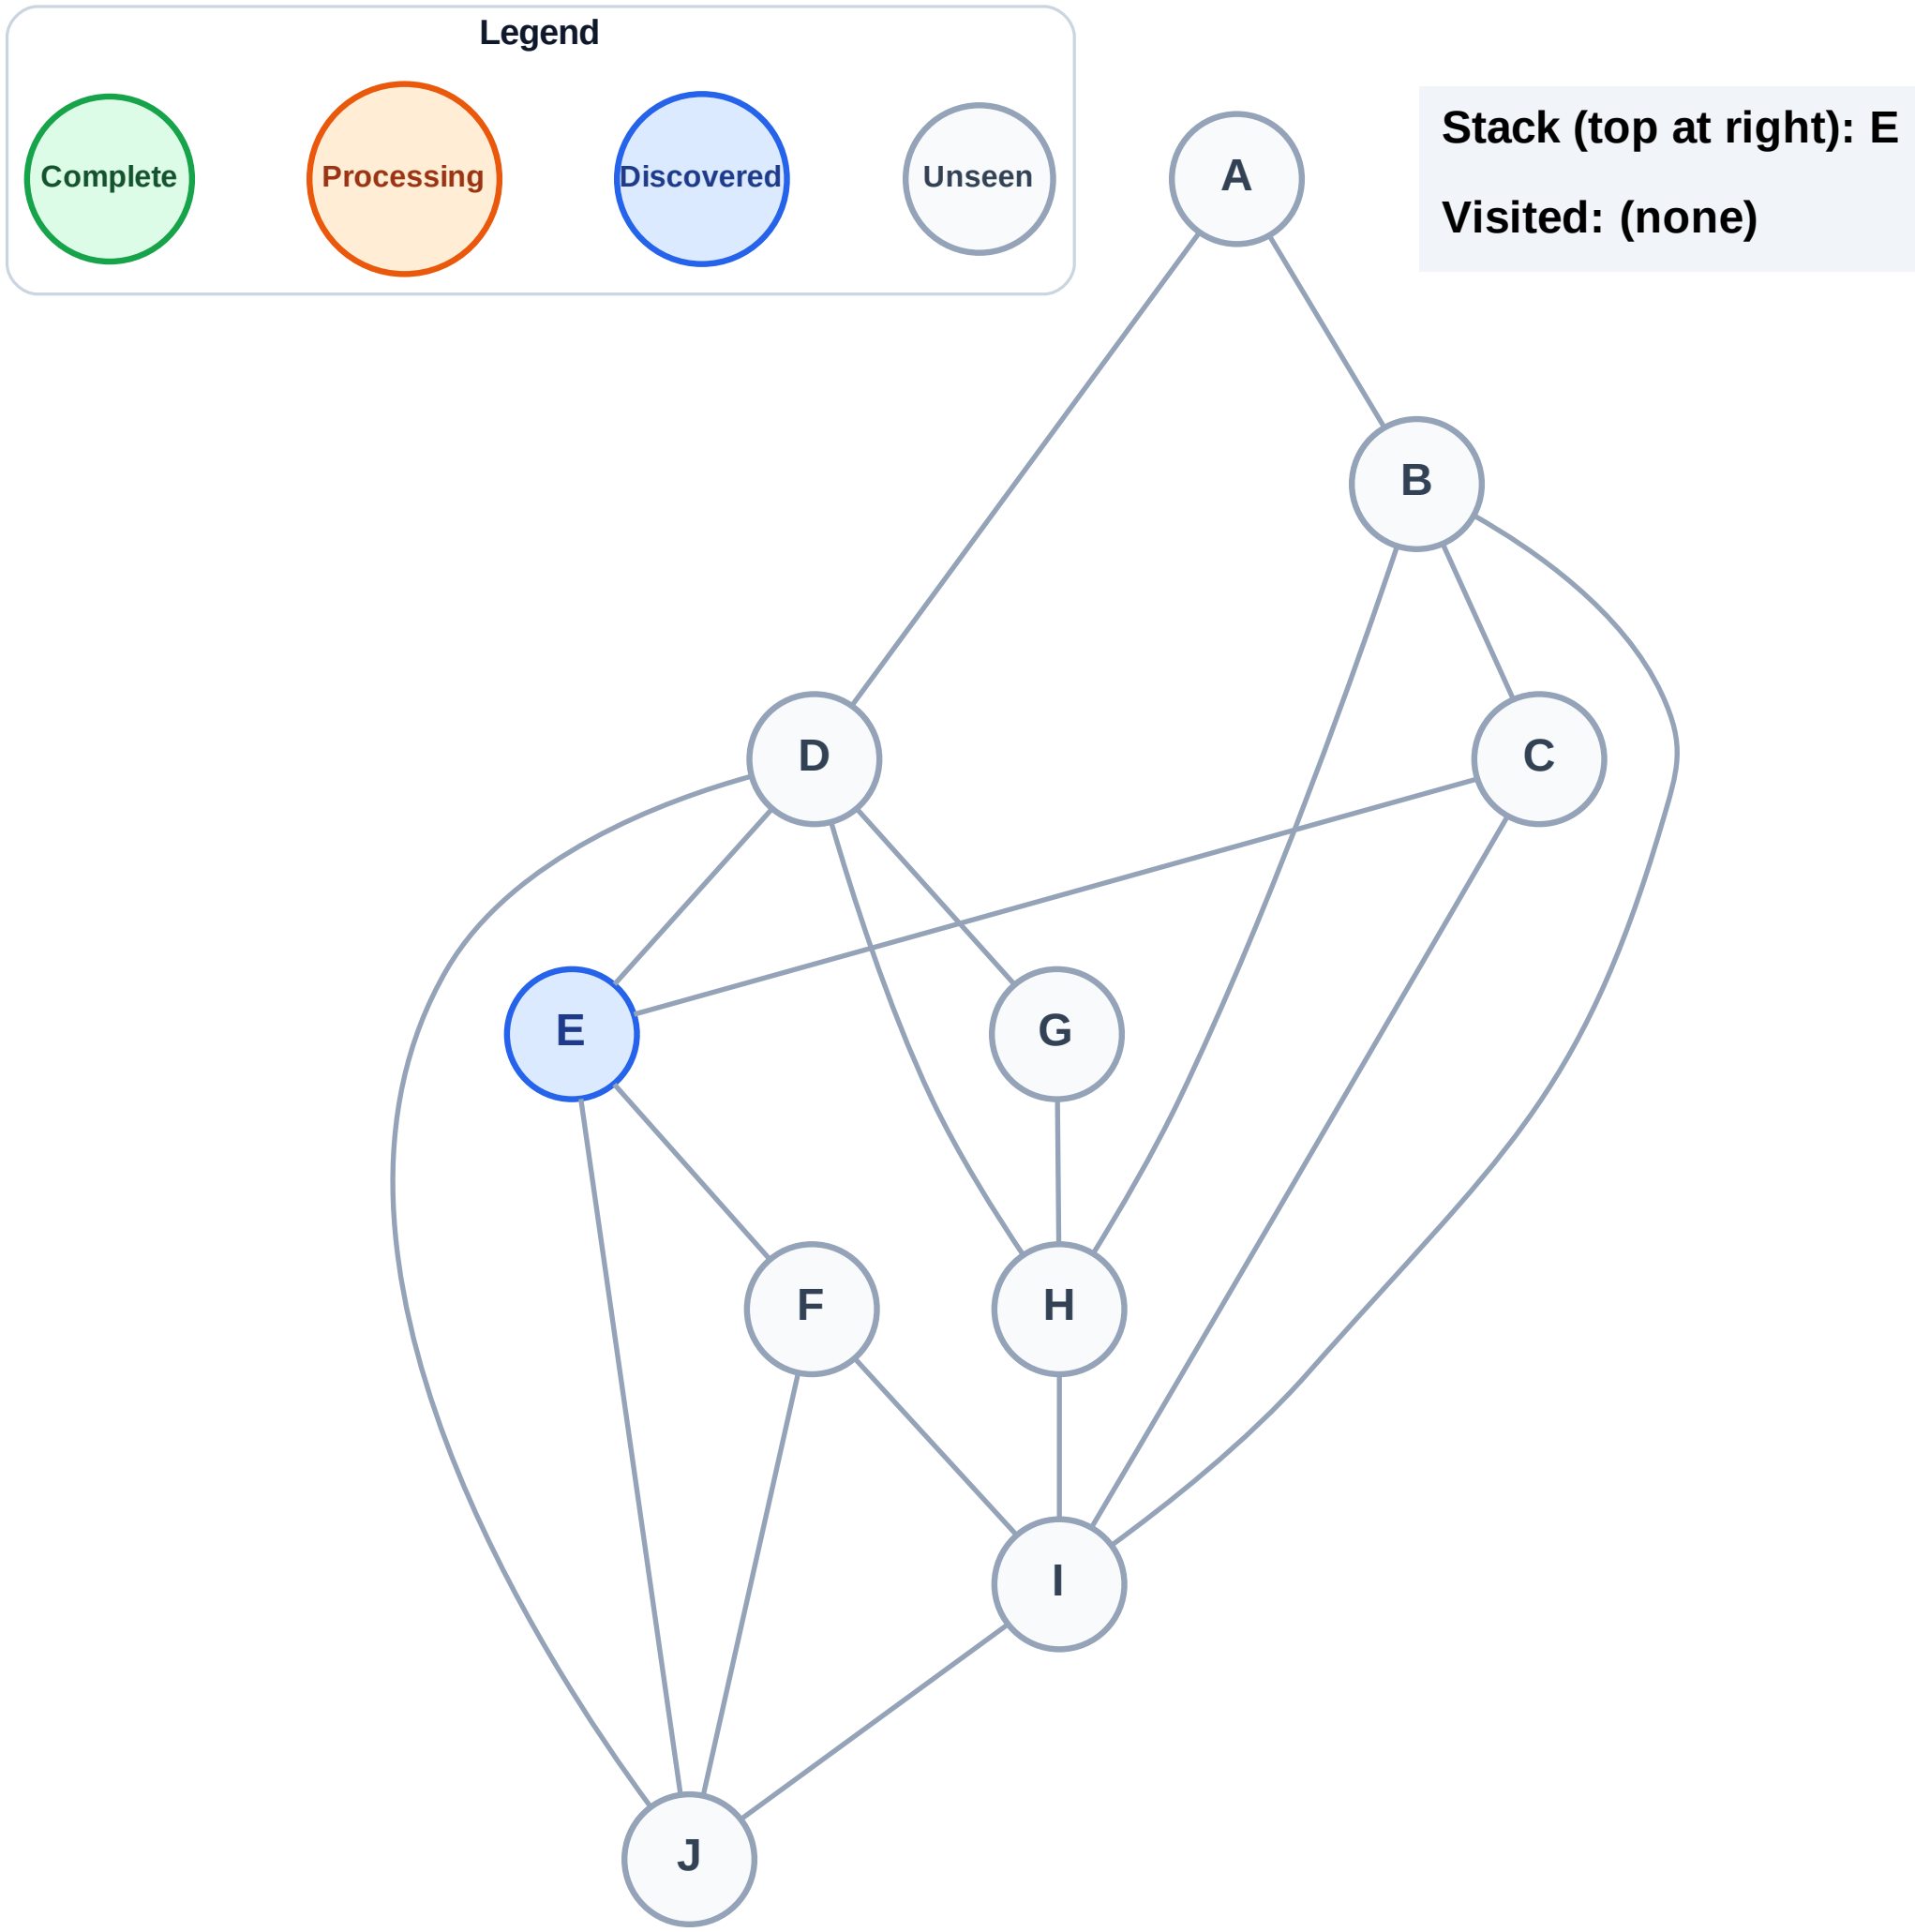

DFS Traversal

Step 2: Process node E

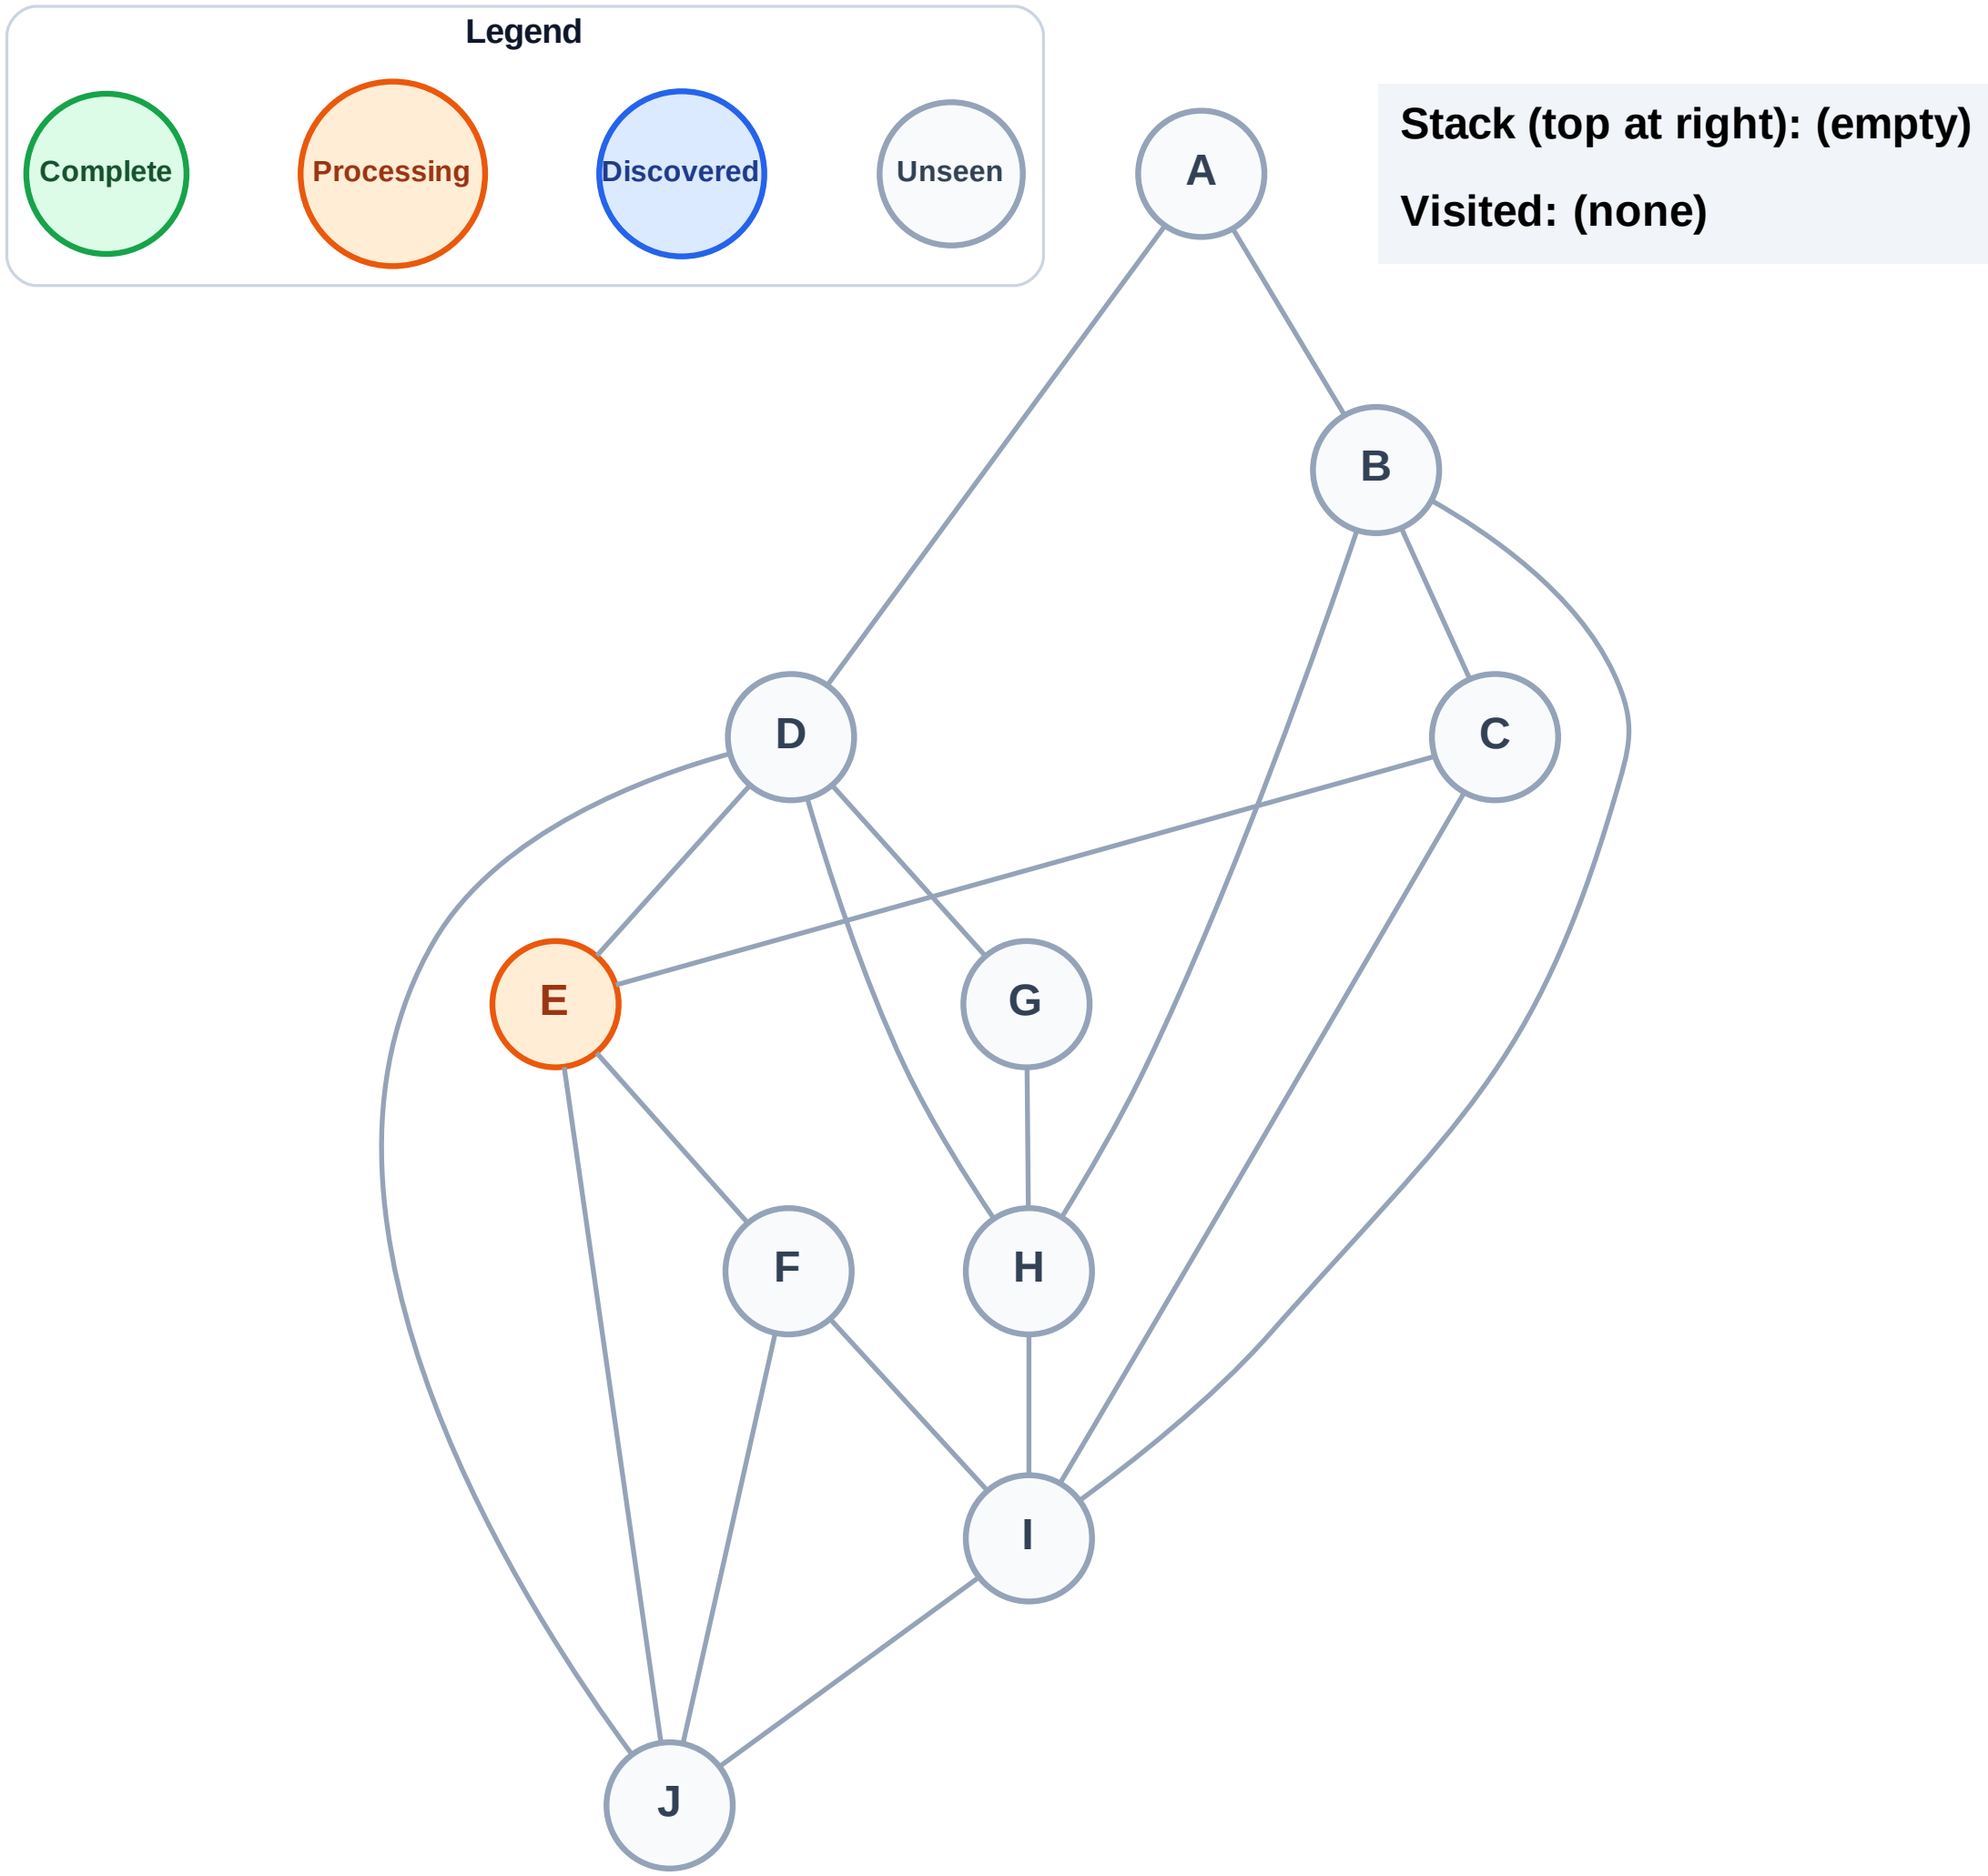


Stack (top at right): (empty)

Visited: (none)

DFS Traversal

Step 3: Discover J, F, D, C from E

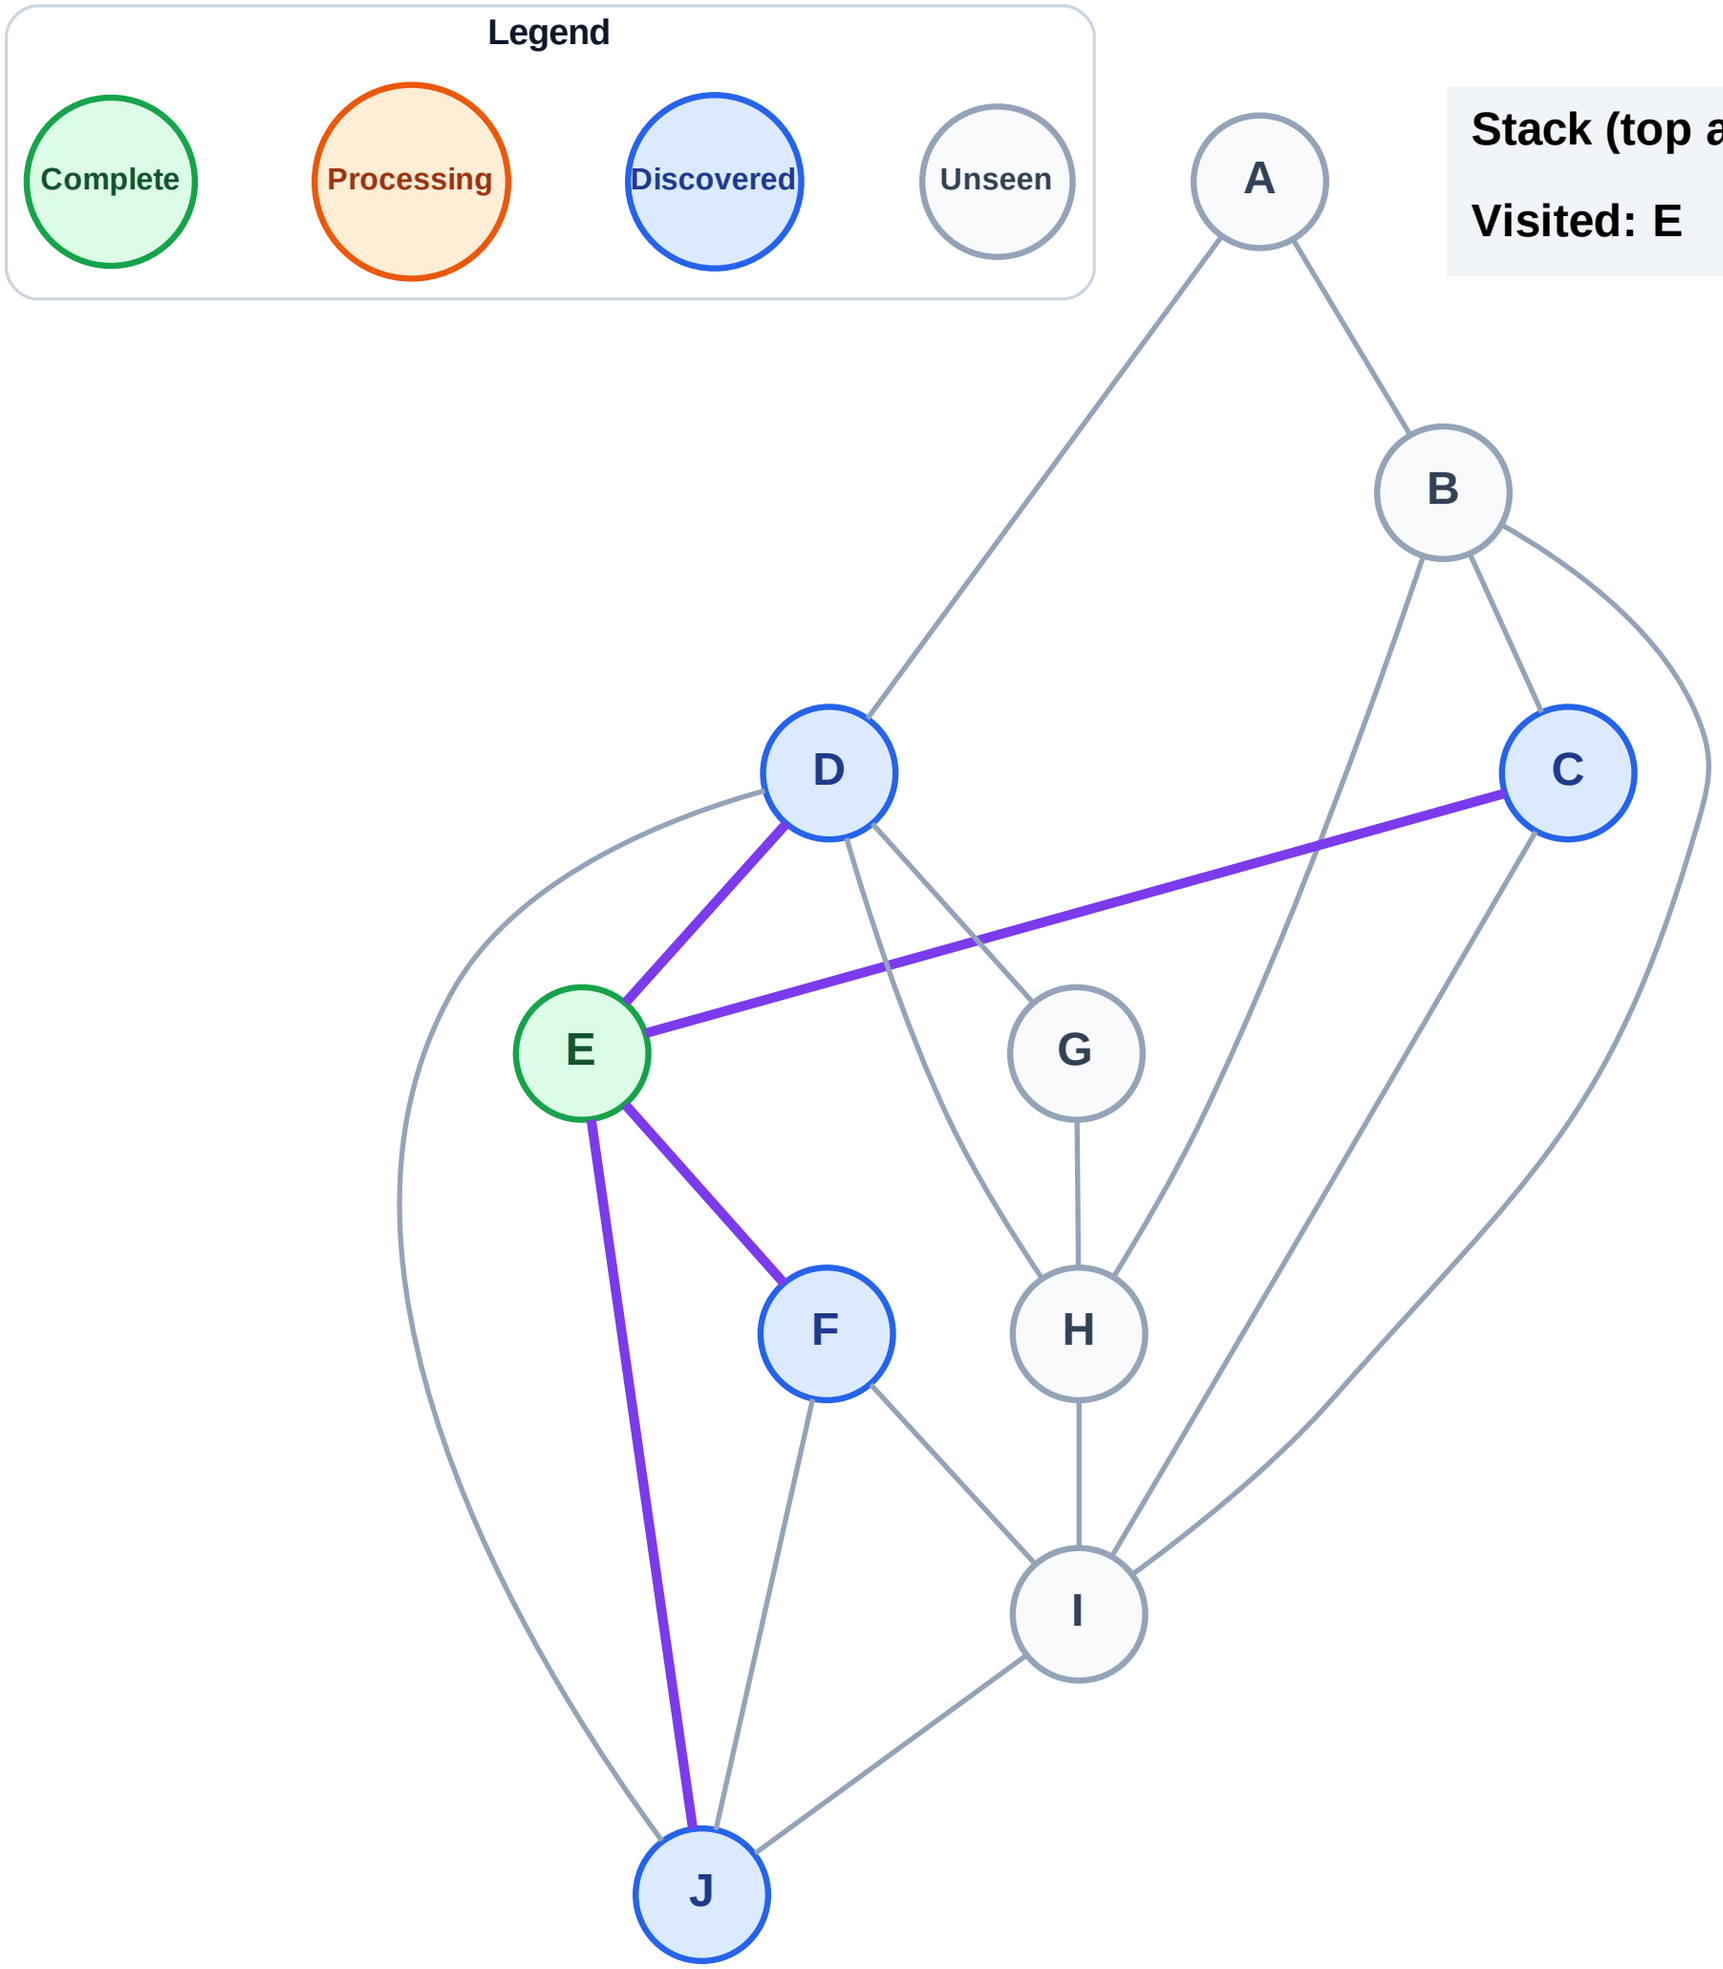


Stack (top at right): J | F | D | C

Visited: E

DFS Traversal

Step 4: Process node C

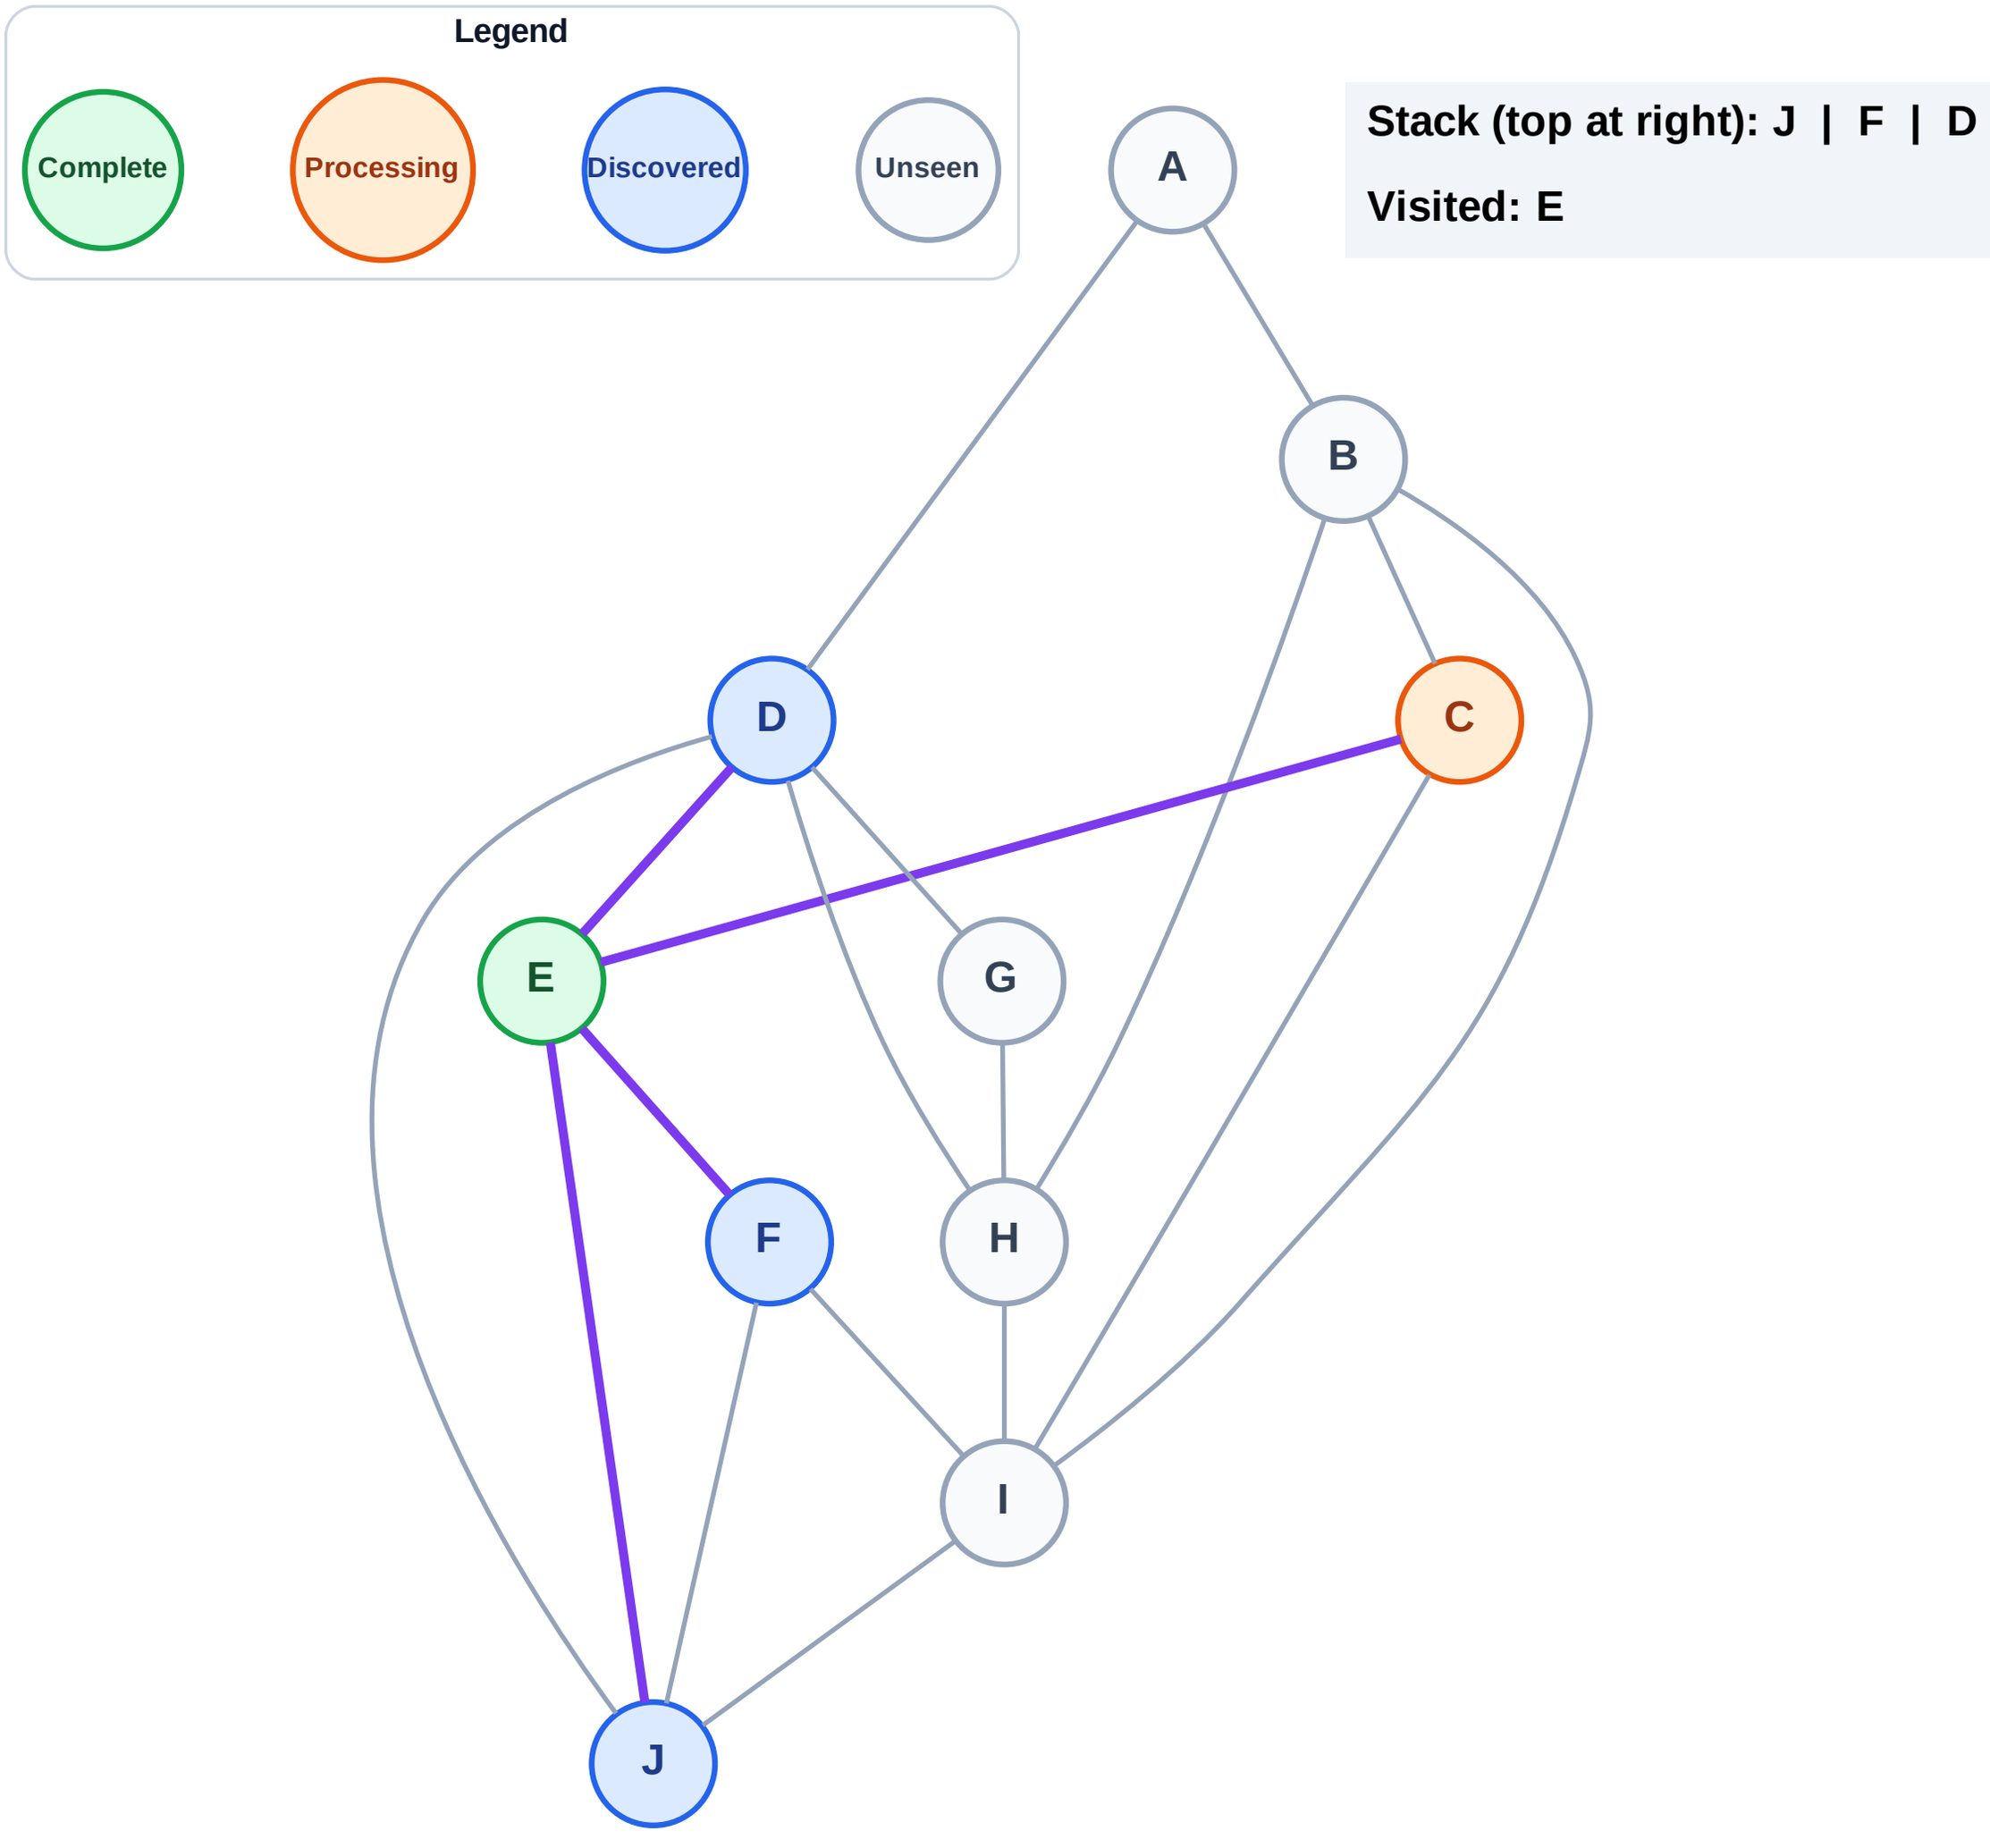


Stack (top at right): J | F | D

Visited: E

DFS Traversal

Step 5: Discover I, B from C

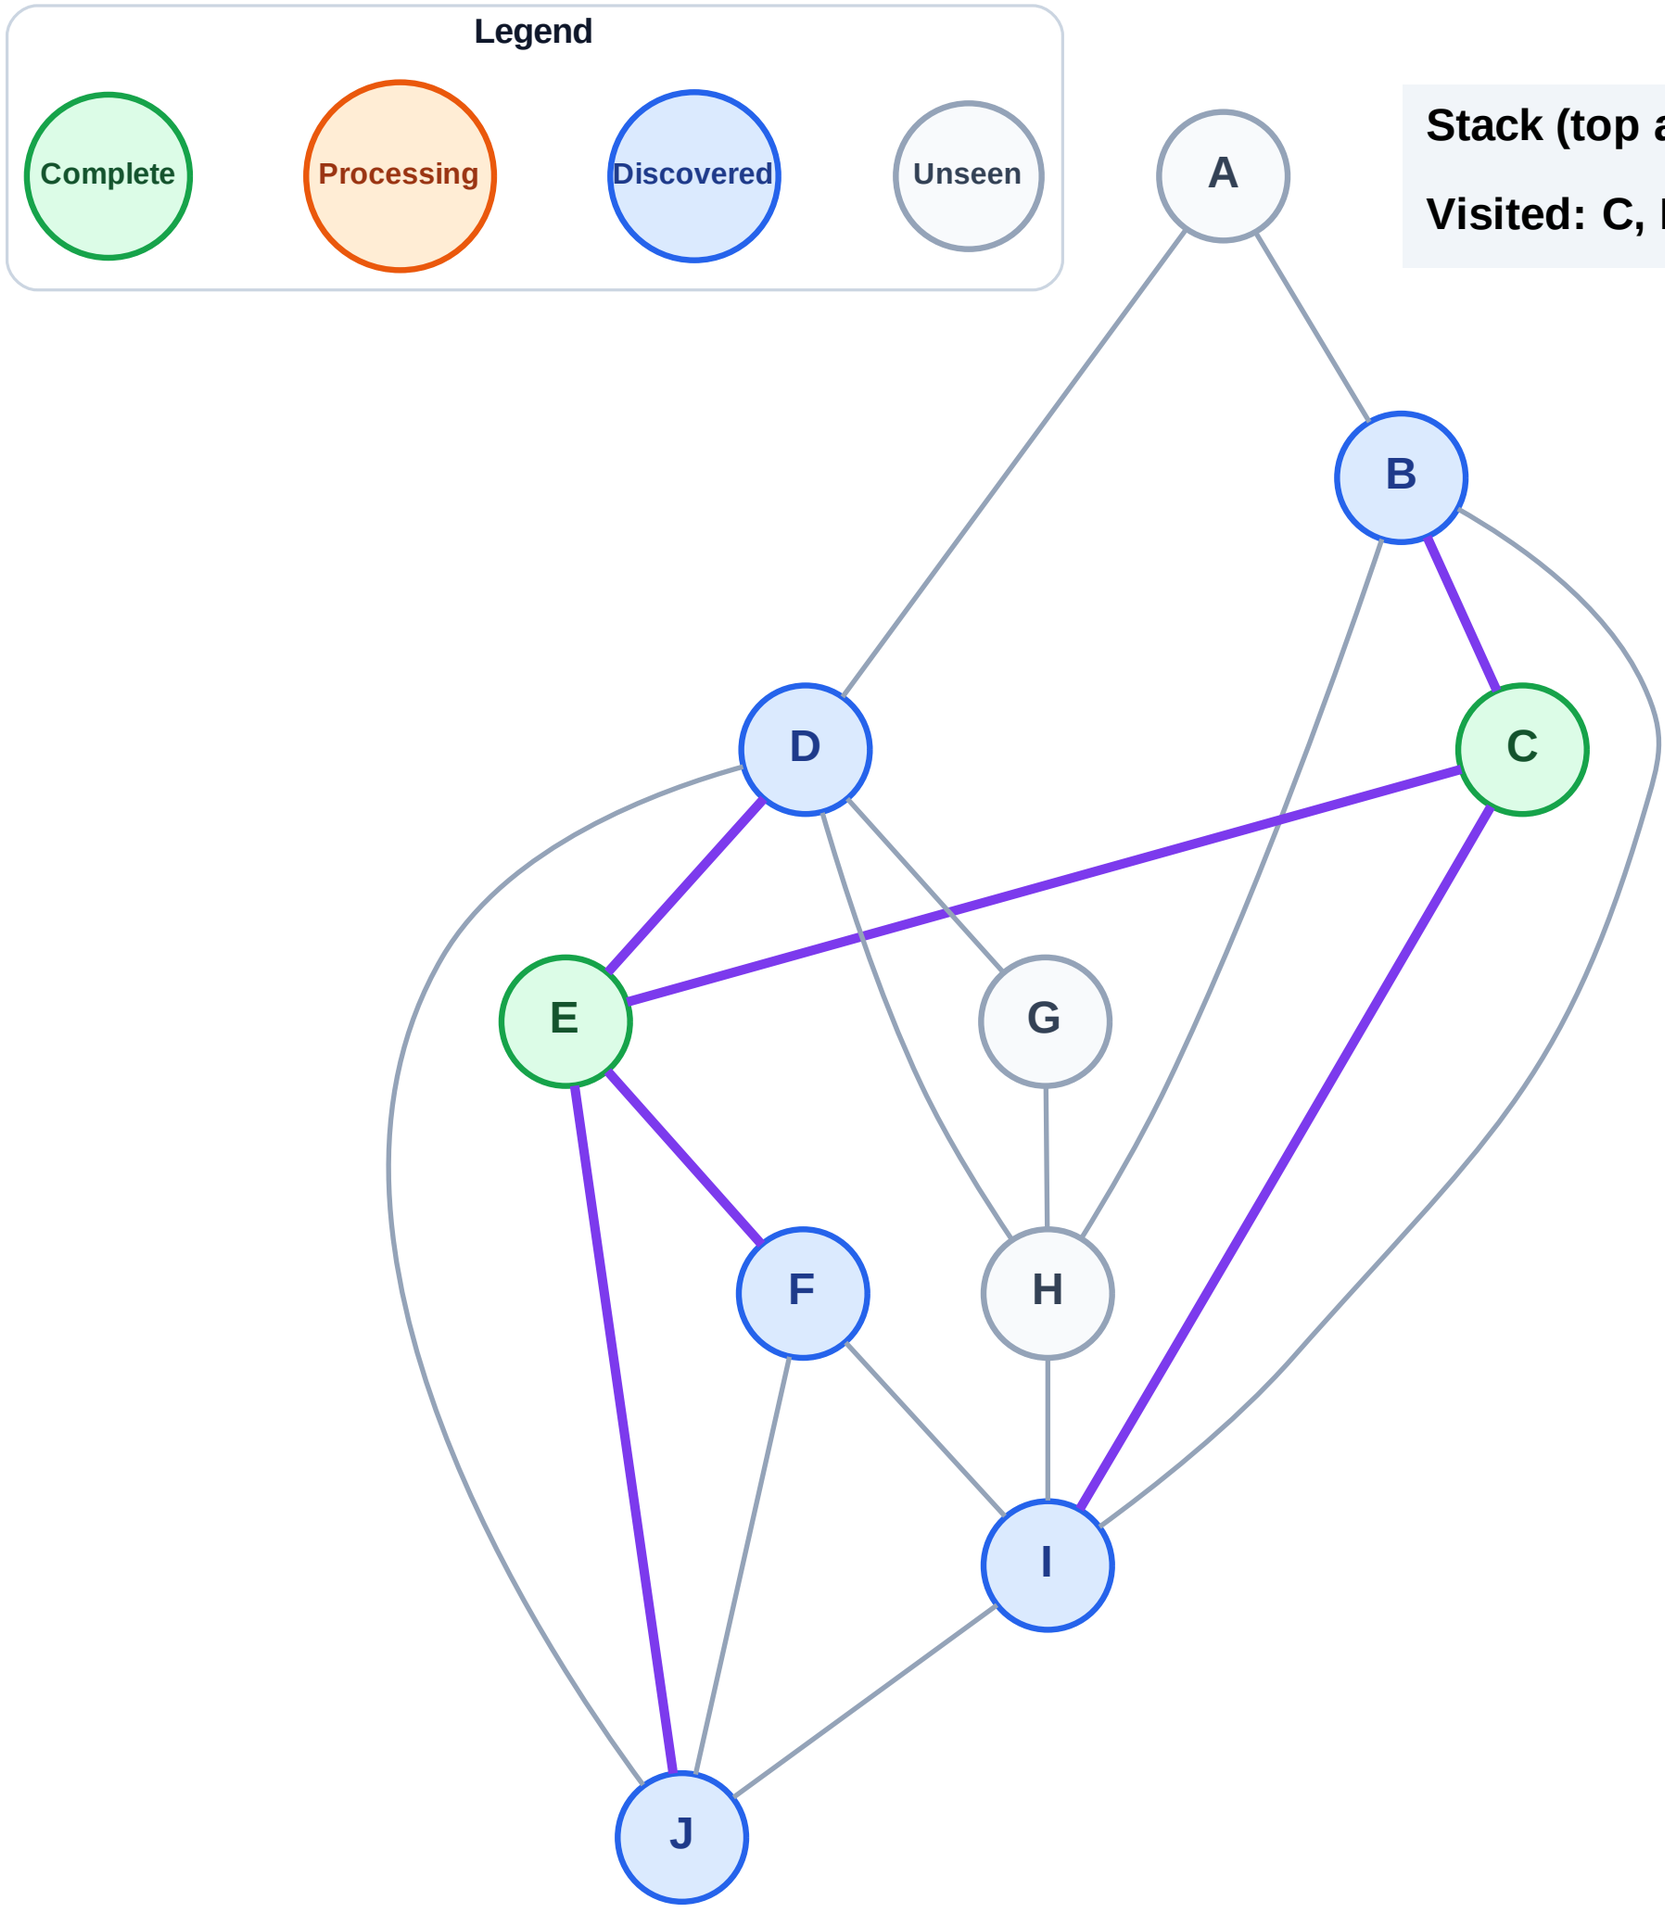


Stack (top at right): J | F | D | I | B

Visited: C, E

DFS Traversal

Step 6: Process node B

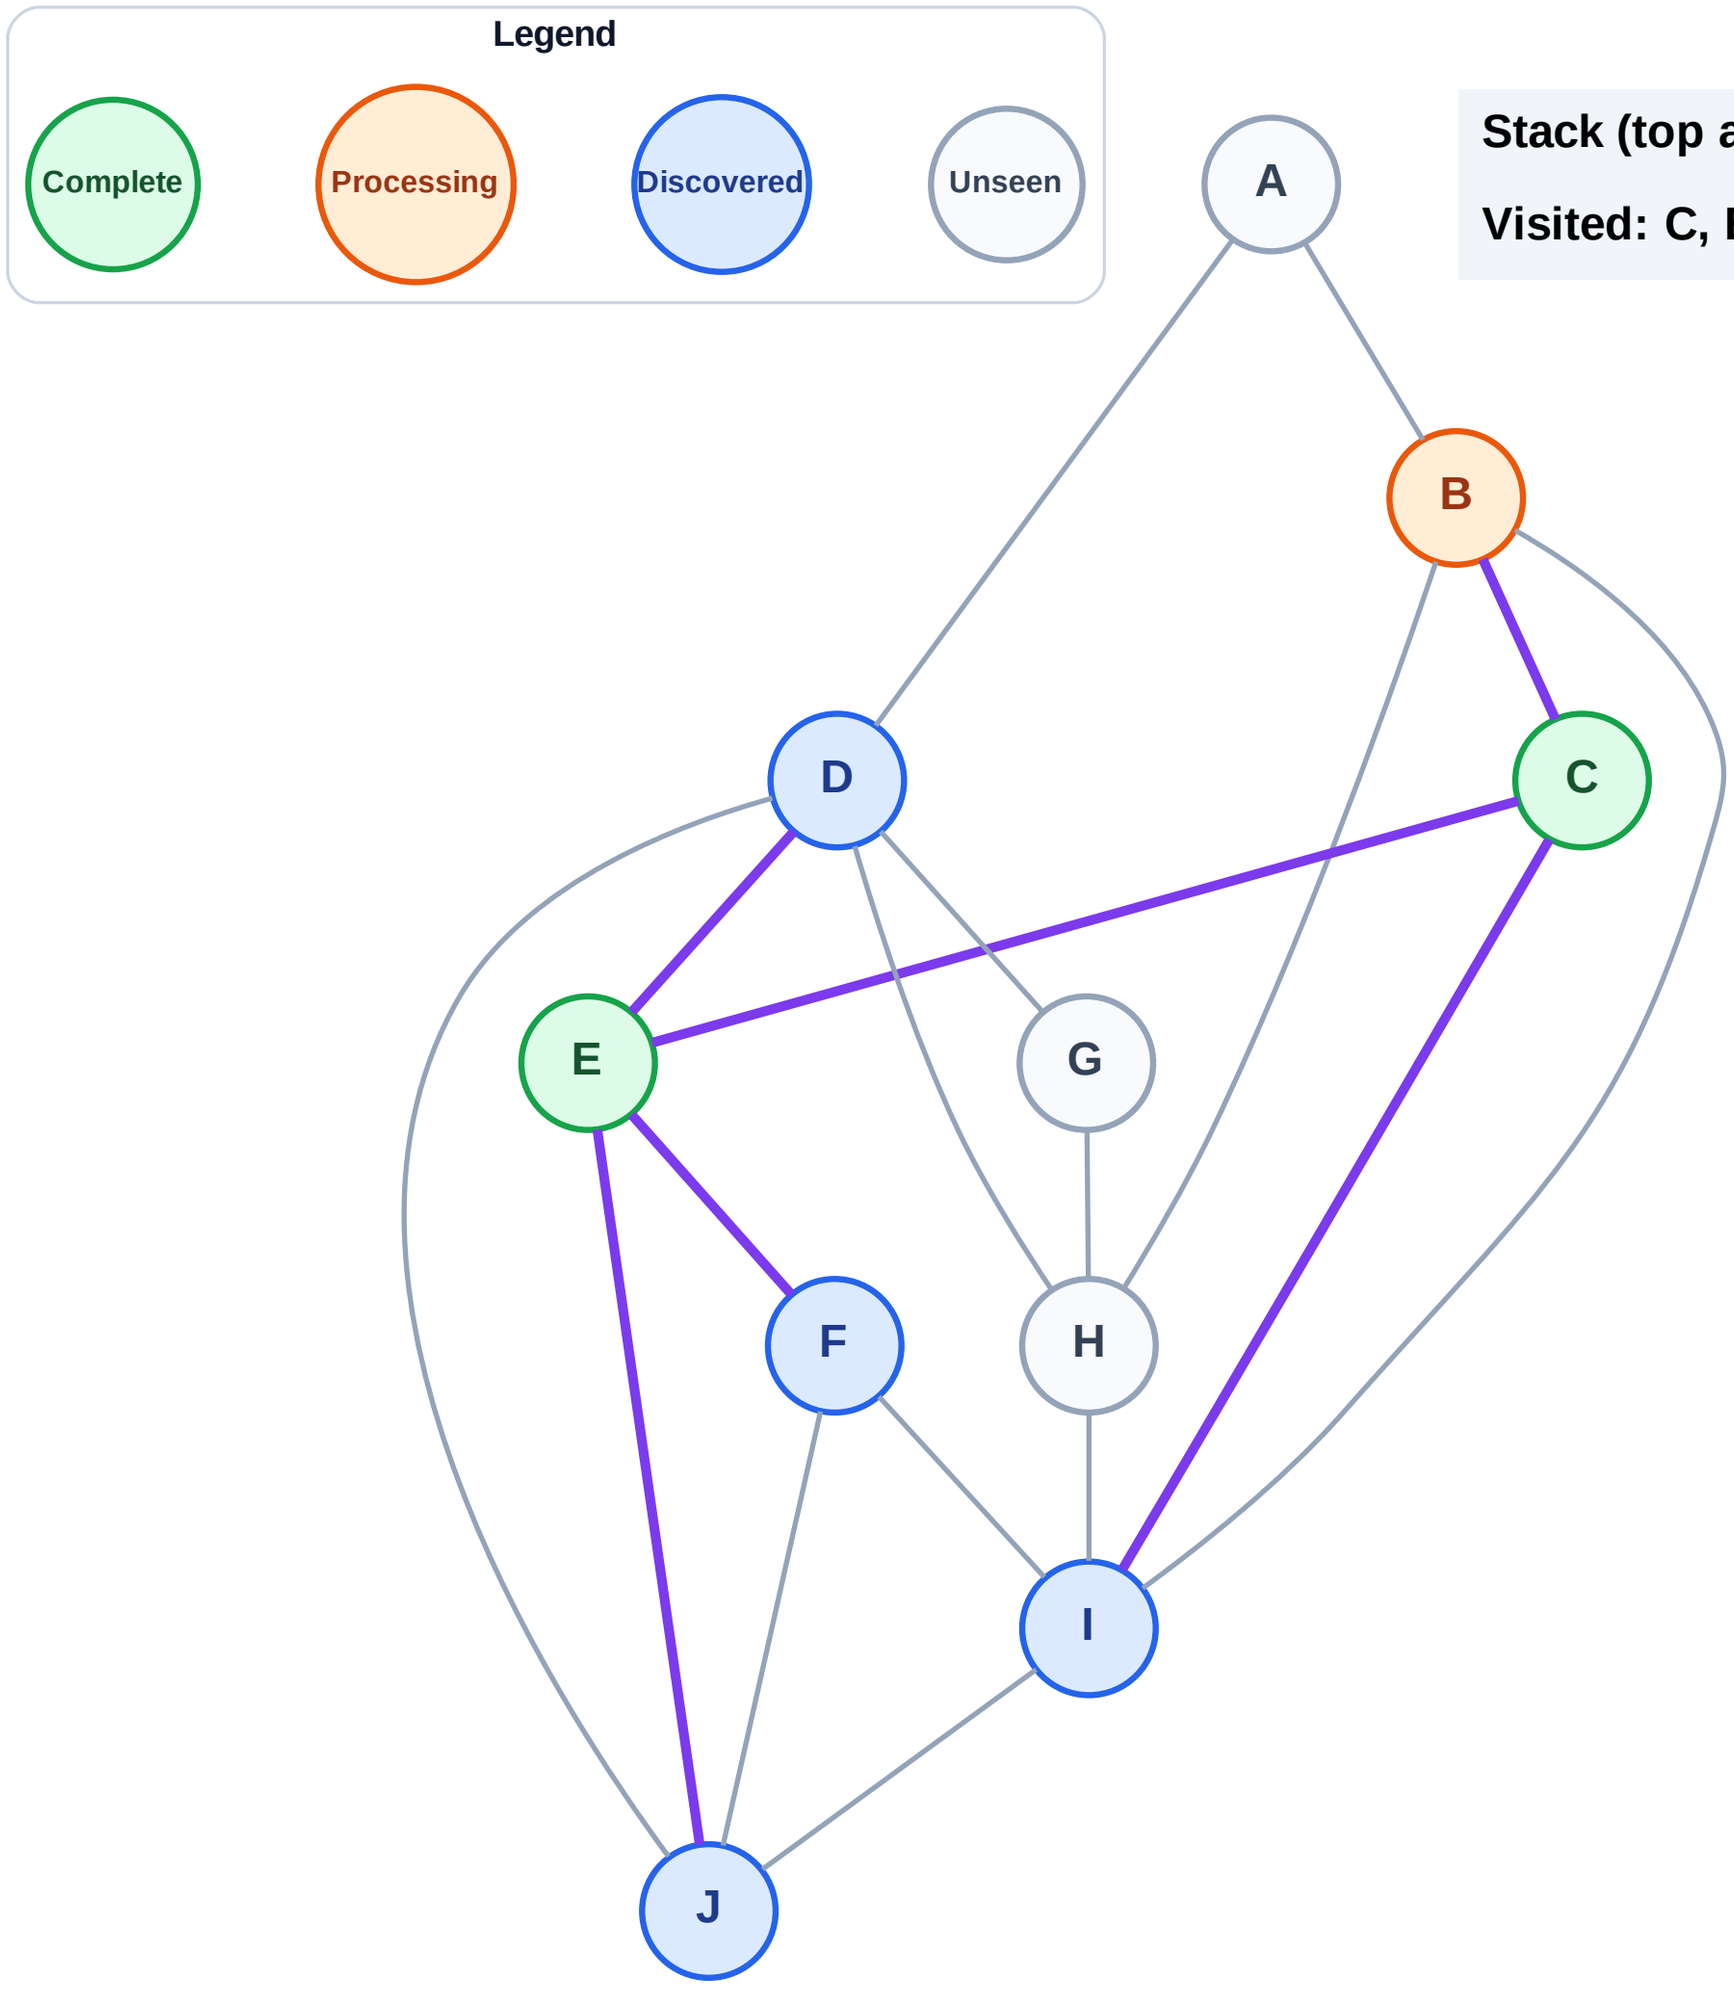


Stack (top at right): J | F | D | I

Visited: C, E

DFS Traversal

Step 7: Discover H, A from B

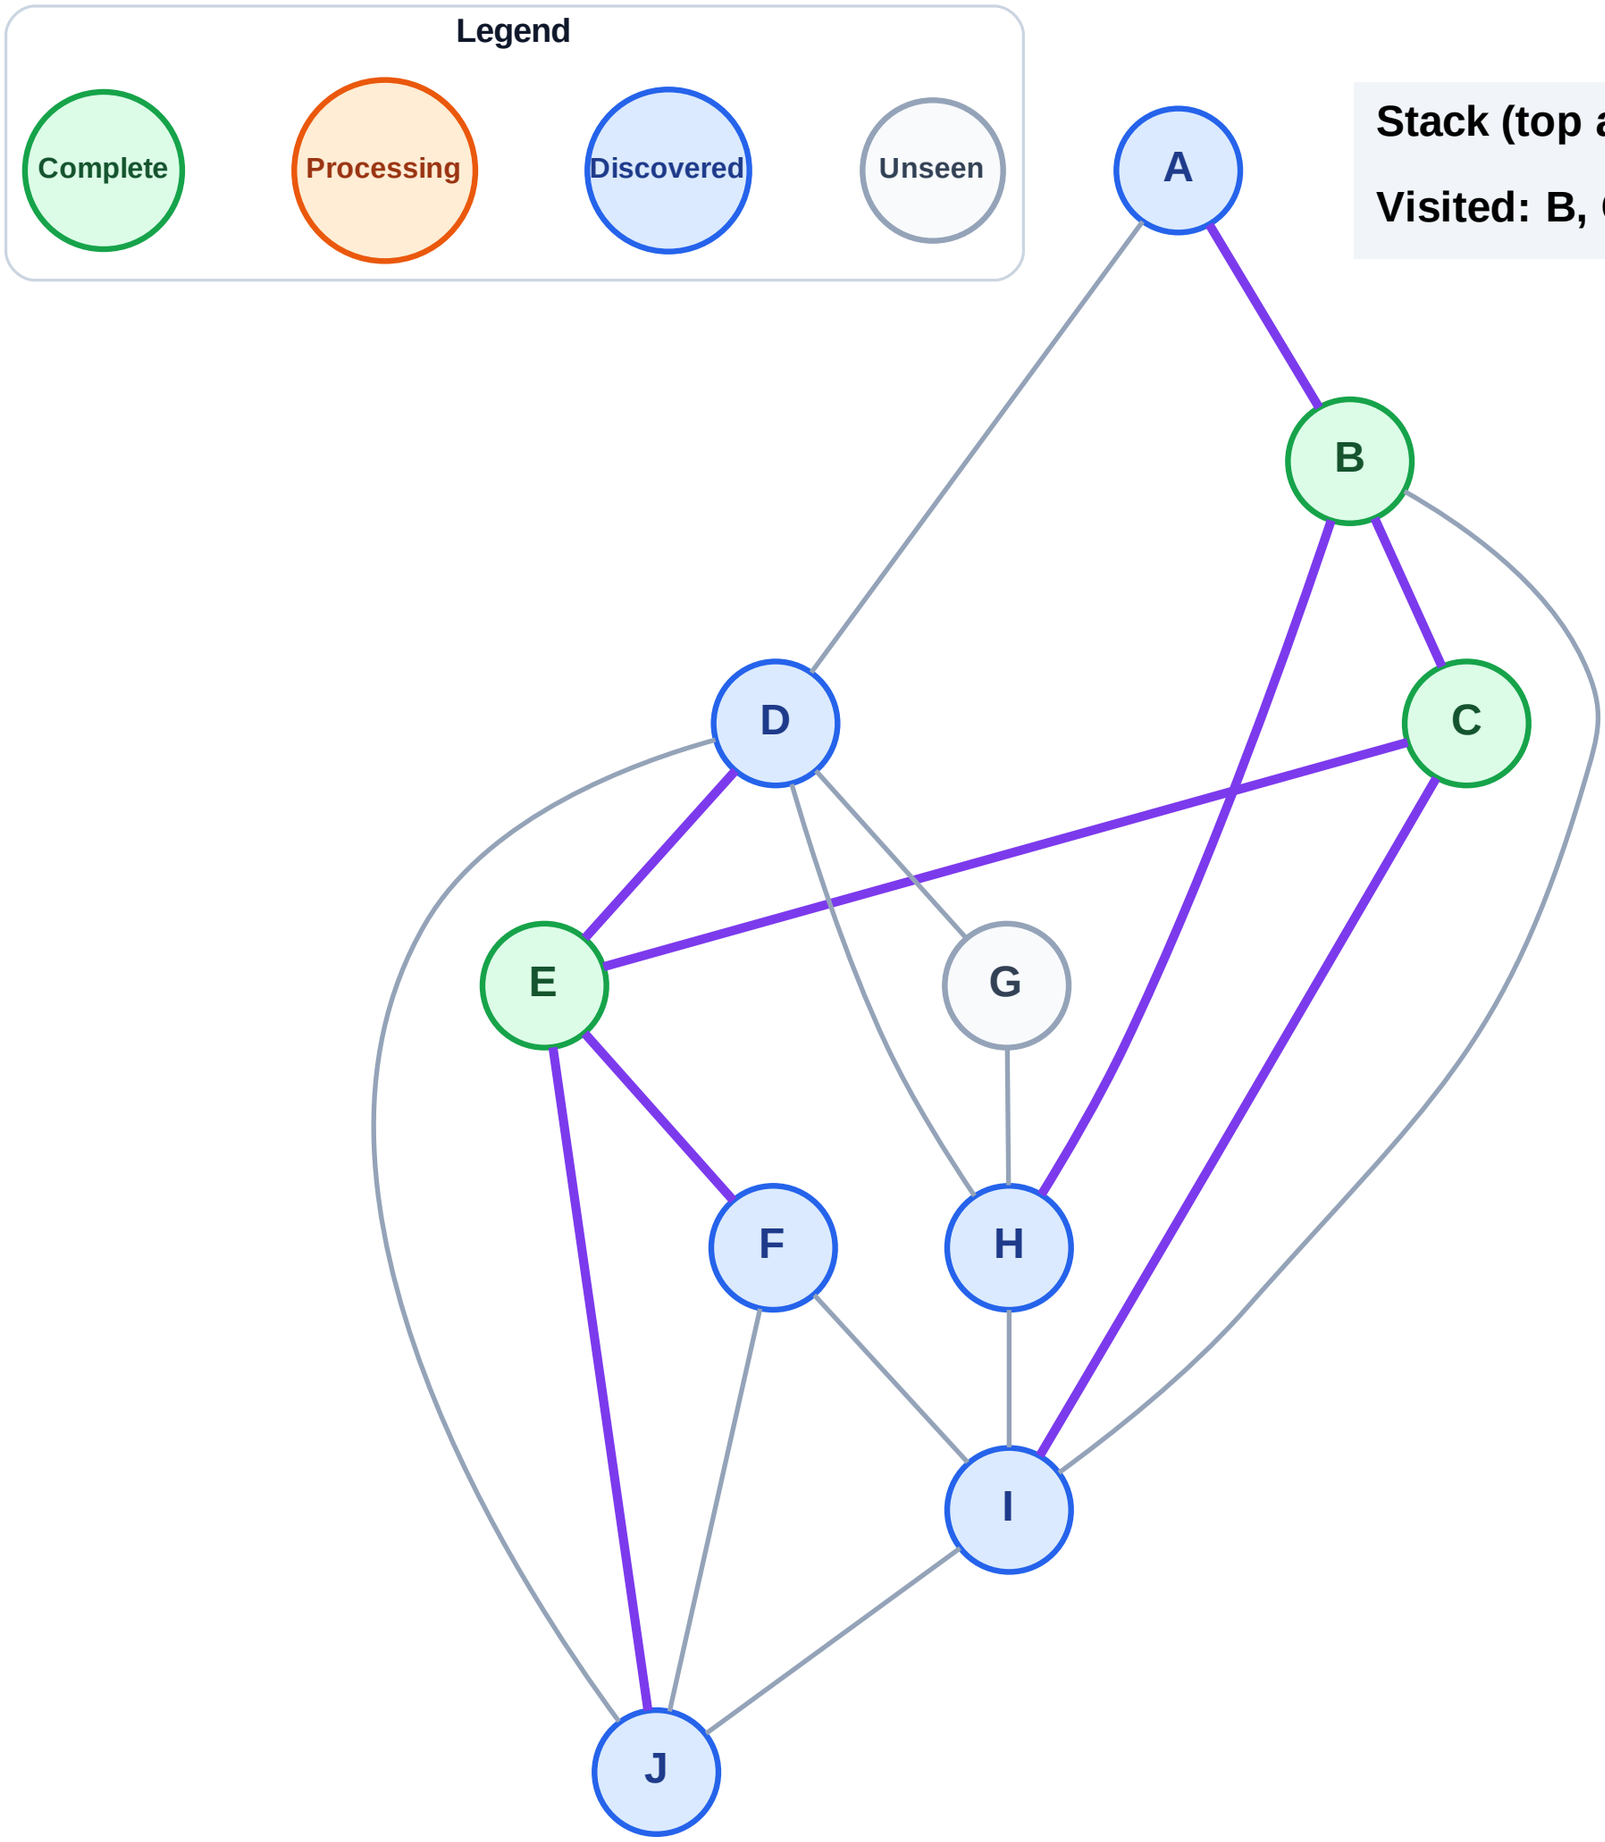


Stack (top at right): J | F | D | I | H | A

Visited: B, C, E

DFS Traversal

Step 8: Process node A

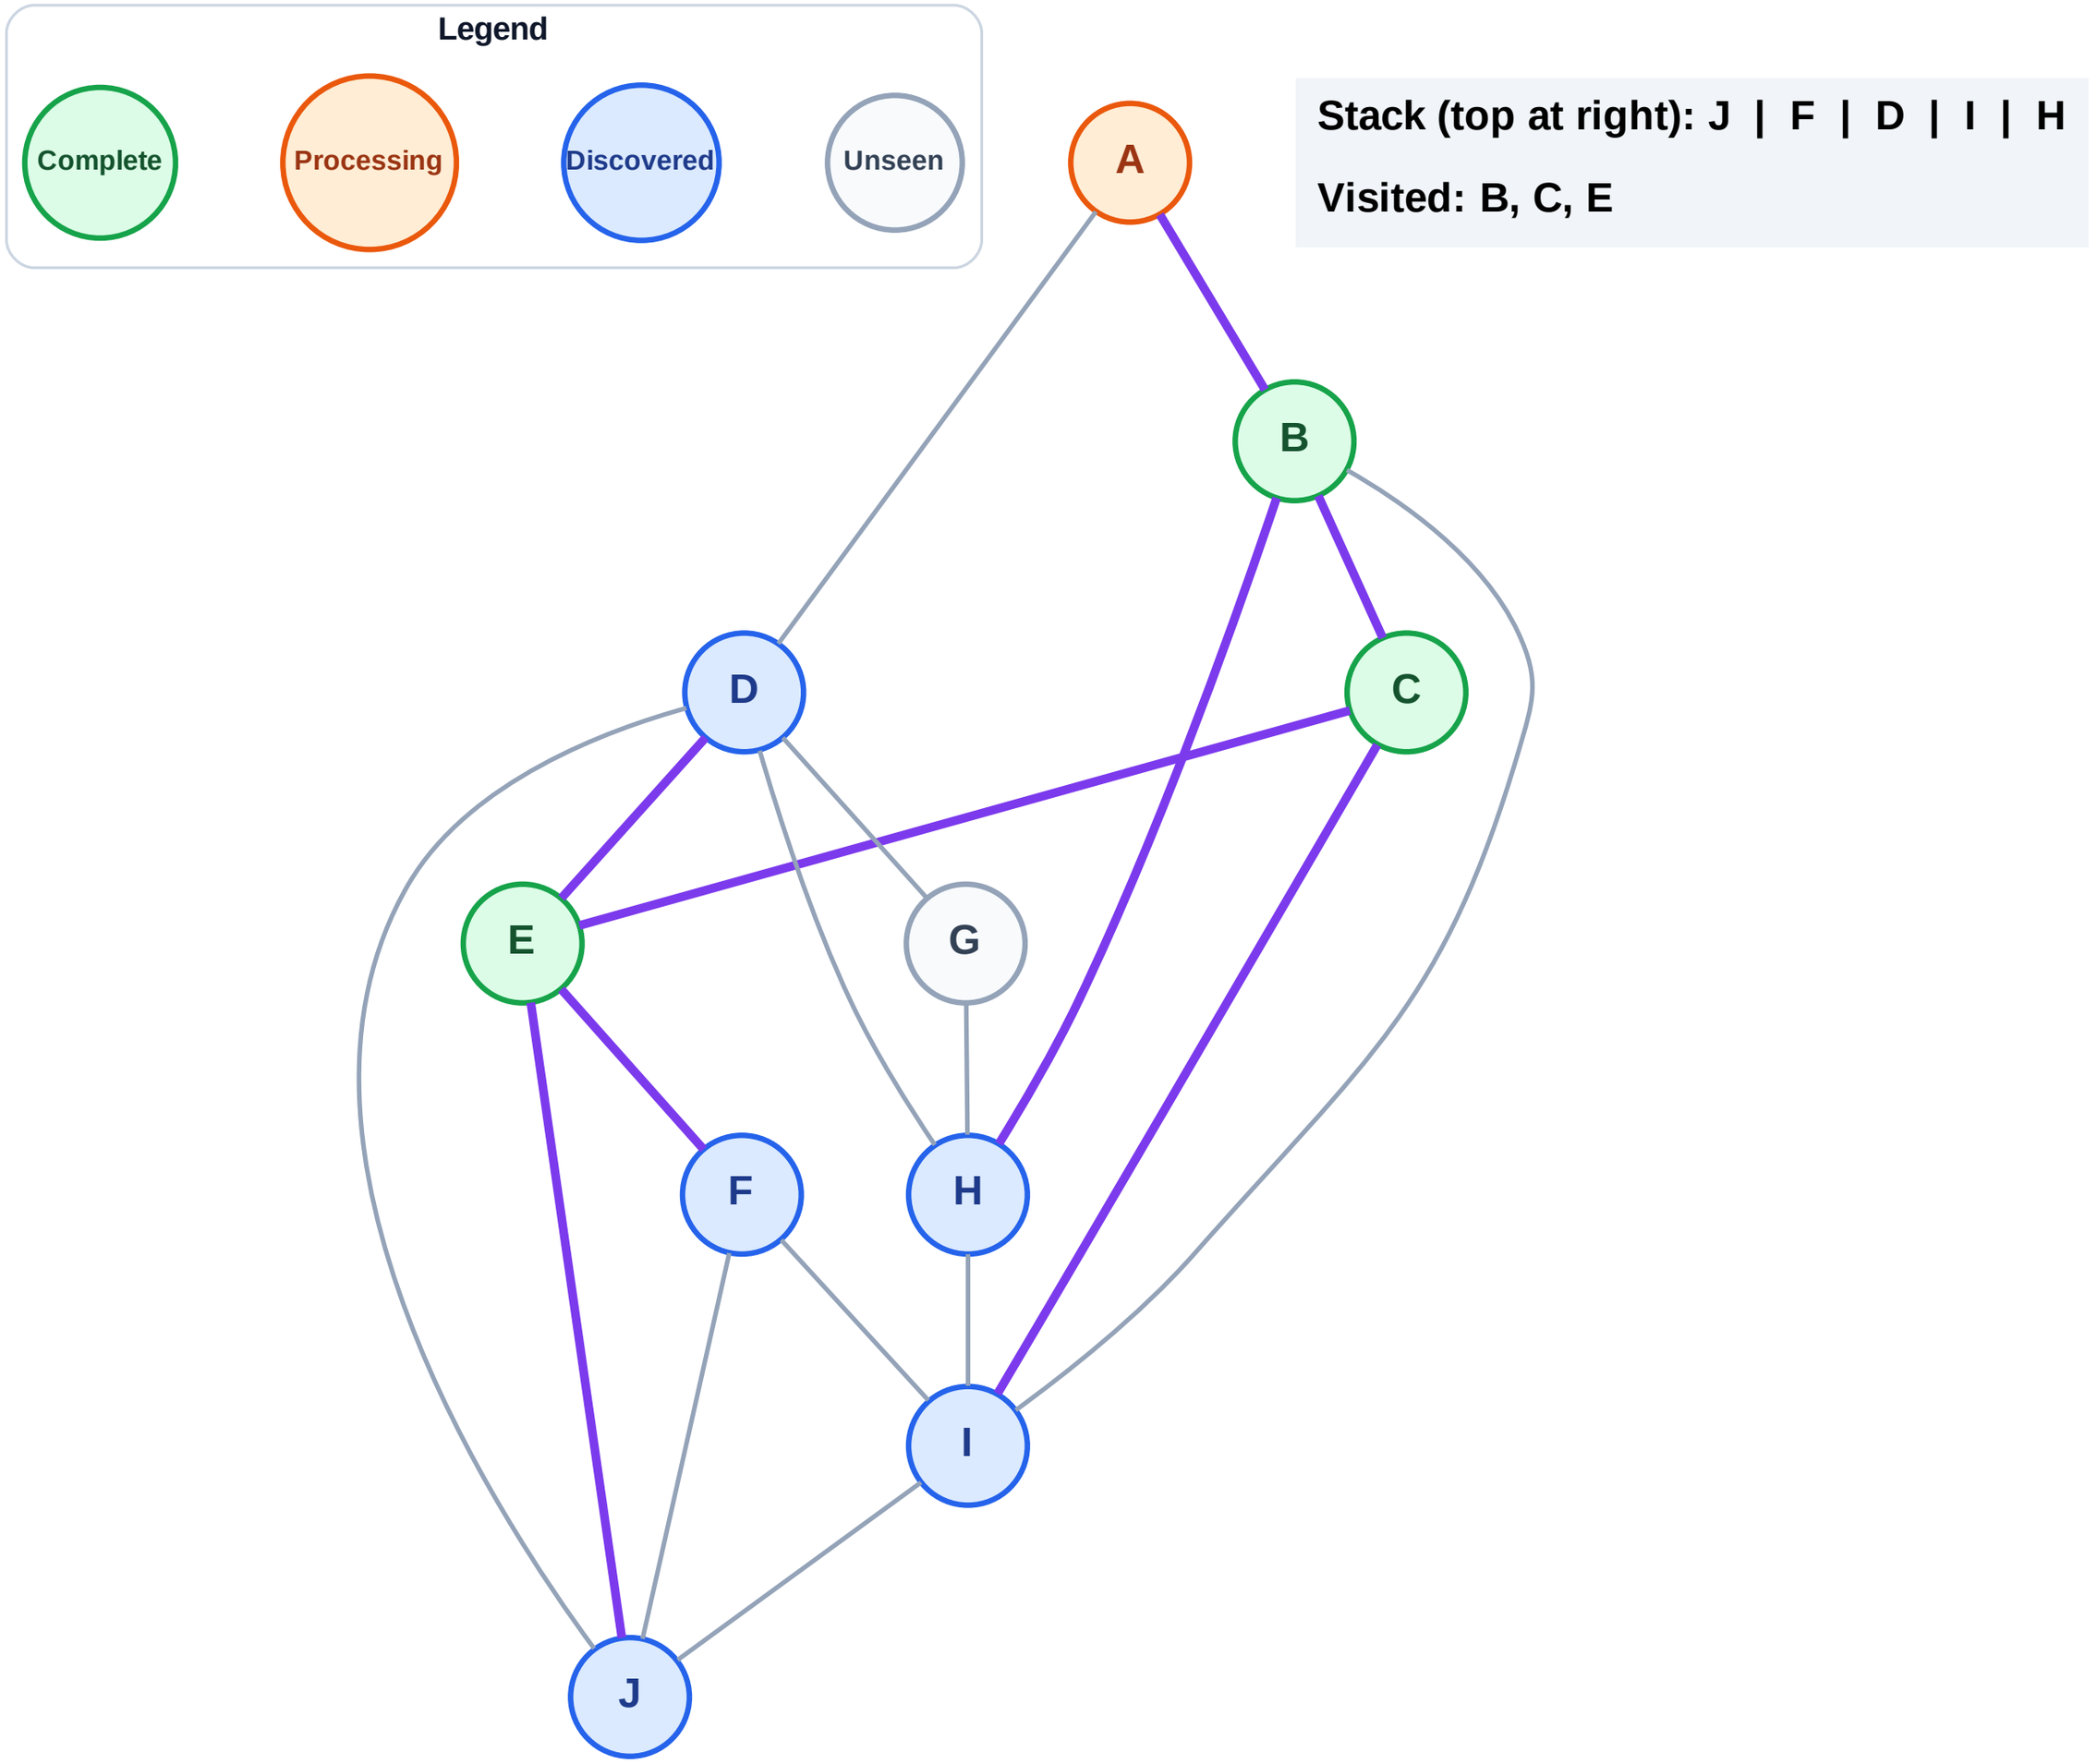


Stack (top at right): J | F | D | I | H

Visited: B, C, E

DFS Traversal

Step 9: No new neighbors from A

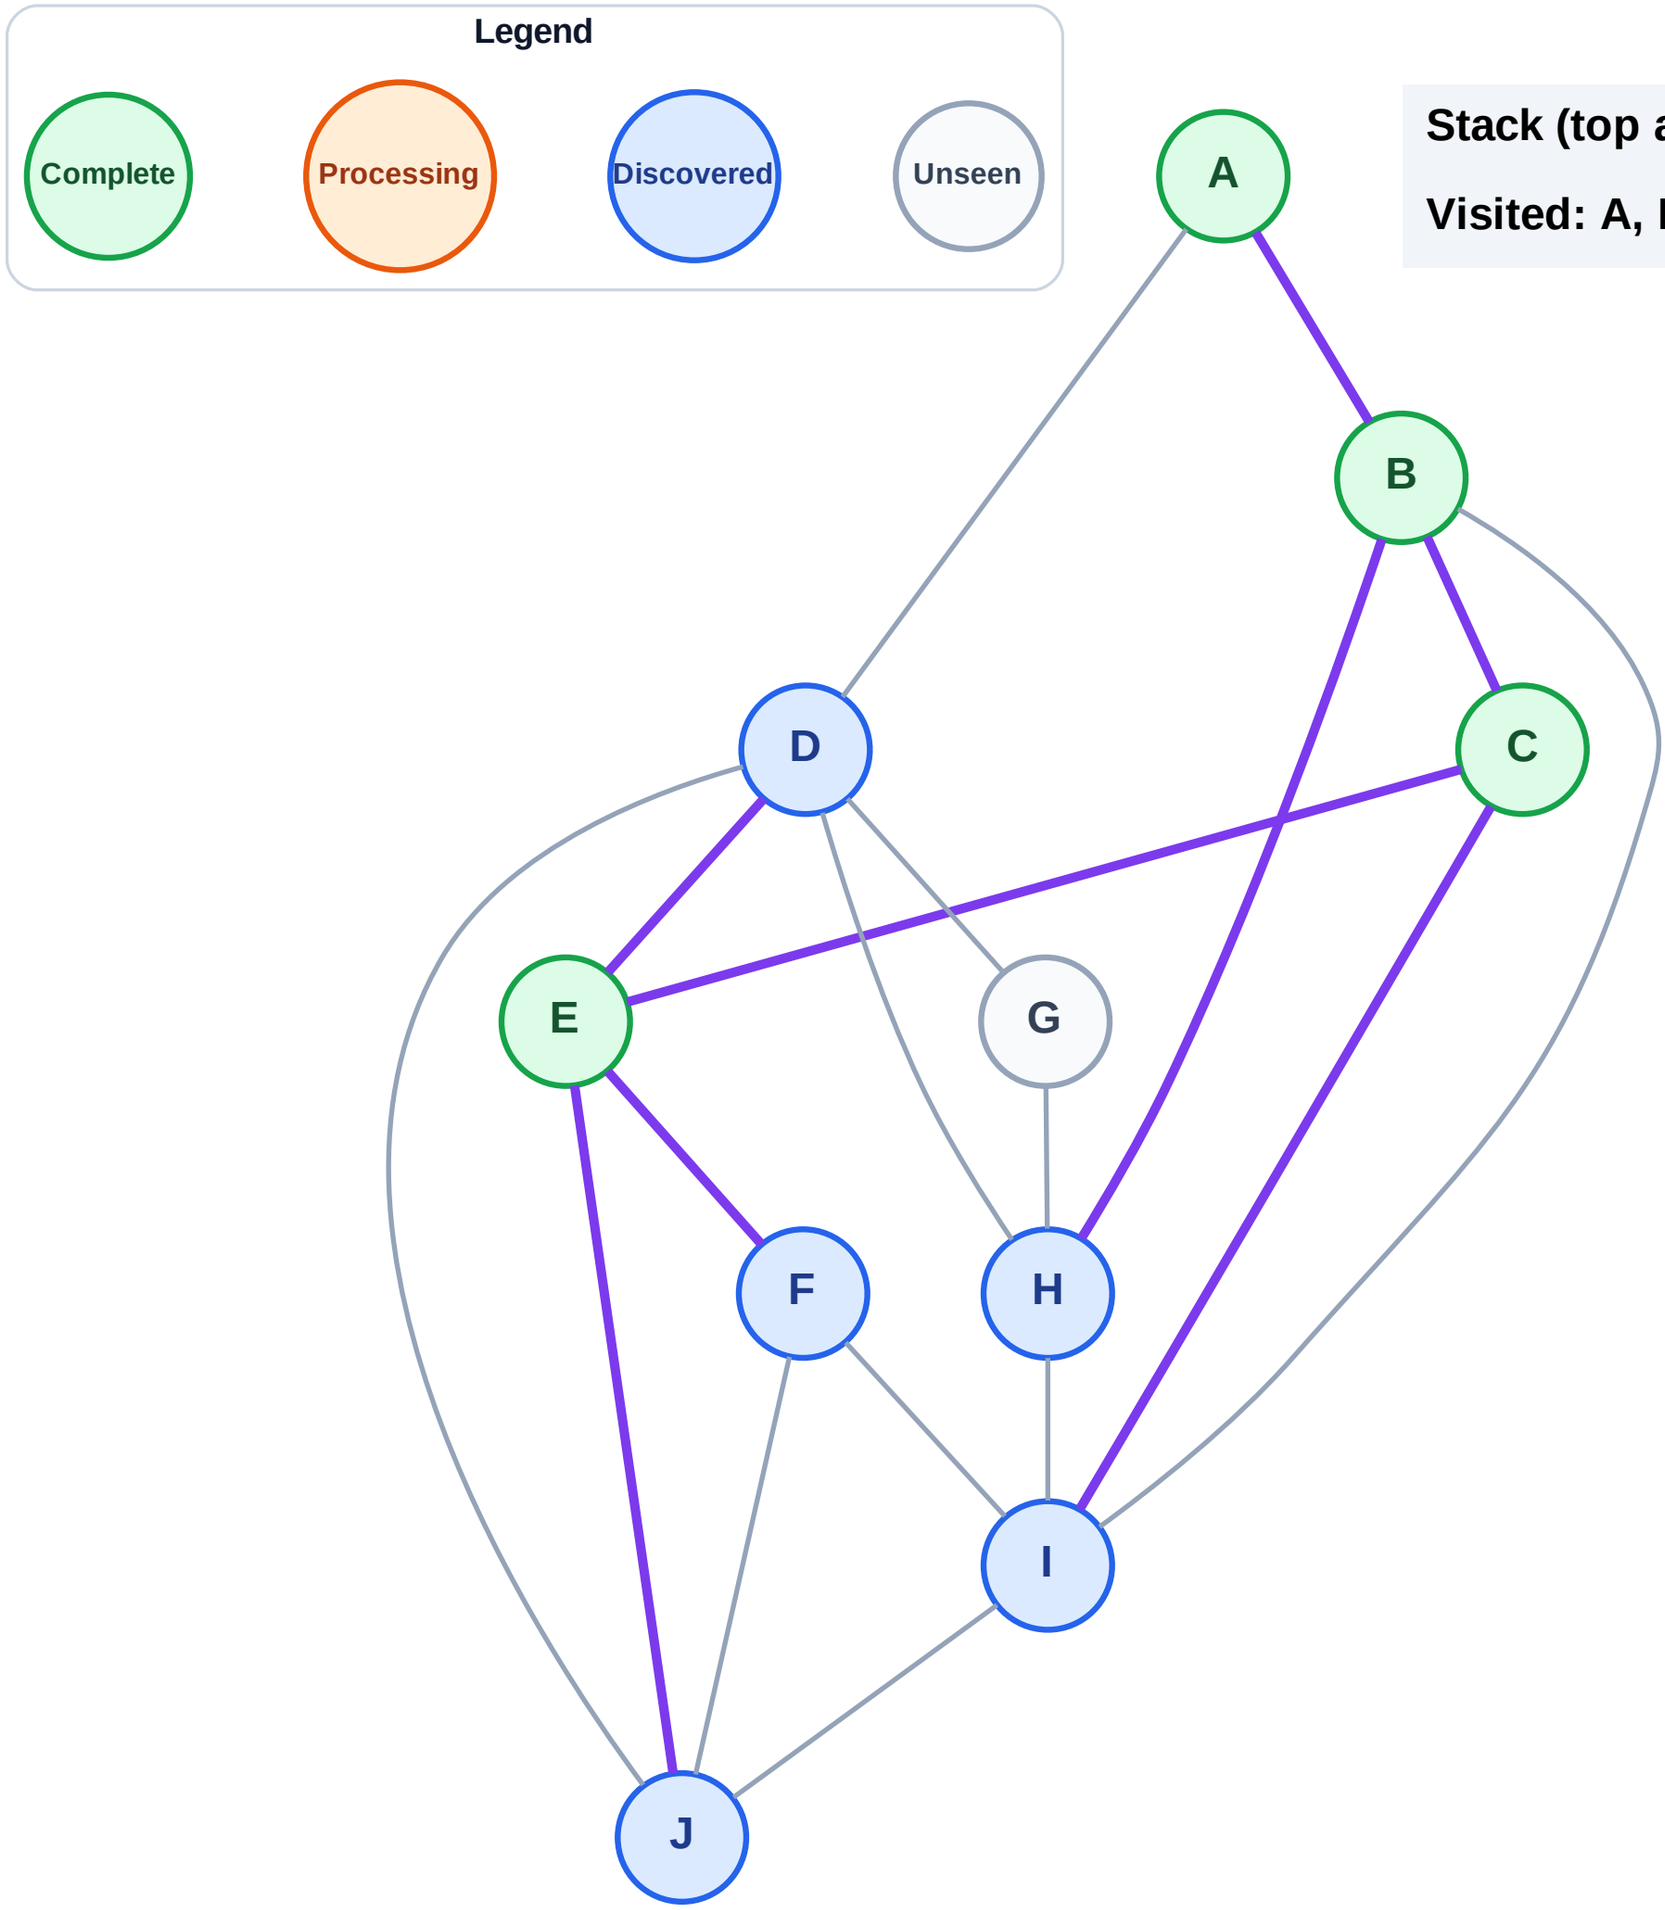


Stack (top at right): J | F | D | I | H

Visited: A, B, C, E

DFS Traversal

Step 10: Process node H

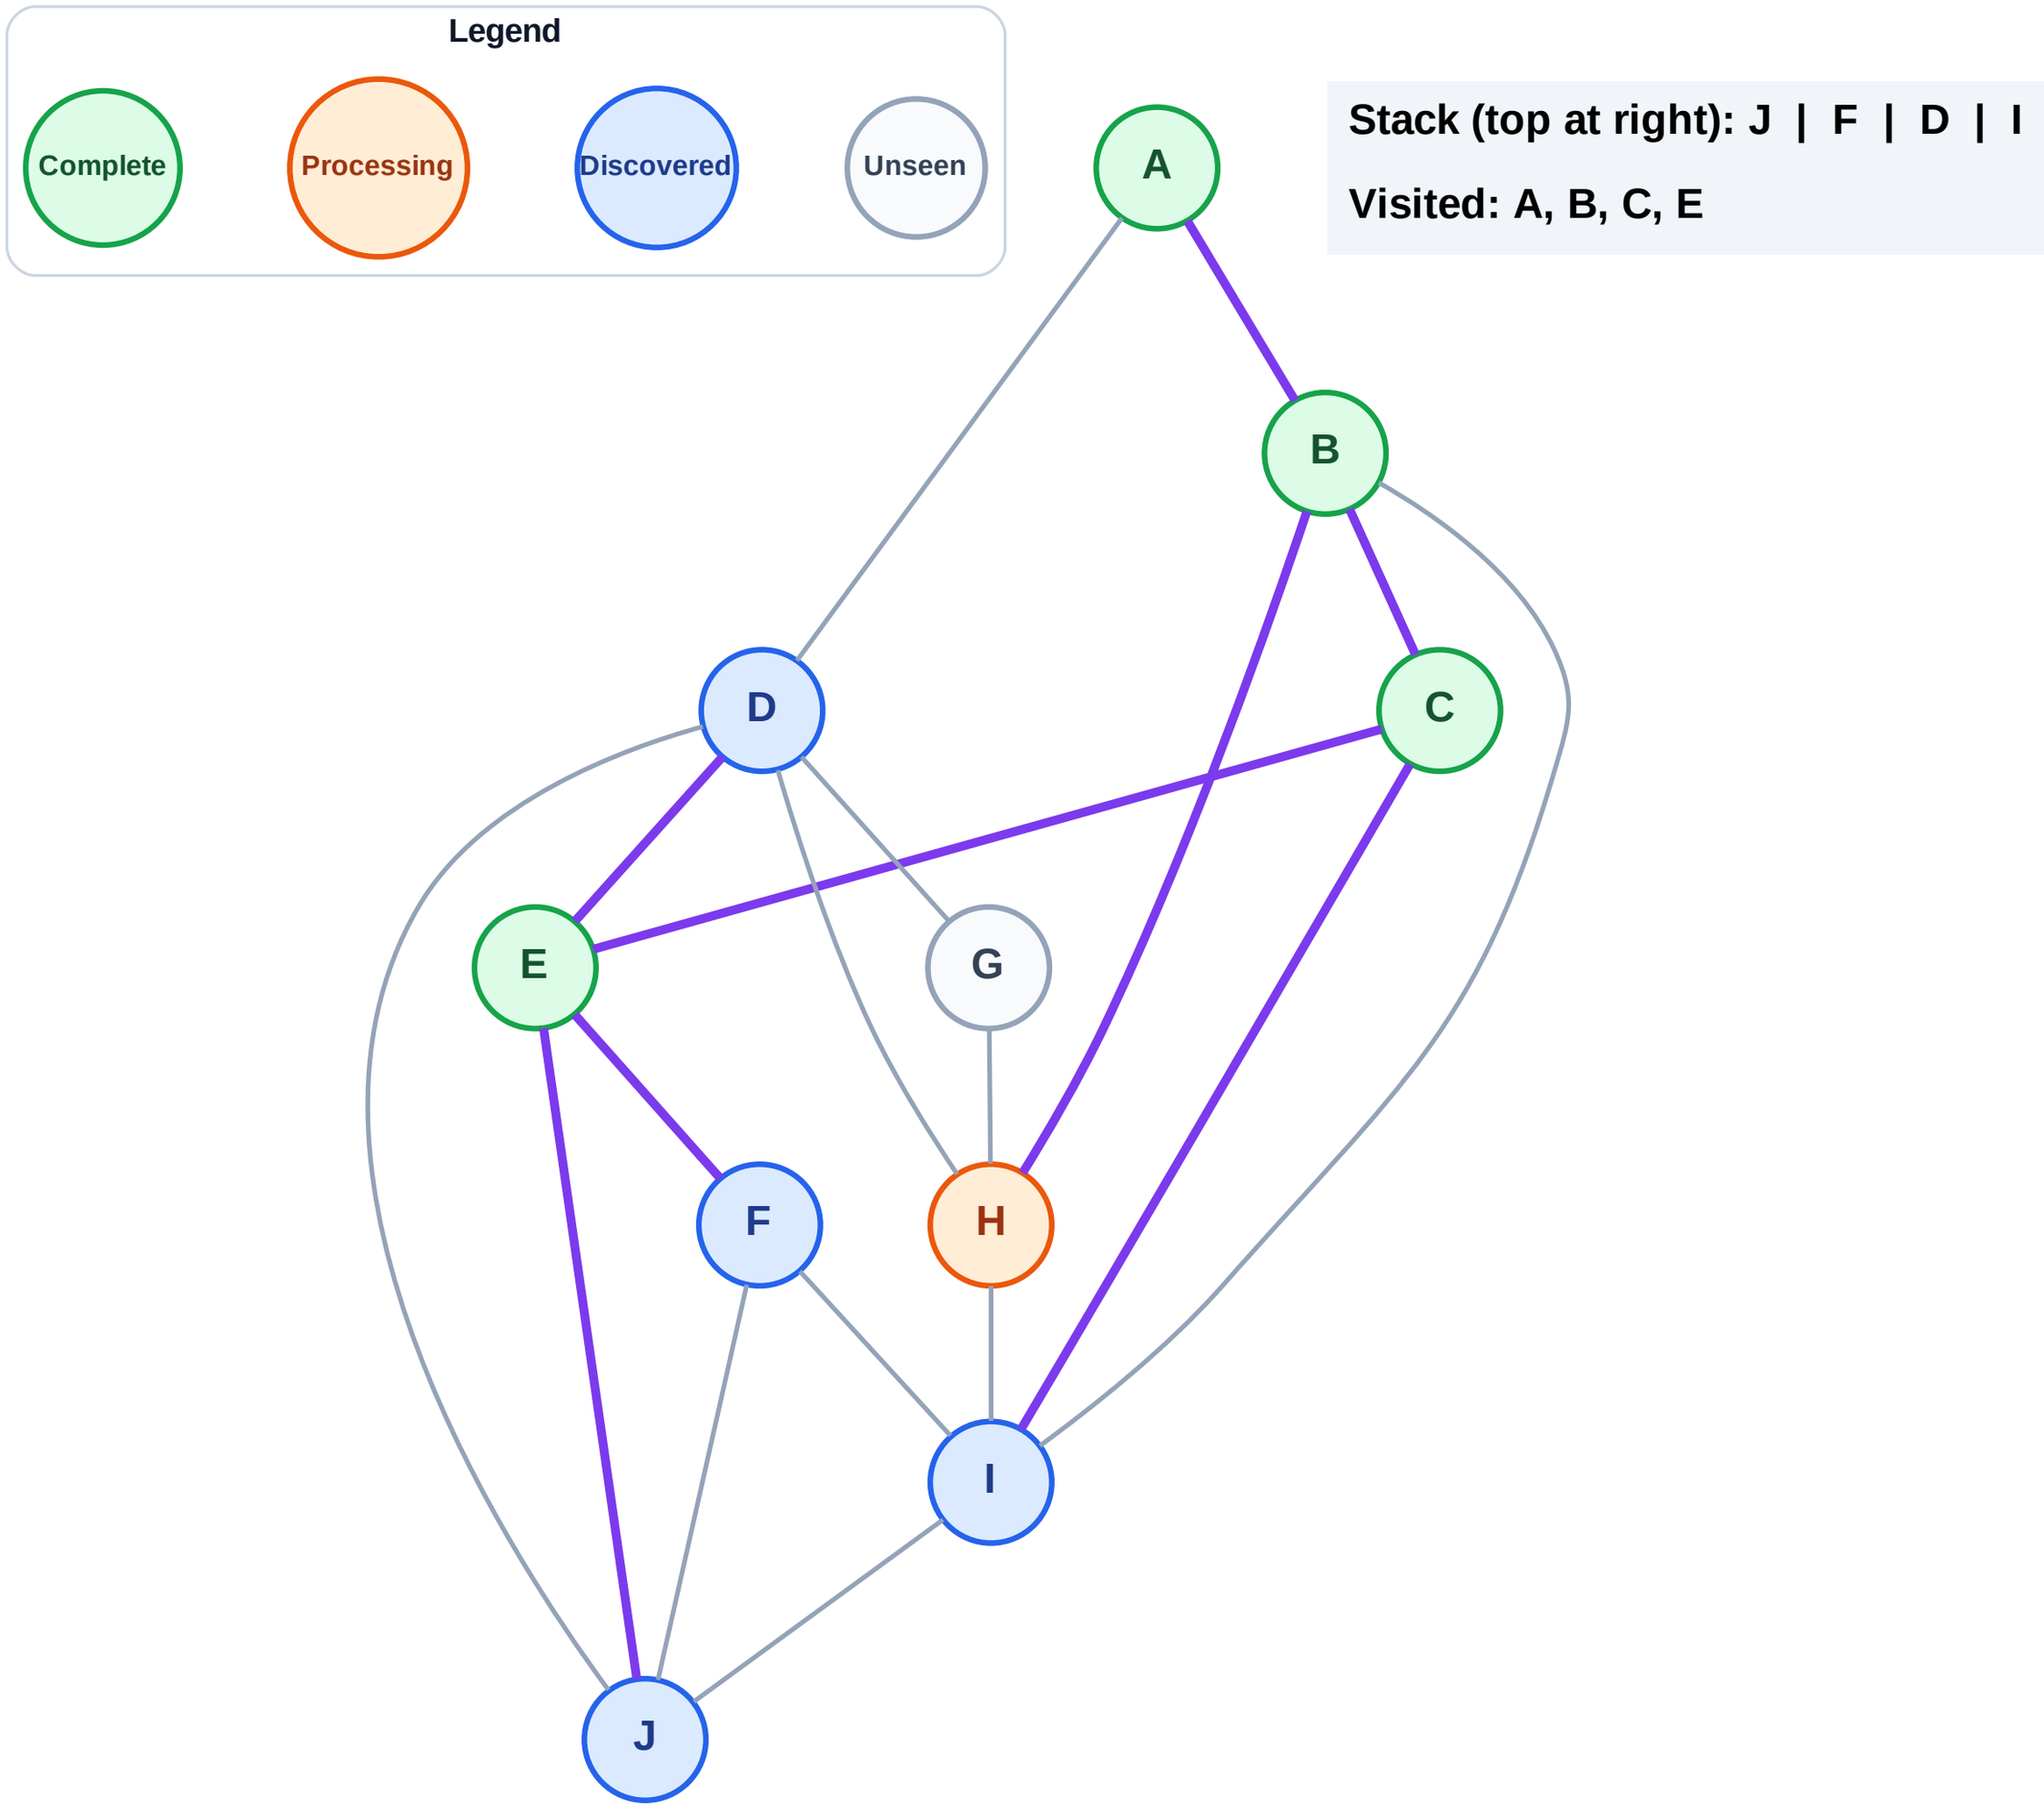


Stack (top at right): J | F | D | I

Visited: A, B, C, E

DFS Traversal

Step 11: Discover G from H

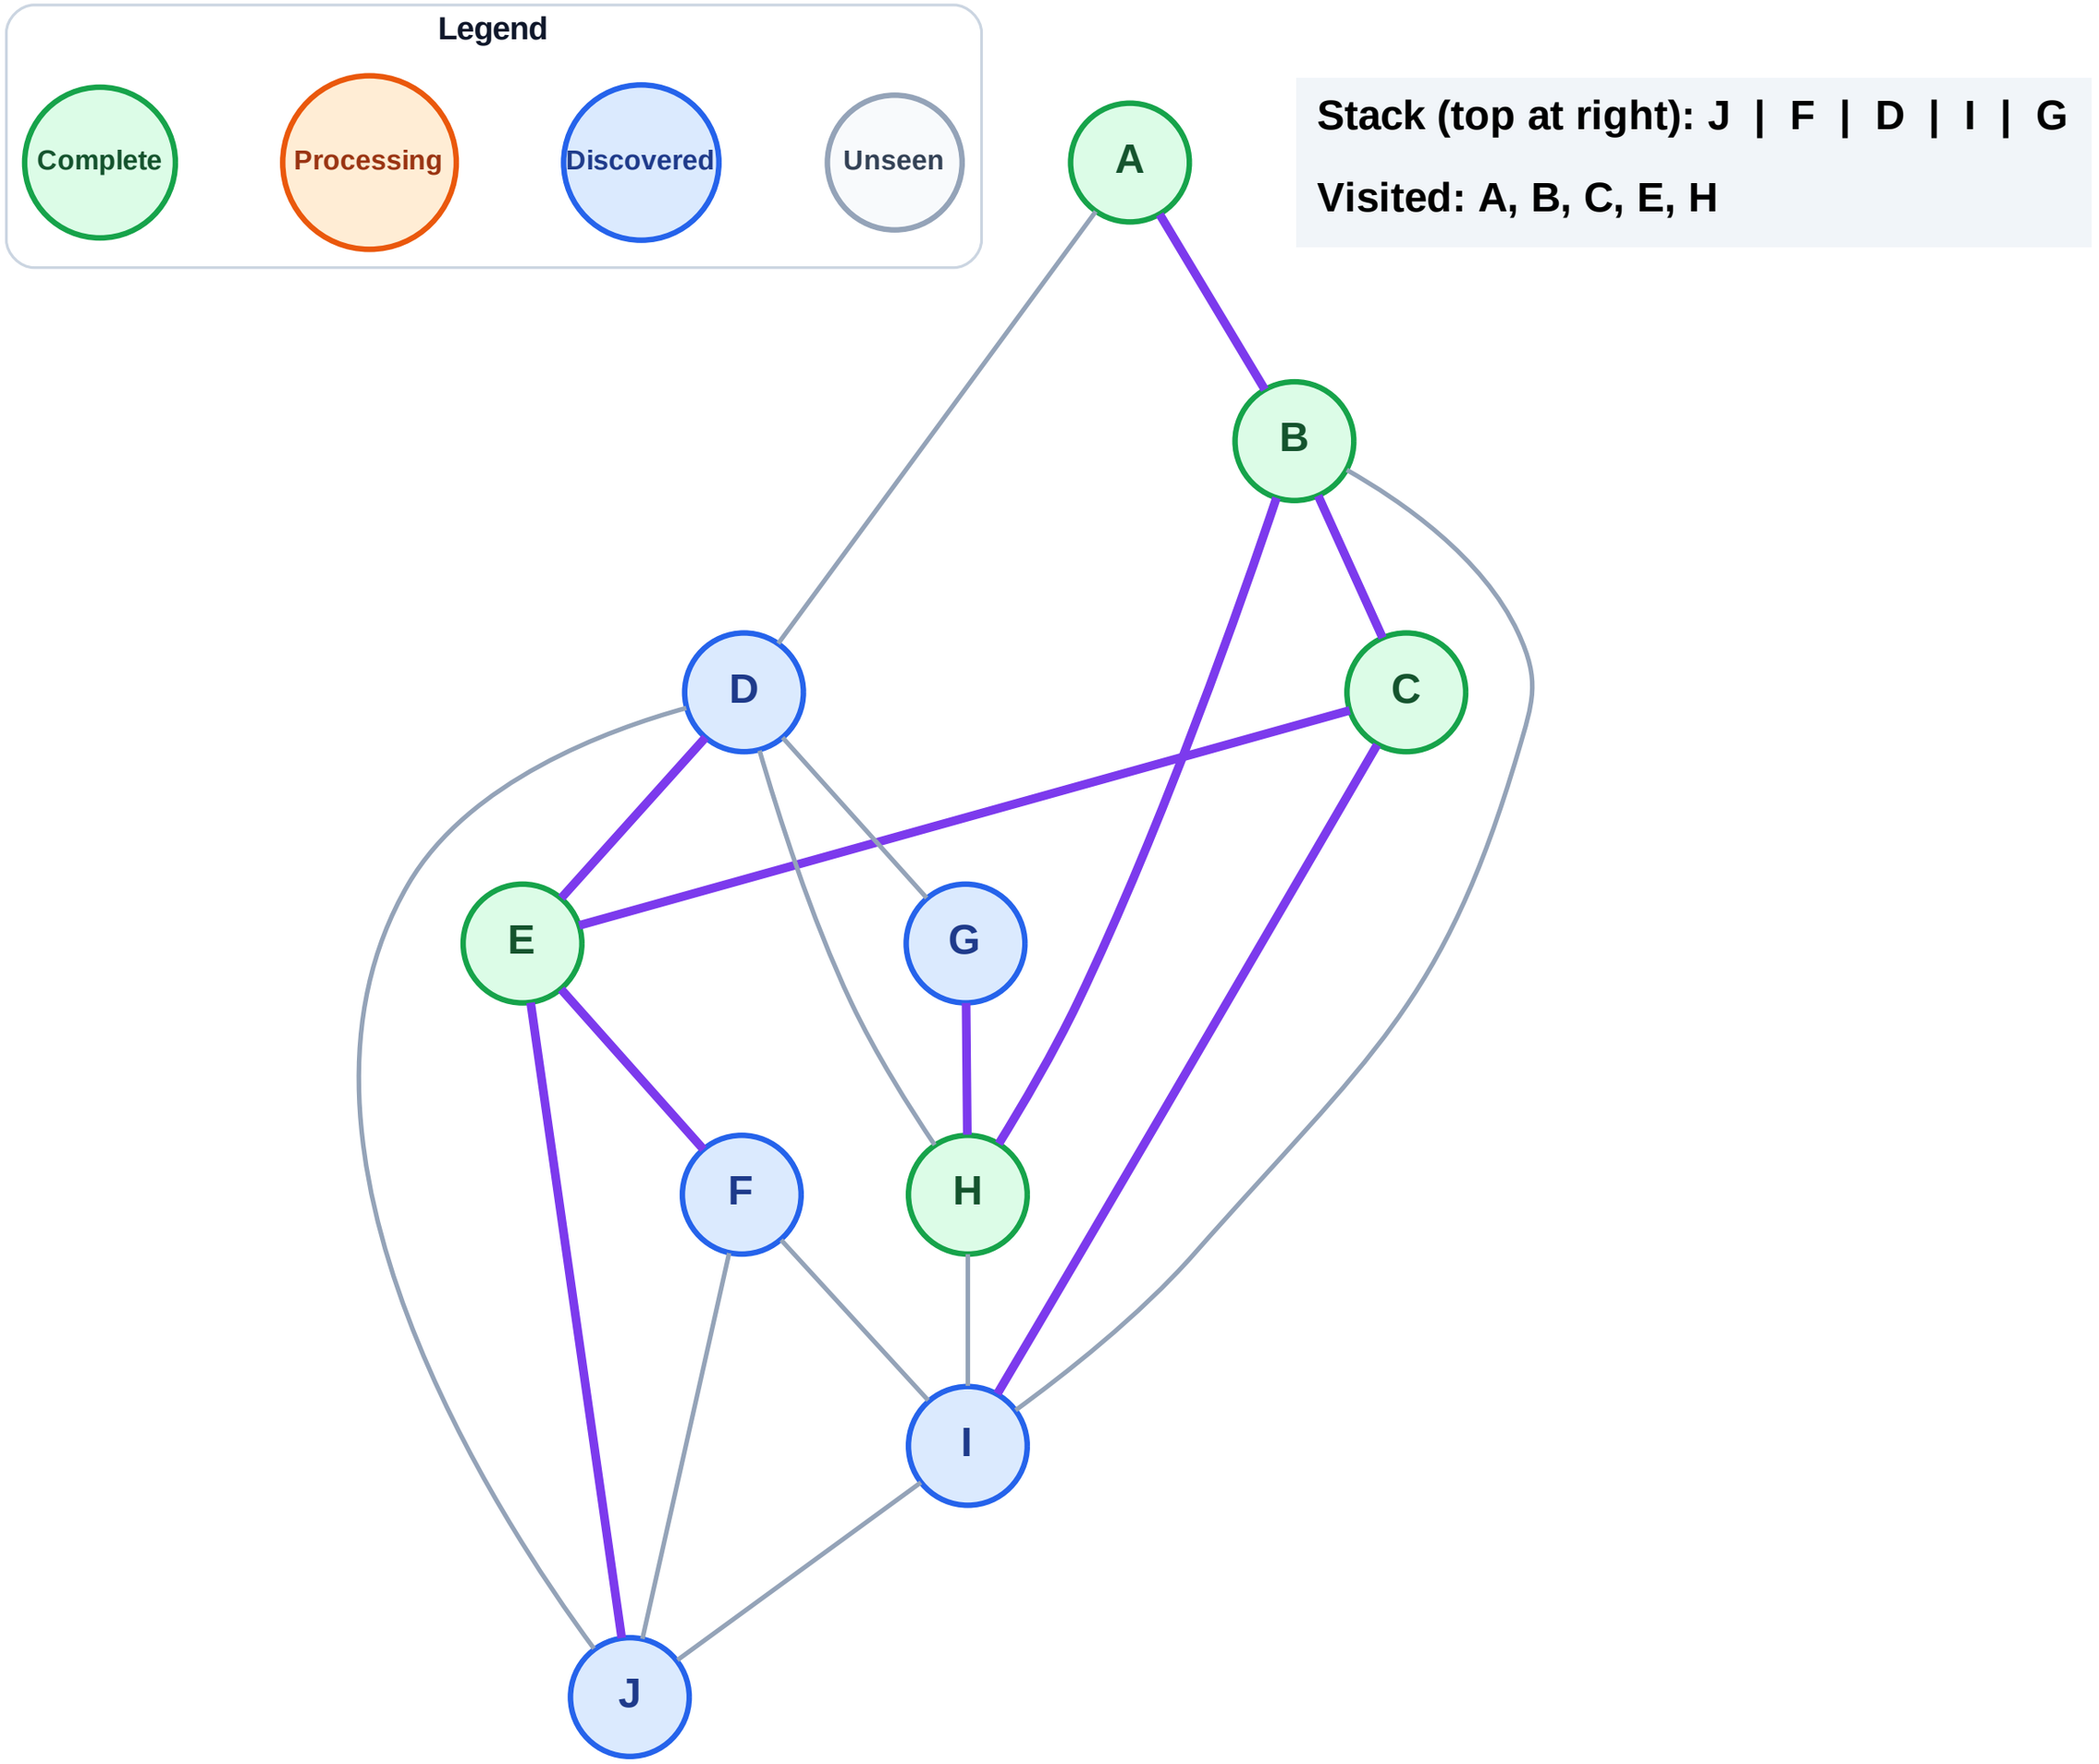


Stack (top at right): J | F | D | I | G

Visited: A, B, C, E, H

DFS Traversal

Step 12: Process node G

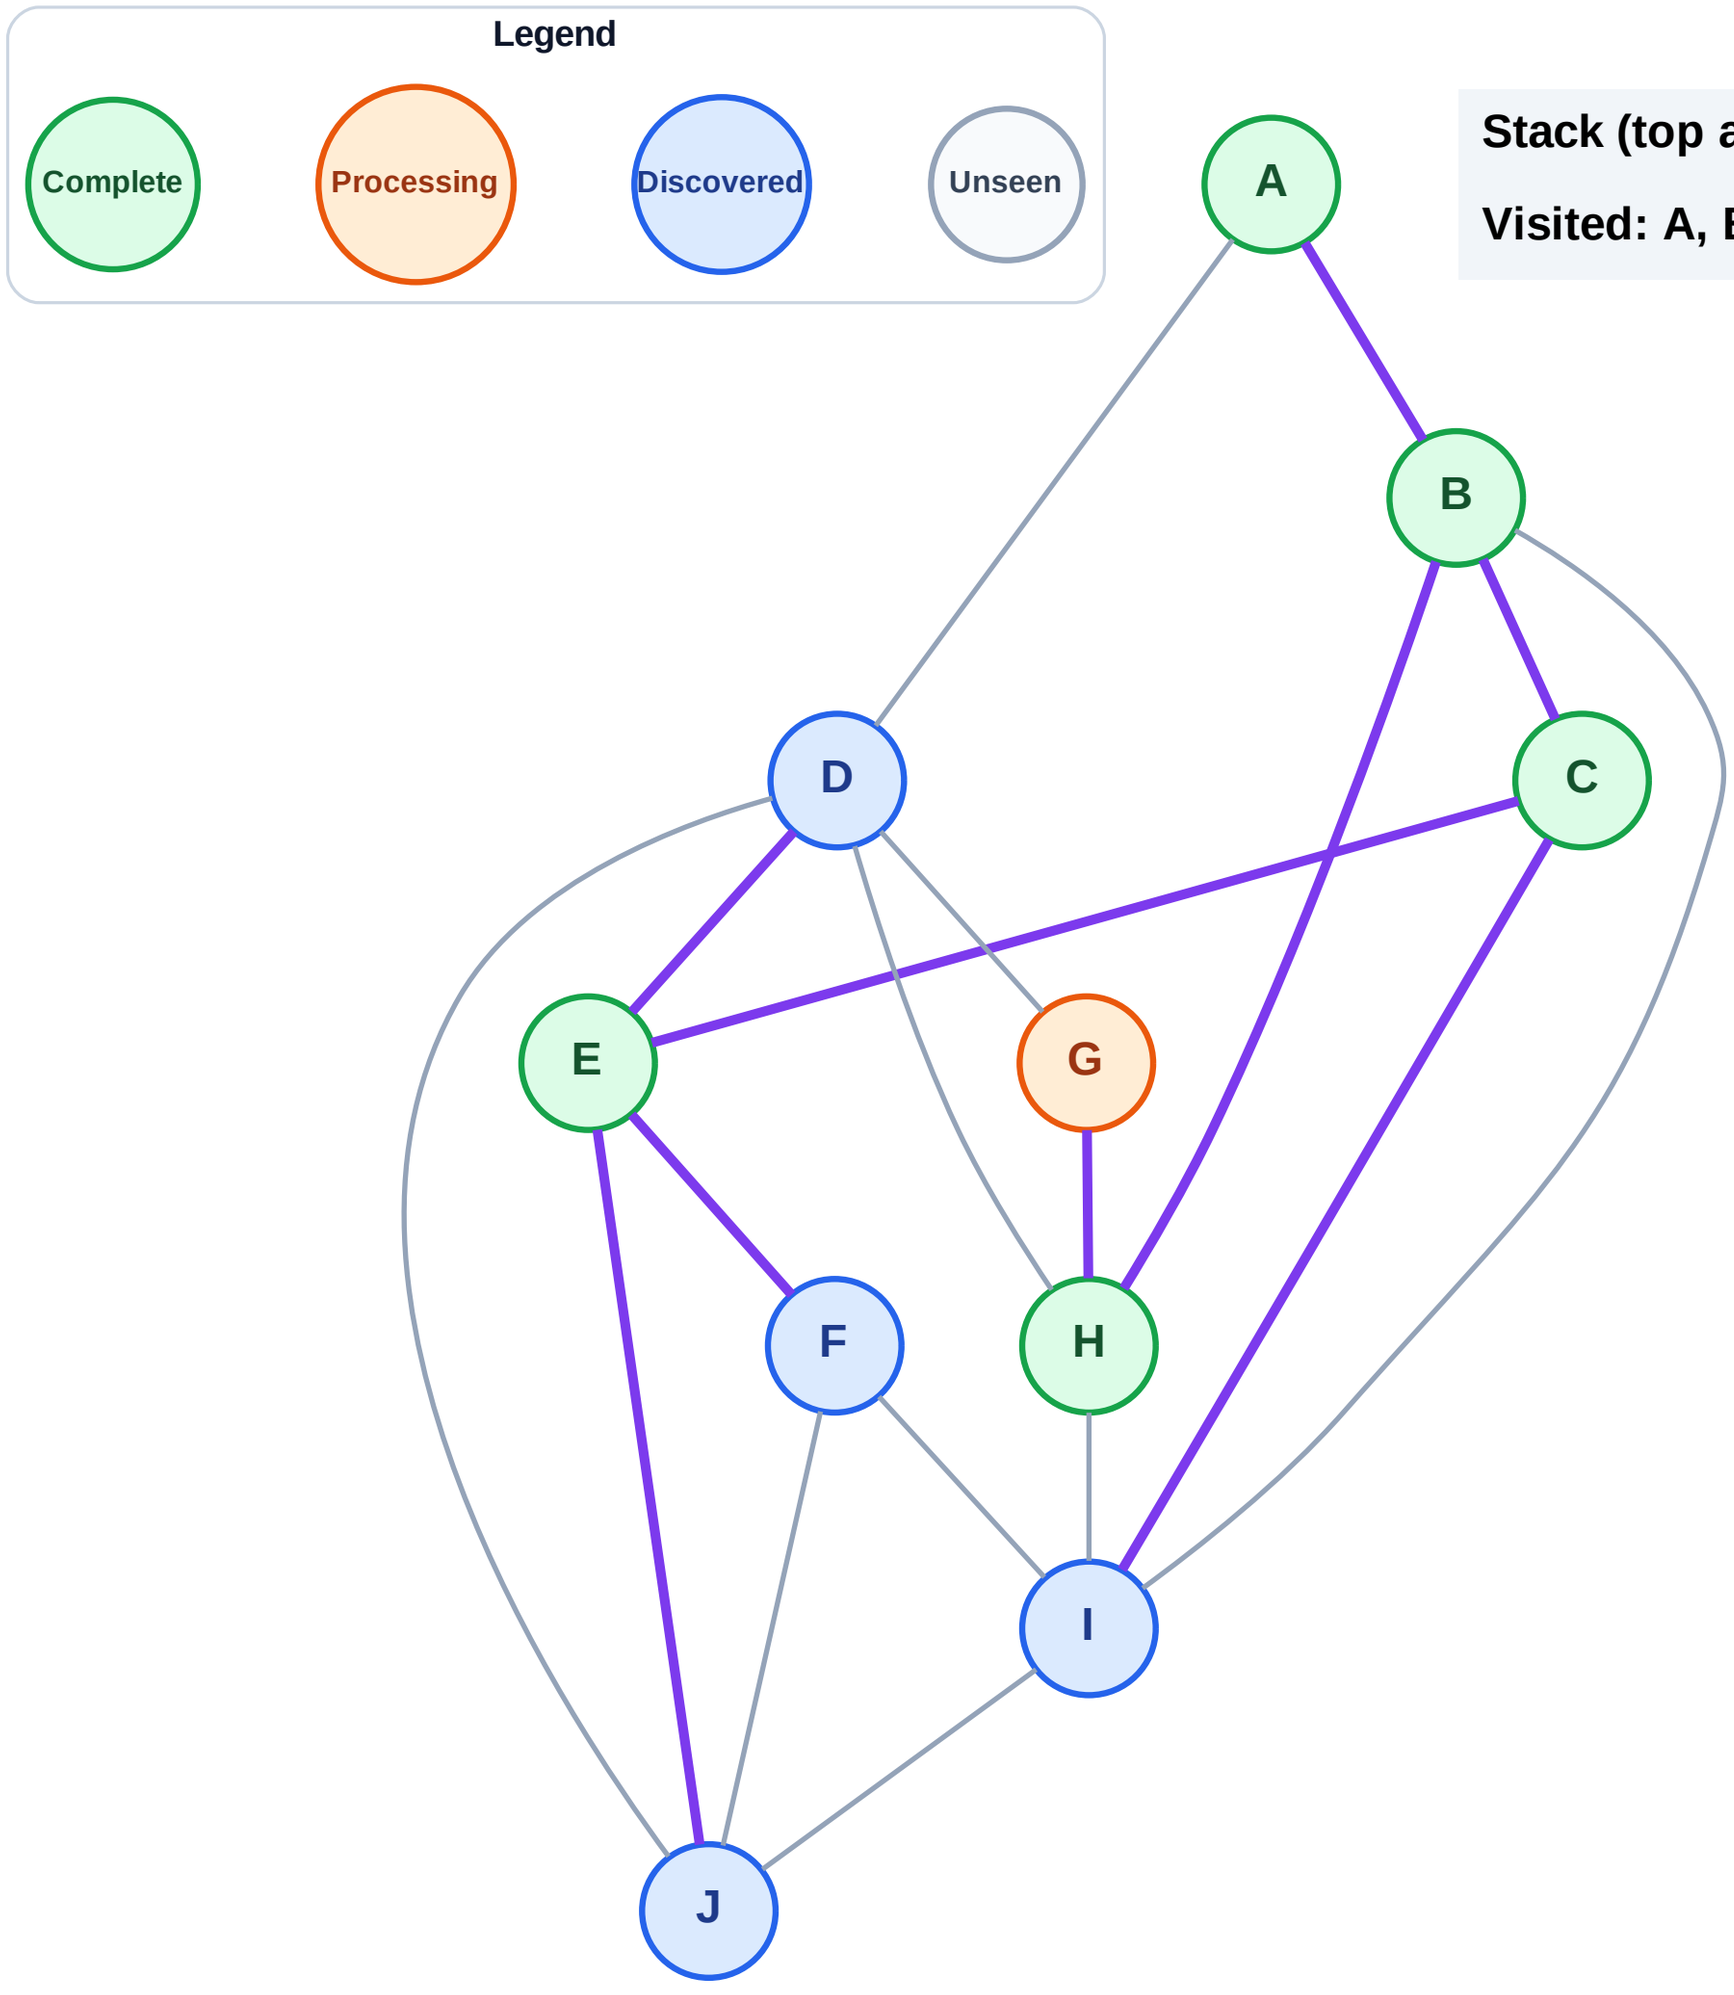


Stack (top at right): J | F | D | I

Visited: A, B, C, E, H

DFS Traversal

Step 13: No new neighbors from G

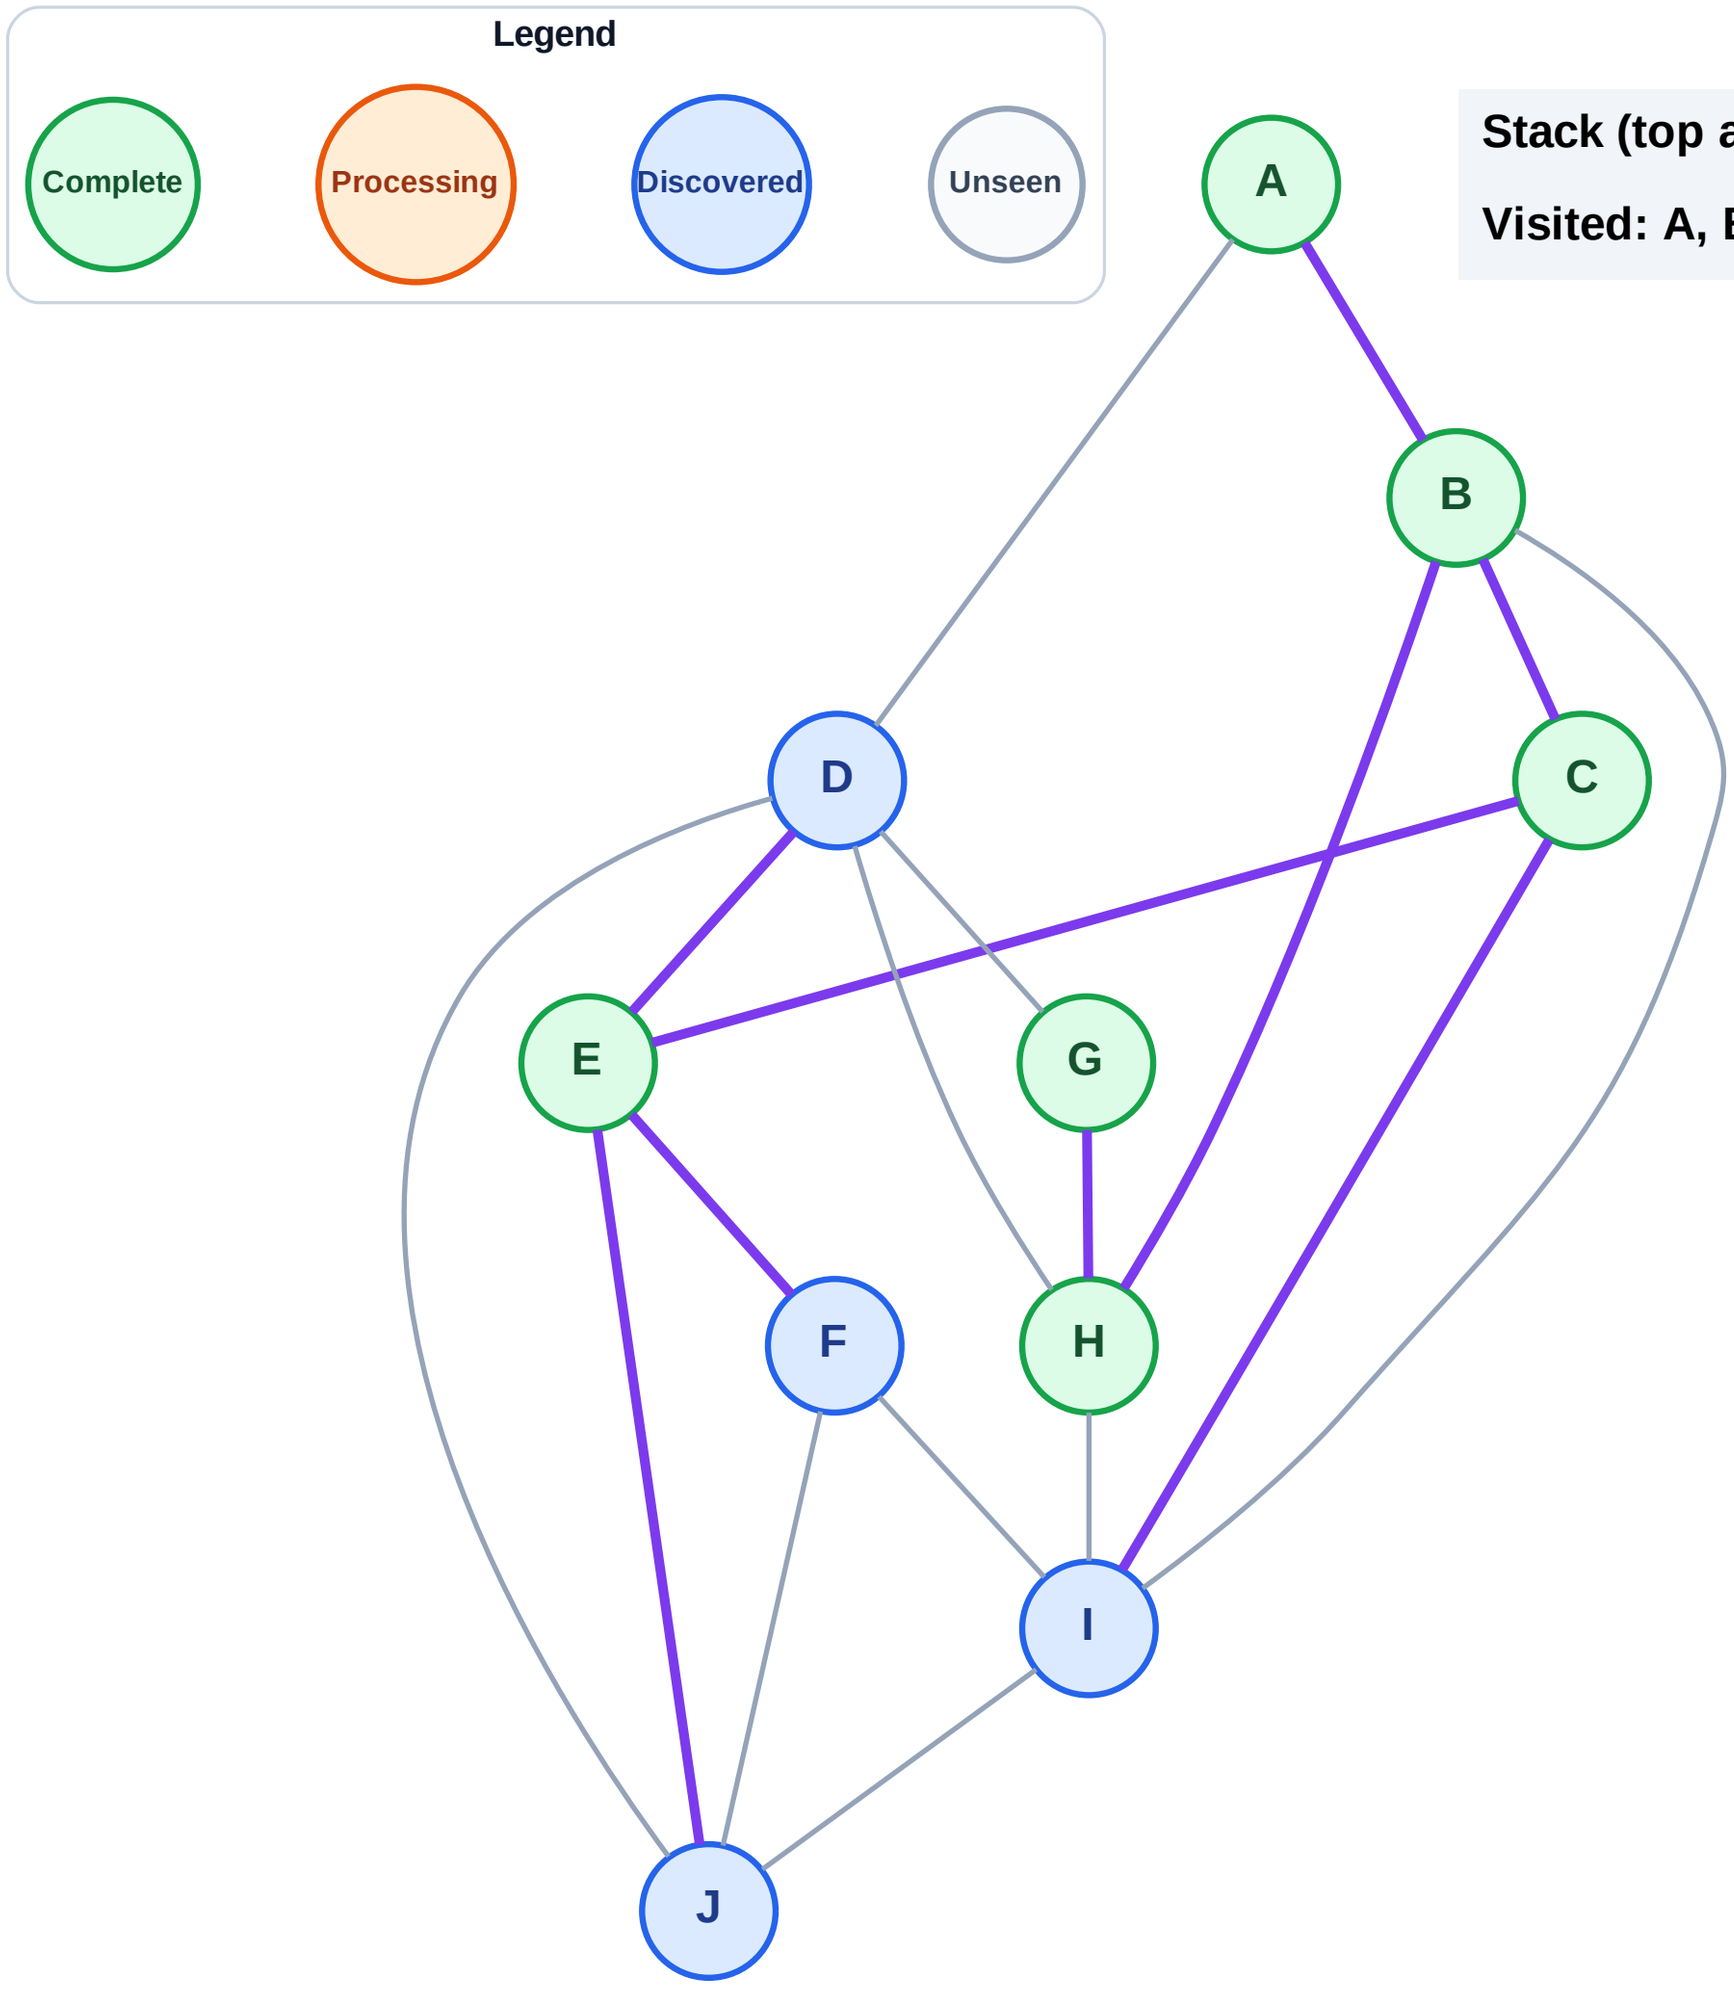


Stack (top at right): J | F | D | I

Visited: A, B, C, E, G, H

DFS Traversal

Step 14: Process node I

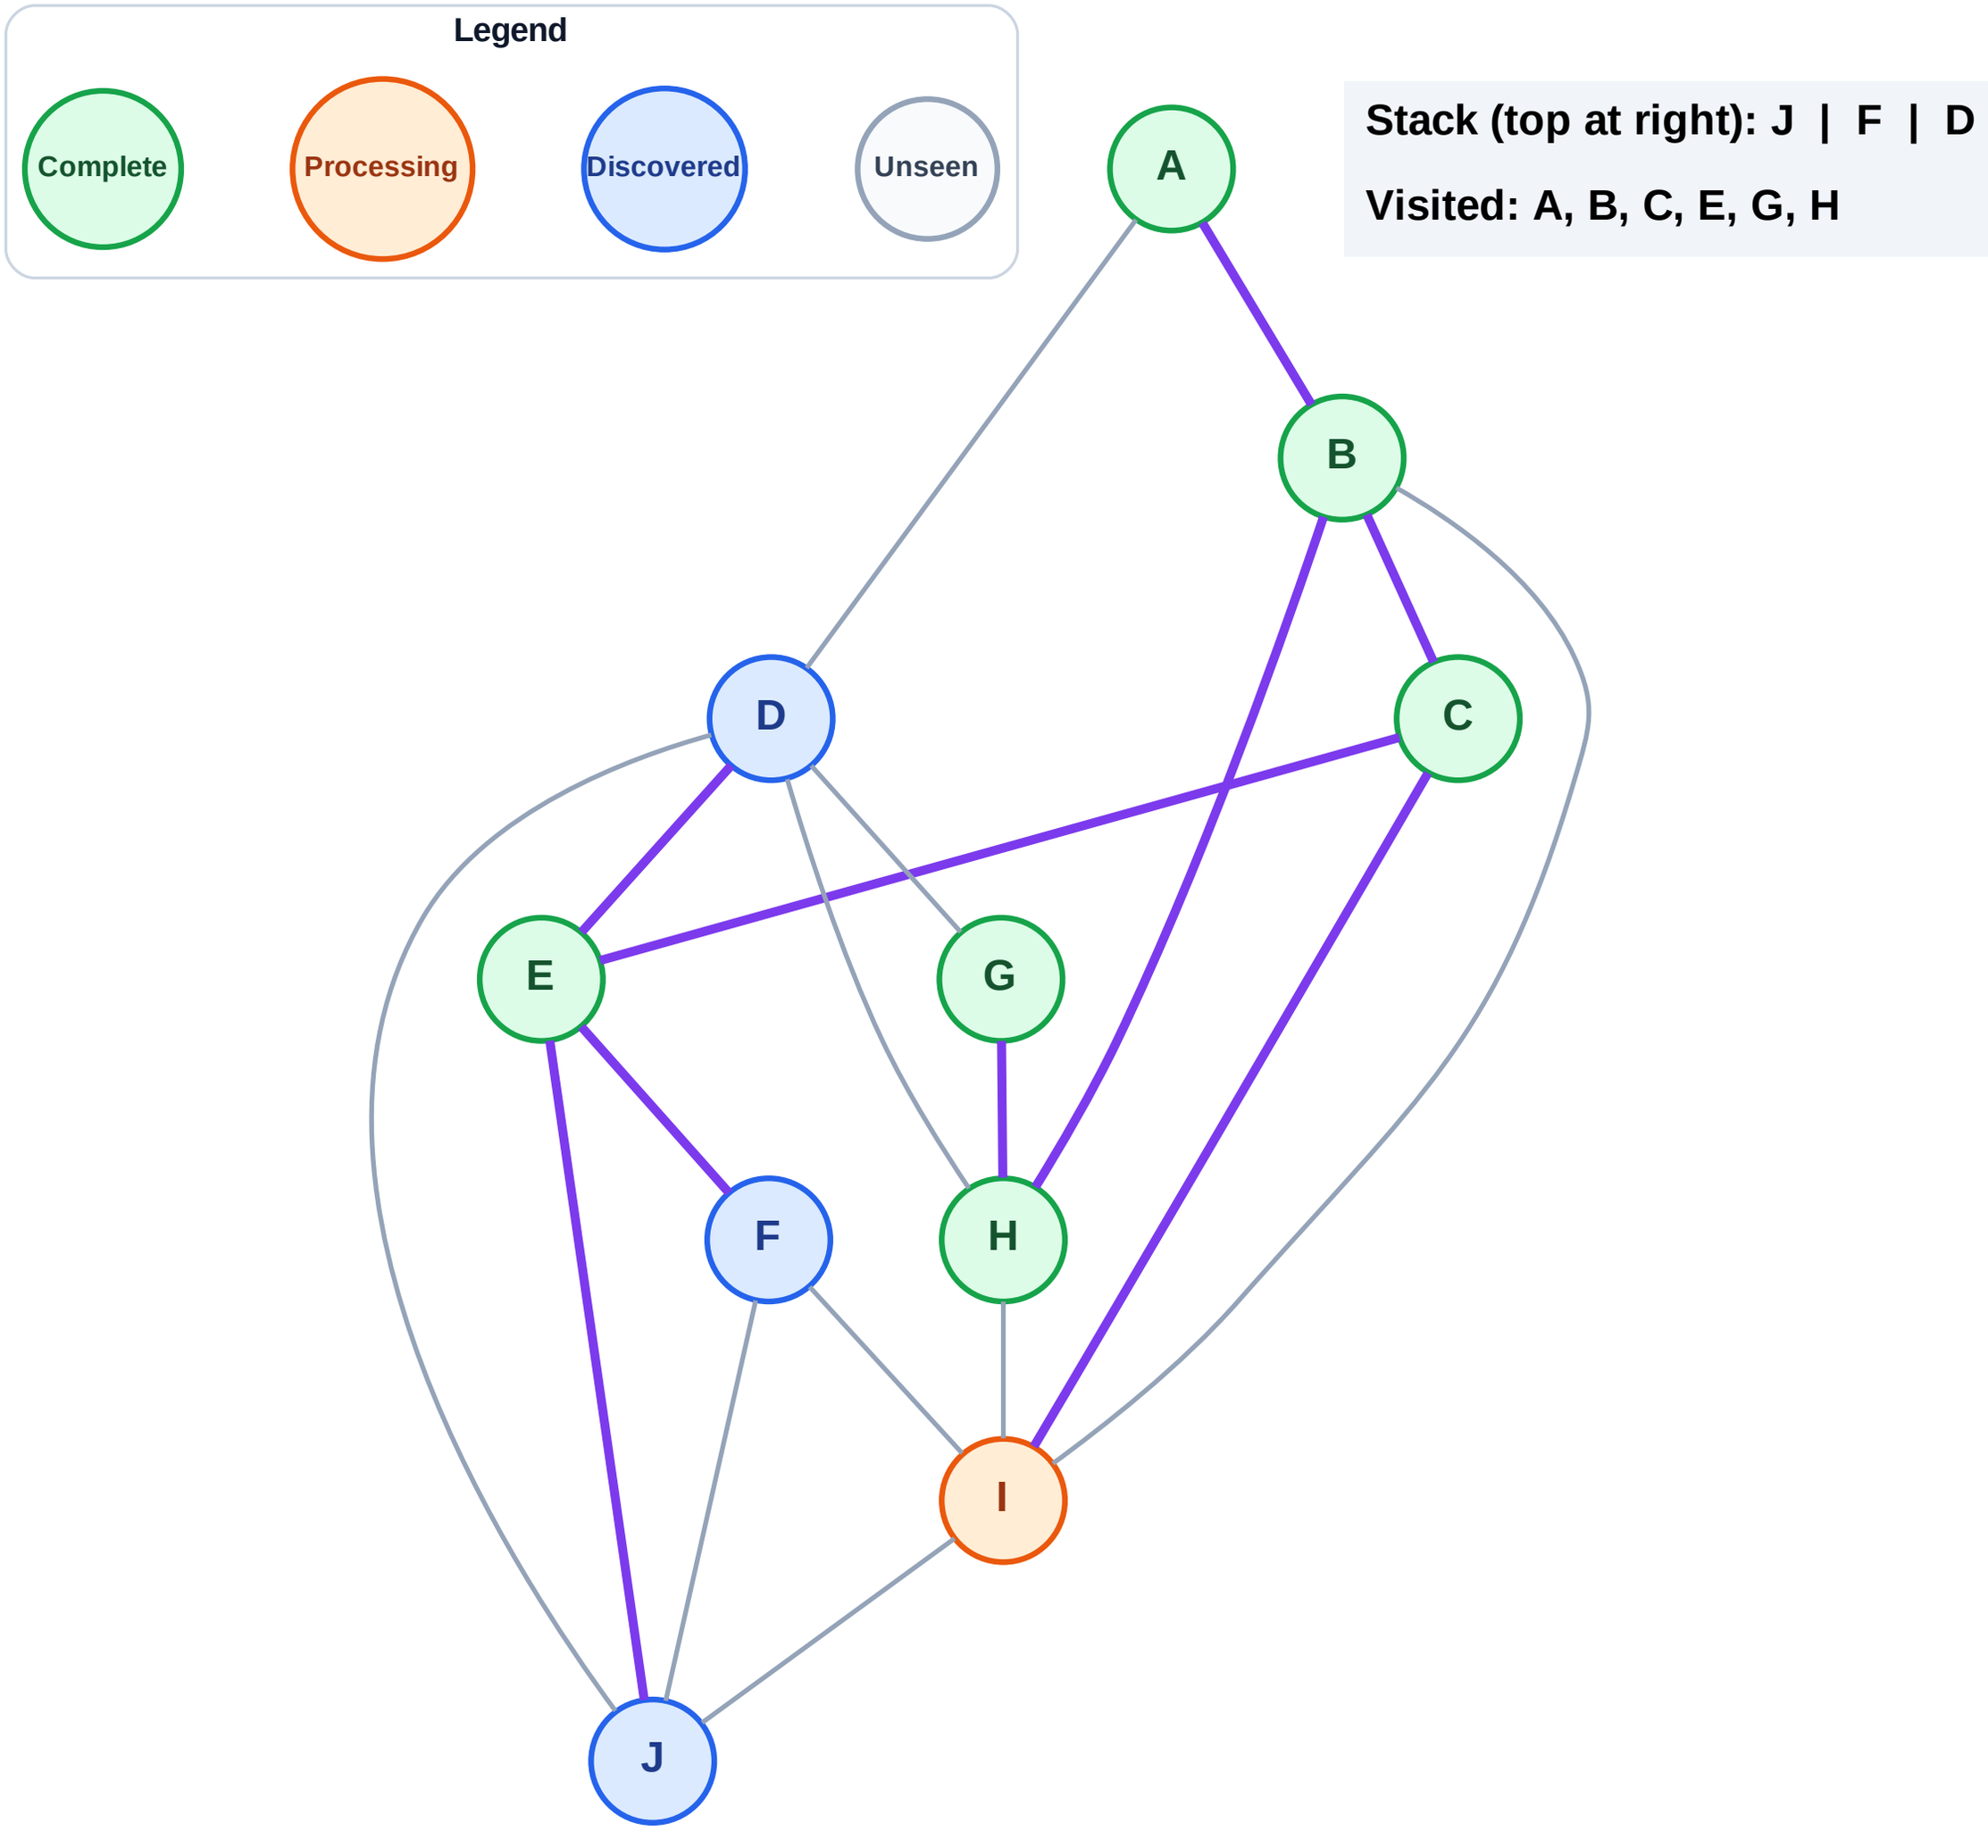


Stack (top at right): J | F | D

Visited: A, B, C, E, G, H


DFS Traversal

Step 15: No new neighbors from I

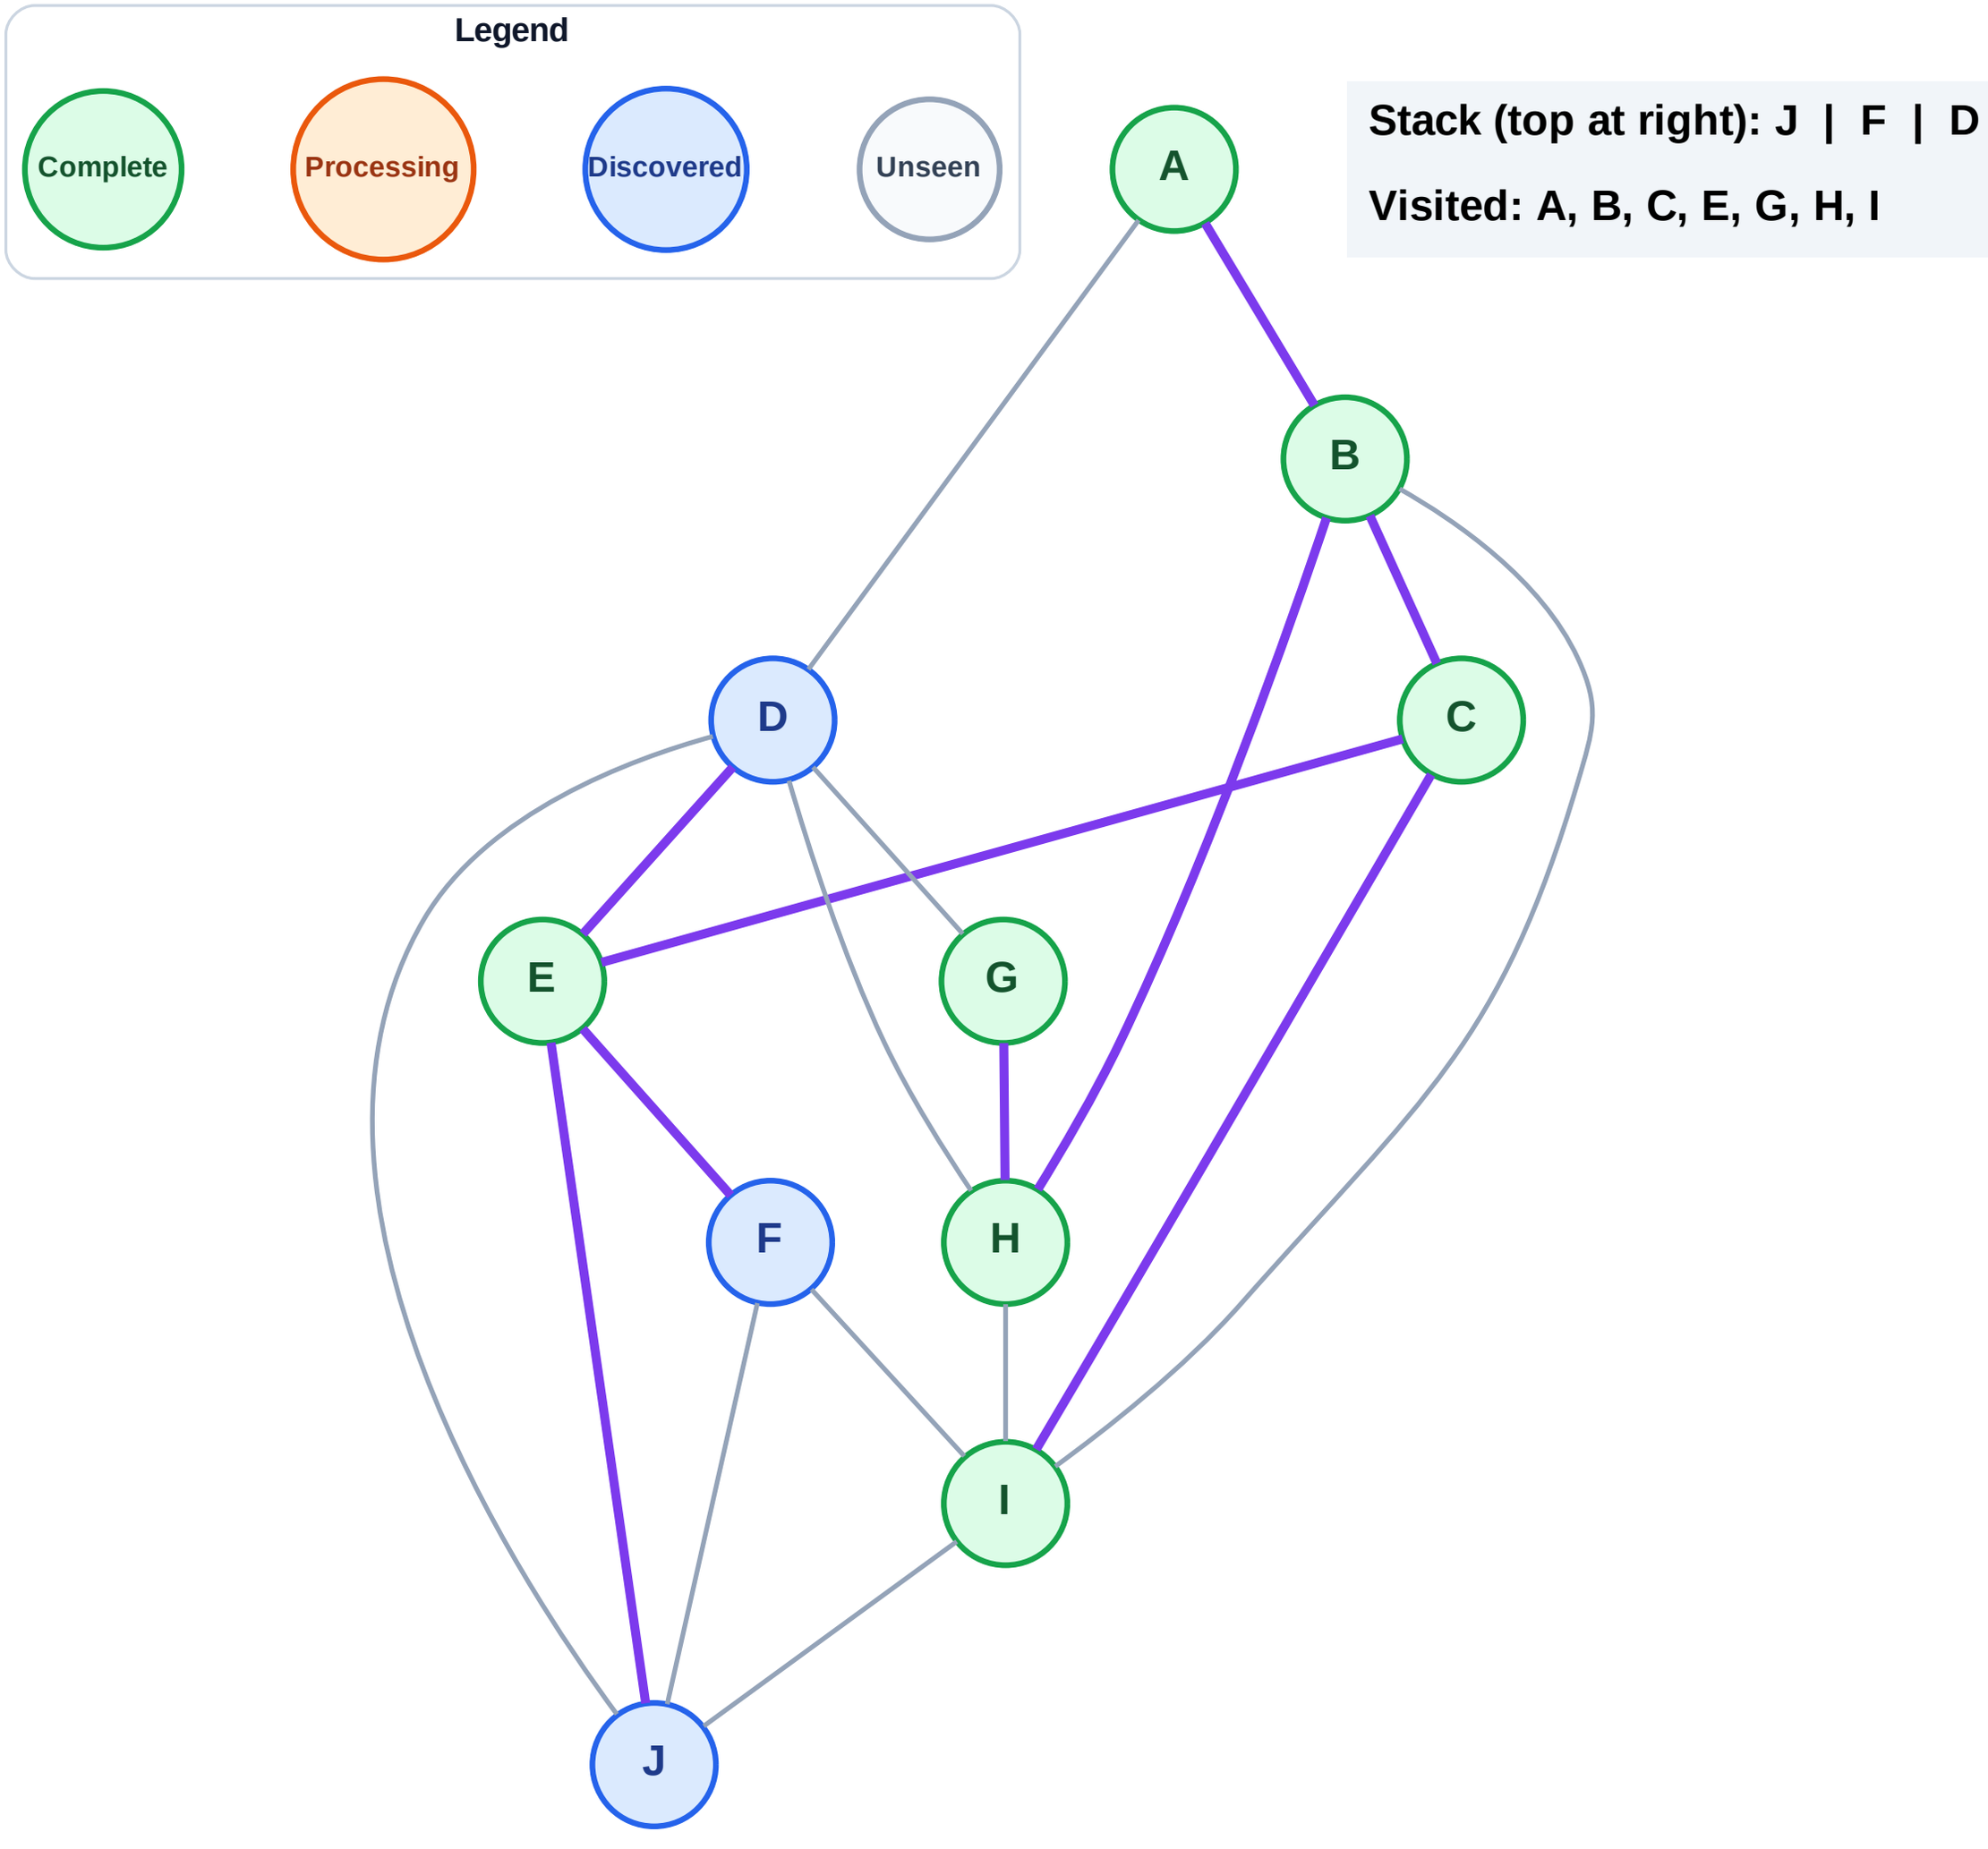


DFS Traversal

Step 16: Process node D

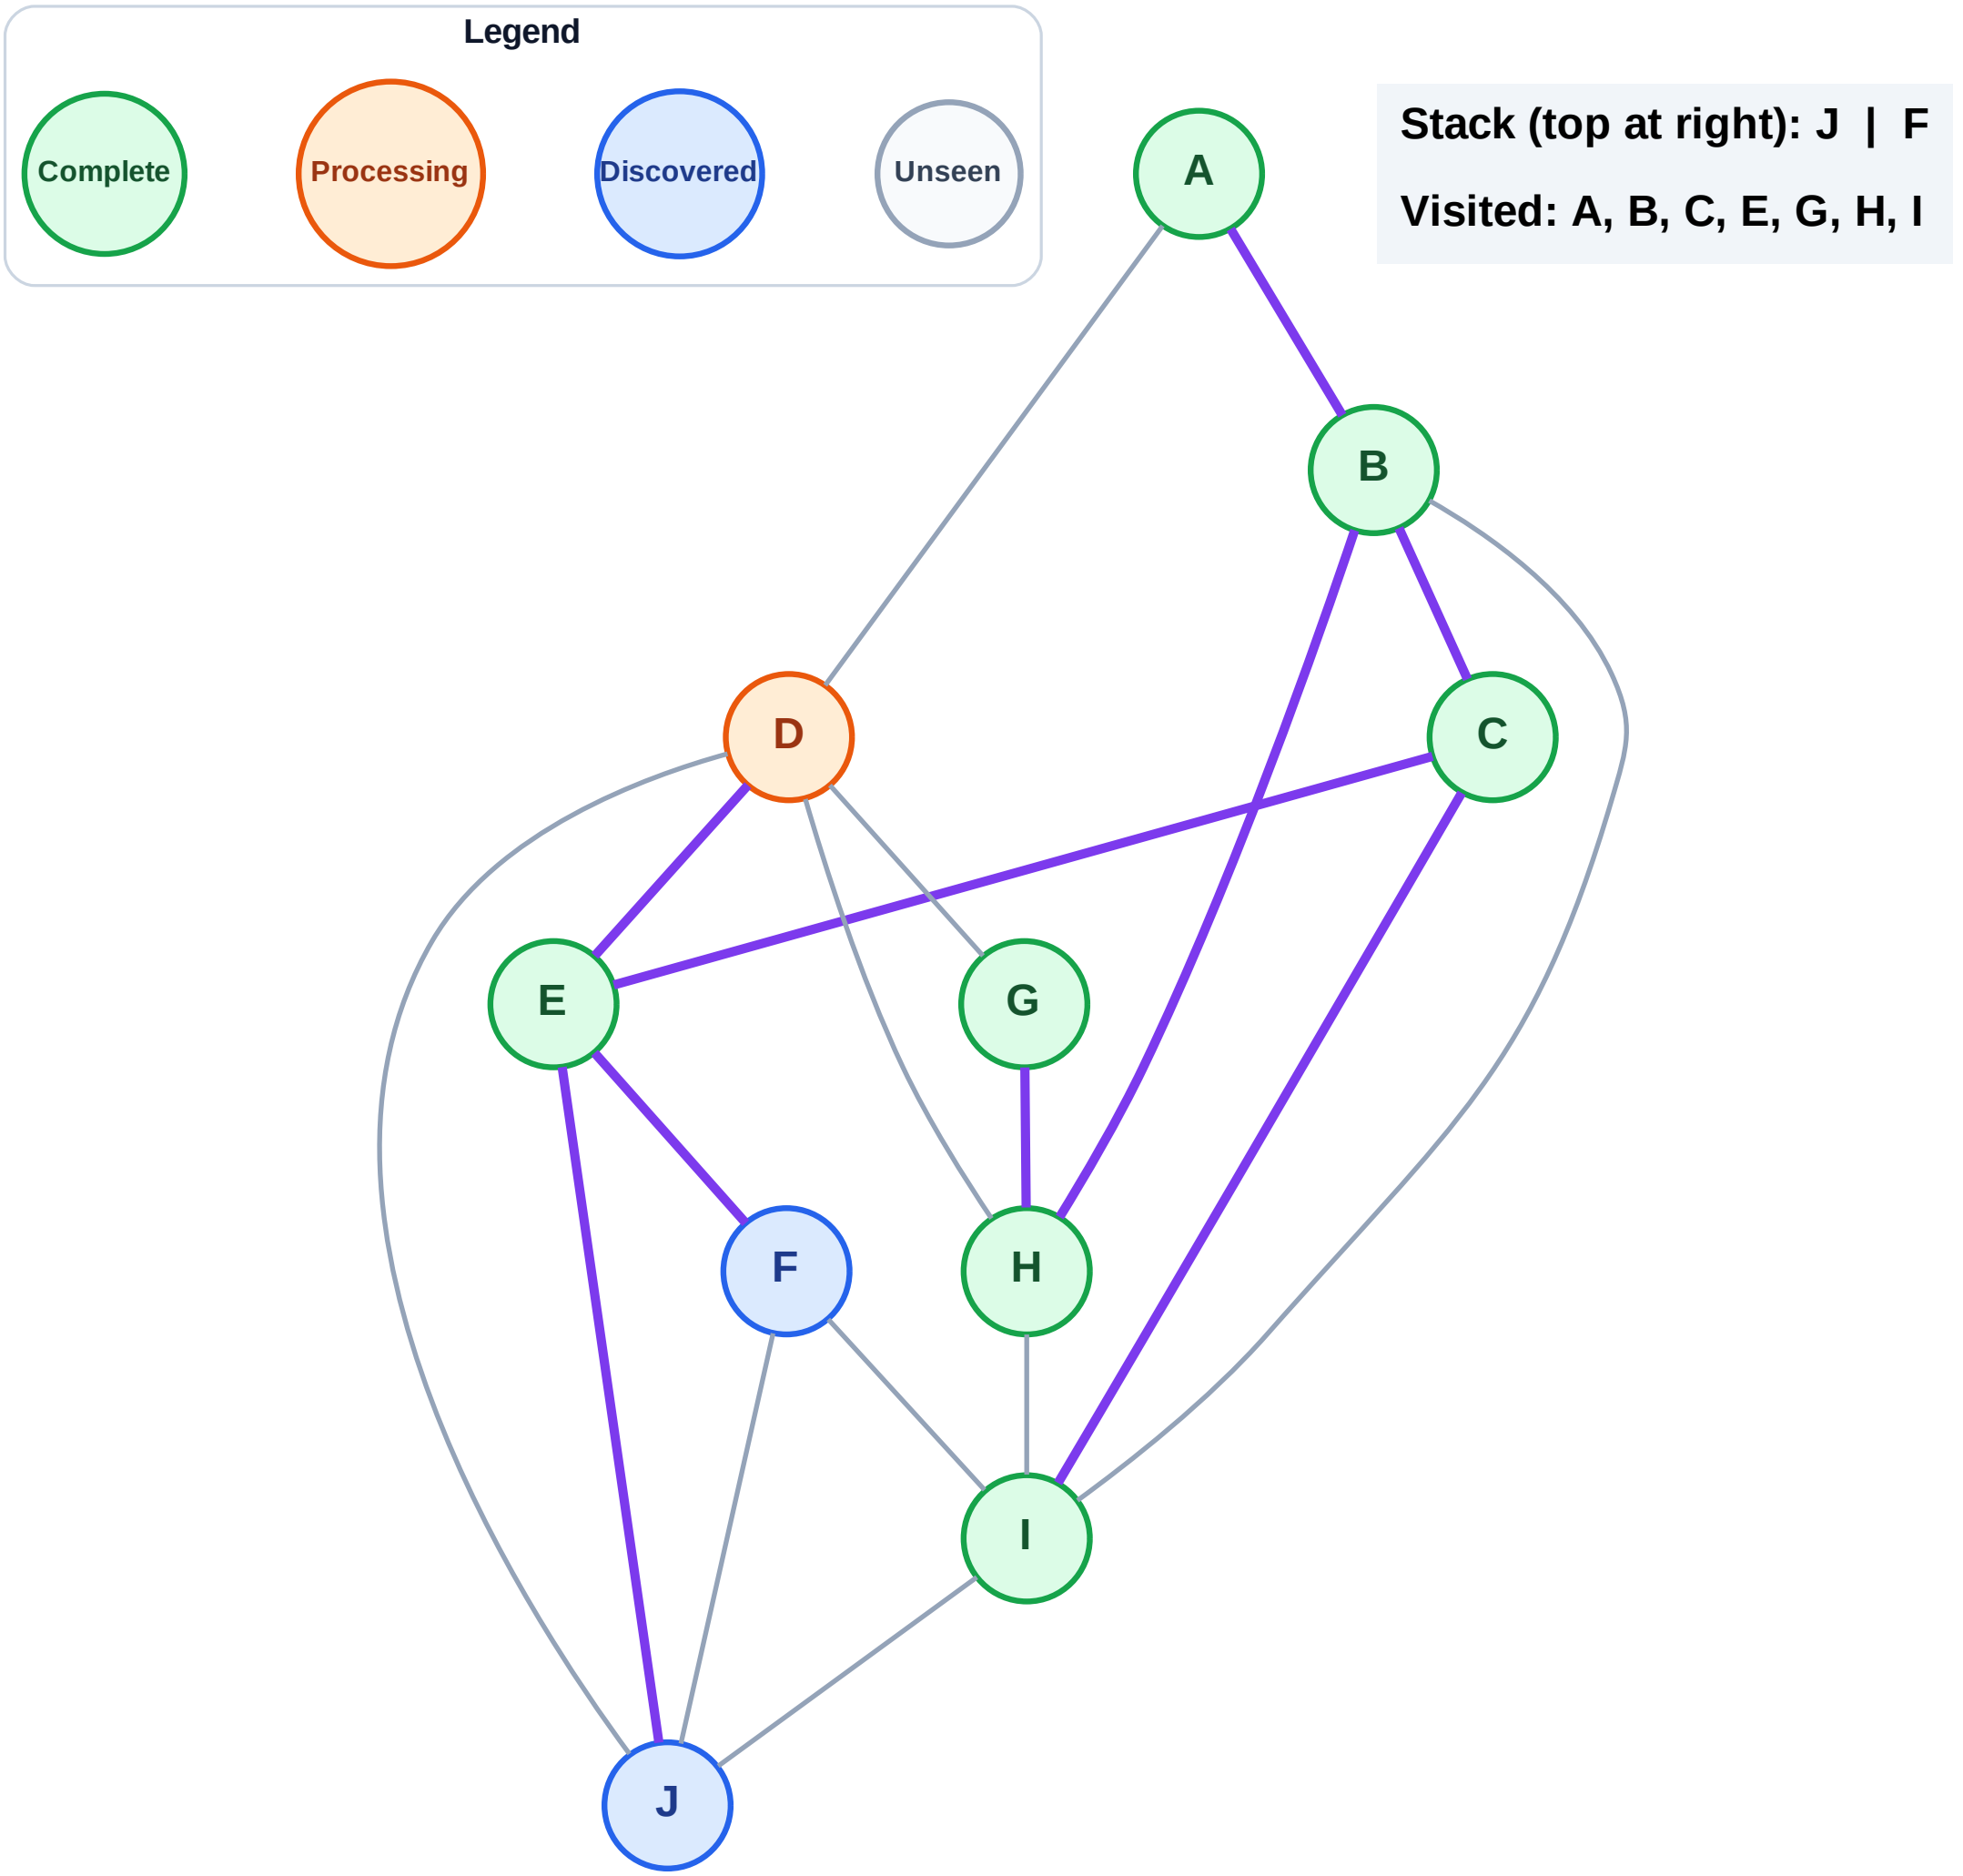

DFS Traversal

Step 17: No new neighbors from D

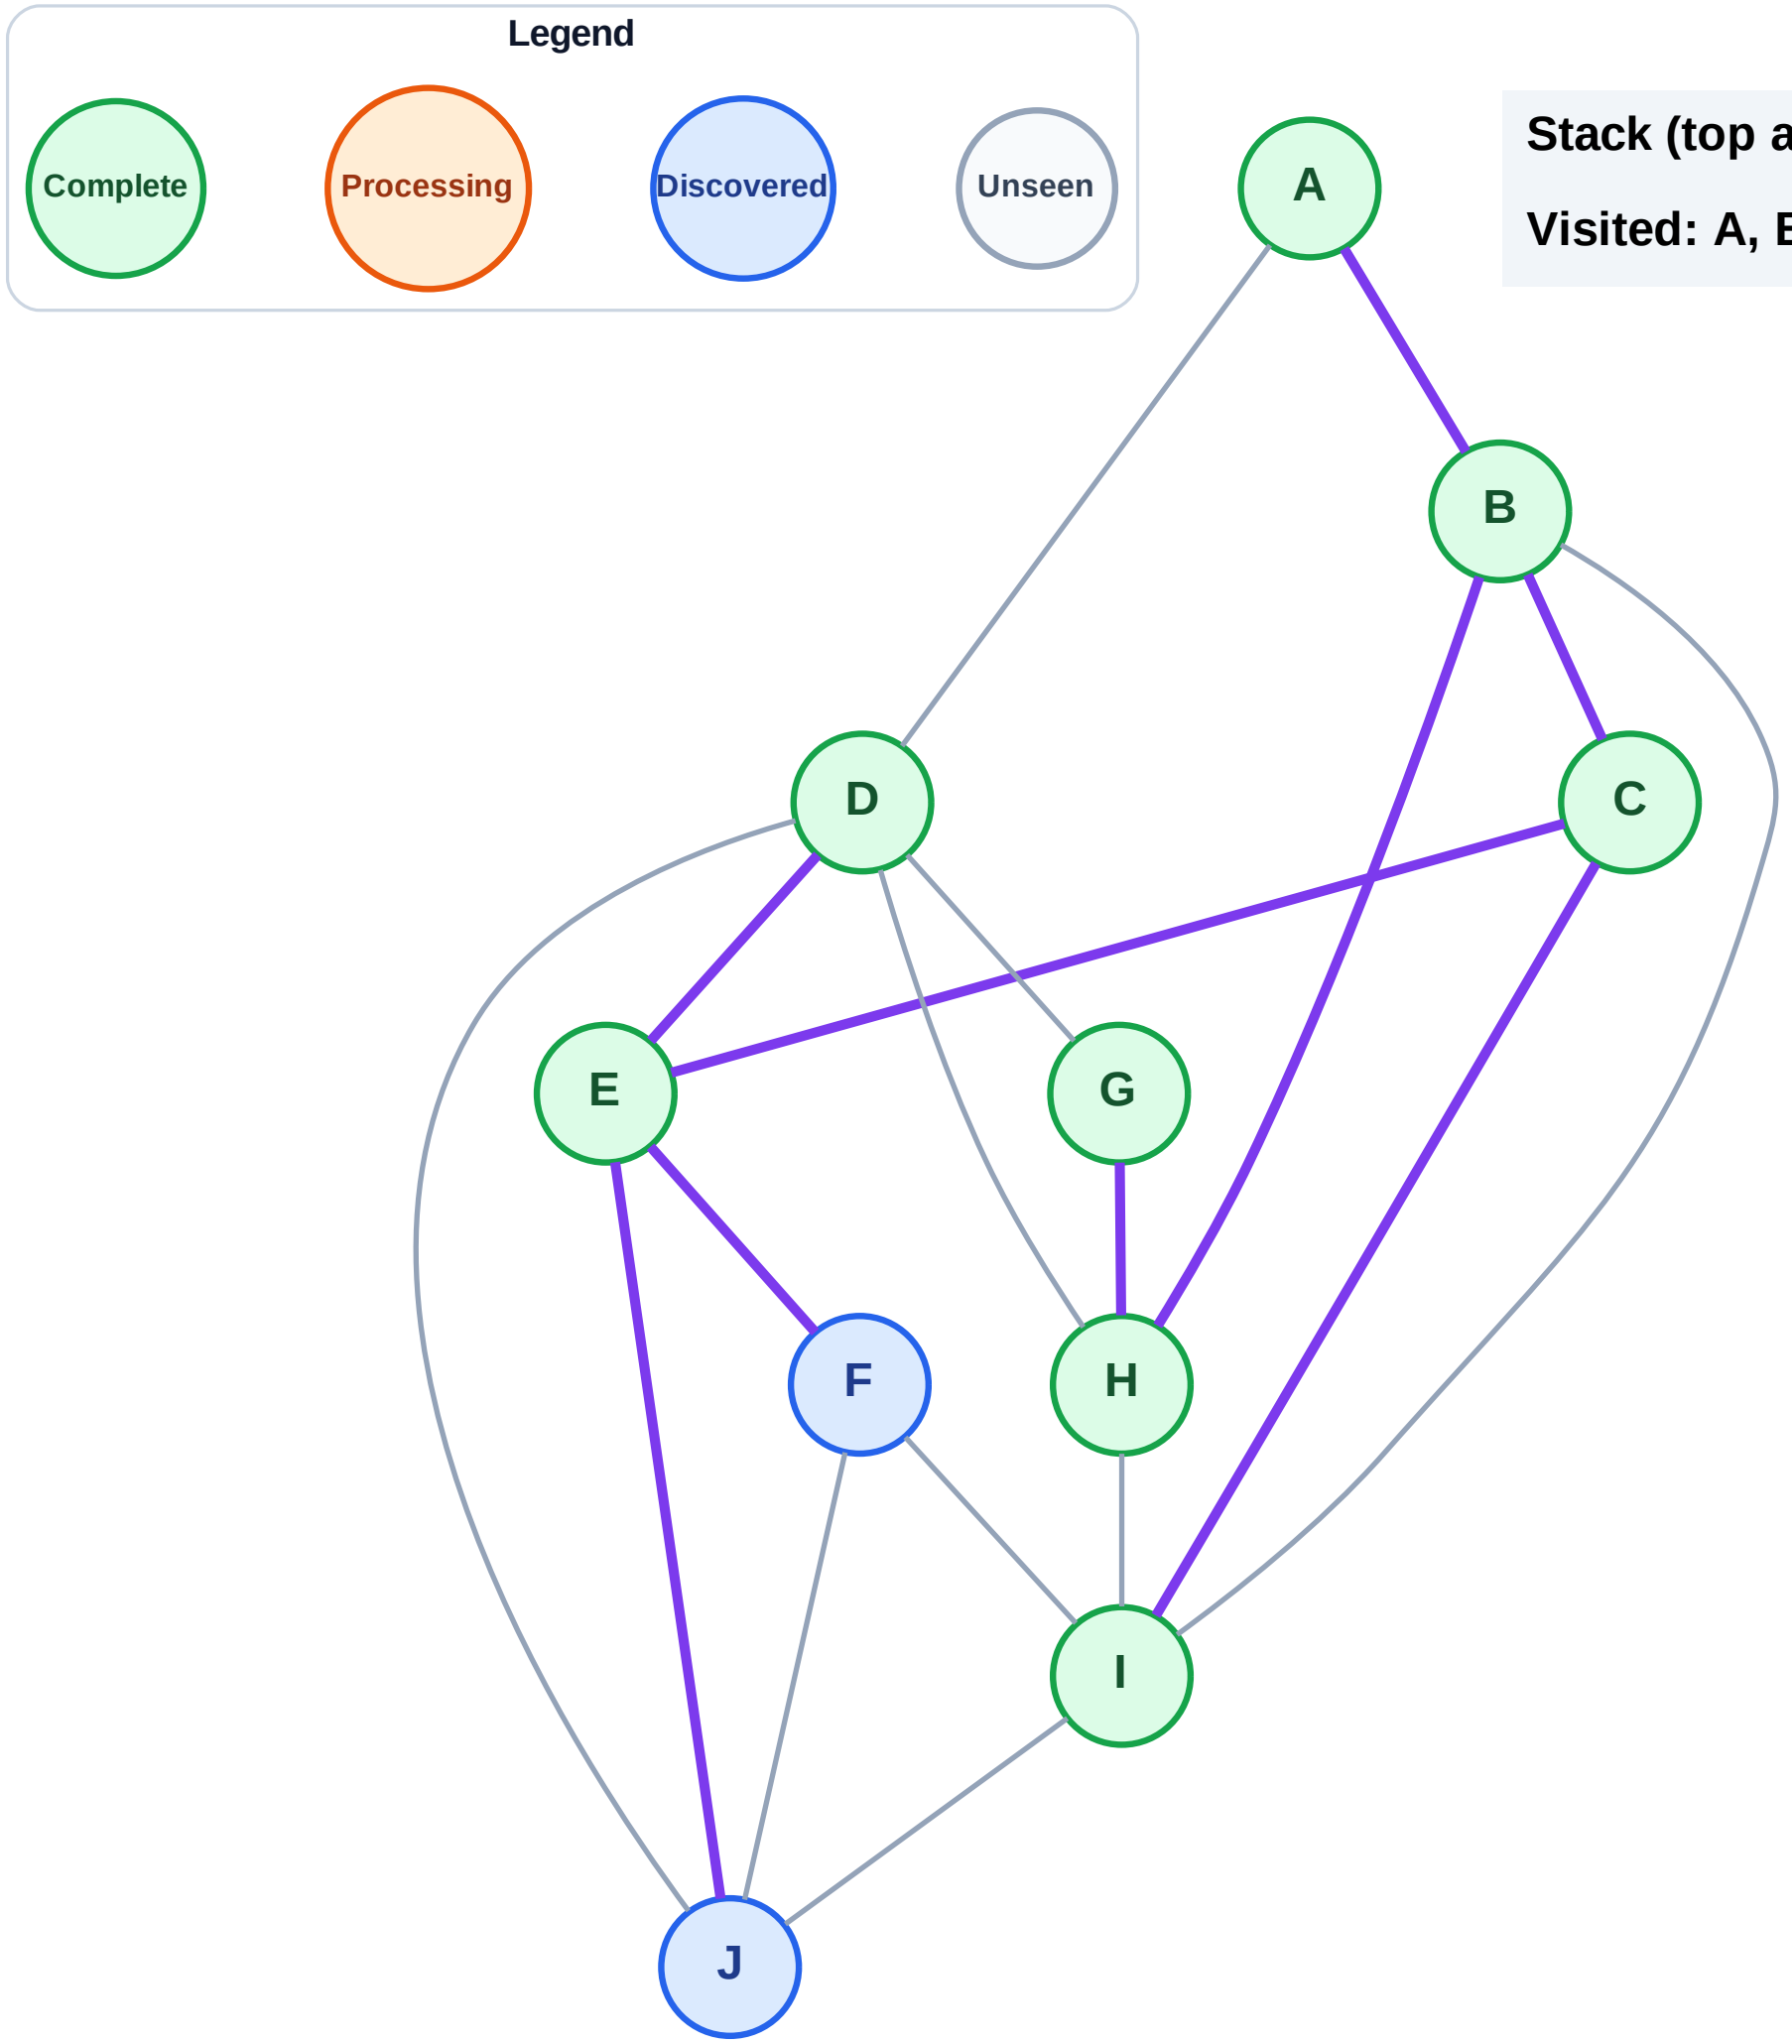


Stack (top at right): J | F

Visited: A, B, C, D, E, G, H, I

DFS Traversal

Step 18: Process node F

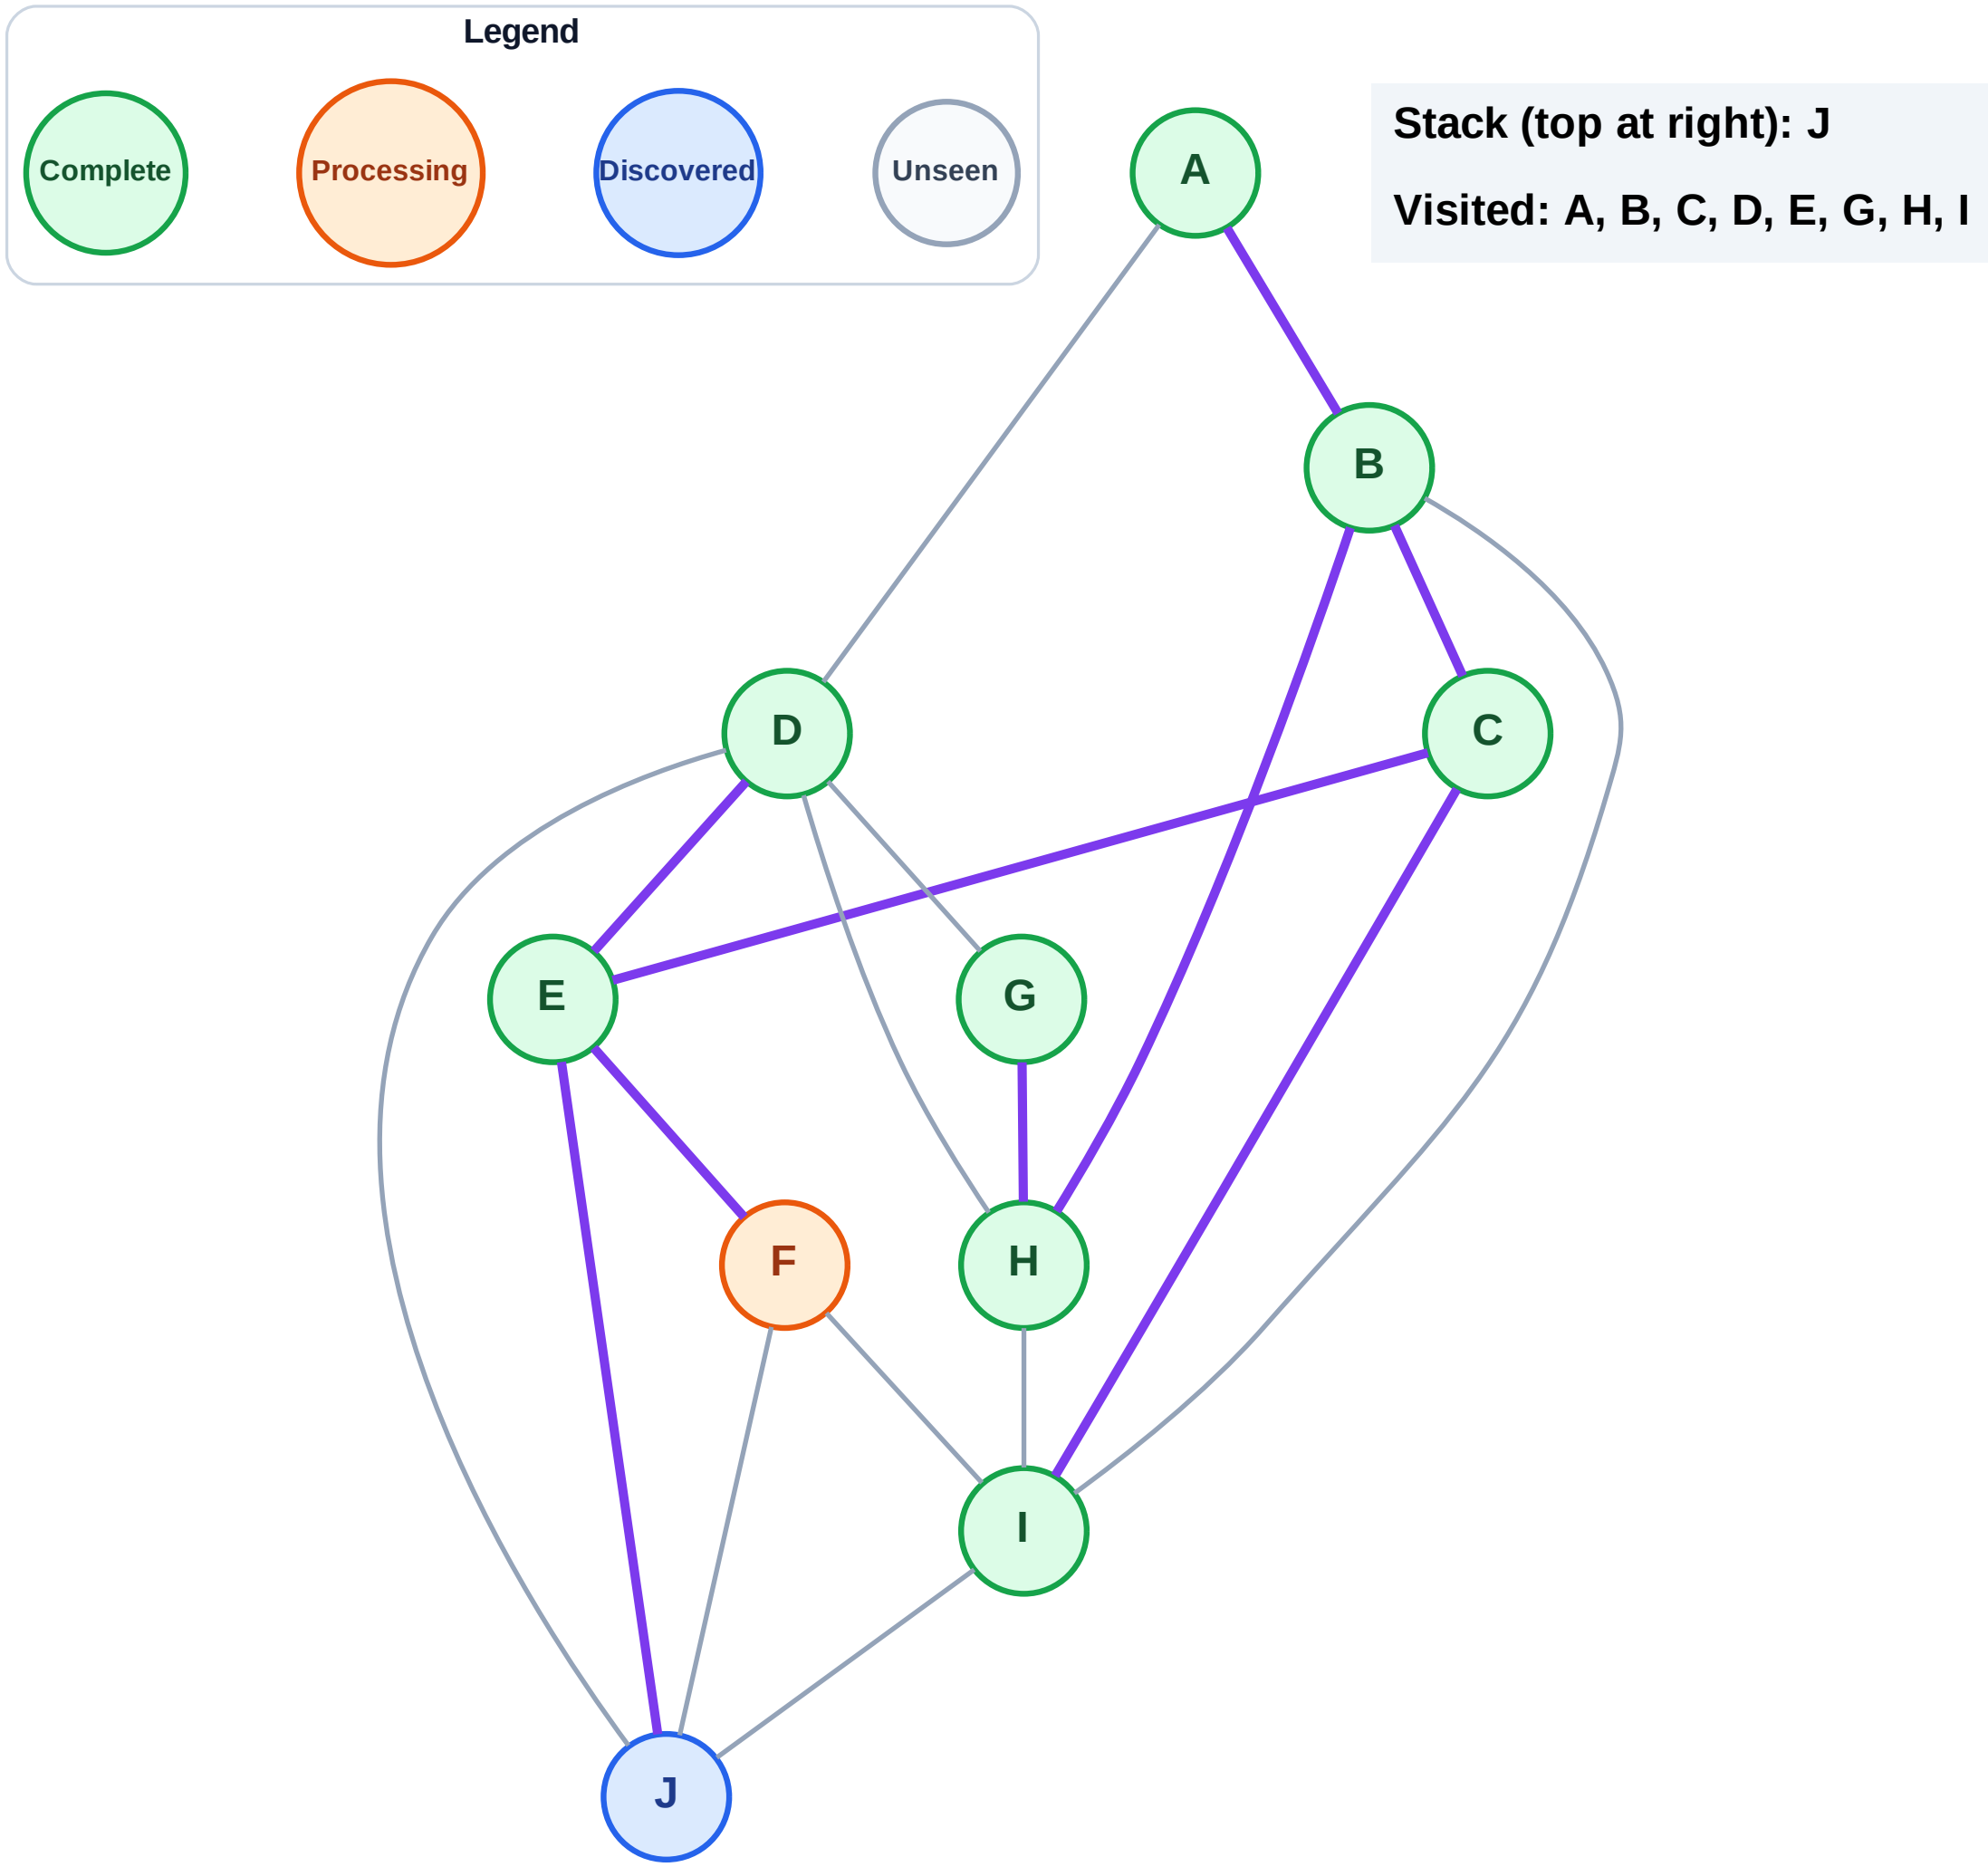


Stack (top at right): J

Visited: A, B, C, D, E, G, H, I


DFS Traversal

Step 19: No new neighbors from F

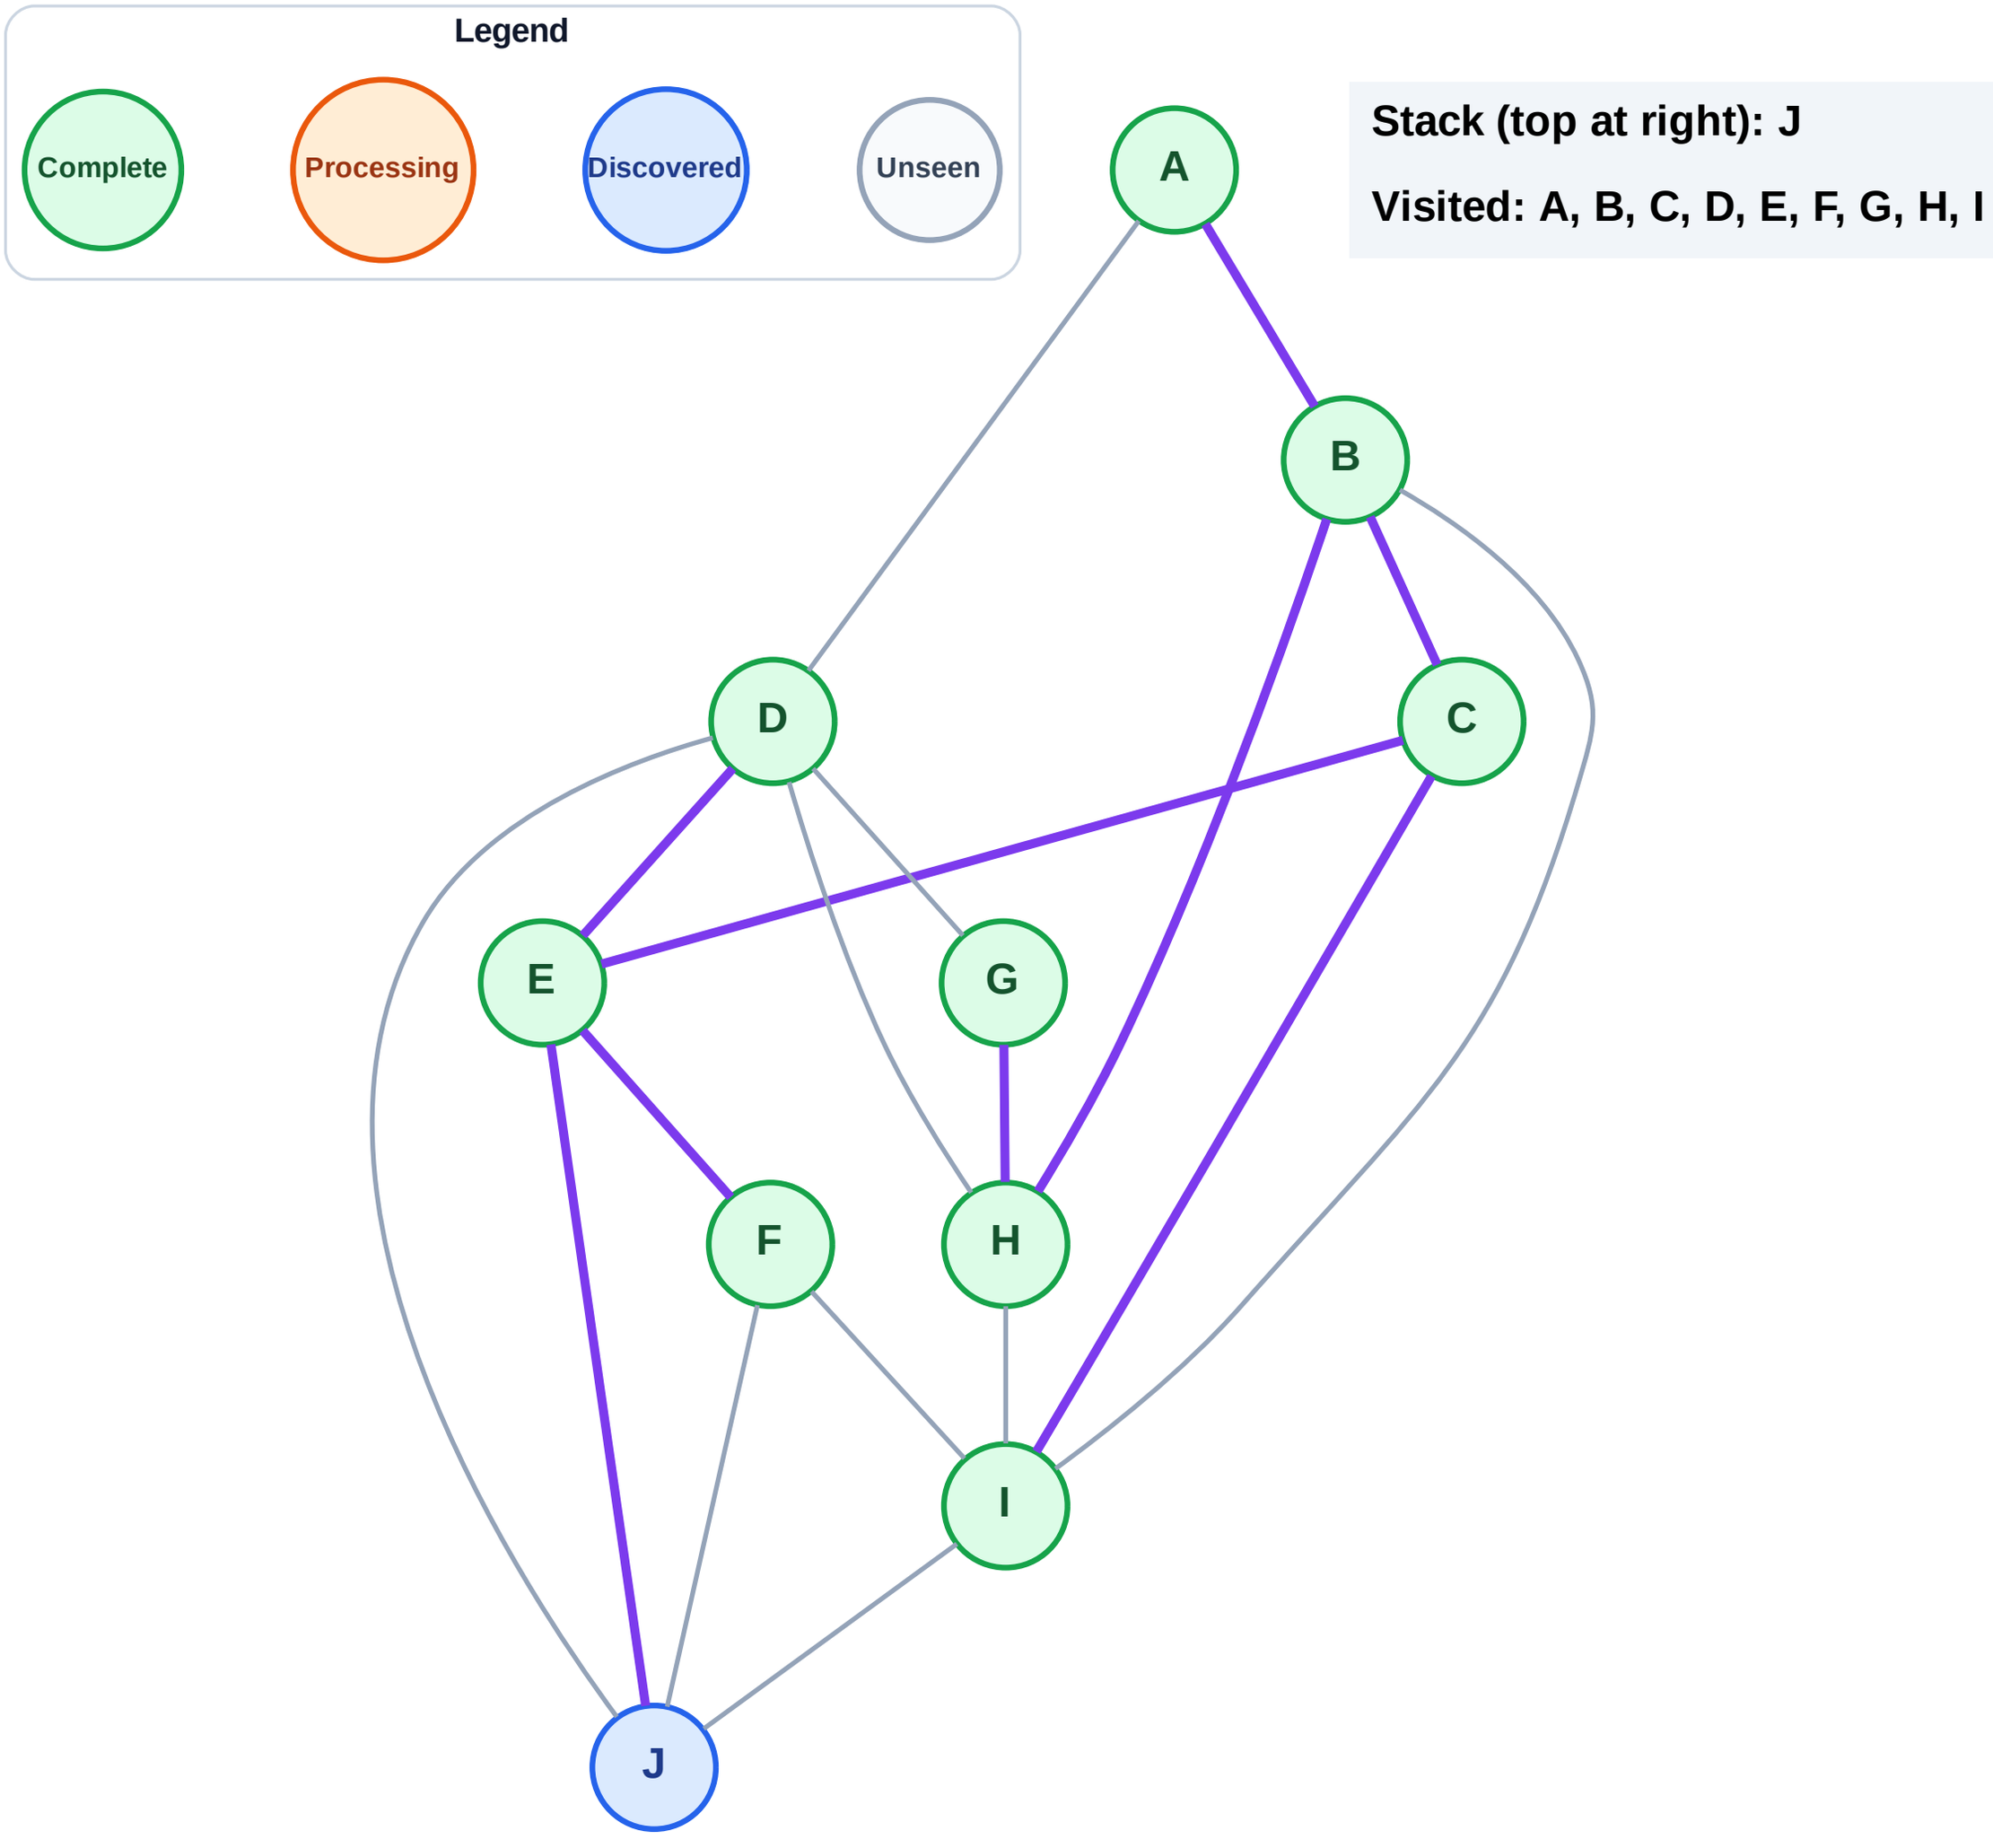

DFS Traversal

Step 20: Process node J

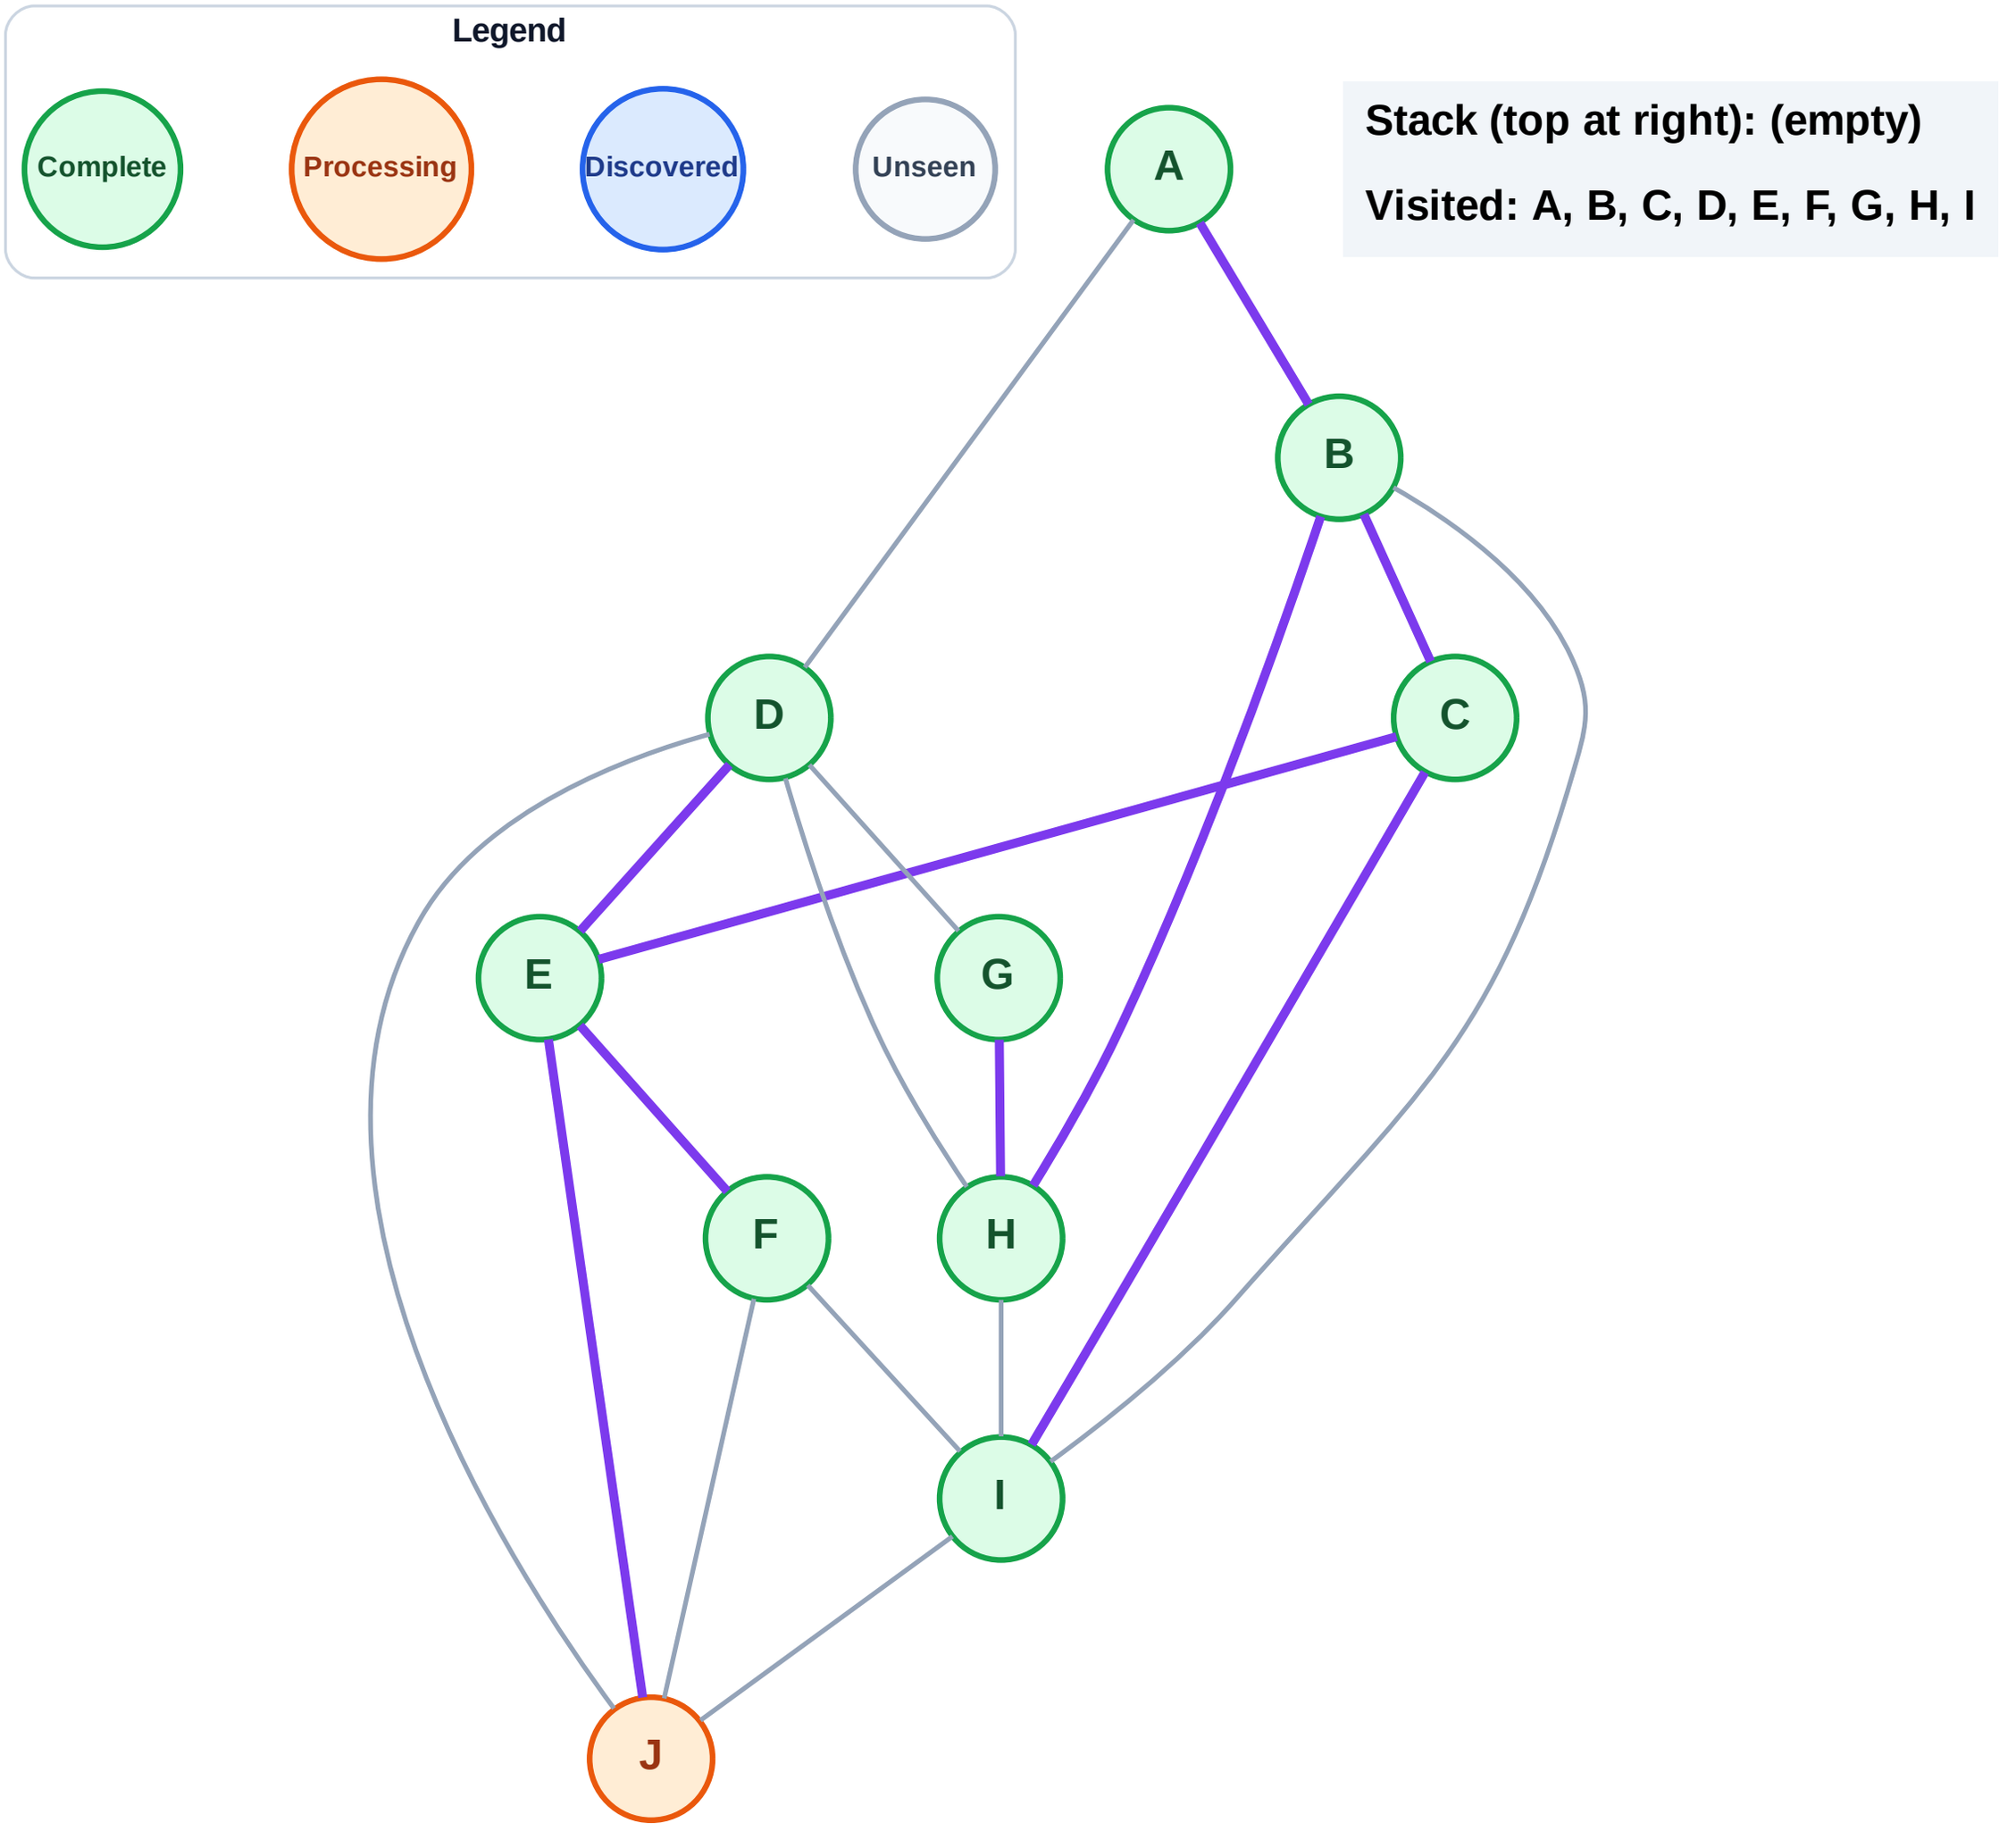


Stack (top at right): (empty)

Visited: A, B, C, D, E, F, G, H, I

DFS Traversal

Step 21: No new neighbors from J

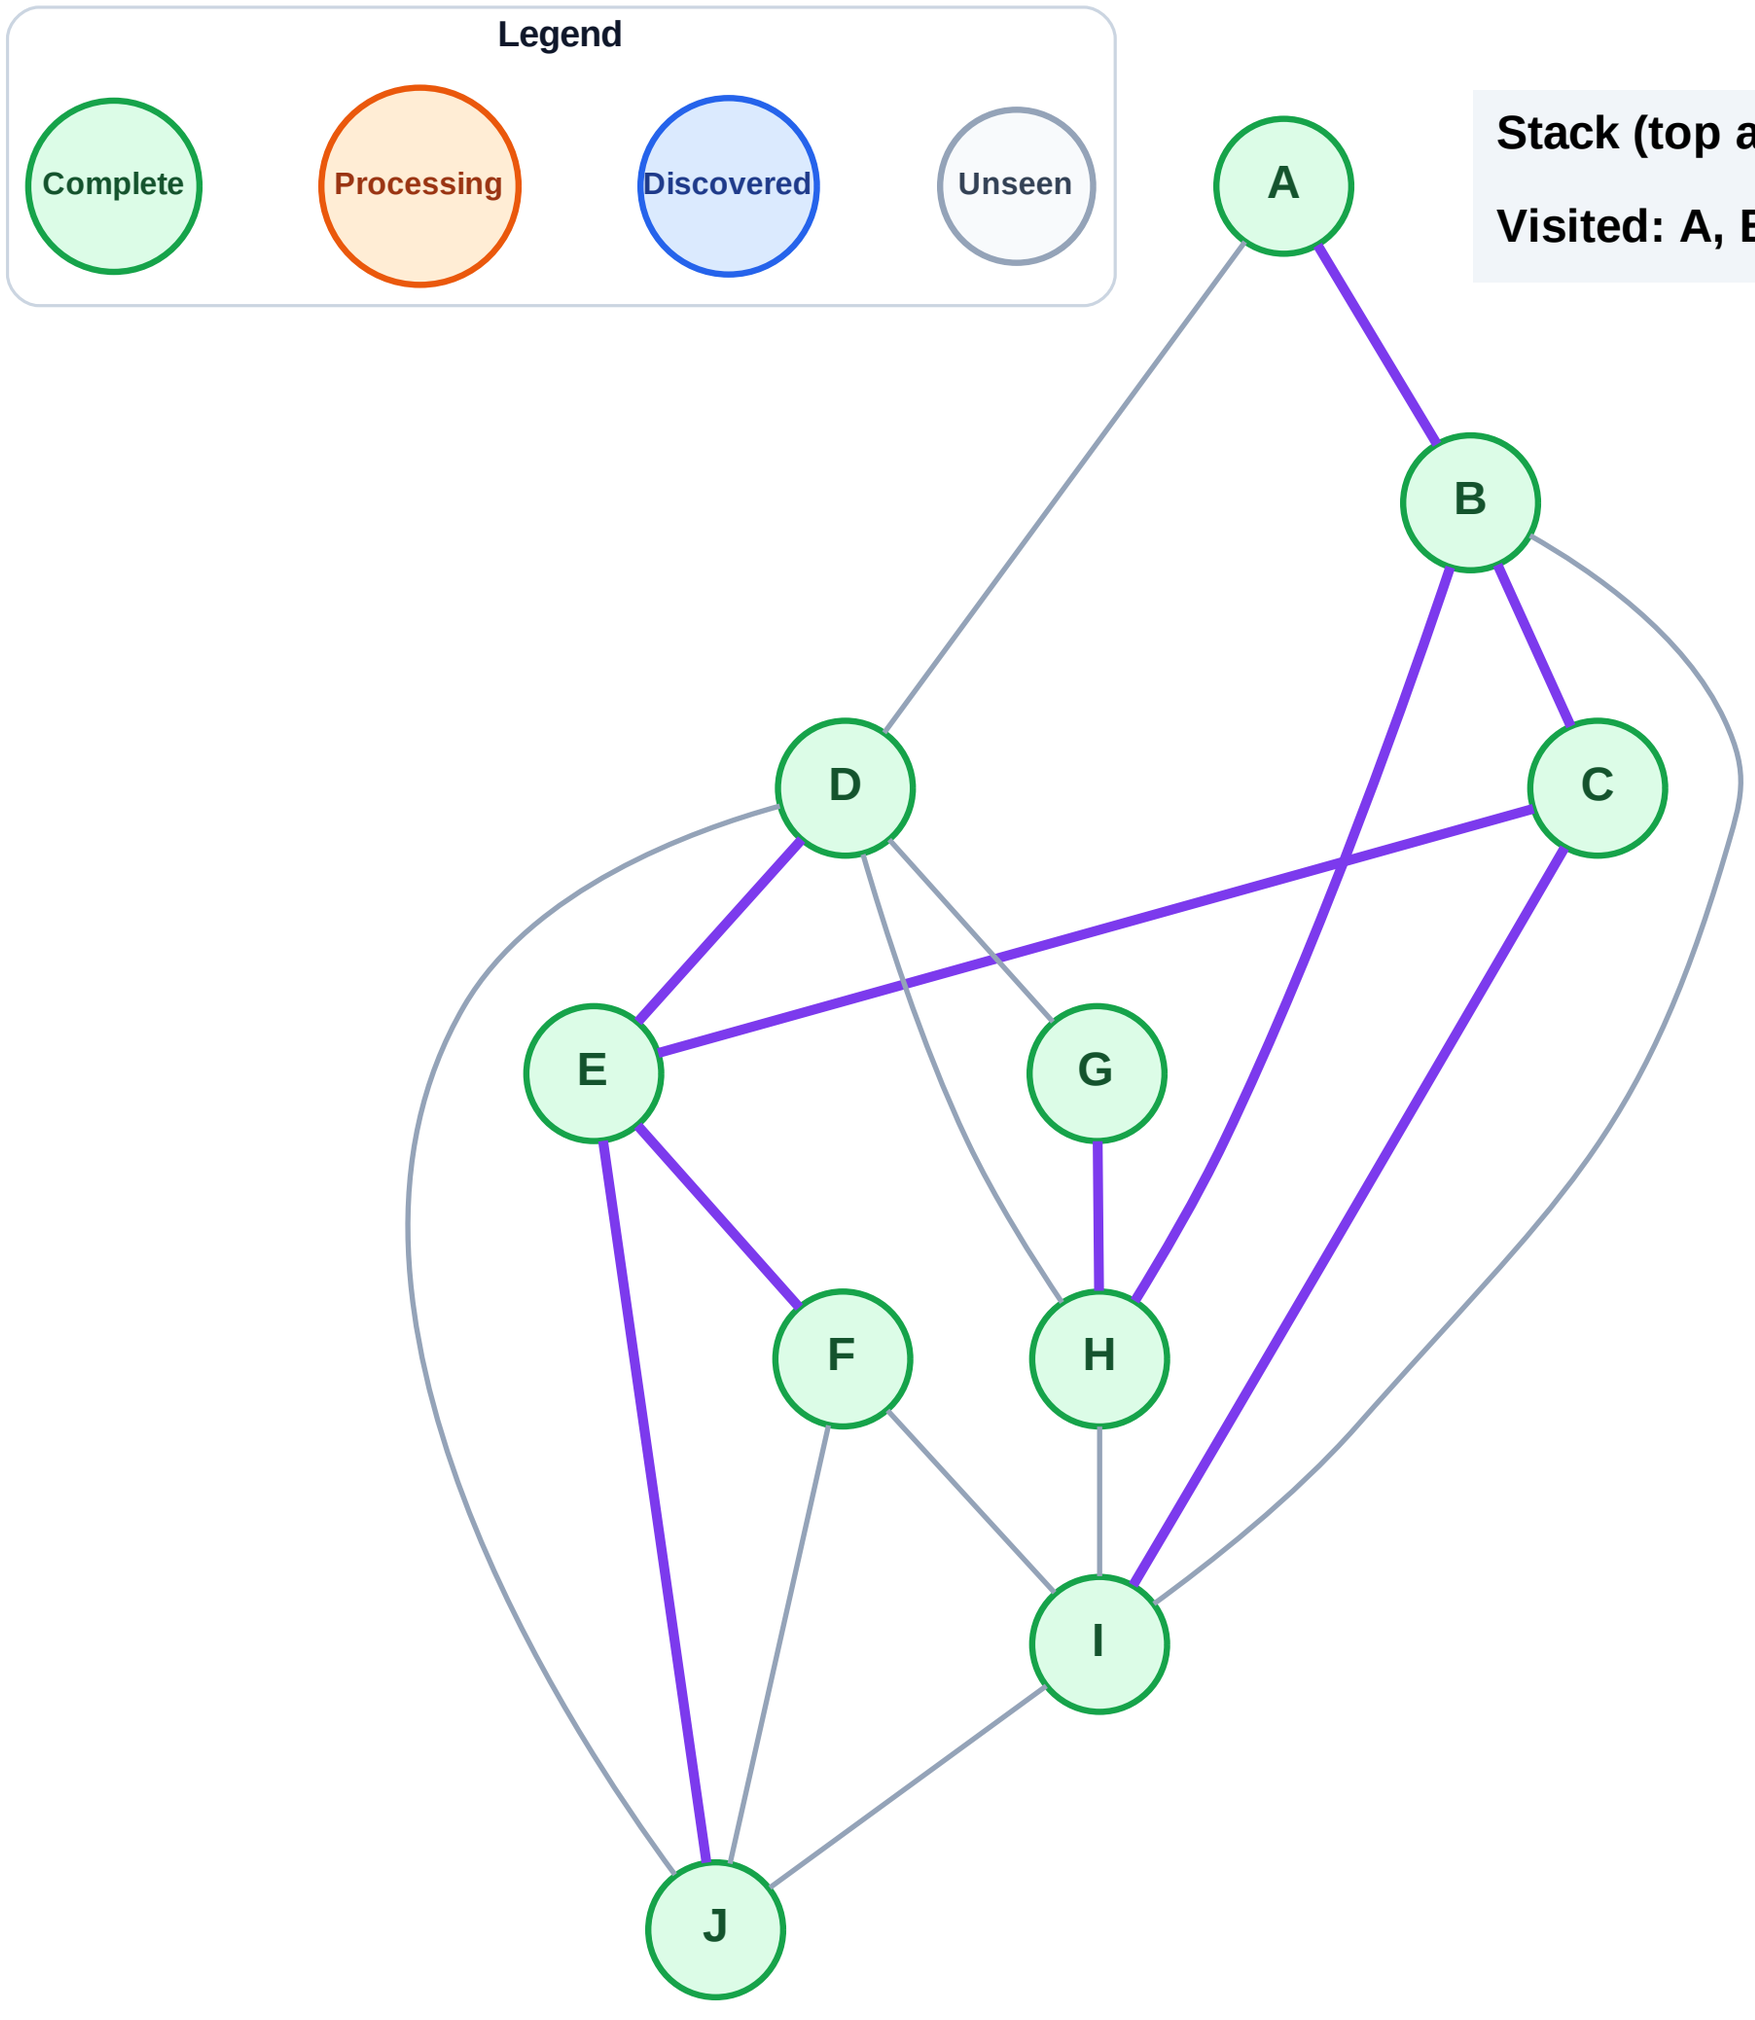

Stack (top at right): (empty)

Visited: A, B, C, D, E, F, G, H, I, J