

Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce
Department of Information Technology (B.Sc.I.T Semester V)
Dot .Net Core and Progressive Web Application Practical

Practical – IV

Roll No.: T008	Name: Aman Manoj Jha
Class: TYIT	Batch: 1
Date of Assignment: 17-07-2026	Date/Time of Submission: 17-07-2026

Part B - Program

- a) Create an ASP.NET Web Forms application using simple server controls.
- a. Design a Student Registration Form using the following ASP.NET controls:
- i. Label and TextBox to accept Student Name
 - ii. RadioButton to select Gender (Male/Female)
 - iii. DropDownList to select Course (BSc IT, BSc CS, BCA)
 - iv. CheckBox for accepting Terms & Conditions
 - v. Calendar control to select Date
 - vi. Button control to submit the form
 - vii. Label control to display the output

Algorithm:

1. Start the program.
2. Display the web form to the user.
3. Enter the Name in the TextBox.
4. Select the Gender from the RadioButtonList.
5. Select the Course from the DropDownList.
6. Accept the Terms & Conditions using the CheckBox.
7. Select a Date from the Calendar.
8. Click the Submit button.
9. Read the entered values (Name, Gender, Course, and Date).
10. Display the entered information in Label2.
11. End the program.

Code:

```
<%@ Page Title="Home Page" Language="C#" MasterPageFile="~/Site.Master"
AutoEventWireup="true" CodeFile="Default.aspx.cs" Inherits="_Default" %>
```

```
<asp:Content ID="BodyContent" ContentPlaceHolderID="MainContent"
runat="server">
```

```

<div>

    <asp:Label ID="Label1" runat="server" Text="Label"></asp:Label>
    <br />
    <asp:TextBox ID="TextBox1" runat="server"></asp:TextBox>
    <br />
    <asp:RadioButtonList ID="RadioButtonList1" runat="server">
        <asp:ListItem>Male</asp:ListItem>
        <asp:ListItem>Femal</asp:ListItem>
        <asp:ListItem>other</asp:ListItem>
    </asp:RadioButtonList>
    <asp:DropDownList ID="DropDownList1" runat="server">
        <asp:ListItem>B.s.c.it</asp:ListItem>
        <asp:ListItem>B.s.c.cs</asp:ListItem>
        <asp:ListItem>BCA</asp:ListItem>
    </asp:DropDownList>
    <br />
    <asp:CheckBoxList ID="CheckBoxList1" runat="server">
        <asp:ListItem>i accepting Terms & amp; Conditions</asp:ListItem>
    </asp:CheckBoxList>
    <asp:Calendar ID="Calendar1" runat="server"></asp:Calendar>
    <br />
    <asp:Button ID="Button1" runat="server" Text="Submit" />
    <br />
    <br />
    <asp:Label ID="Label2" runat="server" Text="Label"></asp:Label>

</div>

```

```

</asp:Content>

```

Console.aspx

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

public partial class _Default : Page
{

```

```

protected void Page_Load(object sender, EventArgs e)
{
    string name = TextBox1.Text;
    string gender = RadioButtonList1.Text;
    string course = Calendar1.SelectedDate.ToString();
    Label2.Text = name + "<b/> " + gender + "<br/>";
}
}

```

First +second=ctrl s

Default2.aspx

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

```

```

public partial class Default2 : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {

    }

    protected void TextBox2_TextChanged(object sender, EventArgs e)
    {

    }
}

```

Default.aspx

```

<%@ Page Title="Home Page" Language="C#" MasterPageFile="~/Site.Master"
AutoEventWireup="true" CodeFile="Default.aspx.cs" Inherits="_Default" %>

```

```

<asp:Content ID="BodyContent" ContentPlaceHolderID="MainContent"
runat="server">

```

```

    <div class="jumbotron">
        <h1>ASP.NET</h1>
        <p class="lead">ASP.NET is a free web framework for building great Web sites
and Web applications using HTML, CSS, and JavaScript.</p>

```

```
<p><a href="http://www.asp.net" class="btn btn-primary btn-lg">Learn more
&raquo;</a></p>
</div>
```

```
<div class="row">
  <div class="col-md-4">
    <h2>Getting started</h2>
    <p>
      ASP.NET Web Forms lets you build dynamic websites using a familiar drag-
      and-drop, event-driven model.
      A design surface and hundreds of controls and components let you rapidly build
      sophisticated, powerful UI-driven sites with data access.
```

```
</p>
    <p>
      <a class="btn btn-default"
href="https://go.microsoft.com/fwlink/?LinkId=301948">Learn more &raquo;</a>
    </p>
  </div>
```

```
<div class="col-md-4">
  <h2>Get more libraries</h2>
  <p>
    NuGet is a free Visual Studio extension that makes it easy to add, remove, and
    update libraries and tools in Visual Studio projects.
```

```
</p>
  <p>
    <a class="btn btn-default"
href="https://go.microsoft.com/fwlink/?LinkId=301949">Learn more &raquo;</a>
  </p>
</div>
```

```
<div class="col-md-4">
  <h2>Web Hosting</h2>
  <p>
    You can easily find a web hosting company that offers the right mix of
    features and price for your applications.
```

```
</p>
  <p>
    <a class="btn btn-default"
href="https://go.microsoft.com/fwlink/?LinkId=301950">Learn more &raquo;</a>
  </p>
</div>
</asp:Content>
```

Output:

MainContent(Custom)div

Label

☐ Male

☐ Femal

☐ other

B.s.c.it

☐ i accepting Terms & Conditions

< July 2026 >

Mon	Tue	Wed	Thu	Fri	Sat	Sun
29	30	1	2	3	4	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30	31	1	2
3	4	5	6	7	8	9

Submit

Label

b) Create a Registration form to demonstrate use of various Validation controls.

Algorithm:

1. Start the program.
2. Display the validation form.
3. Enter the Name.
4. Check if the Name field is empty.
 - If empty, display "Name can't be empty".
5. Enter the Age.
6. Check if the age is between 18 and 99.
 - If not, display "Age should be between 18 to 99".
7. Enter the Password.
8. Enter the Confirm Password.
9. Compare both passwords.
 - If they do not match, display "Invalid Password".
10. If all validations are successful, allow the form to be submitted.
11. End the program.

Code:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Validation.aspx.cs"
Inherits="Validation" %>
```

```
<!DOCTYPE html>
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head runat="server">
```

```
<title></title>
```

```
</head>
```

```
<body>
```

```
<form id="form1" runat="server" aria-readonly="False">
```

```
    Name :<asp:TextBox ID="TextBox1" runat="server"></asp:TextBox>
```

```
    <asp:RequiredFieldValidator ID="RequiredFieldValidator1" runat="server"
ControlToValidate="TextBox1" ErrorMessage="Name can't be
empty"></asp:RequiredFieldValidator>
```

```
    <br />
```

```
    <br />
```

```
    Age :<asp:TextBox ID="TextBox2" runat="server"></asp:TextBox>
```

```
    &nbsp;<asp:RangeValidator ID="RangeValidator1" runat="server"
ControlToValidate="TextBox2" ErrorMessage="Age should be between 18 to
99"></asp:RangeValidator>
```

```
    <br />
```

```
    <br />
```

```
    Password :<asp:TextBox ID="TextBox3" runat="server"
TextMode="Password"></asp:TextBox>
```

```
    <br />
```

```
    <br />
```

```
    Confirm Password :<asp:TextBox ID="TextBox4" runat="server"
TextMode="Password"></asp:TextBox>
```

```
    &nbsp;<
```

```
    <asp:CompareValidator ID="CompareValidator2" runat="server"
ControlToCompare="TextBox3" ControlToValidate="TextBox4" ErrorMessage="invalid
Password"></asp:CompareValidator>
```

```
    <br />
```

```
    <br />
```

```
    <asp:Button ID="Button1" runat="server" Text="Button" />
```


```
    <br />
```

```
</form>
```

```
</body>
```

```
</html>
```

Output:

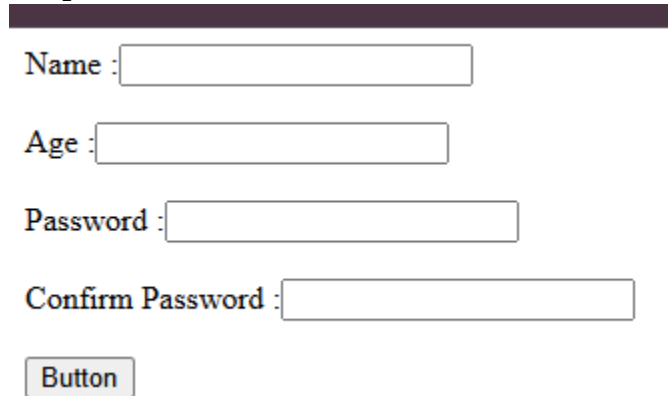

The screenshot shows a web form with a dark purple header bar. Below the header, there are four text input fields arranged vertically. The first field is labeled 'Name :', the second 'Age :', the third 'Password :', and the fourth 'Confirm Password :'. Each label is followed by a rectangular text box. Below these fields is a button labeled 'Button'.

c) Create Web Form to demonstrate use of Adrotator Control.

Algorithm:

1. Start the program.
2. Display the web form.
3. Enter the Name.
4. Check if the Name field is empty.
 - If empty, display "Name can't be empty".
5. Enter the Age.
6. Check if the Age is between 18 and 99.
 - If not, display "Age should be between 18 to 99".
7. Enter the Password.
8. Enter the Confirm Password.
9. Compare both passwords.
 - If they do not match, display "Invalid Password".
10. Click the Button to submit the form.
11. If all validations are successful, submit the form.
12. Load the Advertisements.xml file.
13. Display a random advertisement using the AdRotator control.
14. When the user clicks the advertisement, open the specified website.
15. End the program.

Code:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Validation.aspx.cs"
Inherits="Validation" %>
```

```
<!DOCTYPE html>
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
```

```

<title></title>
</head>
<body>
  <form id="form1" runat="server" aria-readonly="False">
    Name :<asp:TextBox ID="TextBox1" runat="server"></asp:TextBox>
    <asp:RequiredFieldValidator ID="RequiredFieldValidator1" runat="server"
ControlToValidate="TextBox1" ErrorMessage="Name can't be
empty"></asp:RequiredFieldValidator>
    <br />
    <br />
    Age :<asp:TextBox ID="TextBox2" runat="server"></asp:TextBox>
    &nbsp;<asp:RangeValidator ID="RangeValidator1" runat="server"
ControlToValidate="TextBox2" ErrorMessage="Age should be between 18 to
99"></asp:RangeValidator>
    <br />
    <br />
    Password :<asp:TextBox ID="TextBox3" runat="server"
TextMode="Password"></asp:TextBox>
    <br />
    <br />
    Confirm Password :<asp:TextBox ID="TextBox4" runat="server"
TextMode="Password"></asp:TextBox>
    &nbsp;<asp:CompareValidator ID="CompareValidator2" runat="server"
ControlToCompare="TextBox3" ControlToValidate="TextBox4"
ErrorMessage="invalid Password"></asp:CompareValidator>
    <br />
    <br />
    <asp:Button ID="Button1" runat="server" Text="Button" />
    <br />
    <br />
    <asp:AdRotator ID="AdRotator1" runat="server"
AdvertisementFile="~/Advertisements.xml" />
    <asp:XmlDataSource ID="XmlDataSource1"
runat="server"></asp:XmlDataSource>
    <br />
  </form>
</body>
</html>

```

Advertisements:

```
<?xml version="1.0" encoding="utf-8" ?>
```

```
<?Advertisements version="1.0" encoding="utf-8" ?>
```

```
<Advertisements>
```

```
<Ad>
```

```
<ImageUrl>Image/img1.png</ImageUrl>
```

```
<NavigateUrl>https://www.googel.com</NavigateUrl>
```

```
<AlternateText>Phoenix Bird</AlternateText>
```

```
<Height></Height>
```

```
<Width></Width>
```

```
</Ad>
```

```
<Ad>
```

```
<ImageUrl>Image/img2.png</ImageUrl>
```

```
<NavigateUrl>https://www.googel.com</NavigateUrl>
```

```
<AlternateText>Phoenix Bird2</AlternateText>
```

```
<Height></Height>
```

```
<Width></Width>
```

```
</Ad>
```

```
<Ad>
```

```
<ImageUrl>Image/img3.png</ImageUrl>
```

```
<NavigateUrl>https://www.googel.com</NavigateUrl>
```

```
<AlternateText>Phoenix Bird3</AlternateText>
```

```
<Height>100</Height>
```

```
<Width>100</Width>
```

```
</Ad>
```

```
</Advertisements>
```

Output:

Name :

Age :

Password :

Confirm Password :

