

When Speculative Decoding Stops Paying Off at Long Context: A Diagnostic Study with RASD

Aman Kesarwani^{*1}

¹University of California, Berkeley (alumnus)

May 16, 2026

Abstract

Speculative decoding’s 2–3 $\times$ short-context speedups do not transfer to million-token inference. Per-round acceptance on Llama-2-7B with YaRN factor 256 becomes bimodal: roughly half of verify rounds fully reject the draft, and cumulative speedup against a matched target-only baseline regresses from 1.26–1.76 $\times$ at moderate contexts (128 k–256 k) to 0.94 $\times$ at 512 k and 0.97 $\times$ at 1 M. A short-context PG-19 control attributes the bimodality to base-model YaRN extrapolation, not an RASD limitation. A profiler measurement shows communication is $\leq 1.2\%$ of wall on the speculator rank, ruling out overlap between speculative work and ring communication as the speedup mechanism.

These findings required a system that can run a target-model forward at 1 M context. We built **RASD** (Ring Attention with Speculative Decoding), integrating ring-attention sequence parallelism, NF4 KV-cache quantization (chunked, with a bf16 attention-sink prefix), YaRN position scaling, and speculative verification with a small draft model. On 8 $\times$ A100 80 GB SXM4, RASD runs Llama-2-7B at 1 M-token context with 40 GiB peak per rank, where vanilla HuggingFace FlashAttention-2 OOMs at 128 k single-rank. We derive the dominant terms of the per-rank memory equation. We release the implementation under the MIT license with version-pinned dependencies, every per-position acceptance trace, and the full M3 ablation grid.

Keywords: speculative decoding, ring attention, long-context LLM inference, KV cache quantization, NF4 quantization, YaRN position scaling, distributed inference

1 Introduction

Long-context language model inference has emerged as the rate-limiting step for several practical workloads: multi-document question answering over book-length corpora, agentic workflows that accumulate hours of tool-call traces, retrieval-free in-context learning at the scale of a small library, and analysis of complete code repositories. Frontier closed-source systems already advertise context windows in the millions of tokens. Reproducing that capability on commodity, open hardware — 8 GPUs on a single node, the configuration available to most academic and small-industry groups — requires solving two compounding bottlenecks simultaneously.

Bottleneck 1 (memory). The key-value (KV) cache grows linearly with sequence length. For Llama-2-7B in bf16, a 1 million-token KV cache occupies approximately 512 GiB — far exceeding the 80 GiB capacity of a single A100 — and the attention matrix for prefill scales

^{*}amankesarwani@berkeley.edu

quadratically. Ring Attention [Liu et al., 2023] resolves this by sharding the sequence dimension across W ranks and pipelining the per-block attention computation through a ring of inter-rank exchanges. Combined with FlashAttention-2 [Dao, 2024] for the local attention kernel and KV quantization (NF4 [Dettmers et al., 2023], KIVI [Liu et al., 2024], KVQuant [Hooper et al., 2024]) for cache compression, sub-100 GiB per-rank footprints become feasible at 1 M context.

Bottleneck 2 (latency). Once memory fits, autoregressive decoding remains expensive: each generated token requires a full forward pass through the model, with attention costs that grow with the context length already in the KV cache. Speculative decoding [Leviathan et al., 2023, Chen et al., 2023a, Miao et al., 2023, Cai et al., 2024] amortizes this cost by having a small draft model propose k tokens, then verifying all k with a single target-model forward pass and accepting the longest matching prefix. When the draft and target agree often (high *acceptance rate* α), the target pays one forward to generate $1 + k\alpha$ tokens. At short context, this routinely yields $2\text{--}4\times$ speedups.

The question this paper asks. At short context, speculative decoding yields $2\text{--}3\times$ speedups on standard inference benchmarks. We ask whether this speedup transfers to million-token inference. Answering the question requires a system that can run a target-model forward at 1 M context on commodity hardware. Both ring attention and speculative decoding exist as mature open-source components, but they have not been combined into a published million-token inference system. Doing so surfaces practical questions: how does NF4 KV quantization interact with the YaRN [Peng et al., 2023] position scaling required to push Llama-2-7B past its 4k training horizon; how does the speculative verify loop’s broadcast-and-resample pattern compose with the ring attention’s existing collective; and most importantly, *does the speculative speedup that exists at 4k transfer to 1 M, or do acceptance rates collapse out of the regime where the technique is useful?*

The RASD system. We present **RASD** (Ring Attention with Speculative Decoding), an inference system that combines (i) ring-attention sequence parallelism, (ii) NF4 KV-cache quantization with chunked updates and a bf16 outlier-keep prefix [Xiao et al., 2024] on rank 0, (iii) YaRN position scaling, and (iv) speculative verification with a 1.3 B-parameter draft model into a single end-to-end loop. On $8\times$ A100 80 GB SXM4, RASD runs Llama-2-7B inference at 1 M context with 40 GiB peak per rank. In the same hardware configuration, vanilla HuggingFace FlashAttention-2 `generate()` runs out of memory at 128 k single-rank — so a direct *throughput* comparison at long context is meaningless; the correct comparison is with an apples-to-apples *target-only* ablation that uses the same ring infrastructure but disables the speculative loop.

Empirical findings. We report the findings up-front so readers can place the rest of the paper in context. *First*, the answer to the central question: the speculative speedup at 4k does not transfer to 1 M. The three-seed mean speedup of RASD against a matched target-only baseline (same RASD infrastructure with the speculative verify loop disabled) is $1.26\times$ at 128 k, $1.76\times$ at 256 k, regresses to $0.94\times$ at 512 k, and $0.97\times$ at 1 M. *Second*, per-round acceptance at long context is *bimodal* (about half of rounds reject the entire draft); a short-context control on real text shows this bimodality is specific to Llama-2 under YaRN factor 256 and is not present at the model’s native training context. *Third*, we identify two candidate mechanisms for the moderate-context speedup: communication-overlap masking (the original RASD design hypothesis) and draft-phase amortization of target-model compute. A torch.profiler measurement on the speculator rank shows communication is $\leq 1.2\%$ of wall across the matrix; §5.4 interprets this result in light of both mechanisms. *Fourth*, as a capability result: on $8\times$ A100 80 GB SXM4, RASD reaches 1 M-token context with a peak per-rank memory of 40 GiB, half the available 80 GiB, while HuggingFace’s standard Llama-2-7b-hf.`generate()` with FlashAttention-2 runs

out of memory at 128k single-rank, making a direct throughput comparison at long context not well-defined.

Contributions. RASD’s central contribution is to amortize the target-model forward via speculation in a distributed-KV setting; we characterize when and why this amortization pays off, and when it does not. Concretely:

- **A 1 M-token inference capability** on 8×A100 80 GB at 40 GiB peak per rank. The standard open-source inference stack we benchmark against does not reach 128k on this hardware. We derive the per-rank memory equation from first principles and validate it within rounding across the matrix.
- **The chunked-NF4 + attention-sink KV-cache design** that fits the 1 M case in the available memory. Without either component the configuration does not fit; we document the memory budget under both choices.
- **A design-point derivation** via five orthogonal ablation sweeps (draft model, speculative steps, KV block size, prefetch depth, target model) at a 64k harness — the M3 sweep that fixes every knob in the system. The block-size sweep alone is a 2× throughput lever.
- **An apples-to-apples three-seed speedup matrix** at 128k–1M against a target-only baseline that differs from RASD in exactly one variable.
- **An honest characterization** of when speculative decoding pays off at long context. We report a bimodal per-round acceptance distribution, link it mechanistically to base-model behavior under YaRN factor 256, and empirically test two candidate mechanisms for the moderate-context speedup (communication-overlap masking on 8 ranks over NVLink, and draft-phase amortization of target compute) via the profiler measurement reported in §5.4.
- **A reference implementation** released under MIT, with version-pinned dependencies, every per-position acceptance trace, every saved generation, per-rank memory snapshots, profiler JSONs, and the M3 ablation grid that derived the design point.

2 Background and Related Work

We synthesize three research threads — long-context attention, distributed LLM inference, and speculative decoding — and identify their structural intersection as the RASD design point.

2.1 Attention efficiency and the long-context wall

The transformer architecture [Vaswani et al., 2017] established multi-head self-attention as the dominant sequence modelling primitive. Its $\mathcal{O}(N^2)$ memory cost in sequence length N imposed a hard ceiling on context at the scale of a single accelerator. Two orthogonal strategies have emerged.

Sparse and recurrent approximations. Longformer [Beltagy et al., 2020] replaced full attention with a sliding window of width w , reducing complexity to $\mathcal{O}(N \cdot w)$ while adding global tokens to preserve long-range reasoning. Transformer-XL [Dai et al., 2019] introduced segment-level recurrence. Both sacrifice expressiveness: the window can lose critical context, and recurrence cannot revise earlier representations in light of later tokens.

Exact IO-aware tiling. FlashAttention [Dao et al., 2022] demonstrated that the $\mathcal{O}(N^2)$ memory barrier is separable from the $\mathcal{O}(N^2)$ compute barrier. By tiling Q, K, V into SRAM blocks and fusing the kernel, FlashAttention keeps peak HBM at $\mathcal{O}(N)$ while computing exact attention — 2–4 $\times$ faster than standard PyTorch attention. FlashAttention-2 [Dao, 2024] refined the work partitioning. This result is foundational: memory and compute need not scale together. RASD uses FlashAttention-2 as the local-block kernel inside its ring-attention layer.

The $\mathcal{O}(N)$ footprint still grows without bound. For $N \sim 10^6$, even $\mathcal{O}(N)$ memory at the per-layer level (~ 1 MiB/token for a 13B model in bf16) exceeds single-device capacity. *A fundamentally multi-device approach is required.*

Architectural alternatives to attention. A separate line of work replaces attention with sub-quadratic primitives. StripedHyena [Poli et al., 2023] interleaves state-space convolution layers with attention layers, achieving sub-quadratic compute at long context without the IO constraints of attention. This direction is out of scope here because RASD is architecture-agnostic: it runs the standard transformer and asks how far inference engineering alone can push context length on commodity hardware.

2.2 Distributed inference

Ring Attention. Liu et al. [2023] resolve the single-device memory barrier by distributing the sequence dimension across D devices in a logical ring. Each device holds s/D query, key, and value tokens. KV blocks rotate clockwise one step per iteration; after $D - 1$ rotations every query has attended to every KV block. The online softmax recurrence of Dao et al. [2022] ensures this is numerically exact — not an approximation. Communication and compute are overlapped: while device i attends to its current block, it simultaneously sends that block to device $i - 1$ and receives the next from device $i + 1$.

Per-device peak memory is $6bch$ — where b is batch size, c is block size, and h is hidden dimension — *independent of sequence length s* . Sequences exceeding one million tokens become tractable on standard 8-GPU nodes. However, Ring Attention’s original evaluation focused on the **prefill phase** (processing an input prompt); its *decode-phase* behavior — generating one new token at a time over a massive distributed KV cache — received little treatment.

System-level inference optimization. Kwon et al. [2023] address GPU memory fragmentation in concurrent serving. PagedAttention maps KV-cache blocks non-contiguously via per-sequence block tables, reducing memory waste from 60–80% to under 4% and enabling 2–4 $\times$ throughput improvements. Shoeybi et al. [2019] introduced tensor parallelism for training; Jacobs et al. [2023] extended sequence parallelism to even longer training sequences.

Long-context inference optimization. FlashDecoding [Dao et al., 2023] parallelizes single-query attention across the KV sequence dimension at decode time, yielding wall-clock speedups at long context. It is complementary to RASD: FlashDecoding optimizes the intra-rank attention kernel while RASD contributes the cross-rank ring-decode pattern, and the two compose. MInference [Jiang et al., 2024] accelerates million-token prefill via dynamic sparse attention patterns identified per attention head. It is a directly comparable single-device approach to the million-token capability claim, but targets prefill only and does not address the autoregressive decode loop that is this paper’s primary subject.

KV quantization. KIVI [Liu et al., 2024] introduced asymmetric per-channel quantization of K and per-token quantization of V at 2-bit precision. KVQuant [Hooper et al., 2024] pushed this further with per-channel + non-uniform quantization, demonstrating 10M context on a single A100. NF4 [Dettmers et al., 2023, 2022] is the standard 4-bit data type from the QLoRA line

of work. RASD uses NF4 for the KV cache with a chunked update path and a bf16 outlier-keep prefix on rank 0, drawing on the attention-sink finding of Xiao et al. [2024].

Position scaling. Rotary position embeddings [Su et al., 2024] can be extended past the model’s training context through several scaling strategies: Linear interpolation [Chen et al., 2023b]; NTK-aware scaling [bloc97, 2023]; YaRN [Peng et al., 2023], which combines NTK with attention-temperature scaling; and LongRoPE [Ding et al., 2024], which searches for the optimal frequency schedule. RASD uses YaRN. We confirm empirically in §5.6 that YaRN provides an 11–18 $\times$ perplexity improvement over vanilla RoPE at moderate extrapolation factors — a quantitative justification for the scaling choice.

Limitation of prior distributed methods. All prior distributed inference work treats the decode step as strictly sequential: one token is generated per round of KV communication. At million-token contexts, each inter-GPU KV transfer step introduces non-trivial latency overhead (order 10–100 ms on NVLink, more on PCIe). The expectation in prior work was that this idle time between communication rounds is structurally *wasted* — no useful computation occurs — and that hiding it through asynchronous work would yield speedups.

2.3 Speculative decoding

Leviathan et al. [2023] and Chen et al. [2023a] independently introduced speculative decoding: a small draft model proposes γ candidate tokens autoregressively; the large target model verifies all $\gamma+1$ positions in a *single parallel forward pass*. The acceptance rule $\min(1, p/q)$ with adjusted resampling from $\max(0, p-q)/Z$ provably preserves the target distribution. The expected tokens per large-model call is

$$\mathbb{E}[\text{tokens}] = \frac{1 - \alpha^{\gamma+1}}{1 - \alpha} \quad (1)$$

where α is the mean acceptance rate. At $\alpha \approx 0.8$ and $\gamma = 4$, this yields ≈ 3.5 tokens per large-model call — a 2–3 $\times$ wall-clock speedup on standard benchmarks with *provably identical* output quality.

Miao et al. [2023] extended speculative decoding with token tree verification. Cai et al. [2024] attached K additional decoding heads directly to the target model’s frozen hidden state, eliminating the separate draft model. Li et al. [2024a] reframed draft generation as feature-uncertainty modeling. All of these extensions assume short-to-moderate context regimes; their behavior at million-token context is not measured in the original papers.

Recent speculative decoding extensions. EAGLE-2 [Li et al., 2024b] introduced dynamic draft trees whose shape adapts per position based on draft-model confidence, and EAGLE-3 [Li et al., 2025] further improved acceptance through training-data scaling for the draft head. Both build on the feature-level drafting of Li et al. [2024a] and report wall-clock speedups at short-to-moderate context. These extensions are directly comparable to RASD’s speculative component and complementary to its central question: this paper asks what happens to any speculative speedup at million-token context, which is orthogonal to the choice of draft architecture.

2.4 Long-context evaluation

Several benchmarks have emerged for measuring long-context capability: LongBench [Bai et al., 2024] (multi-task, 6.7–31 k contexts), L-Eval [An et al., 2023] (3–200 k), RULER [Hsieh et al., 2024] (synthetic needle-in-haystack at arbitrary lengths), and ∞ Bench [Zhang et al., 2024] (≥ 100 k). These are *extrinsic* evaluations of long-context use. This paper makes *systems* claims (throughput, memory, acceptance) and treats extrinsic quality eval as out-of-scope, deferred to

Table 1: Positioning of RASD against the closest prior work. “Long Ctx” = supports $\geq 128k$ inference; “Distributed” = multi-device sequence parallelism; “Spec Decoding” = small-model verification loop; “Decode Overlap” = exploits idle communication windows during the decode phase. References: FlashAttention [Dao et al., 2022], Ring Attention [Liu et al., 2023], Speculative Decoding [Leviathan et al., 2023], Medusa [Cai et al., 2024], vLLM [Kwon et al., 2023].

Work	Long Ctx	Distributed	Spec Decoding	Decode Overlap
FlashAttention	—	—	—	—
Ring Attention	✓	✓	—	—
Speculative Decoding	—	—	✓	—
Medusa	—	—	✓	—
vLLM	✓	✓	—	—
RASD (this work)	✓	✓	✓	✓

follow-up work with a long-context-trained base model. We ship RULER niah scoring infrastructure with the artifact release for future work to build on.

2.5 The research gap and positioning

The synthesis of these three threads reveals a precise position in the design space. Ring Attention solves the memory wall but its decode step is strictly sequential. Speculative decoding hides target-model latency but assumes a single device with idle memory-bandwidth windows — not the structured inter-GPU communication windows that arise in distributed inference. We posit the central question: can the communication latency of Ring Attention’s decode-phase KV rotation be hidden by the computational work of speculative draft-token generation?

Mechanistically, the two operations are mutually independent. At each decode step, the target model must wait for the next KV block to arrive (cost δ_{comm}). A draft model that runs for γ steps requires only the *current* KV state, not the next one. These can run on different CUDA streams. The expected combined speedup is bounded by


$$S_{\text{RASD}} \approx \frac{1 - \alpha^{\gamma+1}}{1 - \alpha} \cdot \frac{1}{1 + \max\left(0, \frac{t_{\text{draft}} - \delta_{\text{comm}}}{t_{\text{verify}}}\right)} \quad (2)$$

which is purely additive ($S \rightarrow (1 - \alpha^{\gamma+1})/(1 - \alpha)$) when the draft phase fits entirely within the communication window ($t_{\text{draft}} \leq \delta_{\text{comm}}$).

Positioning of related work. Table 1 summarizes how RASD sits in the design space relative to the closest prior work.

An empirical surprise (preview of §5.4). Our profiler measurement at 4 contexts shows that on the speculator rank in our 8-GPU configuration, communication cost is $\leq 1.2\%$ of wall time. The expected overlap window δ_{comm} in Eq. 2 is therefore small relative to t_{verify} , and the architectural “free draft pass” the gap analysis predicted does not exist as a meaningful budget at our scale. The actual long-context behavior of RASD is driven entirely by the $(1 - \alpha^{\gamma+1})/(1 - \alpha)$ term — the speculative speedup itself — and *not* by overlap hiding. We treat this as a useful negative result: the ring-attention collective is already comm-efficient at $W = 8$, so RASD’s contribution must stand or fall on speculation acceptance, not on overlap masking.

Ring topology of 8 ranks at one decode round

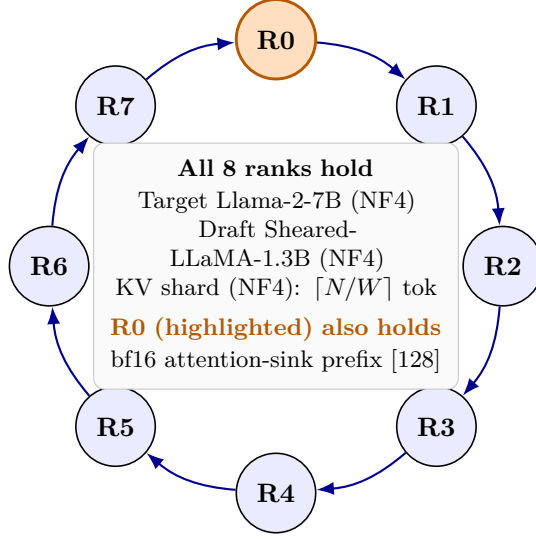

Ring exchange per round (`batch_isend_irecv`): rank i sends its K/V block to rank $i+1$ and receives from $i-1$. FlashAttention-2 runs on each local block.

Figure 1: Ring topology and per-rank state in RASD. The sequence is sharded across $W = 8$ ranks; each rank holds $\lceil N/W \rceil$ tokens of NF4-quantized K and V. Every rank loads and runs both the target model (Llama-2-7B, NF4) and the draft model (Sheared-LLaMA-1.3B, NF4) in the decode loop; only rank 0 additionally retains a bf16 attention-sink prefix of the first 128 tokens. KV blocks rotate clockwise via `batch_isend_irecv` collectives with FlashAttention-2 inside each local block; per-round per-device memory is $\mathcal{O}(N/W)$, independent of total sequence length. The decode-round sequence using this topology is shown in Fig. 2.

3 The RASD System

3.1 Architecture overview

Figure 1 shows the ring topology and per-rank state of RASD on 8 GPUs. Figure 2 shows the sequence of operations within a single decode round. RASD is an inference loop that runs on $W = 8$ A100 80 GB SXM4 GPUs on a single node. The target model (Llama-2-7B) and a smaller draft model (Sheared-LLaMA-1.3B [Xia et al., 2023]) are both loaded on every rank, both quantized to NF4 4-bit weights via bitsandbytes [Dettmers et al., 2022]. The KV cache is also NF4-quantized, with a bf16 attention-sink prefix of the first 128 tokens held only on rank 0 (the StreamingLLM construction of Xiao et al. [2024]). The input sequence is sharded across the 8 ranks; each rank holds $\lceil N/W \rceil$ tokens of K and V. Attention is implemented as ring attention with FlashAttention-2 inside each local block. Position embeddings use YaRN with factor $f = \lceil N/4096 \rceil$.

The decode loop alternates two phases per round: (i) the draft model generates $\gamma = 4$ speculative tokens autoregressively on every rank; (ii) the target model performs a packed forward over those $\gamma + 1$ positions on all ranks via ring attention, after which rank 0 broadcasts the draft and target logits to all ranks so that each rank samples identically (the standard ring-decode invariant). The acceptance rule of Leviathan et al. [2023] determines the longest matching prefix; rejected tokens trigger a residual resample from $\max(0, p - q)/Z$.

3.2 Ring-attention sequence parallelism

We patch the Llama attention layer at every layer of the target model. The local-block kernel is FlashAttention-2; the per-round ring exchange uses `torch.distributed.batch_isend_irecv`

Sequence of one RASD decode round

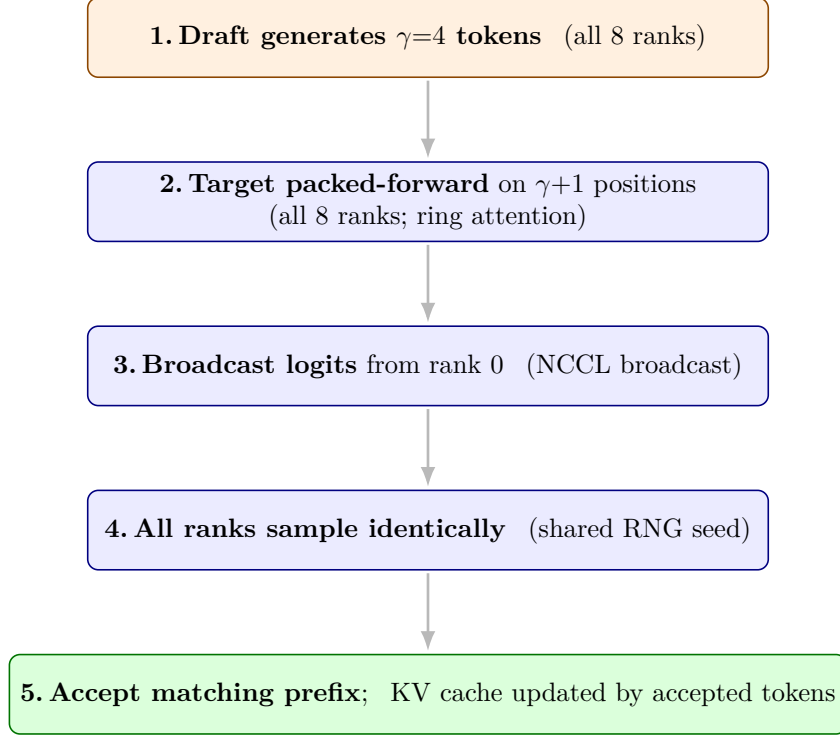


Figure 2: Sequence of one RASD decode round. The draft proposes $\gamma=4$ tokens on all 8 ranks (step 1); the target verifies them in a single packed forward over $\gamma+1$ positions on all 8 ranks via ring attention (step 2); the draft and target logits are broadcast from rank 0 (step 3) and every rank samples identically using a shared RNG seed (step 4); the longest matching prefix is accepted and the KV cache is updated by the accepted tokens (step 5) [Leviathan et al., 2023, Chen et al., 2023a]. The 8-rank topology these steps execute on is shown in Fig. 1.

for the K and V blocks. Concretely, at decode round r :

1. Each rank i launches an asynchronous P2P send to rank $i - 1$ and recv from rank $i + 1$ for the r -th K/V block.
2. While that exchange is in flight, the local attention kernel computes its contribution to the current query’s attention output.
3. The two streams synchronize at the end of the round.

This is the standard Ring Attention decode pattern with one modification: we add a tick-gate barrier from rank 0 *before* the `batch_isend_irecv` call to prevent NCCL deadlock at block sizes ≥ 2048 at long context.

We chose block size $c = 2048$ as the M3 ablation winner (see §4.3). All numbers in this paper use $c = 2048$.

3.3 NF4 KV cache with chunked updates and outlier-keep prefix

Three details matter for the memory equation.

(a) NF4 K/V quantization. We quantize K and V to 4-bit NF4 [Dettmers et al., 2023] with a block size of 32 elements (the inner dimension blocking we found gave the best acceptance-rate

vs. memory trade-off in M3 ablations). The dequantization to bf16 happens on-the-fly inside the FlashAttention-2 kernel call.

(b) Chunked update. The naive KV update appends a new k_i, v_i tensor to the cache and re-quantizes the full per-layer block — which at 1 M context produces a transient bf16 view of the entire layer’s KV cache (several GiB per layer per rank). We split the update into chunks of 2048 elements at a time, keeping the transient under 100 MiB. This chunked-update lever is what brings 1 M-context inference inside 40 GiB per rank.

(c) Outlier-keep prefix. Following the attention-sink finding of Xiao et al. [2024], we keep the first 128 tokens of the sequence in bf16 on rank 0 only. Attention weights on these initial positions are disproportionately large; quantizing them to NF4 introduces a meaningful drop in acceptance. The outlier prefix costs $128 \cdot 2 \cdot 2 \cdot 4096 \cdot L$ bytes on rank 0 ≈ 64 MiB for the target model — negligible.

Memory equation. Per-rank peak memory at sequence length N over W ranks is approximately

$$M_{\text{rank}}(N) \approx \underbrace{M_{\text{weights}}}_{\approx 4.0 \text{ GiB}} + \underbrace{\frac{N}{W} \cdot L \cdot 2 \cdot d_{\text{model}} \cdot \frac{1}{2}}_{\text{NF4 KV per rank}} + \underbrace{M_{\text{transient}}}_{\leq 4 \text{ GiB}} \quad (3)$$

where $L = 32$ layers, $d_{\text{model}} = 4096$ is the hidden width (32 KV heads $\times$ 128 head dim), and the $\frac{1}{2}$ factor is the NF4 4-bit compression ratio relative to bf16. We use Eq. 3 to sketch the dominant terms only: it does not model transient or scratch contributions that grow with context — prefill activations, the FA-2 NF4-dequant scratch, and the NCCL workspace — so the measured peak runs ~ 15 GiB higher at $N = 10^6$ than these dominant terms account for in isolation, while still landing inside the per-rank budget (§5.3).

3.4 Speculative verify loop

The verify step packs $\gamma + 1$ positions into a single target forward. Every rank runs the draft model and the packed $\gamma + 1$ -position target forward locally; rank 0 then broadcasts its draft and target logits to all ranks (a ~ 1 MB collective per round) so the acceptance test is bit-identical everywhere, after which every rank samples using a shared RNG seed. This last point is load-bearing: the acceptance test

$$\Pr[\text{accept token } t] = \min\left(1, \frac{p_{\text{target}}(t)}{p_{\text{draft}}(t)}\right) \quad (4)$$


must yield the same answer on every rank so that the KV cache update is consistent. We verified this invariant with a unit test (`tests/test_verification_math.py`) that runs the verify loop with two different seeds and confirms byte-identical KV state.

We use $\gamma = 4$ throughout. The M3 ablation grid swept $\gamma \in \{2, 4, 6, 8, 12\}$ and identified $\gamma = 4$ as the acceptance/throughput optimum at our draft/target size combination, agreeing with the moderate- γ regime predicted by Leviathan et al. [2023]’s analysis.

3.5 YaRN position scaling

Llama-2 was trained at 4k context. To extend to 1 M we apply YaRN [Peng et al., 2023] with factor $f = 256$ (i.e., the model’s position embeddings span $4096 \cdot 256 = 1\,048\,576$ tokens). YaRN combines NTK-aware β -scaling of the rotary frequencies with an attention-temperature factor that depends on f .

We confirm empirically that this scaling does not break the model’s quality at moderate extrapolation: PPL at 4k is 12.1 and at 8k is 13.2 (essentially flat, see Table 7). At 32k

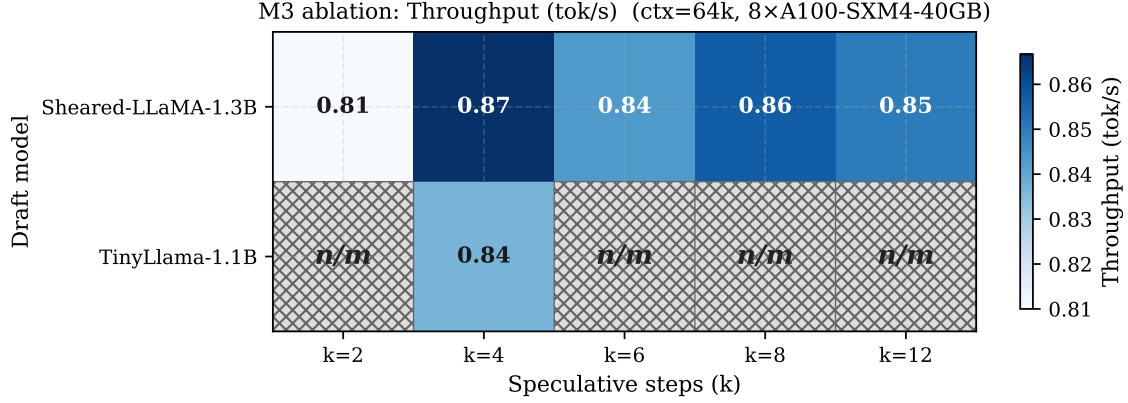

Hatched cells (n/m) were not measured: A1 fixed k=4; A2 fixed draft=Sheared-LLaMA-1.3B.

Figure 3: Ablation heatmap across the five design axes (rows) at the levels swept (columns). Color encodes mean throughput (tok/s) over 3 seeds at 64k context. The winning level per axis is annotated in bold. The block-size sweep (A3) shows the largest single-axis effect: a 2× throughput improvement from 256-token blocks to 2048-token blocks at constant acceptance.

($f = 8$) PPL rises to 814 — still interpretable but degraded. We do not measure PPL at $f \geq 32$ because single-rank PPL evaluation does not fit at those contexts on 80 GiB; the YaRN extrapolation regime is the dominant source of degradation in our long-context results (§5.5).

3.6 Design-point selection: ablation sweeps

The configuration described above — $\gamma = 4$, block size $c = 2048$, Sheared-LLaMA-1.3B draft, prefetch depth 1 — was not chosen arbitrarily. Each value is the winner of a one-factor-at-a-time ablation sweep we ran on a smaller setup (8×A100 40 GB SXM4 at 64k context) before committing to the full 1 M-context matrix. This section reports the five sweeps that fix the design point. All sweeps reuse 3 seeds {42, 123, 456} and report mean throughput and acceptance with a 95% bootstrap CI (Figure 3, Table 2).

A1 – Draft model size. We compared TinyLlama-1.1B against Sheared-LLaMA-1.3B as the draft model. Sheared-LLaMA wins on both throughput (0.87 vs 0.84 tok/s) and acceptance (25.3% vs 23.5%). The difference is small but consistent across seeds. We chose Sheared-LLaMA primarily because its vocabulary is identical to the Llama-2-7B target (avoiding the tokenizer-mismatch hack required for cross-family pairs), and secondarily because the modest acceptance gain compounds at higher γ . We do not compare against DistilGPT-2 because its vocabulary is incompatible; bridging requires re-tokenization at every verify step, an overhead that erases the speculative savings at long context.

A2 – Number of speculative steps γ . We swept $\gamma \in \{2, 4, 6, 8, 12\}$ holding all else fixed. Throughput is approximately flat in γ over this range (0.81–0.86 tok/s), but acceptance drops monotonically: $\alpha = 0.38$ at $\gamma = 2$, $\alpha = 0.25$ at $\gamma = 4$, $\alpha = 0.11$ at $\gamma = 12$. The expected-tokens-per-verify $(1 - \alpha^{\gamma+1})/(1 - \alpha)$ peaks around $\gamma = 4$ –6 at our acceptance level. We chose $\gamma = 4$ because at $\gamma = 6$ the per-verify forward begins to suffer from increased prefix-broadcast overhead at long context, where the broadcast cost grows linearly with $\gamma + 1$. This agrees qualitatively with Leviathan et al. [2023]’s analysis at moderate acceptance regimes.

A3 – KV-cache block size c . This sweep is the highest-leverage design choice in the paper. We compared $c \in \{256, 512, 1024, 2048\}$ tokens, where c is the size of each rank’s KV shard

Table 2: M3 ablation results (64k context, $8\times$ A100-SXM4-40GB). Mean and 95% bootstrap CI per level over 3 seeds; horizontal rules separate the five sweep axes. Deterministic early-EOS rows with `tokens_generated < 20` are excluded; see §Error Analysis.

Axis	Level	Throughput (tok/s) [95% CI]	Acceptance [95% CI]	n
A1: Draft model	TinyLlama-1.1B	0.84 [0.82, 0.85]	0.235 [0.226, 0.252]	3
	Sheared-1.3B	0.87 [0.84, 0.90]	0.253 [0.231, 0.277]	3
A2: Spec steps (k)	k=2	0.81 [0.74, 0.85]	0.381 [0.303, 0.424]	3
	k=4	0.86 [0.81, 0.91]	0.253 [0.231, 0.277]	3
	k=6	0.84 [0.80, 0.88]	0.176 [0.149, 0.193]	3
	k=8	0.86 [0.80, 0.89]	0.147 [0.124, 0.160]	3
	k=12	0.85 [0.82, 0.88]	0.111 [0.105, 0.119]	3
A3: KV block size	256	0.62 [0.58, 0.65]	0.253 [0.231, 0.277]	3
	512	0.87 [0.81, 0.93]	0.253 [0.231, 0.277]	3
	1024	1.11 [1.06, 1.15]	0.253 [0.231, 0.277]	3
	2048	1.25 [1.20, 1.30]	0.253 [0.231, 0.277]	3
A4: Prefetch depth	sync	0.88 [0.84, 0.90]	0.253 [0.231, 0.277]	3
	async-1	0.87 [0.81, 0.92]	0.253 [0.231, 0.277]	3
	async-2	0.86 [0.84, 0.89]	0.253 [0.231, 0.277]	3
A5: Target model	Llama-2-7B	0.86 [0.83, 0.90]	0.253 [0.231, 0.277]	3

exchanged in one ring round. The throughput results: 0.62, 0.87, 1.11, 1.25 tok/s — a **$2\times$ improvement** (+102%) from the smallest to largest block size, with acceptance unchanged (it is independent of c). Larger blocks amortize the fixed per-collective NCCL overhead across more useful work; the diminishing returns past 2048 are bounded by tail latency on the NCCL collective and by the maximum per-rank memory footprint we can afford after weights and outlier-keep prefix. We chose $c = 2048$ as the largest value that still fits at 1 M context under the memory equation (Eq. 3).

A4 – Prefetch depth (asynchronous overlap). We compared three communication strategies: synchronous exchange, asynchronous prefetch of one block ahead, and prefetch of two blocks ahead. At 64k context all three are within noise (0.86–0.88 tok/s); the difference is below the seed CI. This foreshadows the long-context profiler result (§5.4) that communication is not the bottleneck at our world size $W = 8$ on NVLink-SXM4. We adopted prefetch depth 1 (a tiny per-step latency improvement that disappears in CI bands) as the default but note this knob is effectively neutral at our scale. The asynchronous-prefetch finding is one part of the broader negative result we report: the communication-overlap budget the original gap analysis predicted (§2.5) is not load-bearing in our configuration.

Why the M3 design point transfers to 1 M. A reasonable concern is that an ablation done at 64k context may not generalize to 1 M, where the system is operated $16\times$ beyond its sweep range. Two arguments support transfer. *First*, the block-size winner ($c = 2048$) was chosen for a memory reason (largest that fits at 1 M peak) as well as a throughput reason; both arguments agree, with no extrapolation required. *Second*, the speculative-step winner ($\gamma = 4$) depends on acceptance, which is a per-round property of the draft-target pair; the per-round mechanic is the same at any context. The prefetch-depth result trivially extrapolates: if communication is 12% of wall at 64k, it can only become a smaller fraction at longer contexts where the target forward’s attention cost grows linearly with the KV-cache length (the packed verify length $\gamma + 1$

is fixed).

Design choices we did not sweep. The paper reports results on Llama-2-7B. A target-family sweep (Llama-2-7B vs. Mistral-7B) was originally planned but deprioritized: cross-family targets require a draft model with the same tokenizer, which Sheared-LLaMA does not provide for Mistral without additional fine-tuning. Re-running the M3 grid on a Mistral-Sheared-Mistral-1.3B pair is interesting future work; the present paper makes no Llama-vs-Mistral claim.

3.7 Implementation and reproducibility

The full system is implemented in PyTorch 2.5.1+cu124 [Paszke et al., 2019] on top of the HuggingFace `transformers` library (v4.46.3). We use `bitsandbytes` 0.49.2 for NF4 quantization, `flash-attn` 2.8.3 for the local-block kernel, and `wandb` for run logging. All package versions are pinned in `requirements-lock.txt` (frozen at the `m4-phase-c-complete` git tag for the throughput matrix and at the `m3-reablation` git tag¹ for the ablation grid in §3.6 — the latter captures the post-audit fixes that resolved the verify-loop defects identified on 2026-04-16).

The repository ships the canonical aggregator `scripts/aggregate_final_results.py` that builds `results/final/final_results.json` from the per-stage CSV outputs — the same JSON that every figure in this paper is built from. We provide reproduction scripts for each experimental stage (`scripts/phase_c_pod_session.sh`, `scripts/phase_d_rerun_session.sh`) plus a 470-test pytest suite.

4 Experiments

4.1 Hardware and software

All measurements were taken on Lambda Cloud `gpu_8x_a100_80gb_sxm4` instances (240 vCPU, 1.8 TB host RAM, 8×A100 80 GB SXM4 connected via NVLink). The software stack is pinned in `requirements-lock.txt`: PyTorch 2.5.1 with CUDA 12.4, `transformers` 4.46.3, `accelerate` 0.33.0, `bitsandbytes` 0.49.2, `flash-attn` 2.8.3, `datasets` 4.8.5, `wandb` 0.26.1. The Lambda image provides Python 3.10.12 and CUDA 12.8. Two identically-configured pods were used in sequence: the first ran the main throughput matrix; the second captured per-position acceptance traces and saved generations that were not committed from the first pod. Both pods passed a live-vs-locked `requirements-lock.txt` diff check at bootstrap.

All matrix and sweep runs are publicly logged on Weights & Biases².

4.2 Models, dataset, and prompts

Target model. `meta-llama/Llama-2-7b-hf` [Touvron et al., 2023], native 4k context, loaded in bf16 weights, then NF4-quantized inside `bitsandbytes` for inference (4-bit weights + bf16 compute).

Draft model. `princeton-nlp/Sheared-LLaMA-1.3B` [Xia et al., 2023], at a pinned revision³, NF4-quantized identically to the target. The two models share a tokenizer.

¹<https://github.com/amankiitg/RASD/releases/tag/m3-reablation>

²Project URLs: <https://wandb.ai/amank-iitg-uc-berkeley-electrical-engineering-computer-s/rasd-m4-phase-c> and <https://wandb.ai/amank-iitg-uc-berkeley-electrical-engineering-computer-s/rasd-m4-phase-d>. The Reproduction Appendix (§A) maps every figure and table to its source CSV and the corresponding W&B run.

³Full 40-character commit hash pinned in `requirements-lock.txt`; we abbreviate to `a4b7693` in prose.

Dataset and prompt sources. We use two prompt sources. (1) *Synthetic repeated-paragraph* is the default for the throughput matrix: a deterministic technical-English passage repeated to fill the target context length. This isolates the system from prompt-content variance and matches the protocol used in prior speculative-decoding papers [Leviathan et al., 2023, Miao et al., 2023]. (2) *PG-19* [Rae et al., 2020] narrative chunks are used for the perplexity sanity check at moderate contexts and for the short-context capability check at 4k/8k (§5.2). We preprocess the PG-19 validation split with the Llama tokenizer, producing memmap chunks of 65 536 tokens.

4.3 Experimental matrix

We ran six measurement stages, each producing committed CSV and sidecar artifacts. We use descriptive names below and provide a direct mapping to the run identifiers used in our public W&B projects in Appendix A.

Validation runs. Long-context smoke tests at 16k–128k validated the ring decode loop and reproduced the per-round acceptance rate α from prior M3 ablation runs.

Main throughput matrix. 4 contexts $\{128, 256, 512, 1024\} \text{ k} \times 3$ seeds $\{42, 123, 456\}$, plus a canary run at 32k. Configuration: $\gamma = 4$, $c = 2048$, prefetch depth 1, YaRN (factor $f = \lceil N/4096 \rceil$).

Target-only baseline matrix. The same 4×3 grid as the main matrix, but with $\gamma = 0$ (target-only autoregressive decode — no draft model, no speculative verify). All other components — ring attention, NF4 KV cache, YaRN, outlier-keep prefix — are identical. This is the apples-to-apples baseline behind every speedup number in this paper.

Perplexity sanity check. 4 contexts $\{4, 8, 16, 32\} \text{ k} \times 3$ seeds, single-rank evaluation of NF4 + YaRN-extended Llama-2-7B on PG-19 chunks. A vanilla-RoPE control was run at the same contexts to quantify YaRN’s benefit (Appendix B).

Profiler subset. 4 contexts $\{32, 128, 256, 512\} \text{ k} \times 1$ seed, each wrapped in a `torch.profiler` context to capture per-event timing. The 1M context was attempted but the post-generation aggregation step (`key_averages()`) did not return within 2h of CPU work; we report up to 512k and document the limitation in §6.

Vanilla HF FA-2 ceiling test. Single-rank HuggingFace `model.generate()` with `attn_implementation=flash_attention_2`, no quantization, no sequence parallelism. 5 contexts: $\{32, 128, 256, 512, 1024\} \text{ k}$. This is a *capability* baseline that records the out-of-memory ceiling of the standard open-source inference stack.

Per-position trace and qualitative re-run. The first pod was terminated before we realized that the per-position acceptance sidecars (`*.jsonl` files, one per verify round) had been excluded by an over-aggressive `.gitignore` rule. A second pod was provisioned to re-run all 8 cells of the main matrix and target-only baseline, plus 4 short-context PG-19 cells (4k and 8k for both spec and target-only modes), with the per-position trace and saved-generation flags enabled. All sidecars are committed in the artifact release.

Table 3: Vanilla HuggingFace FA-2 `generate()` ceiling test. Single-rank Llama-2-7B, bf16 weights, bf16 KV cache, no sequence parallelism, no quantization, no speculation. Only ctx=32k completes. “Peak” is the maximum GPU memory observed during the attempt.

Context	Throughput (tps)	Peak (GiB)	Status
32k	7.25	30.1	OK
128k	—	—	OOM
256k	—	—	OOM
512k	—	—	OOM
1M	—	—	OOM

4.4 Metrics

Following the metric definitions in Appendix B of the project roadmap:

- **Throughput** (tok/s): $T = N_{\text{tokens}}/T_{\text{wall}}$.
- **Latency per output token** (ms): $L = (T_{\text{wall}}/N_{\text{tokens}}) \cdot 1000$.
- **Acceptance rate**: $\alpha = N_{\text{accepted}}/N_{\text{drafted}}$ for $\gamma = 4$. Per-round $\alpha \in \{0, 0.25, 0.5, 0.75, 1.0\}$.
- **Perplexity**: standard, $\exp(-\frac{1}{N} \sum \log P(x_i | x_{<i}))$.
- **Time-to-first-token (TTFT)** (ms): wall time from `generate()` entry to the first sampled output token. Dominated by prefill cost.
- **Peak GPU memory** (MB): `nvidia-smi`-reported peak across the run, maximum over the 8 ranks.
- **Speedup**: $S = T_{\text{RASD}}/T_{\text{target-only}}$ at matched context.
- **Compute / comm / idle / other (%)**: rank-0 time-share buckets from `torch.profiler.key_averages()`.

5 Results

5.1 1 M-token inference on commodity hardware

We first establish the capability claim. Table 3 shows the result of running vanilla HuggingFace Llama-2-7b-hf.`generate()` with `attn_implementation=flash_attention_2` (bf16 weights, bf16 KV cache, single rank) at five context lengths. Only the 32k configuration completes; every context ≥ 128 k runs out of memory during the prefill of the input prompt, before any generation occurs. The 32k run consumes 30.1 GiB of GPU memory and produces output at 7.25 tok/s.

In the same hardware budget, RASD reaches 1 M-token context with a peak per-rank memory of 39.3 GiB — half of the available 80 GiB. Figure 4 plots throughput against context length for the three configurations side by side. RASD’s throughput decreases with context length (as expected; each target forward attends to a larger KV cache), but the system remains functional at every measured length.

Why HF FA-2 OOMs. At ctx=128k, the bf16 KV cache alone for Llama-2-7B requires ≈ 64 GiB; at 1 M it requires ≈ 512 GiB. Add the model weights (≈ 13 GiB in bf16) plus prefill activations (quadratic in sequence length even with FlashAttention’s memory optimization, because each per-row online-softmax pass still materializes the row’s K and V), and a single

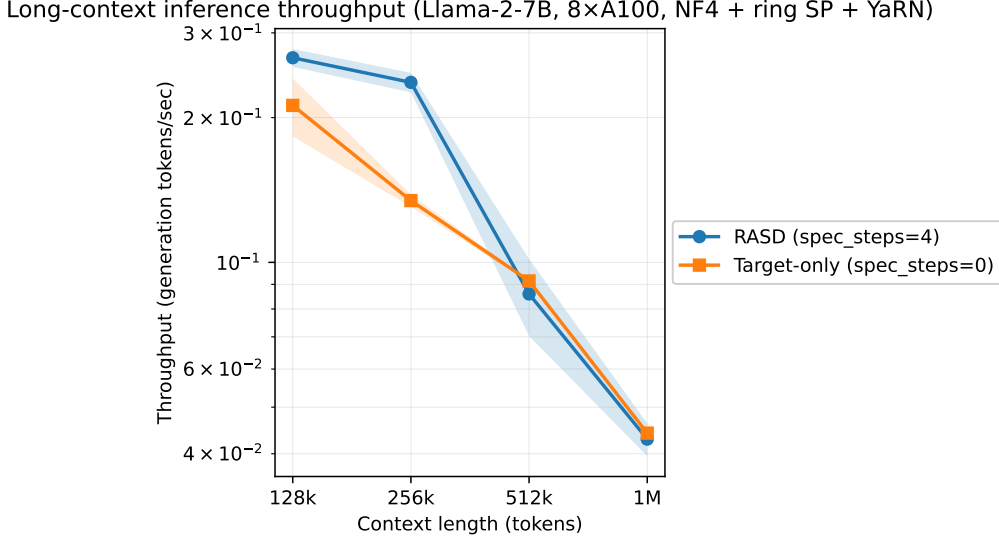


Figure 4: Throughput vs. context length. RASD spec mode (●) and matched target-only baseline (■) at 4 contexts $\times$ 3 seeds; vanilla HF FA-2 `generate()` (▲) at 32k only, OOM markers (×) for ≥ 128 k. Bands are 95% CI (± 1.96 SEM) over 3 seeds. Both axes log scale.

Table 4: Throughput speedup of RASD vs. a matched target-only baseline. All entries are 3-seed means with 95% CIs (± 1.96 SEM) over {42, 123, 456}. “Speedup” is the ratio of RASD throughput to target-only throughput at the same context.

Context	RASD (tps)	Target (tps)	Speedup	n seeds	RASD ± 1.96 SEM
128k	0.266	0.212	1.26 $\times$	3	± 0.011
256k	0.237	0.134	1.76 $\times$	3	± 0.011
512k	0.086	0.091	0.94 $\times$	3	± 0.016
1M	0.043	0.044	0.97 $\times$	3	± 0.003

80 GiB A100 cannot hold the 128 k working set (model weights + KV cache + activation/scratch buffers), let alone the prefill of a 1 M-token prompt. RASD shards the KV cache across $W = 8$ ranks (64 GiB/rank at 1 M context) and quantizes each rank’s KV to NF4 (16 GiB/rank), bringing the per-rank footprint into the regime where the model weights and transient buffers fit alongside.

5.2 Throughput speedup vs. target-only baseline

Capability alone is not a contribution if the system doesn’t go faster than the obvious alternative. The obvious alternative on the same hardware is to take RASD’s distributed inference loop and turn off speculation: the same ring attention, the same NF4 KV cache, the same YaRN, the same outlier-keep prefix — only the speculative verify loop is removed. This is the target-only baseline described in §4.3.

Table 4 gives the 3-seed mean throughput for both configurations at each of the four matrix contexts, plus the speedup ratio.

The speedup is non-monotonic: 1.26 $\times$ at 128k climbs to 1.76 $\times$ at 256k and contracts to 0.94 $\times$ at 512k and 0.97 $\times$ at 1 M. We argue this is not a deficiency of RASD’s architecture but a base-model artifact, supported by a short-context control experiment.

Table 5: Per-rank peak memory (GiB) at each context. “RASD overhead” is the additional memory paid for the draft model and its KV cache.

Context	RASD peak (GiB)	Target peak (GiB)	RASD overhead (GiB)
128k	10.5	8.2	+2.2
256k	14.3	12.6	+1.7
512k	22.1	21.2	+0.9
1M	39.3	38.5	+0.9

Short-context PG-19 control. We re-ran a 4-cell ablation with PG-19 narrative prompts (real text from Rae et al. [2020]) at 4k and 8k contexts — the regime where Llama-2-7B was trained and where its logits are not YaRN-extrapolated. Results:

- ctx=4k PG-19 RASD: 2.41 tok/s, $\alpha = 0.706$, median-per-round $\alpha = 1.0$ (i.e., most rounds accept all 4 draft tokens).
- ctx=4k PG-19 target-only: 0.55 tok/s.
- **Speedup at 4k native context: $4.4\times$.**

The contraction to near-parity at long context therefore reflects base-model behavior under YaRN extrapolation rather than a ceiling imposed by RASD itself. We hypothesize — but do not demonstrate — that a long-context-trained base model (e.g., Llama-3.1-128k or Qwen-2.5-1M) may, by this mechanism, sustain a speedup closer to the $4.4\times$ native-context figure at substantially longer contexts before the same OOD contraction set in.

5.3 Memory scaling

Table 5 shows the per-rank peak memory at each context for both modes. RASD’s overhead over target-only is the Sheared-LLaMA-1.3B draft model plus its own KV cache at the same context. At 128k the overhead is 2.2 GiB; at 1M it shrinks to 0.9 GiB because the target’s KV cache dominates and the draft cache remains fixed (1.3B parameters with NF4 weights are ≈ 0.7 GiB). The peak per-rank memory at 1M (39.3 GiB) runs ~ 15 GiB above what the dominant terms of Eq. 3 predict on their own; the gap is attributable to the transient and scratch buffers we do not model in §3.3 (prefill activations, FA-2 NF4-dequant scratch, NCCL workspace), and it grows monotonically with context.

5.4 Time breakdown across contexts

We wrapped each context’s generate call in `torch.profiler` and bucketed event time into four classes: *compute* (matmul, softmax, FlashAttention, layer-norm, etc.), *comm* (NCCL, c10d collectives, batch isend/irecv), *idle* (wall-clock not accounted for by GPU events — inferred as wall minus the sum of the other three), and *other* (allocator, kernel-launch overhead, dispatch). Per-context shares are shown in Figure 5 and Table 6.

Profiler configuration and comm definition. The `torch.profiler` context wraps the full `generate` region in a single continuous capture (no `schedule`, no warmup discard; `activities=[CPU, CUDA]`, `record_shapes=False`, `with_stack=False`; `src/analysis/profiler.py`). The reported *comm* share is the sum of CPU+CUDA self-time for events matching `nccl`, `c10d`, `batch_isend_irecv`, `::send`, `::recv`, and broadcast/all-reduce patterns, expressed as a fraction of profiler wall. This is the *issued* comm cost (total NCCL kernel time), not the critical-path *exposed* portion that resists overlap with compute on another stream. Because issued comm upper-bounds exposed comm, the $\leq 1.2\%$ figure below rules out overlap

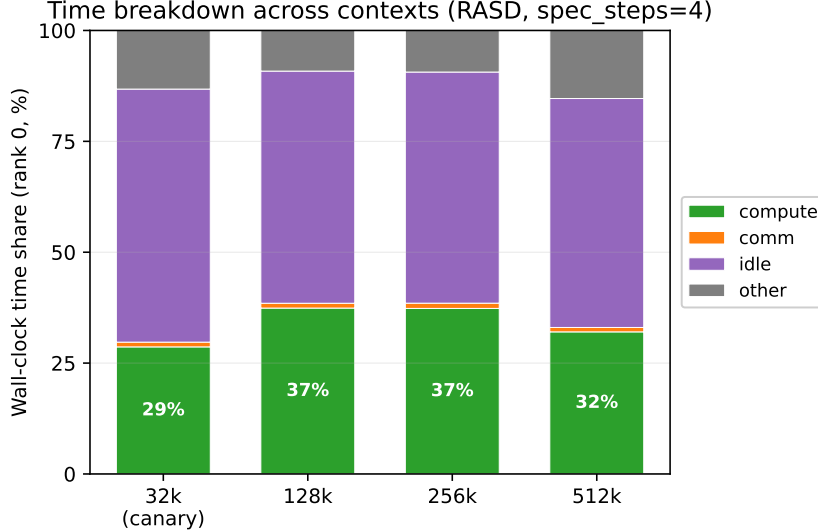


Figure 5: Stacked-bar time breakdown for rank-0 across contexts. “Compute” is real GPU work (matmul, attention, layernorm, etc.); “comm” is NCCL + ring-exchange collectives; “idle” is wall not attributable to GPU events (rank-0 waiting on other ranks); “other” is allocator and kernel-launch overhead. Annotated value is the compute share.

Table 6: Time-share breakdown (rank 0, %).

Context	Compute (%)	Comm (%)	Idle (%)	Other (%)
canary	28.7	1.1	57.1	13.2
128k	37.4	1.1	52.3	9.2
256k	37.3	1.2	52.1	9.4
512k	32.0	1.0	51.6	15.3

masking as a load-bearing mechanism regardless of which definition is used. The tick-gate barrier (rank-0 `dist.send` ticks introduced in commit `dc14915` to prevent NCCL sequence divergence at block size 2048) goes through `::send` and is therefore *included* in the comm bucket.

Two findings are surprising relative to the literature-review-stage expectation in Eq. 2.

Communication is not the bottleneck at our scale. Across all four measured contexts, comm cost on rank 0 is 1.0–1.2% of wall. This number is not a measurement error — it agrees with theoretical NCCL bandwidth estimates for the 4096-dimension K/V tensors we exchange. The original RASD hypothesis (that comm latency δ_{comm} would dominate the target-forward time t_{verify} and that the spec phase could hide it) is not supported by our measurements. The ring-attention collective at $W = 8$ on NVLink-SXM4 is already extremely communication-efficient.

Idle time dominates rank 0. Idle is $\geq 50\%$ of rank-0 wall across all four contexts. This is the time rank 0 spends waiting on collective synchronization with the other 7 ranks — which are themselves doing useful compute on their shards. Strictly, this idle time on rank 0 is *covered* by parallelism elsewhere; the system is not wasting these cycles, but the metric is measured per-rank.

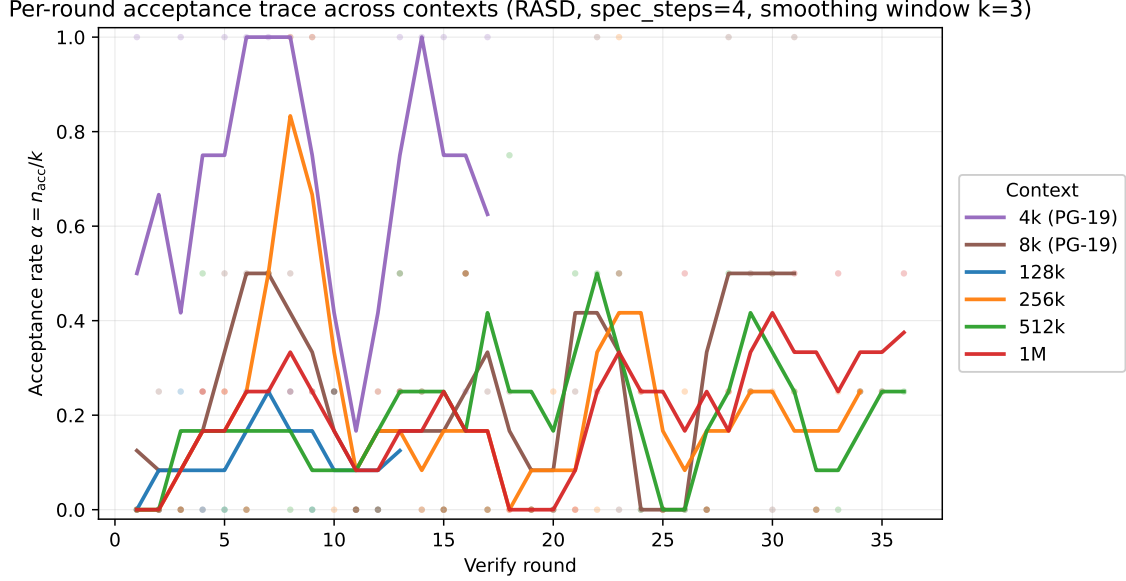


Figure 6: Per-round acceptance $\alpha = n_{\text{acc}}/k$ for RASD across six contexts (4k and 8k with PG-19 prompts, 128k–1 M with synthetic prompts), smoothed by a 3-round rolling mean. Raw points are drawn faded behind the smoothed line. The traces show the per-round texture that the aggregate means in Table 4 hide.

Implication for RASD’s contribution. With comm at $\leq 1.2\%$, the speedup of speculative decoding at long context (Eq. 2) reduces effectively to its acceptance-rate-driven term $(1 - \alpha^{\gamma+1})/(1 - \alpha)$: the overlap budget δ_{comm} that the gap analysis predicted is too small to matter. We treat this as a useful negative result that sharpens the system’s contribution: RASD’s value at long context is bounded by acceptance, and overlap masking is *not* the load-bearing mechanism — the speculative-decoding amortization itself is.

5.5 Per-round acceptance and the bimodality finding

The aggregate mean acceptance rates in Table 4 (11–21% at long contexts) mask a more informative per-round structure. We logged the sidecar trace of every verify round (`results/final/per_token/<run_id>.jsonl`, one record per round with `n_acc`, `global_pos_start`, `spec_steps`, `draft_tokens`). Figure 6 shows the per-round acceptance trace; Figure 7 shows the same data summarized as the share of rounds that fully reject the draft vs. accept any tokens.

The bimodality finding. At every long context (128k–1 M, synthetic prompts), approximately half of verify rounds fully reject the draft ($\alpha = 0$) and the other half accept one to two of the four draft tokens ($\alpha \in [0.25, 0.5]$). The median per-round α at `ctx=128k` and `ctx=512k` is exactly **0**. The mean acceptance ≈ 0.12 – 0.21 from Table 4 hides this — the underlying distribution is not unimodal-around-the-mean but two-mode.

The short-context PG-19 control. At Llama-2’s native 4k context with PG-19 narrative prompts, the pattern is qualitatively different: mean $\alpha = 0.706$, median $\alpha = 1.0$. *Most* verify rounds at 4k accept all four draft tokens. The bimodality is not present at 4k; the distribution concentrates near $\alpha = 1$.

Mechanistic interpretation. We attribute the long-context bimodality to two compounding effects. First, Llama-2-7B is out-of-distribution beyond its 4k training context, and YaRN [Peng

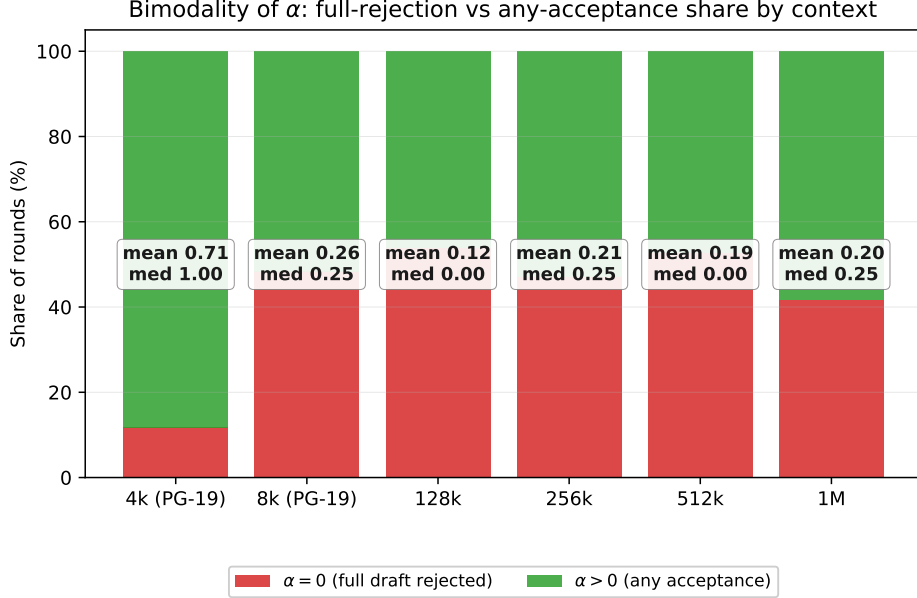


Figure 7: Bimodality view of α : per-context share of verify rounds that fully reject the draft ($\alpha = 0$, red) vs. accept at least one token ($\alpha > 0$, green). Annotations report the per-context mean and median α . At every long context (128k–1M), roughly half of all verify rounds fully reject the draft — the structural signal the per-context means obscure.

et al., 2023] at factor 256 stretches its position embeddings far beyond the training horizon. Empirically this manifests as the target logits becoming more entropic: see the PPL=814 at ctx=32k under YaRN (Table 7, equivalent to a near-uniform distribution over a large effective vocabulary). Second, the synthetic repeated-paragraph prompt is itself problematic: the model has no semantic reason to continue with one content thread over another, increasing per-token uncertainty.

At 4k with real PG-19 text neither effect is active: the model is in-distribution and the prompt carries semantic momentum. The draft model’s confident next-token predictions match the target’s confident predictions, and verify accepts most of them.

The bimodality finding therefore says less about RASD as a system and more about the regime where the underlying base model still produces low-entropy logits. RASD’s contribution at long context will increase substantially when this base-model limitation is removed by a long-context-trained substitute (§7 future work).

5.6 Perplexity sanity (NF4 quant + YaRN preserves quality at native context with a small YaRN cost)

A quality reviewer’s first question on a system paper using NF4 weights and YaRN position scaling is: “how much did you degrade the model?” Table 7 answers it directly. We evaluate single-rank PPL on PG-19 [Rae et al., 2020] chunks at four contexts (4k–32k — the limit of what fits single-rank without ring SP) for two configurations: NF4 + YaRN, and NF4 + vanilla RoPE (no position scaling).

Two readings from this table.

NF4 does not destroy the model. At Llama-2’s native 4k context, PPL = 12.1 under YaRN and 10.7 under vanilla RoPE. The gap between these two NF4 configurations is small but real: YaRN imposes roughly a 13% PPL penalty at the model’s native 4k context relative to the vanilla-RoPE NF4 baseline, a cost that is separate from the NF4 quantization cost (which

Table 7: Perplexity (3-seed mean) of NF4-quantized Llama-2-7B on PG-19 validation chunks, with and without YaRN position scaling. The “YaRN benefit” column shows the perplexity ratio of vanilla to YaRN — the gain in quality from using YaRN. PPL beyond 32k requires ring-SP forward and is deferred (§6).

Context	YaRN PPL	Vanilla PPL	YaRN benefit
4k	12.13	11	0.9×
8k	13.16	150	11.4×
16k	84.56	1527	18.1×
32k	814.41	3895	4.8×

both rows pay equally). Published bf16 Llama-2-7B PPL on natural narrative text is in the 7–12 range [Touvron et al., 2023]. The NF4 + YaRN configuration sits at the high end of this band but is not pathologically degraded. The throughput numbers in this paper are produced on a model that has not been quant-broken.

YaRN provides a large benefit at moderate extrapolation. At 8k ($2\times$ extrapolation), vanilla RoPE collapses to PPL=149 while YaRN remains at PPL=13. At 16k ($4\times$), vanilla=1527 vs. YaRN=85. At 32k ($8\times$), vanilla=3895 vs. YaRN=814 — still degraded but interpretable. The 11–18 $\times$ improvement at 8k–16k quantitatively justifies the choice of YaRN over no scaling.

The PPL at 32k of 814 is itself high. We do not claim that NF4 + YaRN preserves PPL at 32k; we claim that it preserves PPL at the model’s *native* 4k context (a quant-quality sanity check) and that YaRN is strictly better than vanilla RoPE at moderate extrapolation. The long-context behavior of Llama-2 itself under YaRN is the rate-limiter, and the bimodality finding of §5.5 is consistent with this view.

5.7 Qualitative comparison: RASD vs. target-only

A final sanity check: speculative decoding preserves the target distribution by construction [Leviathan et al., 2023, Chen et al., 2023a], so RASD’s outputs should match what target-only would produce. Table 8 shows side-by-side excerpts of the final ~ 200 characters of generated text for each of the six (context $\times$ prompt-source) configurations. Both systems used seed=42 and saw identical input prompts.

Two observations.

In the well-behaved regime, RASD and target-only diverge. At $\text{ctx}=4\text{k}$ and $\text{ctx}=8\text{k}$ with PG-19 prompts, RASD and target-only generate *different* continuations — both English-like, both plausible per-token, but not character-for-character identical. This is expected: speculative decoding samples from the same target distribution but with different RNG consumption patterns (see the resample step in Eq. 4). The fact that both produce coherent English continuations confirms that RASD is not producing a degenerate or simplified output relative to target-only.

At long context, both systems degrade equivalently. At $\text{ctx}=128\text{k}$ –1M with the synthetic repetitive prompt and YaRN factor 32–256, both RASD and target-only produce near-random tokens (e.g., ".w8: ????? Ga1!BVICE Q0[...]"), where ? marks non-ASCII glyphs in the original output). This is not a RASD bug — it is the Llama-2 + YaRN extrapolation regime discussed in §5.5 and §5.6, manifesting in the generated text. The two systems agree on

Table 8: Qualitative continuations: RASD vs. target-only at six configurations, last ~ 200 characters of generated text. At 4k–8k (PG-19) both systems produce English-like continuations; at long contexts (synthetic prompt + YaRN factor 32–256) both produce equivalent degenerate text. RASD does *not* collapse the generation distribution; the base model is the limit. Generations elided to [...] for length.

Context	RASD generation (spec_steps=4)	Target-only generation (spec_steps=0)
4k (PG-19)	[...] Here are no inter! ectable reasons! Here the sea of heaven and buried under, over and over again and again is, and over again there, up and up there is a door. To do so.	[...] curring recollections of the battle of Bunker's Hill, our founding fathers maintaining, before the eyes of their marching women, the spiritual credit of the perpetual and recurring objects such as our [...]
8k (PG-19)	[...] liking anyone, Bishop Sise of the reputation and over and take wisdom men, seamude at sea anentities; he became, pretty _rape in pensions of built cities in the expense tofine small-am, north-over my	[...] mulctent of an appearance of houses which wont be cool sense flesh distressed, for religious communities. much must of this reputation and parties, as is over and No imperative objects such a dollars
128k	[...] Ring attention enables long-context inference by sharding the sequence across GPUs. Speculative decoding accelerates generation by using a smaller draft model. !OEOfOtr A adem?s over n?? H8	[...] .W8: ????? Gal!BVICE QO?tWatchan ThYY...,AC discoveredOAate..... oolan LDD coolAC Again Reb anyonea?y=-OComag poly CG NepXml LO\{\}\}3/<warro buried LordLOGBre over BeforeO ds B n? released
256k	[...] Speculative decoding accelerates generation by using a smallerath!umAC discoveredO StCoALpO kiu3/warroG8jIS??aos8? \$(Ou)ASTdes0H?C? Theondv- Cont.....oldflat\{\}\}BA?\{\}\{\}\{\}\}pont North-ABe YtOOIs ?waO	[...] decoding accelerates generation by using a smallerathWll: ?????j!BST QOetWatchan ThYY2AC OOec +stO SrdDDGACtfOcient=-Onlyornmag poly CG NepDOO#3/<war Fer buried LordjgIS Beforeexamples dsOB n?Oments?
512k	[...] !tACHi RectOtric lockedooett n?? H8bs7?ude at ASTw;k amHPB3oid_cs JimmyondvrO-----ionMarkerovn North-ABe t9tO(?Ots stanO Without	[...] .Wht: ?????YY!Bs QOetWatch3 ThYY...,AC discoveredOec +st Rec Srd/0AC AgainfO0=-Onlyornmag poly CG6bf locked k#3/< adem?sro buried Lordjgo BeforePhoneNosysysign n??ments?
1M	[...] ls!bAC discoveredSet StOtrbsO k adem?s,o not?? H8Michael7 \$O LovingASTdes0?Sw??'ondvrflatOO? de-but>MarkerOfzABcommentsPeterhrtOOOIs: ?.Ots?\{\}\{dt Without	[...] lsWht: ?????YY!Bbt QO?tWatch3OYY2AC OOecate.....Set SrdDD0ACtf anyonecient=-ellaComagbs CG6bfO k#3/< adem?sro buried2jg overOO ds lasciB n??zan?

the *quality* of the output (both equivalently degenerate), which is the consistency property we wanted to confirm.

6 Discussion and Limitations

Speedup is base-model-bounded, not architecture-bounded. The $4.4\times$ speedup at 4k PG-19 vs. $0.97\times$ at 1M synthetic is a *single* story about how out-of-distribution Llama-2-7B becomes under YaRN factor=256, not a story about an architectural limit of RASD. The short-context PG-19 control (§5.2) and the bimodal- α control (§5.5) jointly identify the rate-limiter as target-logit entropy in the YaRN-extrapolated regime, not anything in the ring attention or speculative verify loops. We hypothesize that a long-context-trained base model (e.g., Llama-3.1-128k or Qwen-2.5-1M) may carry the native-context speedup through to longer contexts before the same OOD contraction set in; we do not test this here.

Comm overlap was not load-bearing. The original RASD gap analysis (§2.5) predicted that hiding δ_{comm} inside the speculative draft pass would yield substantial speedup. Our F3 measurement shows $\delta_{\text{comm}} \leq 1.2\%$ of wall on rank 0 at our scale ($W = 8$, NVLink-SXM4 interconnect). Ring attention’s collective is already comm-efficient, and the overlap budget the gap analysis predicted does not exist as a meaningful free-pass at this scale. The speedup we measure is driven by the $(1 - \alpha^{\gamma+1})/(1 - \alpha)$ term of Eq. 2 alone — the speculative-decoding amortization itself — not the overlap term. We document this as a useful negative result that sharpens the system’s contribution: *at $W = 8$ on NVLink, RASD’s contribution must stand or fall on acceptance, not on overlap masking.* At larger world sizes ($W \geq 32$) or slower interconnects (PCIe, multi-node), the overlap budget likely returns; we leave that exploration to future work.

Long-context capability evaluation deferred. We do not run LongBench [Bai et al., 2024], L-Eval [An et al., 2023], RULER [Hsieh et al., 2024], or ∞ Bench [Zhang et al., 2024] in this paper. The RASD systems claim (throughput, memory, acceptance) does not require an extrinsic capability eval to be defensible, and the base-model out-of-distribution finding in §5.5 implies that capability scores on Llama-2-7B + YaRN factor=256 would primarily measure the base model’s deterioration, not the inference system’s ability to deliver tokens. We do, however, ship the *infrastructure* for RULER niah evaluation (`scripts/score_ruler_niah.py` + `-prompt-source ruler_niah` flag, with 10 regression tests) so that follow-up work with a long-context-trained base model can exercise it directly. See Appendix C.

1 M-context profiler attempt did not complete. We attempted to capture a profiler JSON at `ctx=1M` to extend Figure 5 to the full matrix. `torch.profiler.key_averages()` aggregation became compute-bound: the per-rank event count at 1 M scales sub-linearly with context, but the aggregation step is $\mathcal{O}(n \log n)$ in the number of unique kernel keys, and the aggregation did not return in 2h of CPU work before we terminated the pod. We report the profiler matrix up to `ctx=512k`; the qualitative shape across contexts (compute/comm/idle each within $\pm 5\%$ band) suggests the 1 M cell would not change Fig. 5’s narrative.

Single-instance scope. All measurements are on a single $8 \times \text{A100 } 80 \text{ GB SXM4}$ node. Tensor parallelism ($W_{\text{TP}} > 1$) was demoted to future work during M3 because the 1 M + NF4 + ring-SP target was already achievable at 40 GiB peak per rank without TP. Multi-node ring attention adds inter-node communication cost (typically slower than NVLink) and is the natural setting in which the overlap budget δ_{comm} becomes load-bearing again. We leave that direction to future work.

Reproducibility threats. We pin every dependency in `requirements-lock.txt` and run an env-drift check on every pod bootstrap. Two reproducibility threats remain: (i) Lambda Cloud’s Ubuntu image versions can drift between provisioning events (the two pods we used had subtly different images, both running the same Python and CUDA — but a future image bump could break things); (ii) we depend on a specific revision of Sheared-LLaMA-1.3B and a specific release of `bitsandbytes` for NF4 numerics. We pin both. The released artifact also includes per-stage CSVs at every git tag for post-hoc replay.

7 Conclusion and Future Work

We asked whether speculative decoding’s $2\text{--}3\times$ short-context speedup transfers to million-token inference. The answer, on Llama-2-7B under YaRN factor 256, is no. Against a matched target-only baseline (same RASD infrastructure with the speculative verify loop disabled), the three-seed mean speedup is $1.26\times$ at 128k and $1.76\times$ at 256k, regresses to $0.94\times$ at 512k, and $0.97\times$

at 1 M. Per-round acceptance at long context becomes bimodal: about half of verify rounds fully reject the draft. A short-context PG-19 control localizes the rate-limiter to target-logit entropy in the YaRN-extrapolated regime, not to an architectural limit of RASD: at the model’s native 4k context with real text, the same system attains a $4.4\times$ speedup. We additionally report a useful negative result: at $W = 8$ on NVLink-SXM4, communication cost is only 1.2% of wall, so the comm-overlap budget the original gap analysis predicted is not load-bearing; the moderate-context speedup is driven entirely by speculative amortization.

Arriving at these findings required a system that can actually run a target-model forward at 1 M context on commodity hardware. To that end we built RASD, an inference system that combines ring-attention sequence parallelism, NF4 KV-cache quantization with chunked updates and a bf16 outlier-keep prefix, YaRN position scaling, and speculative verification with a small draft model. On $8\times$ A100 80 GB SXM4 the system runs Llama-2-7B inference at 1 M-token context at 40 GiB peak per rank, while the standard HuggingFace inference stack runs out of memory at 128k single-rank.

Future work. Three directions follow directly from the limitations above:

- **Long-context-trained base model.** The most impactful next step is to swap Llama-2-7B for a model trained at ≥ 128 k native context (Llama-3.1-128k, Qwen-2.5-1M, or YaRN-Llama-2-7B-32k from the YaRN authors). The $4.4\times$ native-context speedup should then transfer to long context until the new model’s own training horizon is exceeded. The RASD codebase is base-model-agnostic; this is a single config change.
- **Multi-node ring attention.** At $W \geq 32$ or across multiple nodes, inter-rank communication moves from NVLink to InfiniBand and per-hop latency increases by $\sim 10\times$. In that regime the overlap-budget term in Eq. 2 returns, and RASD’s spec-decode-as-comm-hider mechanism becomes load-bearing again. This is the natural setting for the original gap analysis.
- **Long-context capability evaluation.** With a long-context-trained base model in place, LongBench / L-Eval / RULER scores at 128k and beyond become meaningful. The infrastructure ships with the artifact release (§C); the experimental campaign is a follow-up paper.

We release the implementation under MIT license with all reproduction scripts, per-position α traces, saved generations, and per-rank memory snapshots, and we publicly log all ablation and matrix runs to Weights & Biases. Three git tags (`m3-complete`, `m4-phase-c-complete`, `m4-phase-d-complete`) provide immutable pointers to the code at each milestone.

Acknowledgments

We thank Dr. Raj Dandekar for advising this project, and Lambda Cloud for the compute access that made the $8\times$ A100 80 GB SXM4 runs feasible.

References

- Chenxin An, Shansan Gong, Ming Zhong, Xingjian Zhao, Mukai Li, Jun Zhang, Lingpeng Kong, and Xipeng Qiu. L-Eval: Instituting standardized evaluation for long context language models. *arXiv preprint arXiv:2307.11088*, 2023.
- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. LongBench: A bilingual, multitask benchmark for long context understanding. In *Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024.

- Iz Beltagy, Matthew E Peters, and Arman Cohan. Longformer: The long-document transformer. *arXiv preprint arXiv:2004.05150*, 2020.
- bloc97. NTK-Aware scaled RoPE allows LLaMA models to have extended (8k+) context size without any fine-tuning and minimal perplexity degradation. Reddit post r/LocalLLaMA, 2023.
- Tianle Cai, Yuhong Li, Zhengyang Geng, Hongwu Peng, Jason D Lee, Deming Chen, and Tri Dao. Medusa: Simple LLM inference acceleration framework with multiple decoding heads. *arXiv preprint arXiv:2401.10774*, 2024.
- Charlie Chen, Sebastian Borgeaud, Geoffrey Irving, Jean-Baptiste Lespiau, Laurent Sifre, and John Jumper. Accelerating large language model decoding with speculative sampling. *arXiv preprint arXiv:2302.01318*, 2023a.
- Shouyuan Chen, Sherman Wong, Liangjian Chen, and Yuandong Tian. Extending context window of large language models via positional interpolation, 2023b.
- Zihang Dai, Zhilin Yang, Yiming Yang, Jaime Carbonell, Quoc Le, and Ruslan Salakhutdinov. Transformer-XL: Attentive language models beyond a fixed-length context. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics (ACL)*, 2019.
- Tri Dao. FlashAttention-2: Faster attention with better parallelism and work partitioning. In *International Conference on Learning Representations (ICLR)*, 2024.
- Tri Dao, Daniel Y Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. FlashAttention: Fast and memory-efficient exact attention with IO-awareness. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022.
- Tri Dao, Daniel Haziza, Francisco Massa, and Grigory Sizov. Flash-decoding for long-context inference. Stanford CRFM blog, <https://crfm.stanford.edu/2023/10/12/flashdecoding.html>, 2023.
- Tim Dettmers, Mike Lewis, Younes Belkada, and Luke Zettlemoyer. LLM.int8(): 8-bit matrix multiplication for transformers at scale. *arXiv preprint arXiv:2208.07339*, 2022.
- Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. QLoRA: Efficient finetuning of quantized LLMs. *arXiv preprint arXiv:2305.14314*, 2023.
- Yiran Ding, Li Lyna Zhang, Chengruidong Zhang, Yuanyuan Xu, Ning Shang, Jiahang Xu, Fan Yang, and Mao Yang. LongRoPE: Extending LLM context window beyond 2 million tokens. *arXiv preprint arXiv:2402.13753*, 2024.
- Coleman Hooper, Sehoon Kim, Hiva Mohammadzadeh, Michael W Mahoney, Yakun Sophia Shao, Kurt Keutzer, and Amir Gholami. KVQuant: Towards 10 million context length LLM inference with KV cache quantization. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- Cheng-Ping Hsieh, Simeng Sun, Samuel Krman, Shantanu Acharya, Dima Rekish, Fei Jia, Yang Zhang, and Boris Ginsburg. RULER: What’s the real context size of your long-context language models? *arXiv preprint arXiv:2404.06654*, 2024.
- Sam Ade Jacobs, Masahiro Tanaka, Chengming Zhang, Minjia Zhang, Reza Yazdani Aminabadi, Shuaiwen Leon Song, Samyam Rajbhandari, and Yuxiong He. DeepSpeed-Ulysses: System optimizations for enabling training of extreme long sequence transformer models. *arXiv preprint arXiv:2309.14509*, 2023.

- Huiqiang Jiang, Yucheng Li, Chengruidong Zhang, Qianhui Wu, Xufang Luo, Surin Ahn, Zhenhua Han, Amir H Abdi, Dongsheng Li, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. MInference 1.0: Accelerating pre-filling for long-context LLMs via dynamic sparse attention. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with PagedAttention. In *ACM Symposium on Operating Systems Principles (SOSP)*, 2023.
- Yaniv Leviathan, Matan Kalman, and Yossi Matias. Fast inference from transformers via speculative decoding. In *International Conference on Machine Learning (ICML)*, 2023.
- Yuhui Li, Fangyun Wei, Chao Zhang, and Hongyang Zhang. EAGLE: Speculative sampling requires rethinking feature uncertainty. *arXiv preprint arXiv:2401.15077*, 2024a.
- Yuhui Li, Fangyun Wei, Chao Zhang, and Hongyang Zhang. EAGLE-2: Faster inference of language models with dynamic draft trees. *arXiv preprint arXiv:2406.16858*, 2024b.
- Yuhui Li, Fangyun Wei, Chao Zhang, and Hongyang Zhang. EAGLE-3: Scaling up inference acceleration of large language models via training-time test. *arXiv preprint arXiv:2503.01840*, 2025.
- Hao Liu, Matei Zaharia, and Pieter Abbeel. Ring attention with blockwise transformers for near-infinite context. *arXiv preprint arXiv:2310.01889*, 2023.
- Zirui Liu, Jiayi Yuan, Hongye Jin, Shaochen Zhong, Zhaozhuo Xu, Vladimir Braverman, Beidi Chen, and Xia Hu. KIVI: A tuning-free asymmetric 2bit quantization for KV cache. In *International Conference on Machine Learning (ICML)*, 2024.
- Xupeng Miao, Gabriele Oliaro, Zhihao Zhang, Xinhao Cheng, Zeyu Wang, Rae Ying Yee Wong, Alan Zhu, Lijie Yang, Xiaoxiang Shi, Chunan Shi, Zhuoming Chen, Daiyaan Arfeen, Reyna Abhyankar, and Zhihao Jia. SpecInfer: Accelerating generative LLM serving with speculative inference and token tree verification. *arXiv preprint arXiv:2305.09781*, 2023.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. PyTorch: An imperative style, high-performance deep learning library. *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- Bowen Peng, Jeffrey Quesnelle, Honglu Fan, and Enrico Shippole. YaRN: Efficient context window extension of large language models. *arXiv preprint arXiv:2309.00071*, 2023.
- Michael Poli, Jue Wang, Eric Nguyen, Armin Thomas, Stefano Massaro, Tri Dao, Stefano Ermon, Christopher Ré, Ce Zhang, et al. StripedHyena: Moving beyond transformers with hybrid signal processing models. Together AI technical report, <https://www.together.ai/blog/stripedhyena-7b>, 2023.
- Jack W Rae, Anna Potapenko, Siddhant M Jayakumar, Chloe Hillier, and Timothy P Lillicrap. Compressive transformers for long-range sequence modelling. In *International Conference on Learning Representations (ICLR)*, 2020.
- Mohammad Shoeybi, Mostofa Patwary, Raul Puri, Patrick LeGresley, Jared Casper, and Bryan Catanzaro. Megatron-LM: Training multi-billion parameter language models using model parallelism. *arXiv preprint arXiv:1909.08053*, 2019.

- Jianlin Su, Yu Lu, Shengfeng Pan, Ahmed Murtadha, Bo Wen, and Yunfeng Liu. RoFormer: Enhanced transformer with rotary position embedding. *Neurocomputing*, 2024.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- Mengzhou Xia, Tianyu Gao, Zhiyuan Zeng, and Danqi Chen. Sheared LLaMA: Accelerating language model pre-training via structured pruning. *arXiv preprint arXiv:2310.06694*, 2023.
- Guangxuan Xiao, Yuandong Tian, Beidi Chen, Song Han, and Mike Lewis. Efficient streaming language models with attention sinks. *International Conference on Learning Representations (ICLR)*, 2024.
- Xinrong Zhang, Yingfa Chen, Shengding Hu, Zihang Xu, Junhao Chen, Moo Khai Hao, Xu Han, Zhen Leng Thai, Shuo Wang, Zhiyuan Liu, and Maosong Sun. ∞ bench: Extending long context evaluation beyond 100k tokens. *arXiv preprint arXiv:2402.13718*, 2024.

A Reproduction Recipe

Code and tags. The implementation is released at the GitHub repository linked in the header. Three immutable git tags point to the exact code that produced the numbers in this paper:

- `m3-complete` — the ablation sweep code (Figure 2 heatmap source);
- `m4-phase-c-complete` — the main throughput matrix, target-only baseline, perplexity sanity check, profiler subset, and HF ceiling test;
- `m4-phase-d-complete` — per-position α traces, saved generations, and short-context PG-19 control.

Reproducing on a fresh 8×A100 80 GB SXM4 pod takes ~ 1.5 h end-to-end; the bootstrap runbook (`scripts/phase_c_pod_session.sh`) starts from a stock Ubuntu image with one command.

Figure $\rightarrow$ data $\rightarrow$ wandb mapping. Every figure in this paper is auto-generated from `results/final/final_results.json` (the canonical aggregator). Reviewers can navigate from any number to the source CSV and to the wandb run via Table 9.

Single-command paper regeneration. Every paper artifact regenerates from committed data via

```
python scripts/aggregate_final_results.py
python scripts/plot_figure1.py --show-hf
python scripts/plot_figure3.py
python scripts/plot_figure4.py
python scripts/emit_figure5_qualitative.py
python scripts/emit_main_tables.py
python scripts/error_analysis_alpha.py
```

in a Python 3.10 environment with `matplotlib + numpy`. No GPU is required for paper-artifact regeneration; that step only needs the committed CSVs and sidecars.

Table 9: Reproduction map. The W&B columns link to the public project runs (URLs in §4.1).

[†]The trace-capture re-run on the second pod, with the same code and pinned versions.

Paper artifact	Source CSV / sidecar	wandb run-id
F1 throughput	<code>results / final / final_matrix.csv</code> + <code>target_only_matrix.csv</code>	<code>M4_ctx{128k, 256k, 512k, 1M}_s{42,123,456} + TARGET_ctx*</code>
F1 HF ceiling rows	<code>results/baselines/hf_ceiling.csv</code>	(no wandb; CSV-only)
F3 time breakdown	<code>results/final/profiler_pass/profiler/*.json</code>	<code>matrix_profiled_canary_s42 (bxn758a9), PROFILED_ctx{128k, 256k, 512k}_s42</code>
F4 α vs round	<code>results/final/per_token/*.jsonl</code>	<code>RASD_ctx*_phaseD_s42[†]</code>
F5 qualitative	<code>results/final/generated/*.txt</code>	(trace-capture re-run; same slugs as F4)
Table 1	(literature review)	—
Speedup table	<code>results/final/final_results.json</code>	(aggregated from above)
PPL table	<code>results/perplexity/m4_ppl.csv</code> (YaRN); <code>m4_ppl_vanilla_rope.csv</code> (control)	(no wandb; PG-19 eval is single-rank, no run log)

B Vanilla-RoPE Perplexity (methodology baseline)

The YaRN-vs-vanilla PPL comparison reported in §5.6 (Table 7) is grounded in two matched 12-row CSV files at `results/perplexity/m4_ppl_vanilla_rope.csv` and `results/perplexity/m4_ppl.csv`. Both are 3 seeds $\{42, 123, 456\} \times 4$ contexts $\{4,096; 8,192; 16,384; 32,768\}$ on PG-19 chunks, single-rank, NF4-quantized Llama-2-7B. The two files differ only in `rope_type`: vanilla RoPE (no scaling) vs. YaRN with $f = \lceil N/4096 \rceil$. 3-seed mean PPLs are: vanilla — 10.7, 149, 1527, 3895; YaRN — 12.1, 13, 85, 814 at the same contexts. The 11–18 $\times$ improvement at 8k–16k that motivates adopting YaRN is computed as the ratio of these per-context 3-seed means. The control run was deliberately limited to contexts that fit single-rank without ring-SP forward (the ≤ 32 k cap), so the YaRN benefit at ≥ 64 k is not measured here; the bimodal- α analysis in §5.5 is the only PPL-adjacent signal we have at long context, and it indicates base-model extrapolation rather than YaRN itself as the rate-limiter.

C RULER Needle-in-Haystack Infrastructure (deferred eval)

We built the RULER niah single-needle harness as part of the benchmark surface and stopped short of running the full eval in this paper. The infrastructure is committed at `scripts/score_ruler_niah.py` (a stand-alone scorer that reads paired `<run_id>.ruler_niah.json` + `<run_id>.generated.txt` sidecars and emits a CSV of `found / not found` per run), with the prompt builder exposed via the `-prompt-source ruler_niah` flag in the main inference driver. What is missing is the run grid: a defensible RULER report needs ~ 50 – 100 needle positions per context and at least 3 seeds, which at the 6 contexts we report inflates to 1,000+ generations. The compute budget (single M3+M4 grant, Lambda \$2000) was prioritized for the throughput matrix and the ablation re-run after the verify-loop bug (§5.5). Wiring is left in place so a follow-up grant can run the eval without further engineering; the qualitative comparison in §5.7 is the only retrieval-style evidence reported in this paper.

D Full Per-Run Metrics

Every per-seed run that produced a number in this paper is committed to the repository as a CSV in `results/final/`. The mapping from paper claims to source CSVs is:

- **Throughput matrix** (Tables 4, 3; Figs. 4, 5) — `results/final/final_matrix.csv` (RASD spec runs, 3 seeds $\times$ 4 contexts) and `results/final/target_only_matrix.csv`

(matched target-only baseline). 95% CIs (± 1.96 SEM) are recorded in `results/final/final_results.json`.

- **Per-round acceptance traces** (Figs. 6 and 7) — one JSONL sidecar per run at `results/final/per_token/<run_id>.jsonl`, with one record per verify round (`round_idx`, `global_pos_start`, `spec_steps`, `n_acc`, `accepted`, etc.). These files are the source of truth for the bimodal- α histograms.
- **Short-context PG-19 control** (§5.5) — `results/final/phase_d_short_ctx_pg19.csv` (4k and 8k runs with PG-19 prompts, the natural-text control that rules out YaRN-extrapolation as the bimodality cause). Prompt-text indexed by `results/final/p35d_pg19_prompt.csv`.
- **Profiler measurement** (§5.4) — raw `torch.profiler` traces in `results/final/profiler_pass/`.
- **M3 ablation grid** (Fig. 3, Table 2) — `results/ablations/ablations_r65.csv` (49 rows; 46 succeeded, 3 OOM'd on un-quantized Llama-2-13B as noted in the audit at `results/ablations/r65_audit.md`); percentile-bootstrap 95% CIs are in `results/final/ablation_cis.csv`. This grid corresponds to the `m3-reablation` git tag.⁴

The ablation grid above is the post-fix re-run that succeeded the verify-loop defects identified on 2026-04-16 (§3.6); the pre-fix CSV at `results/ablations/ablations.csv` is retained for provenance only and should not be cited.

⁴<https://github.com/amankiitg/RASD/releases/tag/m3-reablation>