

HTML – Hyper Text Markup Language

HTML

Frames, Images and Forms

CSS


- What is HTML?
- Where does it fit in?
- HTML tags and attributes
- Text formatting tags
- Linking pages
- Working with lists and tables.

What is HTML?

- HTML stands for Hyper Text Markup Language .
- It is used to design and develop Web Pages.
- Tim Berners-Lee invented the World Wide Web and HTML
- HTML is
 - Simple
 - Browser/Platform Independent
 - Not Case Sensitive
 - Different from other Programming Languages
 - A medium for User Interface

HTML tags and attributes

- The HTML instructions are called tags, and look like
 - `<TAG> .... Text here..... </TAG>`
- Container tags : Tags that have starting as well as ending part.
 - e.g.: `<TITLE>Title of the Web Page </TITLE>`
- Empty tags : Tags that do not have the closing part.
 - e.g. `<BR>` , `<HR>`
- (HTML instructions + text to which the instructions apply)= HTML elements
- An attribute is an additional feature you can use to configure the element
- Attributes are optional.

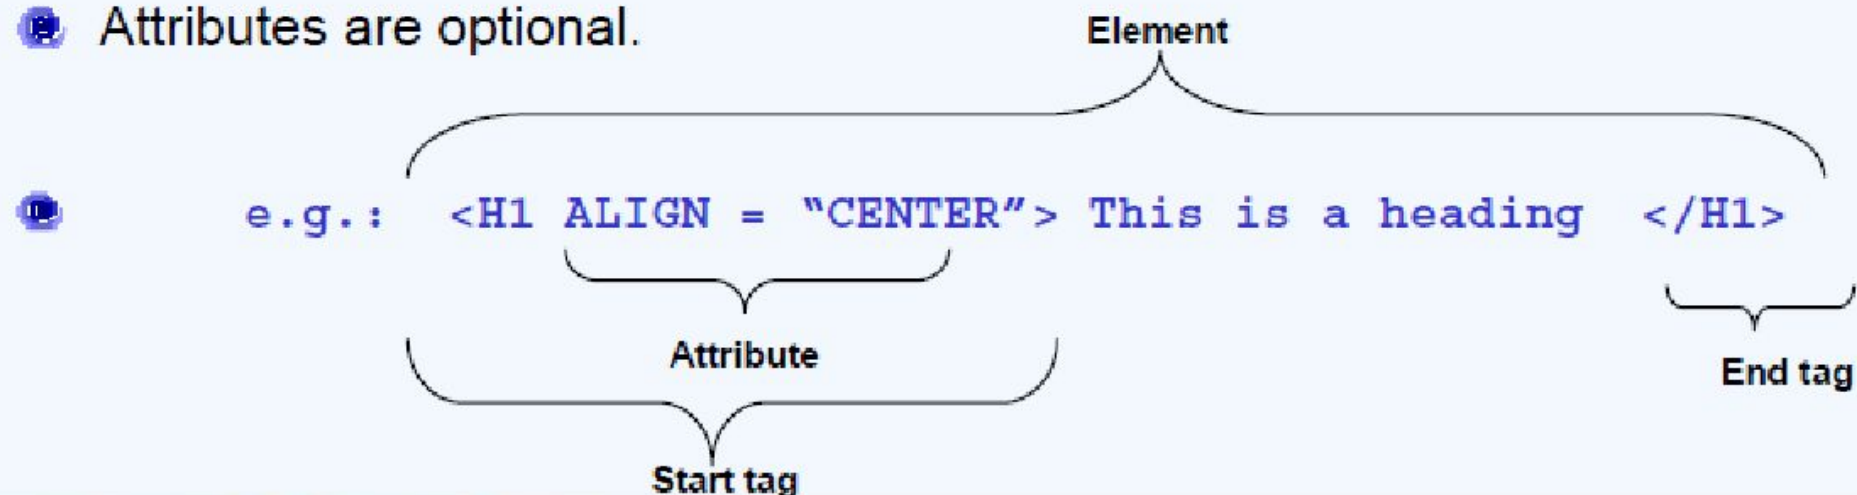

Structure of HTML Document

```
<HTML>
```

```
  <HEAD> <!-- Head Section -->
```

```
    <TITLE>Title of the Web Page </TITLE>
```

```
  </HEAD>
```

```
<BODY> <!-- Body Section -->
```

```
  <!-- Contents on Web Page -->
```

```
  <H1> Contents </H1>
```

```
</BODY>
```

```
</HTML>
```



first.html

- An HTML file can be created by using a simple text editor viz notepad, textpad, editplus
- HTML file must have an extension htm or html.


```
<!DOCTYPE html>
```

```
<html>
```

```
  <head>
```

```
    <title>My WebPage </title>
```


```
  </head>
```

```
  <body>
```

```
    <h1> Welcome to my first webpage </h1>
```

```
  </body>
```

```
</html>
```

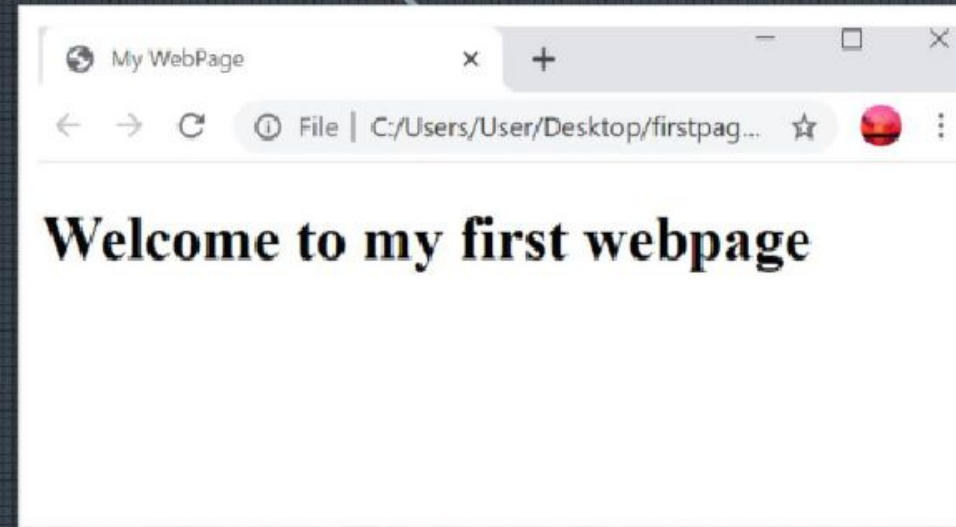

- Write the above html code using editor and save the file as **firstpage.html**
- Open the file firstpage.html using any **browser** to see the result

HTML Document - Head

- ④ Enclosed in **<HEAD> </HEAD>** tag
- ④ Tags that can go in the document head
 - **<TITLE>** Indicates the title of the document that is used as the window caption
 - **<BASE>** specifies the absolute URL address
 - **<LINK>** specifies the relationship between the current document and other documents.
 - **<META>** element can be used to specify name/value pairs describing various properties of the document
 - **<SCRIPT>** specifies the client side script name.
 - **<STYLE>** To Include CSS (Cascading Style Sheet)


HTML Document – Body

🔗 Enclosed in `<BODY>` `</BODY>` tag.


<BODY > tag attributes

- BACKGROUND=x.jpg - Specifies an image to be tiled as background.
- BGCOLOR=color - Specifies the background color
- BGPROPERTIES=FIXED - Fixes the background image so that it doesn't scroll.
- LEFTMARGIN=n - Specifies the left margin for the entire page
- TEXT=color - Specifies the color of text in the page
- TOPMARGIN=n - Specifies the top margin for the entire page.
- LINK - Specifies the link color.
- ALINK - Specifies the active link color.
- VLINK - Specifies the active link color.

Main Colours

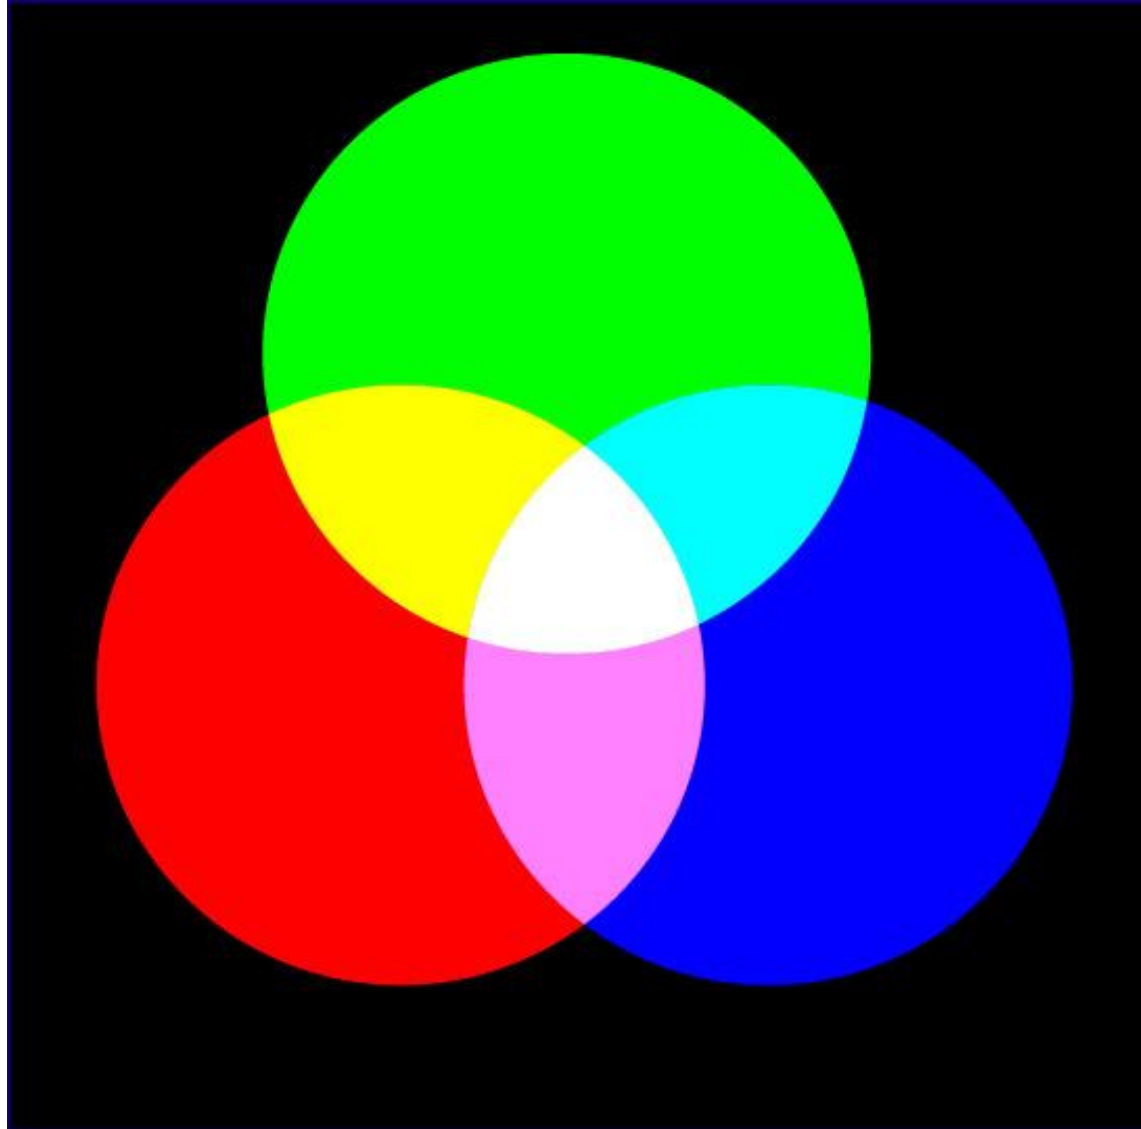

RGB Colour Model

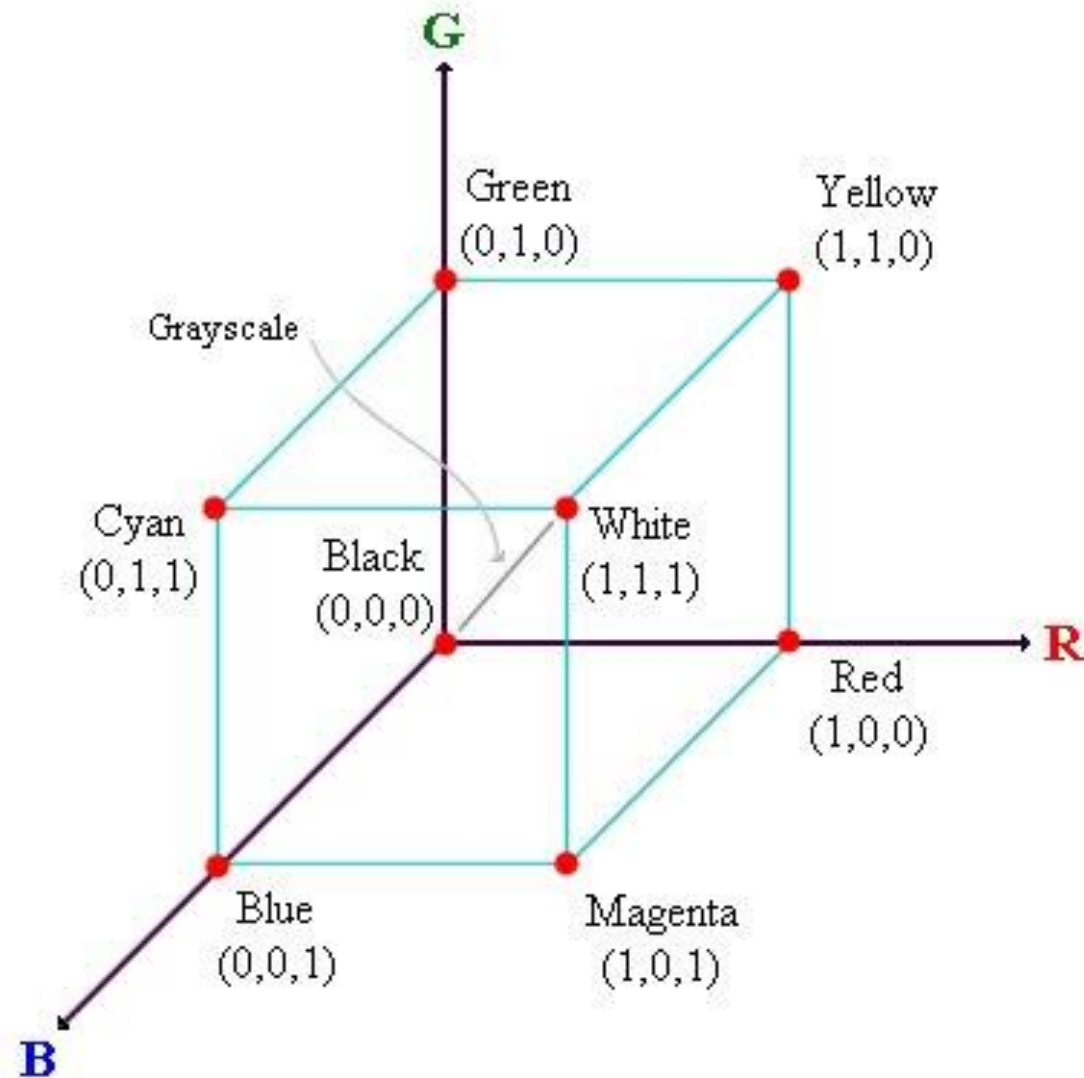

16 Basic Colors

Color Name	RGB Triplet	Hexadecimal	Color Name	RGB Triplet	Hexadecimal
Aqua	(0,255,255)	00FFFF	Navy	(0,0,128)	000080
Black	(0,0,0)	000000	Olive	(128,128,0)	808000
Blue	(0,0,255)	0000FF	Purple	(128,0,128)	800080
Fuchsia	(255,0,255)	FF00FF	Red	(255,0,0)	FF0000
Gray	(128,128,128)	808080	Silver	(192,192,192)	C0C0C0
Green	(0,128,0)	008000	Teal	(0,128,128)	008080
Lime	(0,255,0)	00FF00	White	(255,255,255)	FFFFFF
Maroon	(128,0,0)	800000	Yellow	(255,255,0)	FFFF00

Color Codes

1.	WHITE	1.	#FFFFFF
2.	BLACK	2.	#000000
3.	RED	3.	#FF0000
4.	GREEN	4.	#00FF00
5.	BLUE	5.	#0000FF
6.	MAGENTA	6.	#FF00FF
7.	CYAN	7.	#00FFFF
8.	YELLOW	8.	#FFFF00
9.	AQUAMARINE	9.	#70DB93
0.	BAKER'S CHOCOLATE	10.	#5C3317
1.	VIOLET	11.	#9F5F9F
2.	BRASS	12.	#B5A642
3.	COPPER	13.	#B87333
4.	PINK	14.	#FF6EC7
5.	ORANGE	15.	#FF7F00

Headings, Paragraphs, Breaks & Horizontal Rules

Headings, <Hx> </Hx>

- Inside the **BODY** element, heading elements **H1** through **H6** are generally used for major divisions of the document

<HTML>

<HEAD>

<TITLE> Example Page</TITLE>

</HEAD>

<BODY>

<H1> Heading 1 </H1>

<H2> Heading 2 </H2>

<H3> Heading 3 </H3>

<H4> Heading 4 </H4>

<H5> Heading 5 </H5>

<H6> Heading 6 </H6>

</BODY>

</HTML>

Heading 1

Heading 2

Heading 3

Heading 4

Heading 5

Heading 6

Paragraphs, `<P>` `</P>`

Paragraphs allow you to add text to a document in such a way that it will automatically adjust the end of line to suite the window size of the browser in which it is being displayed. Each line of text will stretch the entire length of the window.

Paragraphs, <P> </P>

```
<HTML><HEAD>
<TITLE> Example Page</TITLE>
</HEAD>
<BODY></H1> Heading 1 </H1>
<P> Paragraph 1, ....</P>
<H2> Heading 2 </H2>
<P> Paragraph 2, ....</P>
<H3> Heading 3 </H3>
<P> Paragraph 3, ....</P>
<H4> Heading 4 </H4>
<P> Paragraph 4, ....</P>
<H5> Heading 5 </H5>
<P> Paragraph 5, ....</P>
<H6> Heading 6</H6>
<P> Paragraph 6, ....</P>
</BODY></HTML>
```

Heading 1

Paragraph 1,....

Heading 2

Paragraph 2,....

Heading 3

Paragraph 3,....

Heading 4

Paragraph 4,....

Heading 5

Paragraph 5,....

Heading 6

Paragraph 6,....

Paragraphs allow you to add text to a document in such a way that it will automatically adjust the end of line to suite the window size of the browser in which it is being displayed. Each line of text will stretch the entire length of the window

Break,

Line breaks allow you to decide where the text will break on a line or continue to the end of the window.

A
 is an empty Element, meaning that it may contain attributes but it does not contain content.

The
 element does not have a closing tag.

Break,

<HTML>

<HEAD>

<TITLE> Example Page</TITLE>

</HEAD>

<BODY>

<H1> Heading 1 </H1>

<P>Paragraph 1,

Line 2
 Line 3
....

</P>

</BODY>

</HTML>

Heading 1

Paragraph 1,....

Line 2

Line 3

....

Horizontal Rule, <HR>

The <HR> element causes the browser to display a horizontal line (rule) in your document.

<HR> does not use a closing tag, </HR>.

Horizontal Rule, <HR>

Attribute	Description	Default Value
SIZE	Determines the thickness of the horizontal rule. The value is given as a pixel value.	2 pixels
WIDTH	Width of the rule in pixels or percentage of screen width	100%
NOSHADE	Draw the rule with a flat look instead of a 3D look	Not set (3D look)
ALIGN	Aligns the line (Left, Center, Right)	Center
COLOR	Sets a color for the rule (IE 3.0 or later)	Not set

Horizontal Rule, <HR>

```
<HTML>
<HEAD>
<TITLE> Example Page</TITLE>
</HEAD>
<BODY>
<H1> Heading 1 </H1>
<P>Paragraph 1, <BR>
Line 2 <BR>
<HR>Line 3 <BR>
</P>
</BODY>
</HTML>
```

Heading 1

Paragraph 1,
Line 2



—
Line 3

Character Formatting

Objectives

Upon completing this section, you should be able to

- Change the color and size of your text.

- Use Common Character Formatting Elements.

- Align your text.

- Add special characters.

- Use other character formatting elements.

Text Formatting Tags

Tag	Description
• <code>....</code>	- Bold
• <code><I>.....</I></code>	- Italic
• <code><U>....</U></code>	- Underline
• <code><STRIKE>...</STRIKE></code>	- Strikethrough
• <code><TT>....</TT></code>	- Typewriter (monospaced)
• <code><CENTER></CENTER></code>	- Centers the text on the screen.
• <code><SUB>....</SUB></code>	- Subscript
• <code><SUP>....</SUP></code>	- Superscript
• <code><BIG>....</BIG></code>	- Bigger font (one font size bigger)
• <code><SMALL>....</SMALL></code>	- Small font (one font size smaller)

Formatting The Web Page

 tag describes the display attributes of the text inside

- tag
 - Allows you to specify the font face and font size.
 - Some common attributes are
 - FACE specifies the font style.
 - SIZE specifies the font size. Value can range from 1 to 7. The default is 3.
SIZE can be set as a relative value using + or – .
 - COLOR- The color of a font can be specified using a hexadecimal number value six characters long.
 - E.g.: `
The Written Word`

Bold, Italic and other Character Formatting Elements

<P> One Size Larger
 - Normal –

 One Size Smaller

 Bold - <I> italics</I> - <U>
Underlined </U> -

 Colored

 Emphasized -
Strong - <TT> Tele Type </TT>

One Size Larger - Normal – One Size
Smaller

Bold - *italics* - Underlined - Colored
Emphasized - **Strong** - Tele Type

Special Characters & Symbols

Special Character	Entity Name	Special Character	Entity Name
Ampersand	&amp; &	Greater-than sign	&gt; >
Asterisk	&lowast; **	Less-than sign	&lt; <
Cent sign	&cent; ¢	Non-breaking space	&nbsp; ;
Copyright	&copy; ©	Quotation mark	&quot; "
Fraction one qtr	&frac14; 1/4	Registration mark	&reg; ®
Fraction one half	&frac12; 1/2	Trademark sign	&trade; TM

Additional Character Formatting Elements

`<STRIKE>` strike-through text`</STRIKE>`

DEL is used for **STRIKE** at the latest browsers

`<BIG>` places text in a big font`</BIG>`

`<SMALL>` places text in a small font`</SMALL>`

`<SUB>` places text in subscript position `</SUB>`

`<SUP>` places text in superscript style position `</SUP>`

Example

<P><STRIKE> strike-through text </STRIKE></BR>

<BIG>places text in a big font </BIG>

<SMALL> places text in a small font</SMALL>

_{places text in subscript position}

Normal

^{places text in superscript style position}

</P>

Lists

Objectives

Create an unordered list.

Create an ordered list.

Create a defined list.

Nest Lists.

Unordered Lists

Unordered Lists

- Unordered lists, are enclosed between the `<UL >` and `</UL >` tag.
- Each item starts with the `<LI>` tag .
- The attribute that can be specified with `<UL>` tag is
TYPE= DISC will give a solid round black
TYPE= SQUARE will give a solid square black bullet
TYPE= CIRCLE will give a circle black bullet

UnOrdered Lists - Bullets appear

- `<UL>` `</UL>` tag
- `<LI>` tag
- TYPE attributes specifies the type of bullet
- TYPE = "disc" | "circle" | "square"

```
<UL TYPE = "disc">  
  <LI> Item 1  
  <LI> Item 2  
  <LI> Item 3  
</UL>
```

O/P :

- Item 1
- Item 2
- Item 3

Ordered Lists

An Ordered list starts with a tag and ends with a tag.

Each list item starts with the tag

The attribute that can be set with are:

TYPE - Controls the numbering scheme to be used

TYPE= "1" will give counting numbers (1, 2, 3....)

TYPE= "A" will give uppercase letters (A, B, C....)

TYPE= "a" will give lowercase letters (a, b, c....)

TYPE= "I" will give uppercase Roman numerals (I, II, III.....)

TYPE= "i" will give lowercase Roman numerals (i, ii, iii,.....)

START - Alters the numbering sequence. Can be set to any value

VALUE - Can be set with the tag to changes the numbering sequence in the middle of an ordered list.

- **Ordered Lists - serial numbers appear**
 - tag
 - tag
 - TYPE attribute controls the numbering scheme
 - TYPE = 1 | A | a | I | i

```
<OL TYPE = "1">  
  <LI> Item 1  
  <LI> Item 2  
  <LI> Item 3  
</OL>
```

O/P : 1. Item 1
 2. Item 2
 3. Item 3

e.g.: <OL TYPE = "1" START =5>

 Item 1

<LI VALUE =3> Item 2

 Item 3

O/P:

5. Item 1

3. Item 2

4. Item 3

A definition list

A definition list is not a list of items.

This is a list of terms and explanation of the terms.

A definition list is a list of terms paired with associated definitions- in other words, a glossary.

Definition list are enclosed with in **<dl> and </dl>**

<dt> - Definition term.

<dd> - Data definition.

Definition List - defines a definition list

<DL> </DL> tag

<DT> - Definition Term

<DD> - Definition Data

```
<dl>
  <dt>Java</dt>
  <dd>An Object Oriented Language</dd>
  <dt>HTML</dt>
  <dd>A Markup Language</dd>
</dl>
```

O/P: Java
 An Object Oriented Language
 HTML
 A Markup Language

Nested lists.

e.g.,

```
<ul>  
  <li>Coffee</li>  
  <li>Tea  
    <ul>  
      <li>Black tea</li>  
      <li>Green tea</li>  
    </ul>  
  </li>  
  <li>Milk</li>  
</ul>
```

Write an HTML code to display the following output:

SAFETY TIPS FOR CANOEISTS


- b. Be able to swim
- c. Wear a life jacket at all times
- d. Don't stand up or move around. If canoe tips,
 - o Hang on to the canoe
 - o Use the canoe for support
 - IV. Be careful
 - V. Do not look around
 - o Swim to shore
- e. Don't overexert yourself
- f. Use a bow light at night

Assignment

1. Write a code for below output.

- Microsoft
 - Windows
 - Office
 - Microsoft Word
 - Microsoft Excel
- Adobe
 - Pagemaker
 - Nersion 7.0

Output

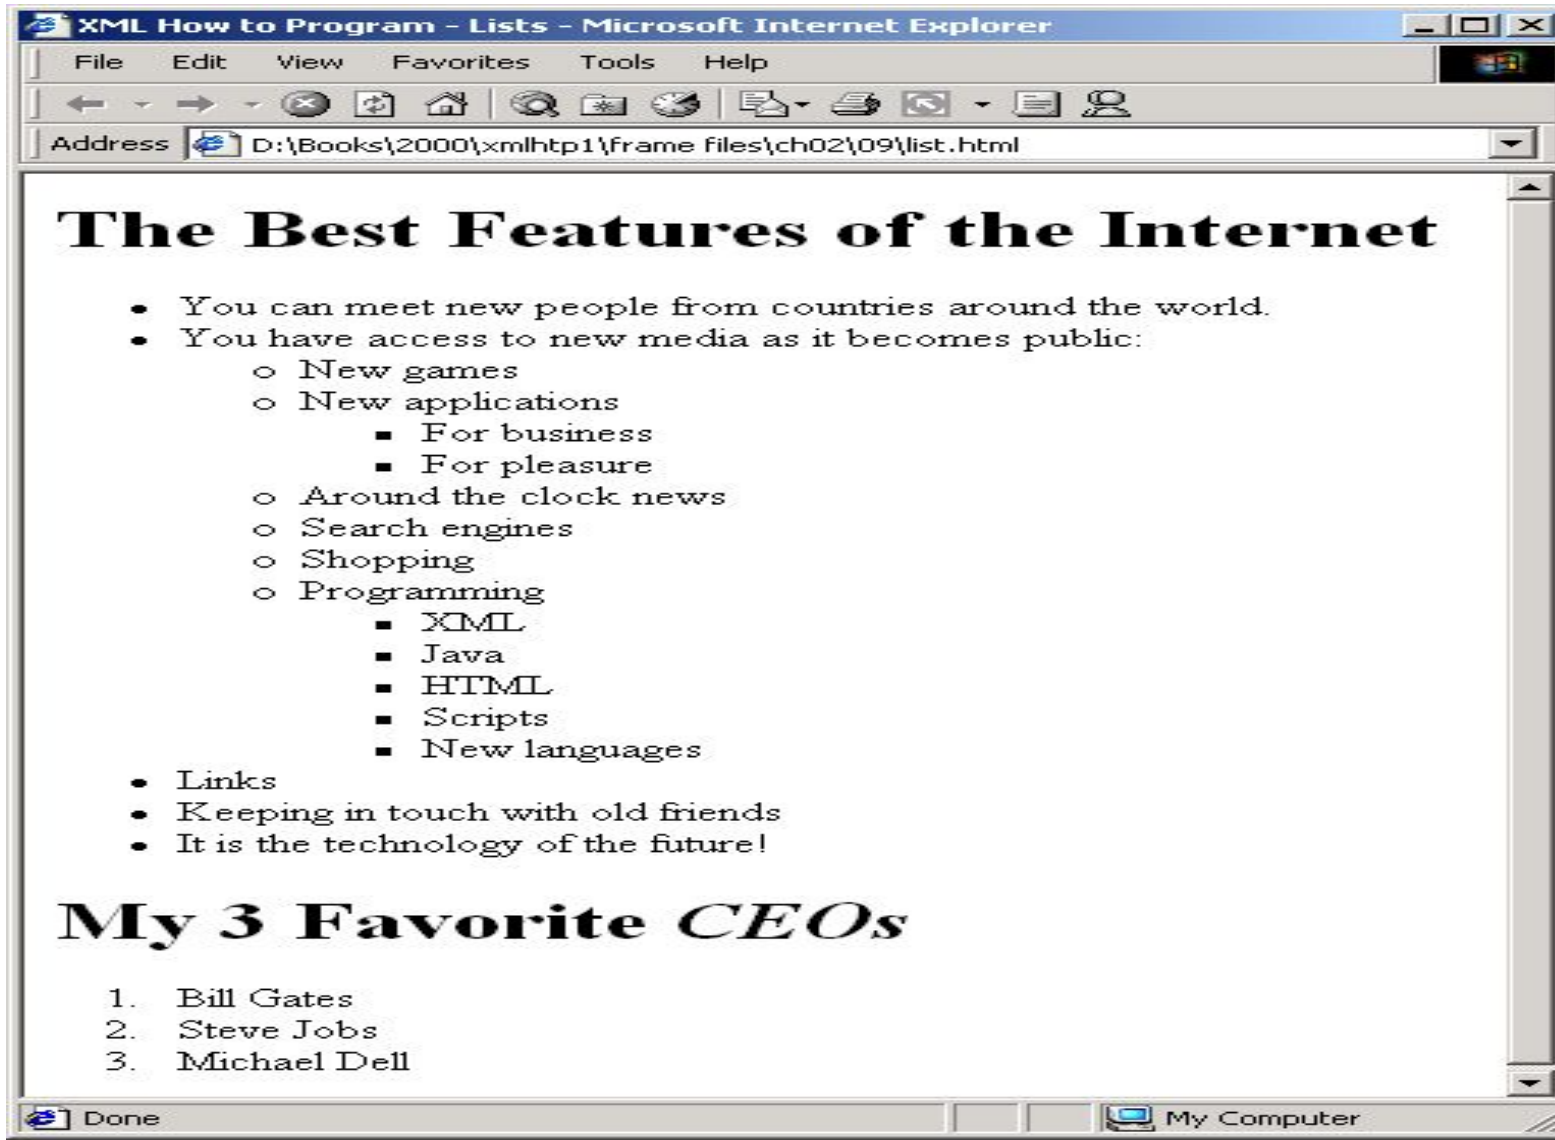


```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<title>My Nested List</title>
</head>
```

```
<body>
<ul>
<li>Computer Science</li>
<ul>
<li>Web Application Engineering</li>
    <ul>
        <li>HTML</li>
        <li>php</li>
        <li>Java Script</li>
    </ul>
```

```
<li>Operating System</li>
    <ul>
        <li>Kernel</li>
        <li>process management</li>
        <li>Embedded System</li>
    </ul>
</ul>
```

```
</body>
</html>
```

Forms ▾



nestedlist.html

Code

Split

Design

Title: My Nested List



- Computer Science
 - Web Application Engineering
 - HTML
 - php
 - Java Script
- Operating System
 - Kernel
 - process management
 - Embedded System

<body>

100% 787 x 479 1K / 1 sec

▼ Properties

Format: None ▾

Style: None ▾

CSS

B*I*

Link

Font: Default Font ▾

Size: None ▾

CSS

▼ Application

Database

Bindings

Server Behavior Composer

+

-

Document type:HTML

To use dynamic data on this page:

1. Create a [site](#) for this file.
2. Choose a [document type](#).
3. Set up the site's [testing server](#).

► Tag Inspector

► Files

Images

Images

**** This element defines a graphic image on the page.

Image File (SRC:source): This value will be a URL (location of the image) E.g. <http://www.domain.com/dir/file.ext> or /dir/file.txt.

Alternate Text (ALT): This is a text field that describes an image or acts as a label. It is displayed when they position the cursor over a graphic image.

Alignment (ALIGN): This allows you to align the image on your page.

Images

Width (WIDTH): is the width of the image in pixels.

Height (HEIGHT): is the height of the image in pixels.

Border (BORDER): is for a border around the image, specified in pixels.

HSPACE: is for Horizontal Space on both sides of the image specified in pixels. A setting of 5 will put 5 pixels of invisible space on both sides of the image.

VSPACE: is for Vertical Space on top and bottom of the image specified in pixels. A setting of 5 will put 5 pixels of invisible space above and below the image.

Some Examples on images

- 1) `<IMG SRC="jordan.gif" border=4>`
- 2) `<IMG SRC=" jordan.gif" width="60" height="60">`
- 3) `<IMG SRC="jordan.gif" ALT="This is a text that goes with the image">`
- 4) `<IMG SRC=" jordan.gif " Hspace="30" Vspace="10" border=20>`
- 5) `< IMG SRC =" jordan.gif" align="left">`
blast blast blast blast blast

Anchors, URLs and Image Maps

Objectives

Insert links into documents.

Define Link Types.

Define URL.

List some commonly used URLs.

Plan an Image Map.

Linking The Pages

- Used to Link Text with other documents
- `<A></A>`
 - HREF
 - NAME (bookmarks inside the page)
 - TITLE (balloon help in IE)
- e.g.:
`<A href="next.html"> Click here </A>`

Additional attributes

ALINK -- specifies the color of the activated link

VLINK -- specifies the color of visited link

LINK -- specifies color of links

Ⓜ Used to link text with **same** documents

Ⓜ e.g.: `<BODY link="blue" alink="green" vlink="red">`

```
<A name="top"> Top of the Page </A>
```

.....

```
<A href="#top">Top</A> </BODY>
```

Internal Links

Internal Links : Links can also be created inside large documents to simplify navigation.

Select some text at a place in the document that you would like to create a link to, then add an anchor to link to like this:

```
<A NAME="bookmark_name"></A>
```

The Name attribute of an anchor element specifies a location in the document that we link to shortly. All NAME attributes in a document must be unique.

Next select the text that you would like to create as a link to the location created above.

```
<A HREF="#bookmark_name">Go To Book Mark</A>
```

```
<a href="#lesson1">Lesson.1</a><br />
  <a href="#lesson2">Lesson.2</a><br />
  <a href="#lesson3">Lesson.3</a><br />
  <a href="#lesson4">Lesson.4</a><br />
  <br />
```

```
<a name="lesson1">Introduction of Lesson.1</a>
  <p>This is sub topic.1</p>
  <p>This is sub topic.2</p>
  <p>This is sub topic.3</p>
  <p>This is sub topic.4</p>
  <br />
```

....

....

[Lesson.1](#)
[Lesson.2](#)
[Lesson.3](#)
[Lesson.4](#)

Introduction of Lesson.1

This is sub topic.1

This is sub topic.2

This is sub topic.3

This is sub topic.4

Introduction of Lesson.2

E-Mail (Electronic Mail)

E.g. <mailto:kmf@yahoo.com>

The type of service is identified as the mail client program. This type of link will launch the users mail client.

<p>To create a link that opens in the user's email program (to let them send a new email), use mailto: inside the href attribute:</p>

<p>Send email</p>

To create a link that opens in the user's email program (to let them send a new email), use mailto: inside the href attribute:


[Send email](#)

Image Maps


Image maps are images, usually in **gif** format that have been divided into regions; clicking in a region of the image cause the web surfer to be connected to a new URL. Image maps are graphical form of creating links between pages.

Area Shapes Used


Finding the coordinates....

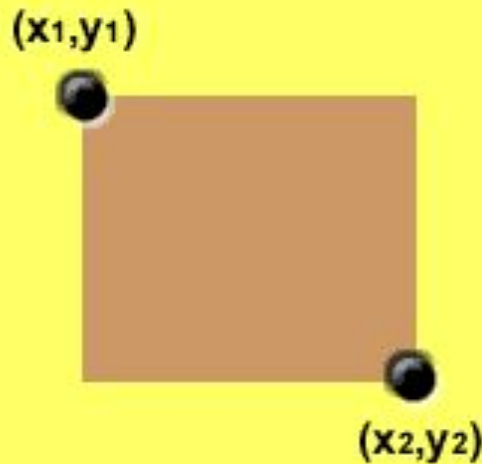

Rectangle



Circle

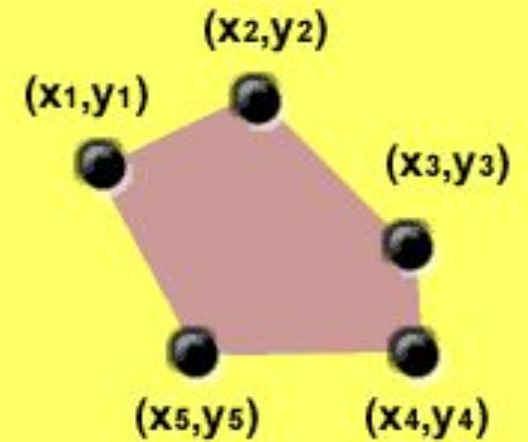

Polygon

Shapes, Coords

- Types of Shapes

- Rect ☐ used for squares and ordered shapes.
- Circle ☐ used for circles.
- Poly ☐ used for unordered shapes.

- Number of coordinations for each shape:

- Rect ☐ 4 numbers for two corners
- Circle ☐ 3 numbers for the center & R
- Poly ☐ depends on the number of corners of the shape(2 numbers for each corner)

Image Maps

▪

Example

```


<map name="workmap">
  <area shape="rect" coords="34,44,270,350" alt="Computer" href="computer.htm">
  <area shape="rect" coords="290,172,333,250" alt="Phone" href="phone.htm">
  <area shape="circle" coords="337,300,44" alt="Coffee" href="coffee.htm">
</map>
```



https://www.w3schools.com/html/html_images_imagemap.asp

The Areas

A clickable area is defined using an `<area>` element.

Shape

Define the shape of the clickable area, and you can choose one of these values:

- `rect` - defines a rectangular region
- `circle` - defines a circular region
- `poly` - defines a polygonal region
- `default` - defines the entire region

Shape="rect"

```
<area shape="rect" coords="34, 44, 270, 350" href="computer.htm">
```

Shape="circle"

To add a circle area, first locate the coordinates of the center of the circle, Then specify the radius of the circle:

```
<area shape="circle" coords="337, 300, 44" href="coffee.htm">
```

Shape="poly"

The `shape="poly"` contains several coordinate points, which creates a shape formed with straight lines (a polygon).

This can be used to create any shape.

```
<area shape="poly" coords="140,121,181,116,204,160,204,222,191,270,140,329,85,355,58,352,37,322,40,259,103,161,128,147" href="croissant.htm">
```

Assignment cont.. Q:3 Write code



Tables

Objectives:

- Insert a table.

- Explain a table's attributes.

- Edit a table.

- Add a table header.

Tables

The <TABLE></TABLE> element has four sub-elements:

Table Row <TR></TR>.

Table Header <TH></TH>.

Table Data <TD></TD>.

Caption <CAPTION></CAPTION>.

The table row elements usually contain table header elements or table data elements.

Tables

- Display data in a tabular format.
- Helps in positioning the contents of the page in a more structured way.
- `<TABLE> ..... </TABLE>` : define a table
- Some attributes
 - `ALIGN` = `LEFT` | `RIGHT` | `CENTER`
 - `BORDER` = `n` (Number of Pixels)
 - `BGColor` = "color" | "#rrggbb"
 - `cellspacing` = `n` (Number of Pixels)
 - `cellpadding` = `n` (Number of Pixels)
 - `width` = % Of Parent | `n` (pixels)

Tables Attributes

BGColor: Some browsers support background colors in a table.

Width: you can specify the table width as an absolute number of pixels or a percentage of the document width. You can set the width for the table cells as well.

Border: You can choose a numerical value for the border width, which specifies the border in pixels.

CellSpacing: Cell Spacing represents the space between cells and is specified in pixels.

CellPadding: Cell Padding is the space between the cell border and the cell contents and is specified in pixels.

Align: tables can have left, right, or center alignment.

Background: Background Image, will be titled in IE3.0 and above.

BorderColor, BorderColorDark

```
<TABLE BORDER=1>      <!-- start of table definition -->
<CAPTION> caption contents </CAPTION>  <!--caption definition -->

<TR>                  <!-- start of header row definition -->
    <TH> first header cell contents </TH>
    <TH> last header cell contents </TH>

</TR>                  <!-- end of header row definition -->
<TR>                  <!-- start of first row definition -->
    <TD> first row, first cell contents </TD>
    <TD> first row, last cell contents </TD>

</TR>                  <!-- end of first row definition -->
<TR>                  <!-- start of last row definition -->
    <TD> last row, first cell contents </TD>
    <TD> last row, last cell contents </TD>

</TR>                  <!-- end of last row definition -->
</TABLE>               <!-- end of table definition -->
```

Tables

```
<table border="1">
```

```
<tr>
```

```
<th> Column 1 header </th>
```

```
<th> Column 2 header </th>
```

```
</tr>
```

```
<tr>
```

```
<td> Row1, Col1 </td>
```

```
<td> Row1, Col2 </td>
```

```
</tr>
```

```
<tr>
```

```
<td> Row2, Col1 </td>
```

```
<td> Row2, Col2 </td>
```

```
</tr>
```

```
</table>
```

Column 1 Header	Column 2 Header
Row1, Col1	Row1, Col2
Row2, Col1	Row2, Col2

Table Caption

A table caption allows you to specify a line of text that will appear centered above or below the table.

<TABLE BORDER=1 CELLPADDING=2>

<CAPTION ALIGN="BOTTOM"> Label For My Table </CAPTION>

The Caption element has one attribute ALIGN that can be either TOP (Above the table) or BOTTOM (below the table).

Basic Table Code

```
<TABLE BORDER=1 width=50%>  
<CAPTION> <h1>Spare Parts </h1> </Caption>  
<TR><TH>Stock Number</TH><TH>Description</TH><TH>List Price</TH></TR>  
<TR><TD bgcolor=red>3476-AB</TD><TD>76mm  
Socket</TD><TD>45.00</TD></TR>  
<TR><TD>3478-AB</TD><TD><font color=blue>78mm Socket</font>  
</TD><TD>47.50</TD></TR>  
<TR><TD>3480-AB</TD><TD>80mm Socket</TD><TD>50.00</TD></TR>  
</TABLE>
```

Spare Parts

Stock Number	Description	List Price
3476-AB	76mm Socket	45.00
3478-AB	78mm Socket	47.50
3480-AB	80mm Socket	50.00

Creating Tables

Simple sample table

Heading1	Heading2
Cell 1	Cell 2
Cell 3	Cell 4

```
<TABLE BORDER=1 CELLSPACING=1 CELLPADDING=1 WIDTH=30% >
<CAPTION> Simple sample table </CAPTION>
  <TR>
    <TH>Heading1</TH>
    <TH>Heading2</TH>
  </TR>
  <TR>
    <TD>Cell 1</TD>
    <TD>Cell 2</TD>
  </TR>
  <TR>
    <TD>Cell 4</TD>
    <TD>Cell 5</TD>
  </TR>
</TABLE>
```


Table Data and Table Header Attributes

- **Colspan:** Specifies how many cell columns of the table this cell should span.
- **Rowspan:** Specifies how many cell rows of the table this cell should span.
- **Align:** cell data can have left, right, or center alignment.
- **Valign:** cell data can have top, middle, or bottom alignment.
- **Width:** you can specify the width as an absolute number of pixels or a percentage of the document width.
- **Height:** You can specify the height as an absolute number of pixels or a percentage of the document height.

Table Data and Table Header Attributes

<Table border=1 cellpadding =2>

<tr> <th> Column 1 Header</th> <th> Column 2
Header</th> </tr>

<tr> <td colspan=2> Row 1 Col 1</td> </tr>

<tr> <td rowspan=2>Row 2 Col 1</td>

<td> Row 2 Col2</td> </tr>

<tr> <td> Row 3 Col2</td> </tr>

</table>

Column 1 Header	Column 2 Header
Row 1 Col 1	
Row 2 Col 1	Row 2 Col 2
	Row 3 Col 2

This cell spans 2 columns!		Cell
This cell spans 3 rows!!	Cell	Cell
	Cell	Cell
	Cell	Cell

```

<TABLE WIDTH="100%" BORDER=1 BGCOLOR=gray>
  <TR ALIGN=CENTER >
    <TD COLSPAN=2>This cell spans 2 columns!</TD>
    <TD> Cell </TD></TR>
  <TR ALIGN=CENTER >
    <TD ROWSPAN=3>This cell spans 3 rows!!</TD>
    <TD> Cell </TD>
    <TD> Cell </TD></TR>
  <TR ALIGN=CENTER >
    <TD> Cell </TD>
    <TD> Cell </TD></TR>
  <TR ALIGN=CENTER >
    <TD> Cell </TD>
    <TD> Cell </TD>
  </TR>
</TABLE>

```

Special Things to Note

- **TH, TD and TR should always have end tags.**
- **A default TABLE has no borders**
By default, tables are drawn without border lines. You need the BORDER attribute to draw the lines.
- **By default, a table is flush with the left margin**
TABLEs are plopped over on the left margin. If you want centered tables, You can either: place the table inside a DIV element with attribute ALIGN="center".
Most current browsers also supports table alignment, using the ALIGN attribute.
Allowed values are "left", "right", or "center", for example: <TABLE ALIGN="left">. The values "left" and "right" float the table to the left or right of the page, with text flow allowed around the table. This is entirely equivalent to IMG alignment

What will be the output?

```
<TABLE BORDER width="750">
```

```
<TR> <TD colspan="4" align="center">Page Banner</TD></TR>
```

```
<TR> <TD rowspan="2" width="25%">Nav Links</TD><TD colspan="2">Feature Article</TD>  
  <TD rowspan="2" width="25%">Linked Ads</TD></TR>
```

```
<TR><TD width="25%">News Column 1 </TD> <TD width="25%"><News Column 2  
</TD></TR>
```

```
</TABLE>
```

Page Banner			
Nav Links	Feature Article		Linked Ads
	News Column 1	News Column 2	

Student List


Firstname	Lastname	Age
Arif	Khan	23
Shahid	Wani	21

```
<table border=1>
<caption>Student List</caption>
  <tr>
    <th>Firstname</th>
    <th>Lastname</th>
    <th>Age</th>
  </tr>
  <tr>
    <td>Arif</td>
    <td>Khan</td>
    <td>23</td>
  </tr>

  <tr>
    <td>Shahid</td>
    <td>Wani</td>
    <td>21</td>
  </tr>
</table>
```


Example – Nested Tables in HTML

```
<table border=1 cellspacing=10>
<tr> Country and cities</tr>
<tr><td> <table border=1 bgcolor=red>
  <tr><th>City</th><th>Country</th></tr>
  <tr><td>Beijing</td><td rowspan=3>China</td></tr>
  <tr><td>Wuhan</td></tr>
  <tr><td>Shanghai</td></tr>
</table>
</td>
<td> <table border=1 bgcolor=green>
  <tr><th>City </th><th>Country</th></tr>
  <tr><td>Lahore</td><td rowspan=2>Pakistan</td></tr>
  <tr><td>Karachi</td></tr>
</table>
</td></tr> </table>
```

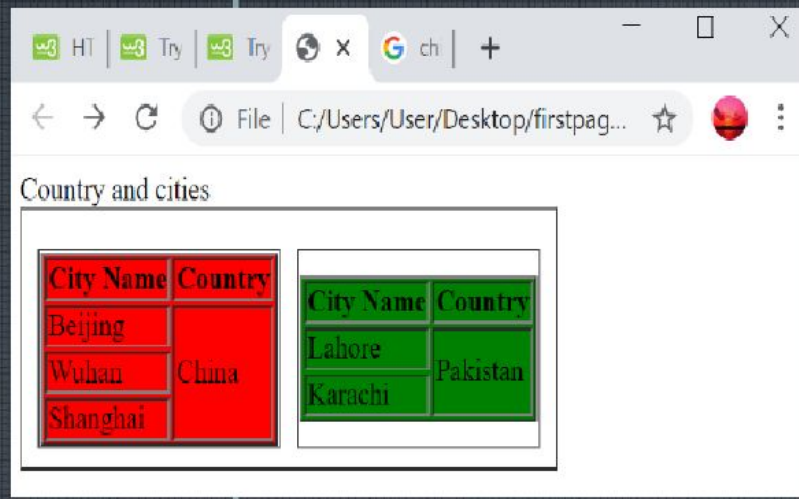

Frames

- Create a Frame based page.
- Work with the Frameset, Frame, and Noframes elements.
- Use the attributes of the Frames elements to control the display.
- Set Targets appropriately.

Frames

- Frameset – group of frames in a browser window where frame is a partition
- Frameset declaration specifies:
 1. How to partition the browser window
 2. What to load into each partition initially
- Use <frameset> tag to **replace** <body> tag
- To view source for frameset declaration, go to View in browser window, select View Source
- To view source for individual frames, right mouse click while mousing over frame content, select View Source

Frames – frameset tag

- rows attribute – used to divide window into rows
- cols attribute – used to divide window into columns
- Each can take different types of values (Think PPP):
 - percent (30%, 70%)
 - pixel amount (100, 400)
 - proportion (*, 2*) (also used to represent remainder)
- Values can be combined:
 - `<frameset rows = "15%, 20%,*">`
3 values mean 3 rows, the first row is 15% the height of the window, the second one is 20% the height of the window, the third is the remainder
 - `<frameset cols = "*", 50%, 80">`
3 values mean 3 columns, the first column is $\frac{1}{2}$ the width of the window minus 80 pixels, the second is $\frac{1}{2}$ the width of the window, the third is 80 pixels (a fixed pixel value is useful for displaying an image)

Frames – frame tag

- Tells the browser what to load into each partition
- src attribute specifies url of file to load
- Frames are loaded in a top-to-bottom, left-to-right manner
- id or name attribute identifies a particular frame by naming it (no spaces allowed in name)

```
<frame src = "top.html" />
```

```
<frame src = "bottom.html" name = "main" />
```

- Notice there is no </frame> tag – use /> instead

Frames – frameset declaration

```
<frameset rows = "20%,80%">  
  <frame src = "top.html" />  
  <frame src = "bottom.html" name = "main" />  
  <noframes>This is best viewed with Netscape version 2.0 or higher.  
  <a href = "noframes.html">View</a> version of the material without frames.  
  </noframes>  
</frameset>
```

Frames – combining cols and rows

- Can use column (cols) and rows (rows) together in frameset:

```
<frameset cols = “*, *, *” rows =  
    “33%, 33%, *”>
```

```
<frame src = “a.html” />
```

```
<frame src = “b.html” />
```

```
<frame src = “c.html” />
```

```
<frame src = “d.html” />
```

```
...
```

```
<frame src = “j.html” />
```

```
</frameset>
```

The partitioning will look like a tic-tac-toe board with the files loaded top-to-bottom, left-to-right:

a.html	b.html	c.html
d.html	e.html	f.html
g.html	i.html	j.html

Frames – nesting cols and rows

Nested framesets produce
output like:



...

```
</head>
```

```
<frameset rows = "30%, 70%">
```

```
  <frame src = "header.html">
```

```
  <frameset cols = "*", 2*">
```

```
    <frame src = "toc.html">
```


```
    <frame src = "display.html"
```

```
      id = "display-area">
```

```
  </frameset>
```

```
</frameset>
```

```
</html>
```

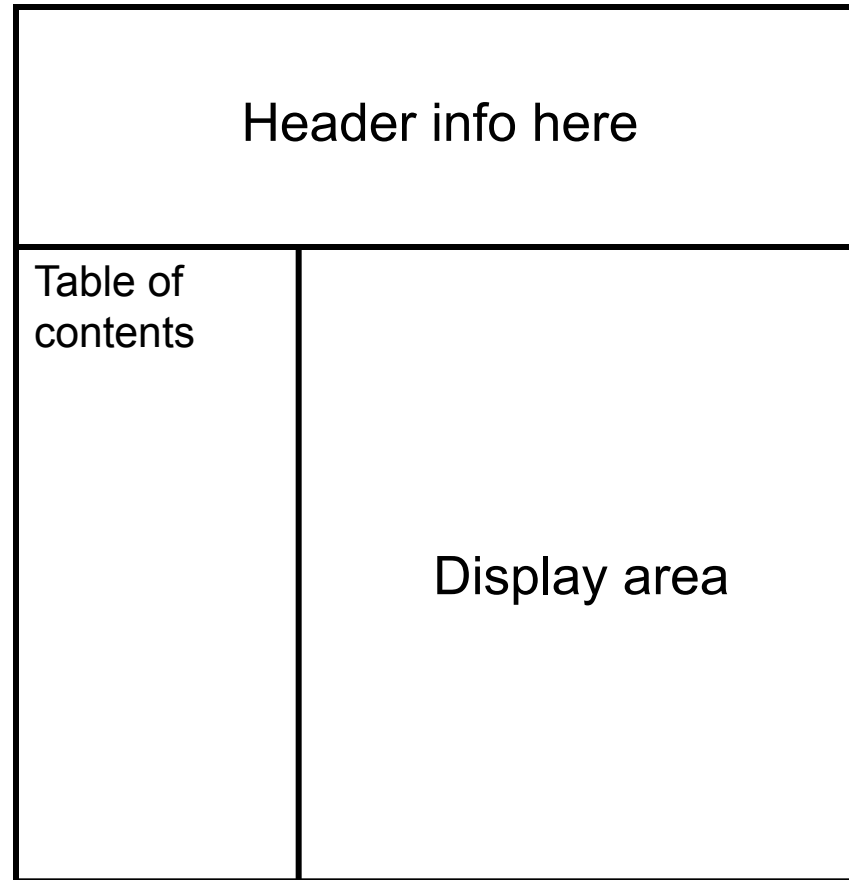

Frames – noframes tag

- Used in case a browser does not support frames (e.g., lynx)
- Content between `<noframes>` and `</noframes>` is displayed if browser does not support frames; content is ignored if browser does support frames.

```
<noframes>This is best viewed with Netscape version 2.0 or higher.  
<a href = "noframes.html">View</a> version of the material without  
frames.  
</noframes>
```

Frames – targeted hyperlinks (con't)

- Special (or magic) targets are reserved names for targeting windows
- Can be used with or without frames:
 - **_blank** - causes document specified in href attribute to be loaded into a new, unnamed browser window (forward and back buttons do not work)
 - **_top** – causes document specified in href attribute to be loaded into the entire browser window containing the link (forward and back buttons do work)
 - **_self** – causes document specified in href attribute to be loaded into same window OR frame (default)
 - **_parent** – causes document specified in href attribute to be loaded into the parent frameset (useful for nested frames)
- Examples:
 - My Project
 - Assignment 1

Frames – inline frames

- Uses the `<iframe>` tag to generate a “floating frame.”
- `<iframe>` tag is **not** used within frameset tag.
- Use anywhere within your document that an `<img />` tag might appear.
- The inline area is 150 pixels high and 300 pixels wide (but those values can be changed).
- The inline area is useful for displaying another document that contains information related to the current document being viewed:

Frame Example

```
<HTML>  
<FRAMESET COLS="*, 2*">  
<FRAME SRC="Frame1.htm">  
<FRAME SRC="Frame2.htm">  
</FRAMESET>  
</HTML>
```

[example](#)




Nesting Frames

```
<HTML>
<FRAMESET COLS="40%,*">
  <FRAMESET ROWS="35%,*">
    <FRAME SRC="Cell1.htm">
    <FRAME SRC="Cell2.htm">
  </FRAMESET>
  <FRAME SRC="Cell3.htm">
</FRAMESET>
</HTML>
```

[example](#)

Example:3FrameExample

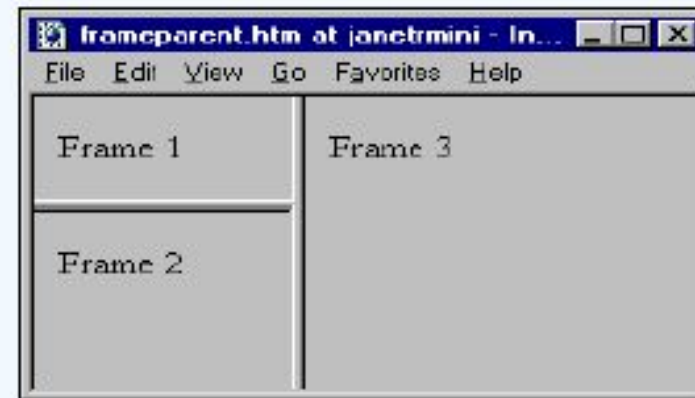

Targeting Frames

- Ensure frame naming
- **<FRAMESET COLS="*, 20%">**
<FRAME NAME="Frame1" SRC="Cell_1.htm">
<FRAME NAME="Frame2" SRC="Cell_2.htm">
</FRAMESET>
- Set the TARGET attribute for one hyperlink
 - **Link Text**
 - **Link Text**
- Set the TARGET attribute for all hyperlinks
 - **<BASE TARGET="Frame2">**
 - **<BASE TARGET="_top">**

Attributes Of Frames Tag

Attribute	Description/Value
NORESIZE	Prevents the frame from being resized by the user.
SCROLLING	Determines whether or not scroll bars are displayed along the frame. Possible values are "yes" or "no"

TARGET attribute takes some values that have special meaning, summarized in the table below

Value	Description
_blank	Loads the page into a new window
_self	Loads the page over the current frame
_parent	Loads the link over the parent frame
_top	Loads the link over all the frames in the window.

What will be the Output?

```
<FRAMESET ROWS="*, 2*, *" COLS="2*, *">  
<FRAME SRC="">  
<FRAME SRC="">  
<FRAME SRC="">  
<FRAME SRC="">  
<FRAME SRC="">  
<FRAME SRC="">  
</FRAMESET>
```


Forms

```
<html>
<head>
<title> Registration Page </title>
</head>
<body>
Registration Form
<form action="....." method="post">
.
<!-- html form elements go here -- >
.
</form>
</body>
</html>
```

Action attribute defines the place to which the values collected through the form elements have to be passed.

Method attribute can either be set To get or post

ent
nd

<FORM> element attributes

- **ACTION**: is the **URL** of the program that is going to accept the data from the form, process it, and send a response back to the browser.
- **METHOD**: **GET** (default) or **POST** specifies which **HTTP** method will be used to send the form's contents to the web server.
- **NAME**: is a form name used by **VBScript** or **JavaScripts**.
- **TARGET**: is the target frame where the response page will show up.

Form Elements

- Form elements have properties: **Text** boxes, **Password** boxes, **Checkboxes**, Option(**Radio**) buttons, **Submit**, **Reset**, **File**, **Hidden** and **Image**.
- The properties are specified in the TYPE Attribute of the HTML element **<INPUT></INPUT>**.

Name:

Sami Ali

Student No.

123456789

Address:

Al al-Bayt University
CIS Department
Faculty of IT

City:

Amman
Amman
Irbid
Karak

is foreign?



Male:



Female:



Submit

Reset

Form Elements

<INPUT> Element's Properties

TYPE= Type of INPUT entry field.

NAME = Variable name passed to application

VALUE= The data associated with the variable name to be passed to the application

CHECKED= Button/box checked

SIZE= Number of visible characters in text field

MAXLENGTH= Maximum number of characters accepted.

Text Box

- **Text boxes:** Used to provide input fields for text, phone numbers, dates, etc.

<INPUT TYPE= " TEXT " >



Browser will display

Textboxes use the following attributes:

- **TYPE:** text.
- **SIZE:** determines the size of the textbox in characters. **Default=20** characters.
- **MAXLENGTH** : determines the maximum number of characters that the field will accept.
- **NAME:** is the name of the variable to be sent to the CGI application.
- **VALUE:** will display its contents as the default value.

Example on Text Box

```
<TITLE>Form_Text_Type</TITLE>
</HEAD> <BODY>
<h1> <font color=blue>Please enter the following
  bioData</font></h1>
<FORM name="fome1" Method= " get " Action= " URL " >
First Name: <INPUT TYPE="TEXT" NAME="FName"
SIZE="15" MAXLENGTH="25"><BR>
Last Name: <INPUT TYPE="TEXT" NAME="LName"
SIZE="15" MAXLENGTH="25"><BR>
Nationality: <INPUT TYPE="TEXT" NAME="Country"
SIZE="25" MAXLENGTH="25"><BR>
The Phone Number: <INPUT TYPE="TEXT" NAME="Phone"
SIZE="15" MAXLENGTH="12"><BR>
</FORM> </BODY> </HTML>
```

Please enter the following
bioData

First Name:

Last Name:

Nationality:

The Phone Number:

Password

- **Password**: Used to allow entry of passwords.

<INPUT TYPE= " PASSWORD " >

Browser will display



Text typed in a password box is starred out in the browser display.

Password boxes use the following attributes:

- **TYPE**: password.
- **SIZE**: determines the size of the textbox in characters.
- **MAXLENGTH**: determines the maximum size of the password in characters.
- **NAME**: is the name of the variable to be sent to the CGI application.
- **VALUE**: is usually blank.

Example on Password Box

User Name: <INPUT TYPE="TEXT" Name="FName"
SIZE="15" MAXLENGTH="25">

Password: <INPUT TYPE="PASSWORD"
NAME="PWord" value="" SIZE="15"
MAXLENGTH="25">

User Name:
Password:

Hidden

- **Hidden:** Used to send data to the CGI application that you don't want the web surfer to see, change or have to enter but is necessary for the application to process the form correctly.

<INPUT TYPE="HIDDEN">

Nothing is displayed in the browser.

Hidden inputs have the following attributes:

- **TYPE:** hidden.
- **NAME:** is the name of the variable to be sent to the CGI application.
- **VALUE:** is usually set a value expected by the CGI application.

Check Box

- **Check Box:** Check boxes allow the users to select more than one option.

<INPUT TYPE="CHECKBOX">

Browser will display



Checkboxes have the following attributes:

- **TYPE:** checkbox.
- **CHECKED:** is blank or CHECKED as the initial status.
- **NAME:** is the name of the variable to be sent to the CGI application.
- **VALUE:** is usually set to a value.

 Select Country:

jordan:<INPUT TYPE="CheckBox" Name="country" CHECKED>

Yemen<INPUT TYPE="CheckBox" Name="country">

Qatar:<INPUT TYPE="CheckBox" Name="country">

Select Language:

Arabic:<INPUT TYPE="CheckBox" Name="language" CHECKED>

English:<INPUT TYPE="CheckBox" Name="language">

French:<INPUT TYPE="CheckBox" Name="language">
</FORM>

Select Country:

jordan: ☒

Yemen ☐

Qatar: ☐

Select Language:

Arabic: ☒

English: ☐

French: ☐

Radio Button

- **Radio Button:** Radio buttons allow the users to select only one option.

<INPUT TYPE="RADIO">

Browser will display



Radio buttons have the following attributes:

- **TYPE:** radio.
- **CHECKED:** is blank or CHECKED as the initial status. Only one radio button can be checked
- **NAME:** is the name of the variable to be sent to the CGI application.
- **VALUE:** usually has a set value.

```
<font color=red> Select Country: </font><BR>
jordan:<INPUT TYPE= "RADIO" Name="country" CHECKED><BR>
Yemen<INPUT TYPE="RADIO " Name="country"><BR>
Qatar:<INPUT TYPE="RADIO" Name="country"><BR> <BR>
<font color=blue>Select Language:</font><BR>
Arabic:<INPUT TYPE="RADIO" Name="language" CHECKED><BR>
English:<INPUT TYPE=" RADIO " Name="language"><BR>
French:<INPUT TYPE=" RADIO " Name="language"> <BR></FORM>
```

Select Country:

jordan: ☒

Yemen ☐

Qatar: ☐

Select Language:

Arabic: ☒

English: ☐

French: ☐

Push Button

- **Push Button:** This element would be used with JavaScript to cause an action to take place.

<INPUT TYPE="BUTTON">

Browser will display



Push Button has the following attributes:

- **TYPE:** button.
- **NAME:** is the name of the button to be used in scripting.
- **VALUE:** determines the text label on the button.

**Click Here to see a baby shouting:
**

**<INPUT TYPE="button" VALUE="ClickMe" >

**

Click Here to see a baby shouting:

ClickMe

Submit Button

- **Submit:** Every set of Form tags requires a Submit button. This is the element causes the browser to send the names and values of the other elements to the CGI Application specified by the ACTION attribute of the FORM element.

<INPUT TYPE="SUBMIT">

The browser will display



Submit has the following attributes:

- **TYPE:** submit.
- **NAME:** value used by the CGI script for processing.
- **VALUE:** determines the text label on the button, usually Submit Query.

First Name: <INPUT TYPE="TEXT" Size=25 name="firstName">

Family Name: <INPUT TYPE="TEXT" Size=25 name="LastName">

Press Here to submit the data:

<INPUT TYPE="submit" VALUE="SubmitData " >

First Name:
Family Name:

Press Here to submit the data:

Reset Button

- **Reset:** It is a good idea to include one of these for each form where users are entering data. It allows the surfer to clear all the input in the form.
- **<INPUT TYPE="RESET">**
- Browser will display 
-
- Reset buttons have the following attributes:
 - **TYPE:** reset.
 - **VALUE:** determines the text label on the button, usually Reset.

First Name: <INPUT TYPE="TEXT" Size=25 name="firstName">

Family Name: <INPUT TYPE="TEXT" Size=25 name="LastName">

Press Here to submit the
data:

<INPUT TYPE="submit" VALUE="SubmitData">
<INPUT TYPE="RESET" VALUE="Reset">

First Name:
Family Name:

Press Here to submit the data:

Image Submit Button

- **Image Submit Button:** Allows you to substitute an image for the standard submit button.

<INPUT TYPE="IMAGE" SRC="jordan.gif">

Image submit button has the following attributes:

- **TYPE:** Image.
- **NAME:** is the name of the button to be used in scripting.
- **SRC:** URL of the Image file.

```
<form>  
<H1><font color=blue>  
Click to go Jordan's Map:  
<INPUT TYPE="IMAGE" SRC="jordan.gif">  
</form>
```

Click to go Jordan's Map: 

File

- **File Upload:** You can use a file upload to allow surfers to upload files to your web server.

- **<INPUT TYPE="FILE">**

- Browser will display



- File Upload has the following attributes:
- **TYPE:** file.
- **SIZE:** is the size of the text box in characters.
- **NAME:** is the name of the variable to be sent to the CGI application.
- **MAXLENGTH:** is the maximum size of the input in the textbox in characters.

<H3>

Please attach your file here to for uploading to

My SERVER...


<INPUT TYPE="File" name="myFile" size="30">

<INPUT TYPE="Submit" value="SubmitFile">

Other Elements used in Forms

- **<TEXTAREA></TEXTAREA>**: is an element that allows for free form text entry.

Browser will display

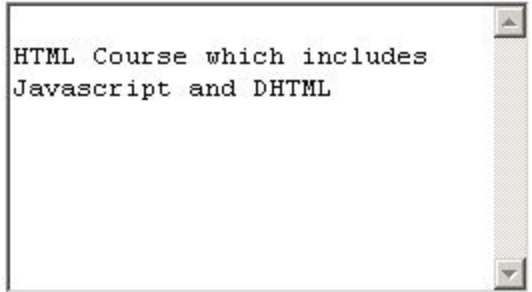A screenshot of a web browser window showing a text area. The text area contains the text "HTML Course which includes Javascript and DHTML". The text area has a vertical scrollbar on the right side. The browser window has a title bar and a standard address bar.

Textarea has the following attributes:

- **NAME**: is the name of the variable to be sent to the CGI application.
- **ROWS**: the number of rows to the textbox.
- **COLS**: the number of columns to the textbox.


<form>

<TEXTAREA COLS=40 ROWS=20 Name="comments" >

From observing the apathy of those
about me during flag raising I
concluded that patriotism if not
actually on the decline is at least
in a state of dormancy.

Written by Khaled Al-Fagih

</TEXTAREA>:

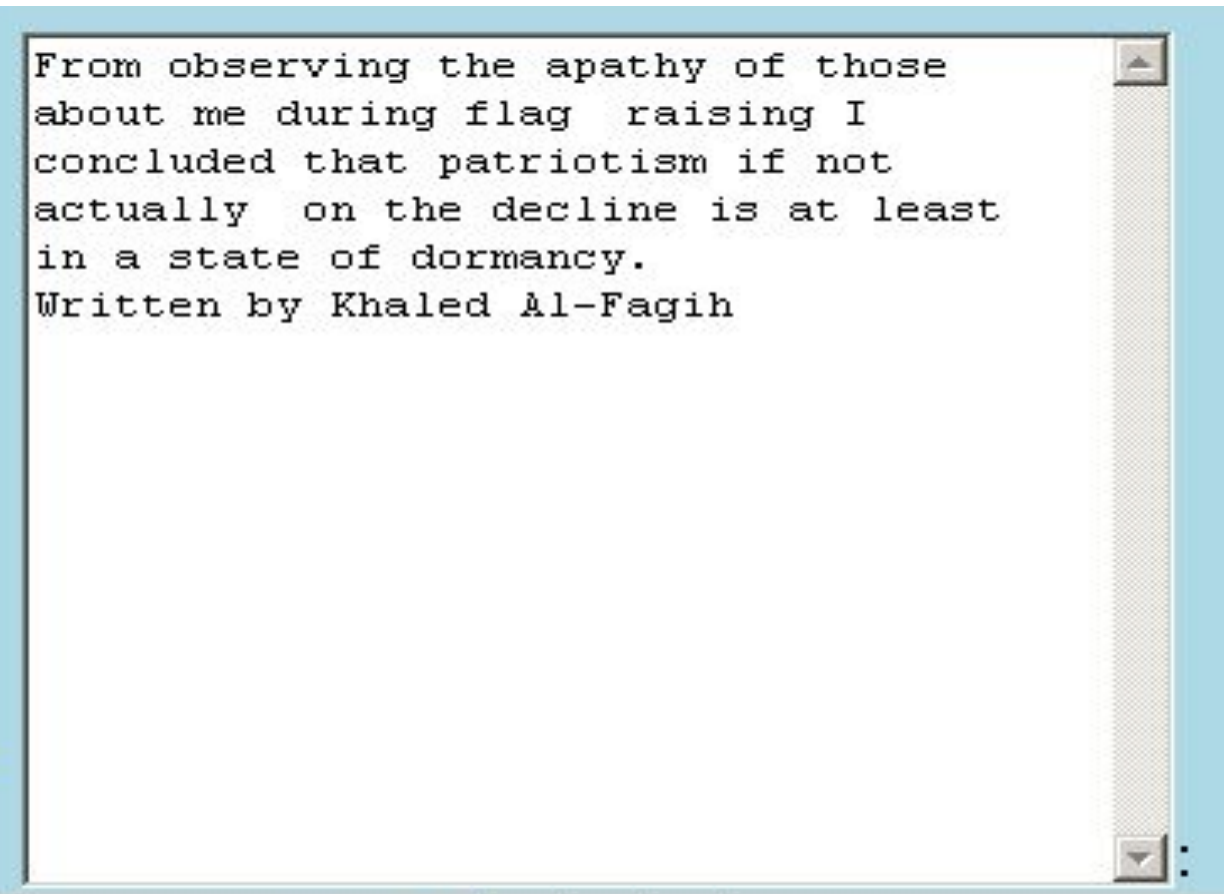

From observing the apathy of those
about me during flag raising I
concluded that patriotism if not
actually on the decline is at least
in a state of dormancy.
Written by Khaled Al-Fagih

Other Elements used in Forms

- The two following examples are **<SELECT></SELECT>** elements, where the attributes are set differently.

The Select elements attributes are:

- **NAME**: is the name of the variable to be sent to the CGI application.
- **SIZE**: this sets the number of **visible** choices.
- **MULTIPLE**: the presence of this attribute signifies that the user can make multiple selections. By default only one selection is allowed.

Select the cities you have visited:

<SELECT name="list" size=5>

<option> London</option>

<option> Tokyo</option>

<option> Paris</option>

<option> New York</option>

<option> LA</option>

<option> KL</option>

</SELECT>

Select the cities you have visited:



Other Elements used in Forms

- **Drop Down List:**



- **Name:** is the name of the variable to be sent to the CGI application.
- **Size: 1.**

Other Elements used in Forms

- **List Box:**



- **Name:** is the name of the variable to be sent to the CGI application.
- **SIZE:** is greater than one.

Other Elements used in Forms

■ Option

The list items are added to the **<SELECT>** element by inserting **<OPTION></OPTION>** elements.

The Option Element's attributes are:

- **SELECTED**: When this attribute is present, the option is selected when the document is initially loaded. **It is an error for more than one option to be selected.**
- **VALUE**: Specifies the value the variable named in the select element.

<h2>What type of Computer do you have?</h2>

<FORM>

<SELECT NAME="ComputerType" size=4>

<OPTION value="IBM" SELECTED> IBM</OPTION>

<OPTION value="INTEL"> INTEL</OPTION>

<OPTION value=" Apple"> Apple</OPTION>

<OPTION value="Compaq"> Compaq</OPTION>

</SELECT>

What type of Computer do you have?



IBM
INTEL
Apple
Compaq

<h2>What type of Computer do you have?</h2>

<FORM>

<SELECT NAME="ComputerType" size=5 multiple>

<OPTION value="IBM" > IBM</OPTION>

<OPTION value="INTEL"> INTEL</OPTION>

<OPTION value=" Apple"> Apple</OPTION>

<OPTION value="Compaq" SELECTED> Compaq</OPTION>

<OPTION value=" other"> Other</OPTION>

</SELECT>

What type of Computer do you have?



IBM
INTEL
Apple
Compaq
Other

There are eleven different types of form elements:

Button	Button
Checkbox	☐
FileUpload	
Hidden	
Password	*****
Radio	☐
Reset object	Reset
Select object	
Submit object	Submit Query
Text	
Textarea	

Forms

```
<html>
<head> <title>registration Page</title></head>
<body><h1>Registration Form</h1>
<form>
<fieldset><legend> User Registration </legend>
Name: <input type=text id=txt1><br>
DoB:<input type=date id=db><br>
email:<input type=email id=eml><br>
<label for="r1"> Gender </label>
<input type=radio value=male id="r1"> Male
<input type=radio value=female id="r1"> Female
<br>Hobbies:<br>
<input type=checkbox value="Reading">Reading<br>
<input type=checkbox value="Gardning">Gardning <br>
<input type=checkbox value="Shooting">Shooting
<br>Country: <select id=country>
<option value="Autralia"> Australia </option>
<option value="Brazil"> Brazil </option>
<option value="Canada"> Canada </option>
</select><br>
<button> submit </buttion>
</fieldset></form>
</body>
</html>
```

Registration Form

User Registration

Name:

DoB:

email:

Gender ☐ Male ☐ Female

Hobbies:

☐ Reading

☐ Gardning

☐ Shooting

Country:

Practice Exercise

Who are you?

Name:

Gender: ☐ Male ☐ Female

A complete example

```
<html>
<head>
<title>Get Identity</title>
<meta http-equiv="Content-Type" content="text/html;
      charset=iso-8859-1">
</head>
<body>
<p><b>Who are you?</b></p>
<form method="post" action="">
  <p>Name:
    <input type="text" name="textfield">
  </p>
  <p>Gender:
    <input type="radio" name="gender" value= m >Male
    <input type="radio" name="gender" value="f">Female</p>
</form>
</body>
</html>
```

Who are you?

Name:

Gender: ☐ Male ☐ Female

Form Example

Enter Your Name	Smith
Enter Your Password	•••••
Enter your Hobbies	Travel ☐ Reading ☒ Sleeping ☐
Notify by email	☒
Output Device	☐ Screen ☐ Printer
Submit Query	Clear
Text Area	Default text goes here

```

<HTML>
<BODY>
<FORM ACTION="" METHOD=POST NAME=form1>
<TABLE BORDER=3 CELLPADDING=1 CELLSPACING=1 width="75%">
  <TR>  <TD>Enter Your Name</TD>
  <TD><INPUT NAME="first_name" VALUE="Smith" SIZE="10" MAXLENGTH="15" ></TD></TR>
  <TR>  <TD>Enter Your Password</TD>
    <TD><INPUT name=password1 type=password></TD></TR>
  <TR>  <TD>Enter your Hobbies</TD>
    <TD><SELECT NAME="Hobbies" Multiple SIZE="2">
      <OPTION VALUE="TR">Travel
      <OPTION SELECTED>Reading
      <OPTION>Sleeping
    </SELECT></TD></TR>
  <TR>  <TD>Notify by email</TD>
    <TD><INPUT TYPE="checkbox" NAME="email" CHECKED></TD></TR>
  <TR>  <TD>Output Device </TD>
    <TD><INPUT TYPE="radio" NAME="output" VALUE="screen"> Screen
      <INPUT TYPE="radio" NAME="output" VALUE="printer">Printer </TD>
  <TR>  <TD><INPUT TYPE="submit" value="Submit Query" id=submit1 name=submit1></TD>
    <TD><INPUT TYPE="reset" VALUE="Clear" id=reset1 name=reset1></TD></TR>
  <TR>  <TD>Text Area</TD>
    <TD><TEXTAREA name="feedback" ROWS =3 COLS= 40> Default text goes here
      </TEXTAREA></TD></TR>

</TABLE>
</FORM>
</BODY>
</HTML>

```