

4.9.3. Privacy Processing of Outgoing Messages

The process for privacy encoding Matter message headers is depicted graphically in [Figure 10](#), “Matter Message Privacy”.

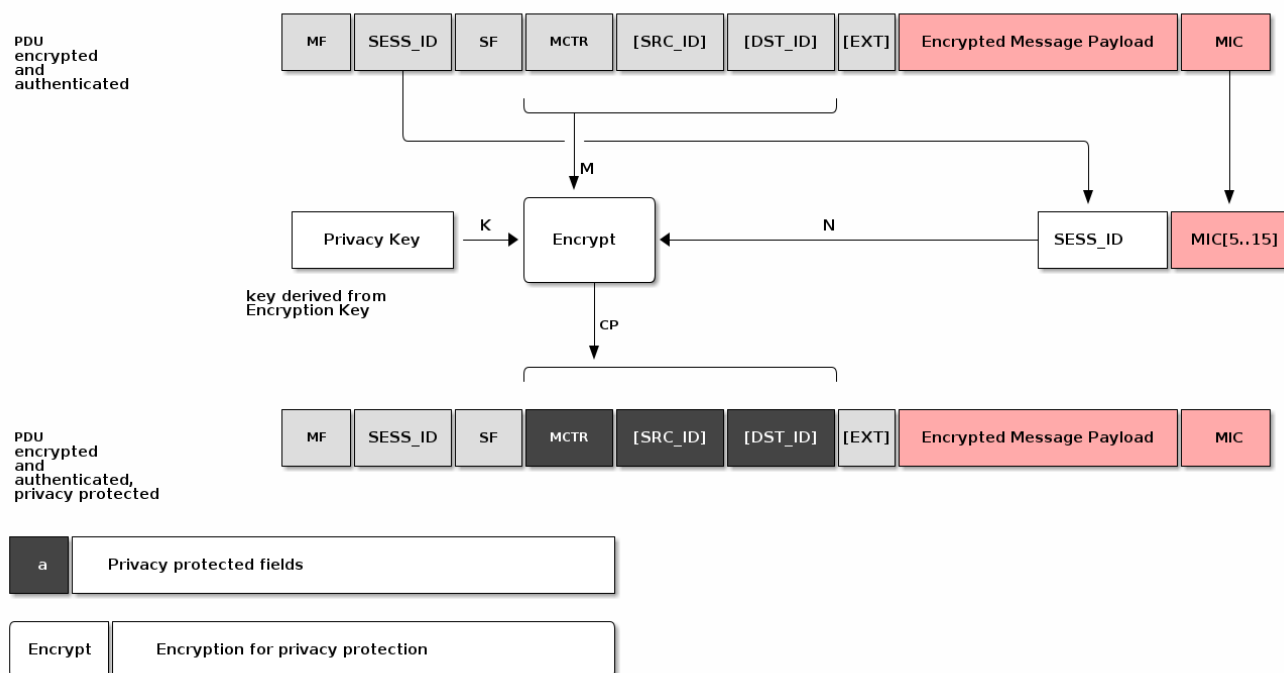


Figure 10. Matter Message Privacy

To apply privacy obfuscation to an encrypted message prepared for transmission by [Section 4.7.1](#), “Message Transmission”, apply obfuscation steps as follows:

1. If **P Flag** is not set, do nothing.
2. Obtain the Privacy Key for the Encryption Key used to secure the message.
3. Execute the encryption operation as specified in [Section 3.7.1](#), “Privacy encryption” with the following instantiations:
 - a. The bit string key *K* SHALL be the Privacy Key obtained from step 1;
 - b. The MIC SHALL be the last **CRYPTO_AEAD_MIC_LENGTH_BYTES** bytes of the **C** outcome of the message security protection as specified in [Section 4.8.2](#), “Security Processing of Outgoing Messages” ($MIC = C[(CRYPTO_AEAD_MIC_LENGTH_BYTES-1)..0]$).
 - c. The nonce *N* SHALL be the **PrivacyNonce** of the message.
 - d. The parameter *M* SHALL be the message header fields where optional fields are only present in *M* if they are present in the message:

$M = \text{Message Counter} || [\text{Source ID}] || [\text{Destination ID}]$

- e. $CP = \text{Crypto_Privacy_Encrypt}(K, M, N)$

4. Let *CP* be the obfuscated output from step 2. *CP* SHALL be used in the final private message in place of the message header fields.