

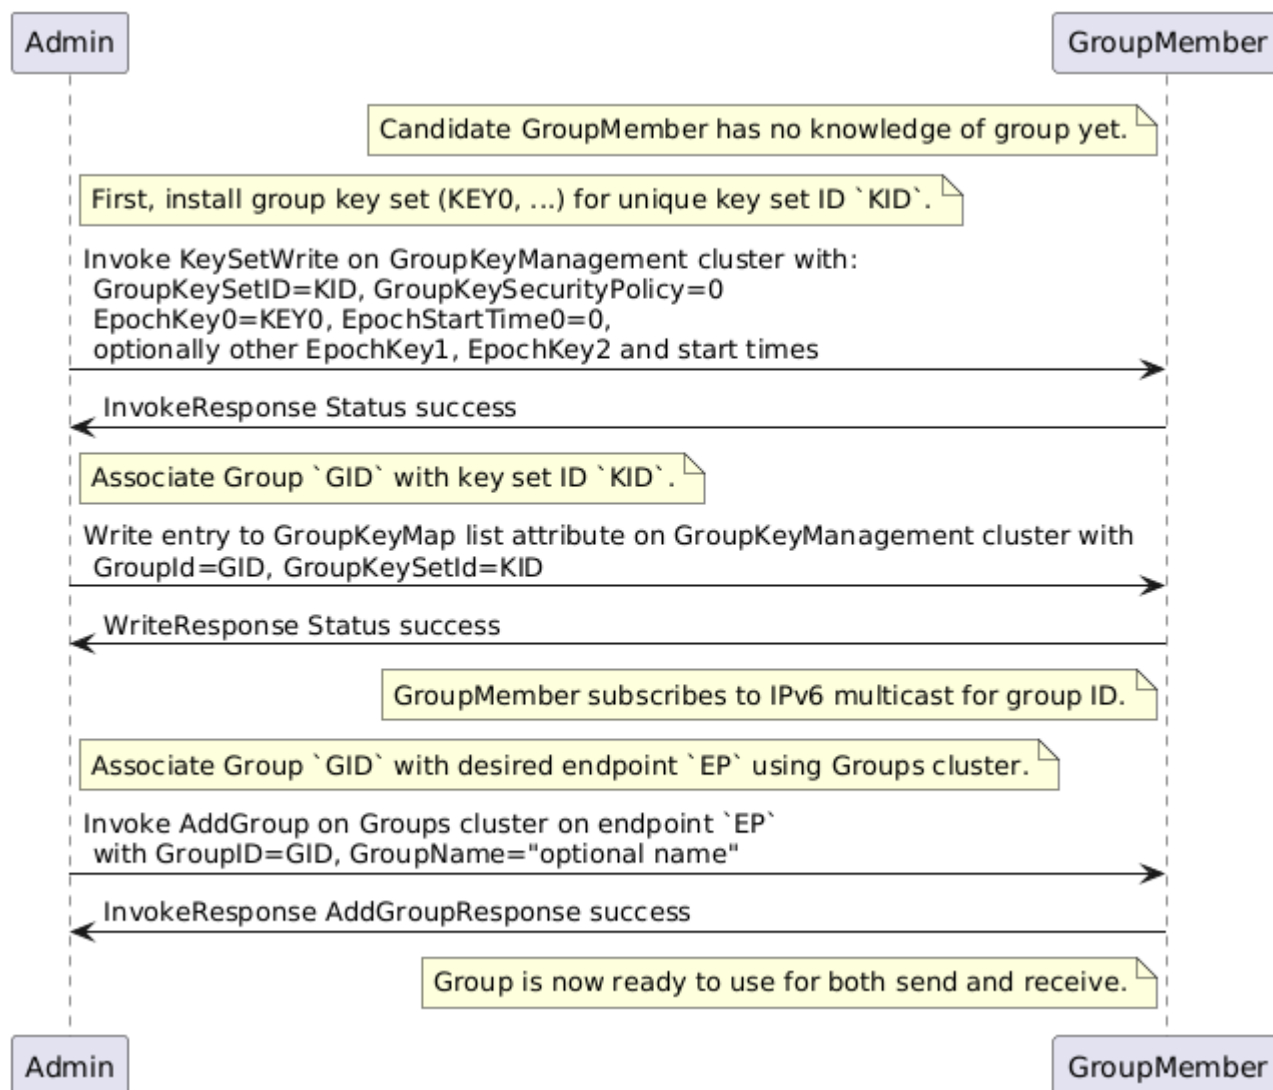


Figure 20. Installing a group onto a new node

Sequence:

- *Admin*:
 - Generate fabric-unique group ID **GID** and random key **key0** for group key set ID **K**.
 - Write the group key set **K** to the remote node, GroupMember, using **KeySetWrite** command.
 - Associate group ID **GID** with key set **K** by writing an entry to the GroupKeyMap list attribute.
- *GroupMember*:
 - Node subscribes to the IPv6 multicast address generated from the fabric ID and group ID.
- *Admin*:
 - Associate endpoint with group ID **GID** by sending the **Groups** cluster's **AddGroup** command to endpoint.

4.18. Message Counter Synchronization Protocol (MCSP)

This section describes the protocol used to securely synchronize the message counter used by a