

4.18.7.1. Scenario 1 — Multicast Receiver Initiated

Assumptions:

- *Sender* transmits a multicast message.
- *Receiver* does not know *Sender* 's message counter.

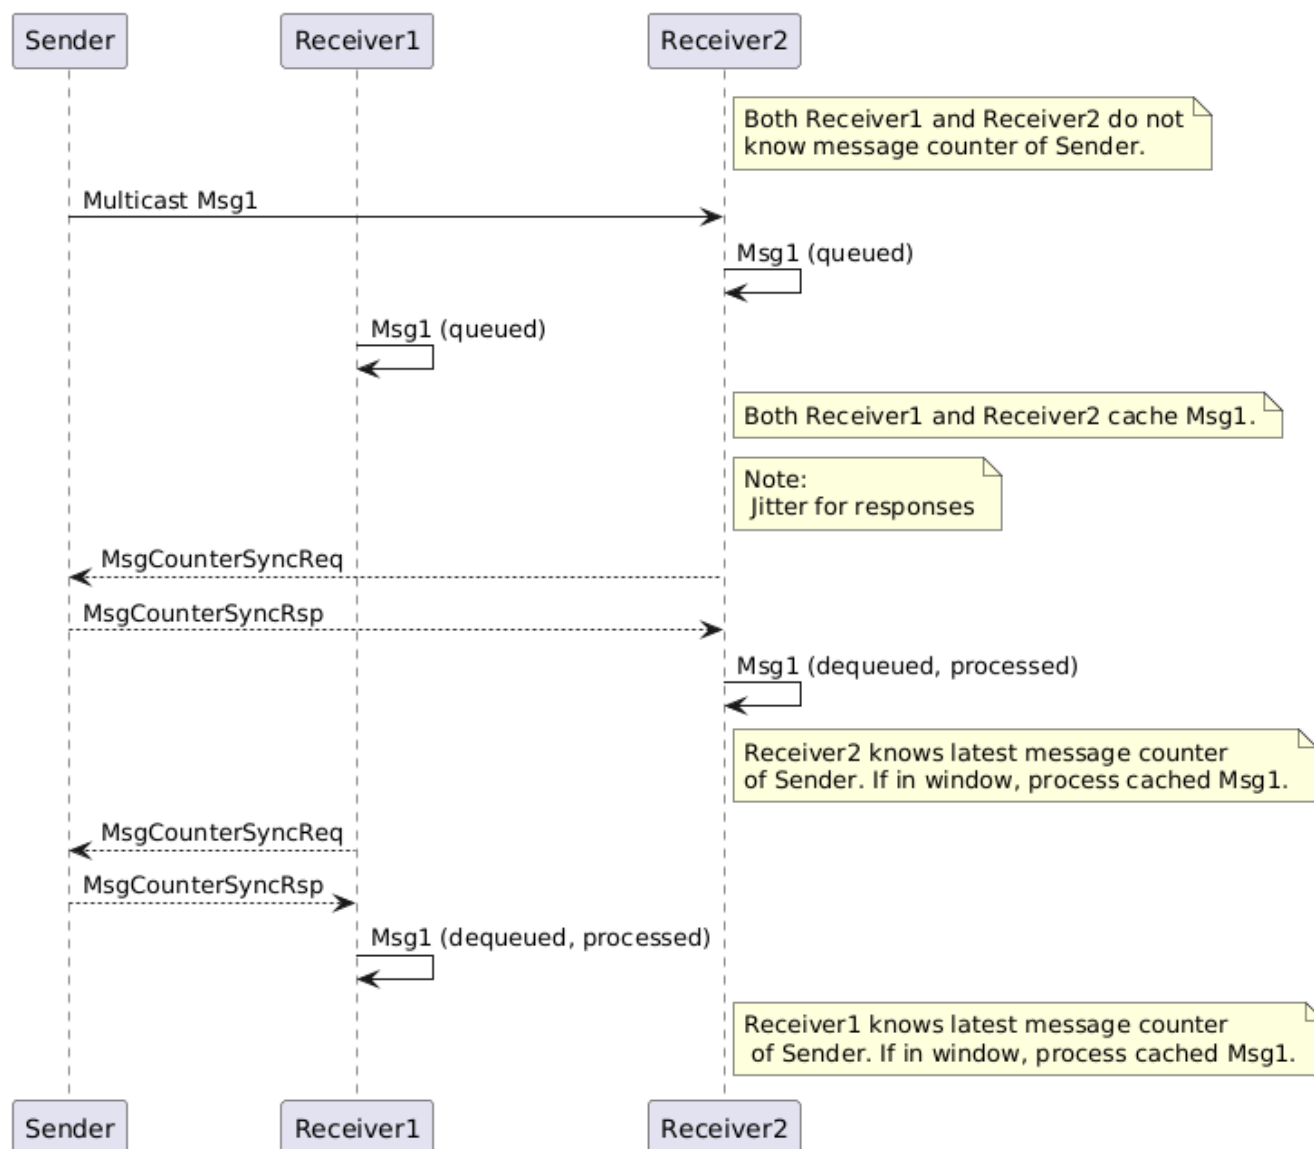


Figure 21. Multicast Receiver Initiated Message Counter Synchronization

Sequence:

- *Sender*:
 - Generates, encrypts and sends *Msg1* as a multicast message. *Msg1* could be:
 - Regular message that starts encrypted group communication with receivers *Receiver1* and *Receiver2*.
- Receivers *Receiver1* and *Receiver2* each:
 - Receive, decrypt, authenticate, and cache *Msg1* message for later processing.
 - Generate, encrypt, and send *MsgCounterSyncReq* message.
- *Sender*: