

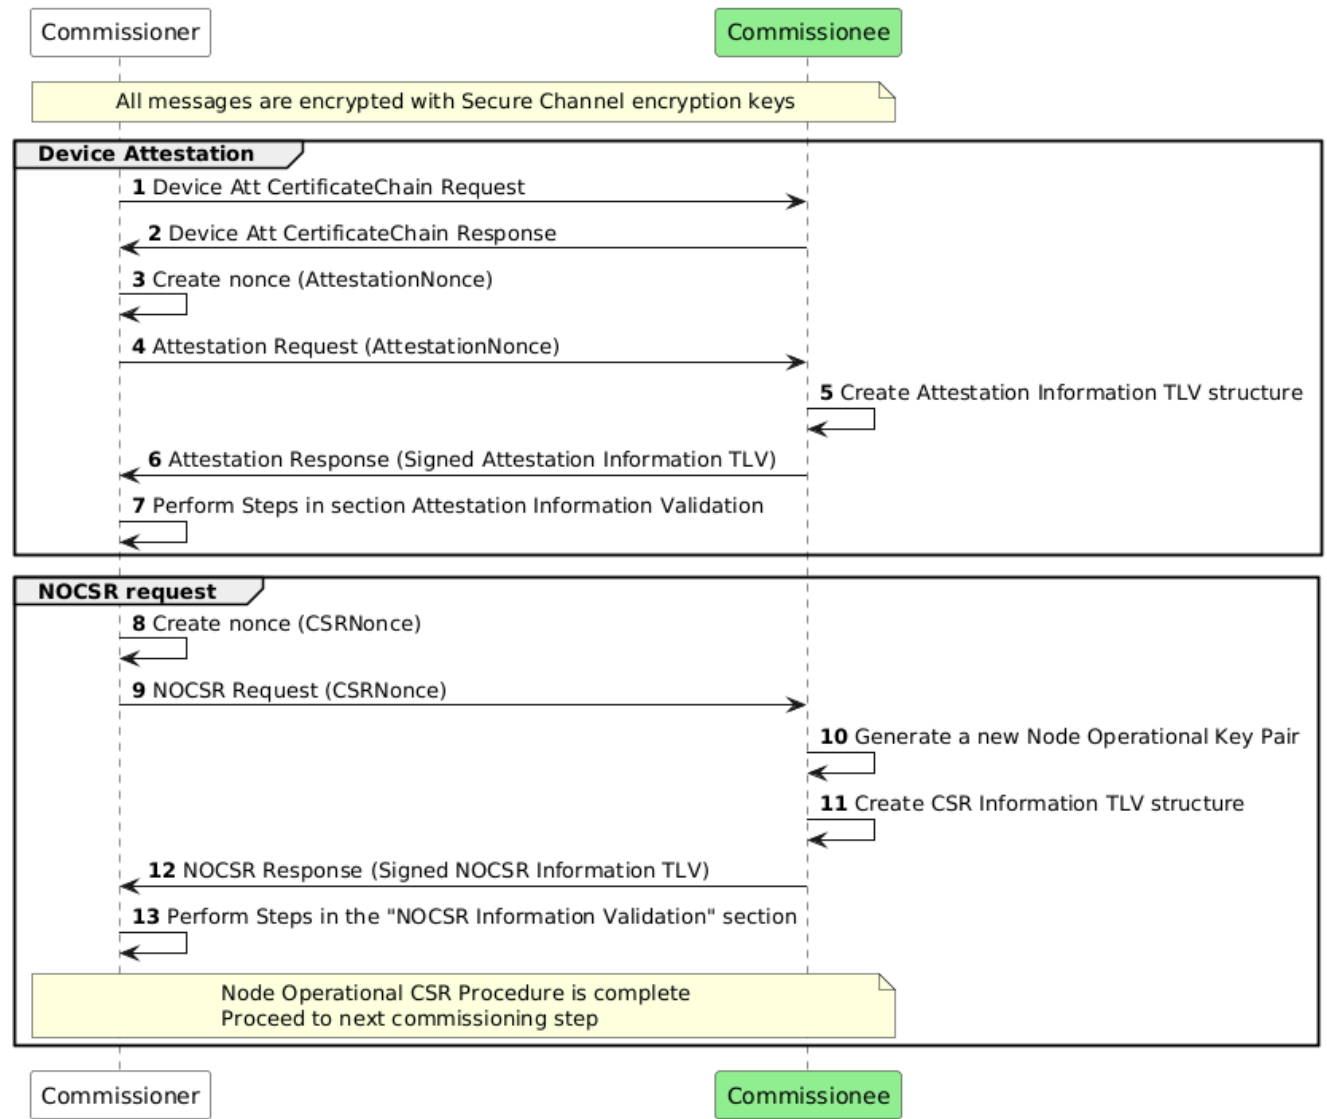


Figure 56. Node Operational Credentials flow

6.4.7. Node Operational Certificate Signing Request (NOCSR)

A Node creates a NOCSR in response to the Commissioner, so that the Commissioner can request a [NOC](#) on the Node’s behalf from its trusted Certificate Authority. The CSR itself SHALL follow the encoding and rules from [PKCS #10](#), with the minimum attributes shown in the example below.

Note that the subject field MAY be any value.

NOCSR

Certificate Request:

Data:

Version: 1 (0x0)

Subject:

Subject Public Key Info:

Public Key Algorithm: id-ecPublicKey

Public-Key: (256 bit)

pub: