

9.2. Endpoint Composition

Endpoint composition SHALL be indicated by these [Descriptor](#) cluster attributes:

- DeviceTypeList SHALL list the device type(s) that the endpoint supports.
- PartsList SHALL indicate endpoints as required for each device type in the DeviceTypeList.

The population of the PartsList of the various endpoints allows for the indication of a hierarchy (composition) for which the following terms are defined:

- "Descendants" of an endpoint E are endpoints that are:
 - in the PartsList of E, or
 - descendants of an endpoint in the PartsList of E.
- "Children" of an endpoint E are endpoints that are descendants of E but not descendants of any endpoint in the PartsList of E. E is the "Parent" endpoint of these Children endpoints. A "Child" endpoint is one of these Children endpoints.
- A "Leaf" endpoint is an endpoint that has an empty PartsList.
- "Sibling endpoints" are endpoints which are children of the same endpoint.

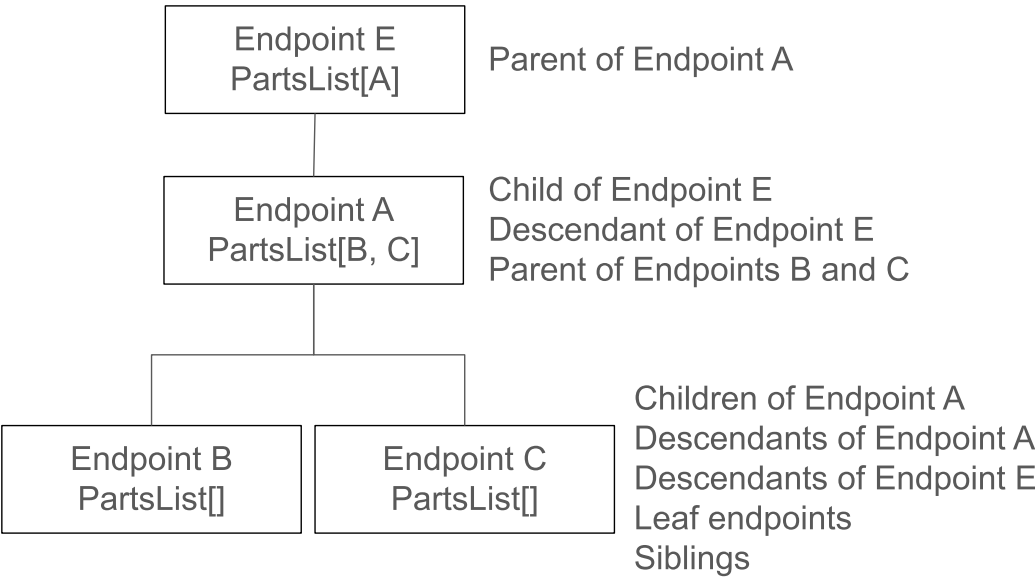


Figure 59. Simplified relationship diagram

An example of composition:

In the [refrigerator composition figure](#) below:

- Endpoint 0 (Root Node, thus using full-family pattern) has a PartsList containing endpoints 1 through 5.
- Endpoint 1 has a PartsList containing endpoints 2 and 4.