

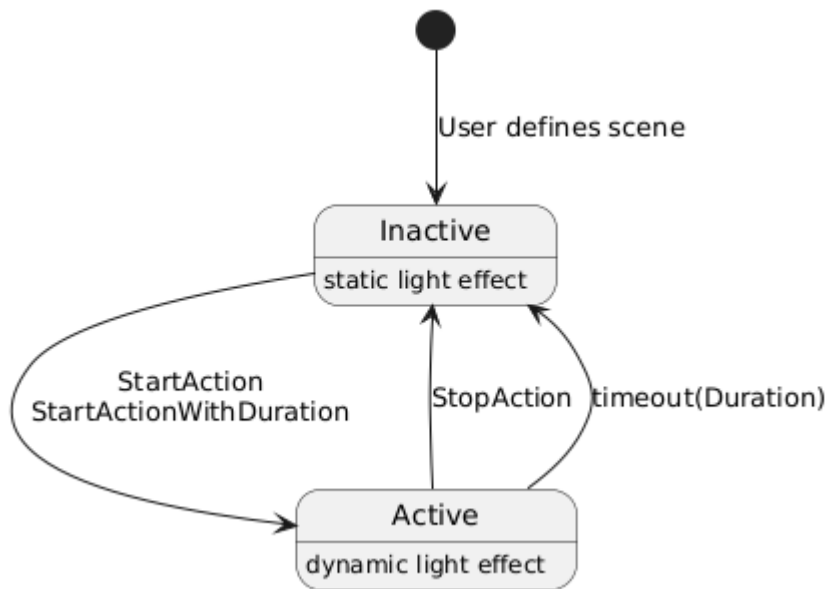


Figure 72. State diagram for example 'dynamic light effect'

9.14.8.3. Example 3: Pause sensor automation

User has defined an automation: a motion sensor controls the lights in a certain room. Sometimes, they want to override that automatic behavior, e.g. when having a party.

The action for this example would refer to such automation, which is typically active, but can be paused (=temporarily disabled).

The corresponding action would have these data fields describing it:

- Name="motion sensor"
- Type=Automation
- EndpointListID references a struct referencing the set of involved endpoints (same as in Example 1)
- SupportedCommands: EnableAction, DisableAction, PauseAction, PauseActionWithDuration, ResumeAction

Typically, the action has been started when the user defines the motion sensor behavior, so without a Matter command the action's state would be 'Active'. The PauseActionWithDuration command (e.g. triggered by a voice command "disable the motion sensor in living room for 2 hours") will trigger the server to disable the behavior associated with the motion sensor for the specified time. A ResumeAction command would make this behavior active again. The automation could also have internal logic to abort the disabling after several hours or during the night-time reset, to accommodate for the case the user 'paused' and forgot to 'resume'.