

receiver possible delivery of more chunked messages within a given Action. This is specified in the [WriteRequestMessage](#) and [ReportDataMessage](#).

While most data types can be easily encoded in this scheme to fit within a message, the fact that lists can be of variable, and arbitrary, length can lead to complications. Specific strategies to encode lists that are chunking friendly are provided in [Section 10.6.4.3.1, “Lists”](#).

10.2.4. Transaction Flows

10.2.4.1. Read (Success)

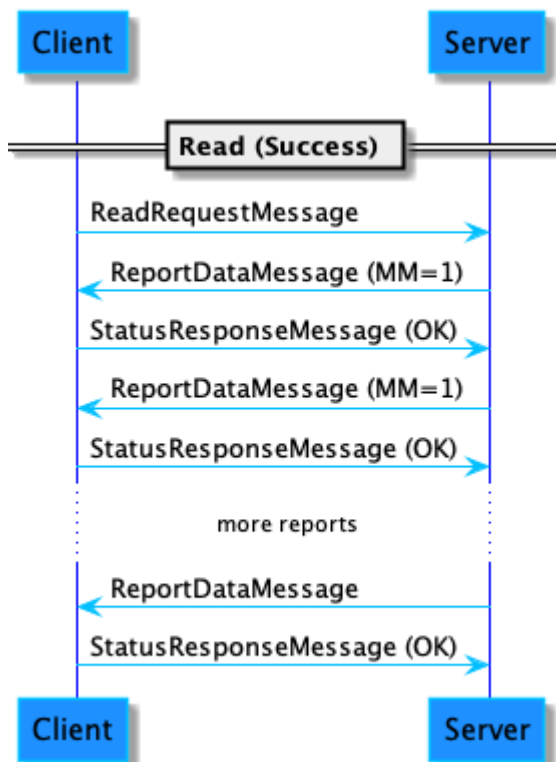


Figure 88. Read message flow

10.2.4.2. Read (Server Error)

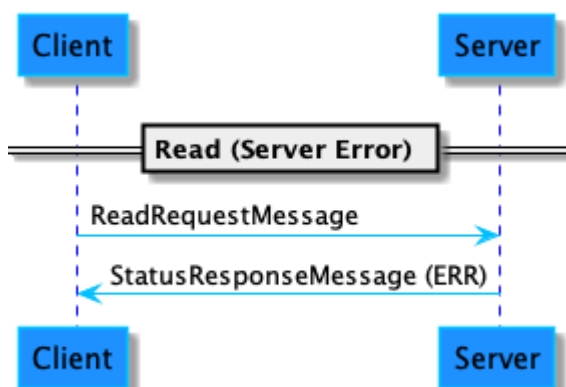


Figure 89. Read message with server-side error flow

10.2.4.3. Read (Client Error)