

Re-started range-based receive from sleepy device acting as driving Sender

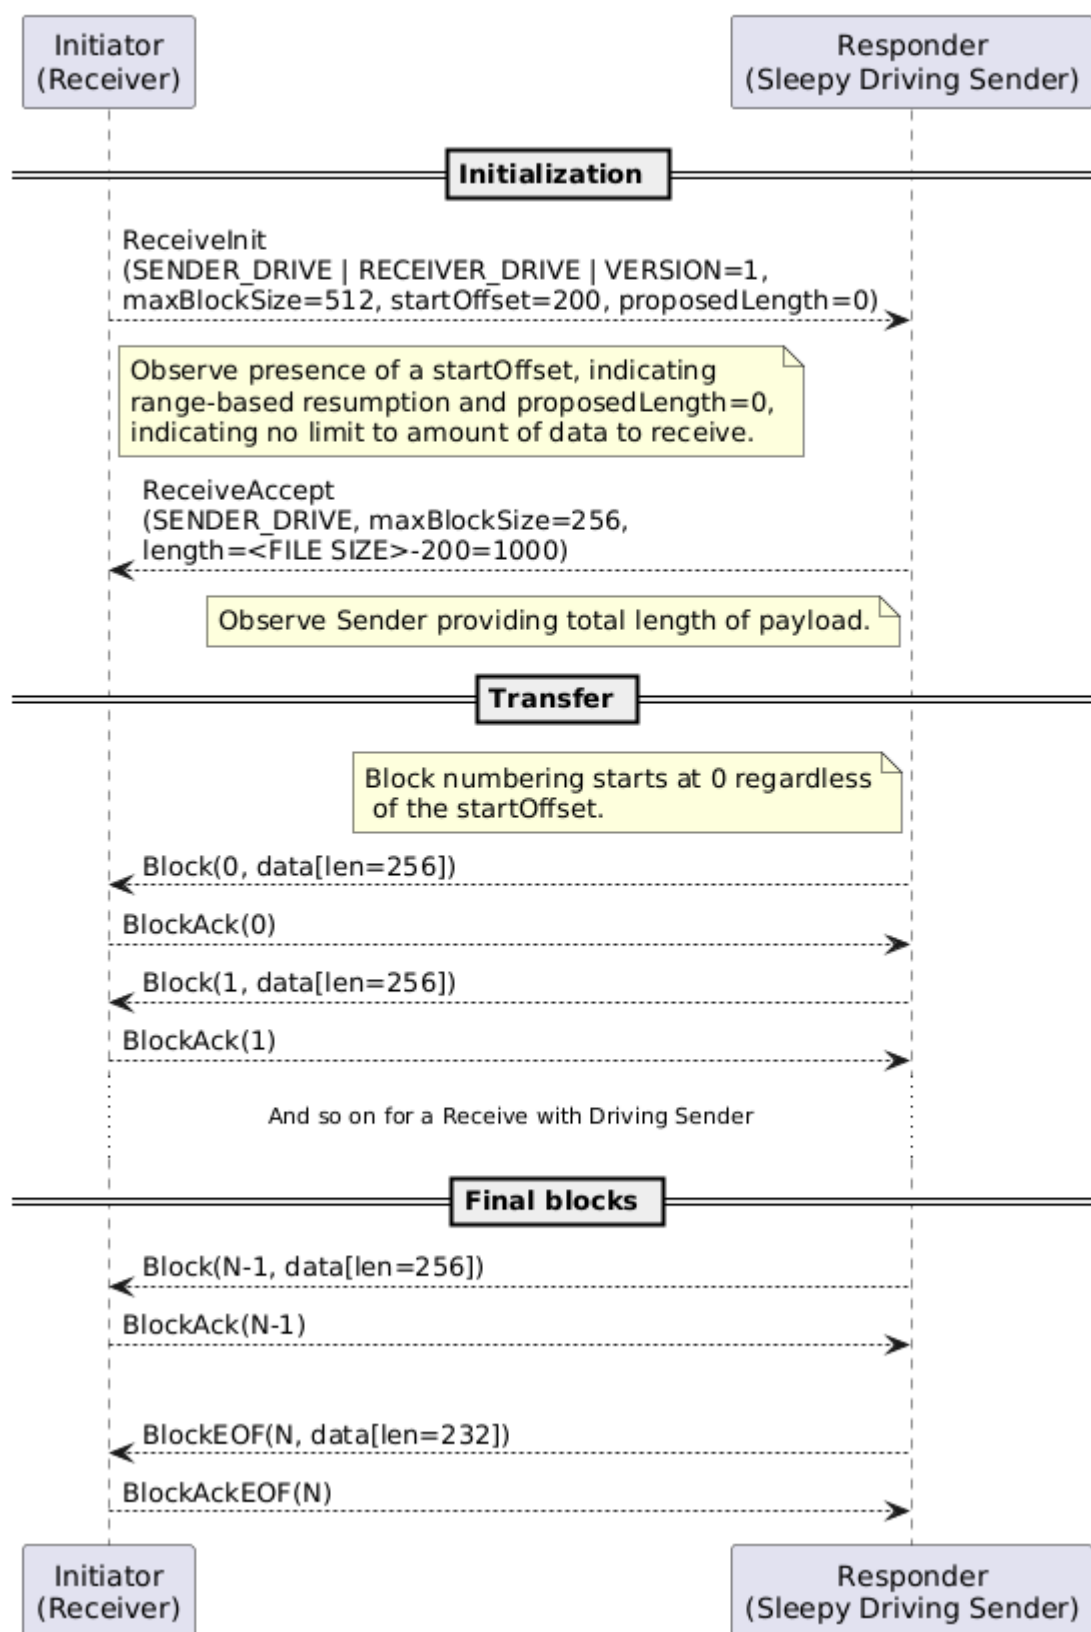


Figure 104. Re-started receive from sleepy device acting as driving Sender

In the following flow, the Initiator wants to download (receive) only a section of a file, starting at offset 200, and of length 1000.

During negotiation, the length (LEN) field of `ReceiveAccept` is set to match the proposed desired region length by the Sender. The range is fully-specified by the `\[startOffset .. startOffset +`