


11.4.3.4.2. Out-Of-Home Streaming

In this situation, the viewer and the camera are likely not in the same network or there could be firewall restrictions that prevent direct communication between them. In this case, a Matter controller that has a CASE session with the camera is needed to coordinate the signaling phase between the camera and the viewer device. The Matter controller exchanges the necessary signaling data with the viewer through an ecosystem specific mechanism.

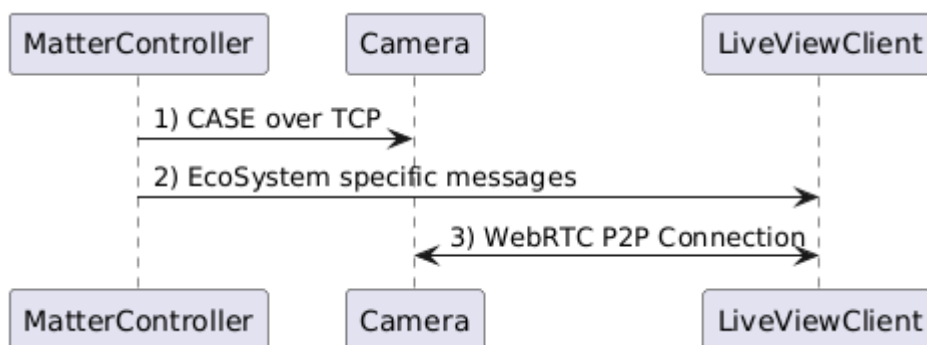

11.4.3.5. Determining If Battery Powered

For camera devices, Controllers SHOULD use the Power Source cluster and the features and attributes found within (See [Power Source Cluster](#), in [\[MatterCore\]](#)) to determine if a device is currently operating on battery power. The pseudo code for this is as follows:

```

// Returns true if device is currently known to be battery powered, false otherwise
function on_battery_power
  // Create a empty list of power source instances, and then add them sorted by the
  Order attribute lowest to highest
  list[power_source_instances]
  for each endpoint in device:
    If endpoint contains a 'Power Source Cluster':
      let power_source_instance be that endpoints 'Power Source Cluster'
      // Check if the power source applies to the whole device (empty list) or the
      cameras endpoint
      If power_source_instance.EndpointList attribute is an empty list or
      power_source_instance.EndpointList contains the endpoint-id of the camera devices
      endpoint:
        power_source_instances.insert_by_rank(power_source_instance,
        power_source_instance.Order)
  
```