

```

    "zone":[
      "main"
    ]
  }

```

Response

```

{
  "response_code":0
}

```

3. Setup the master with GroupID and client list by “setServerInfo (add)”.

Request (URI)

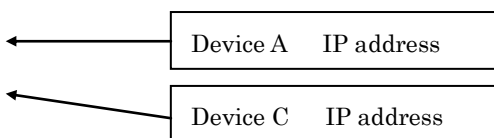
http://{Device B}/ YamahaExtendedControl/v1/dist/setServerInfo

Request (json)

```

{
  "group_id":"9A237BF5AB80ED3C7251DFF49825CA42",
  "zone":"main",
  "type":"add",
  "client_list":[
    "192.168.0.5",
    "192.168.0.6"
  ]
}

```

Response

```

{
  "response_code":0
}

```

4. Start distribution with setting current all system distribution number to the master by “startDistribution”.

*** When group creation is completed, the status of getDistrbutionInfo changes to "working".**

Request (URI)

http://{Device B}/ YamahaExtendedControl/v1/dist/startDistribution?num=0

Response

```

{
  "response_code":0
}

```

