

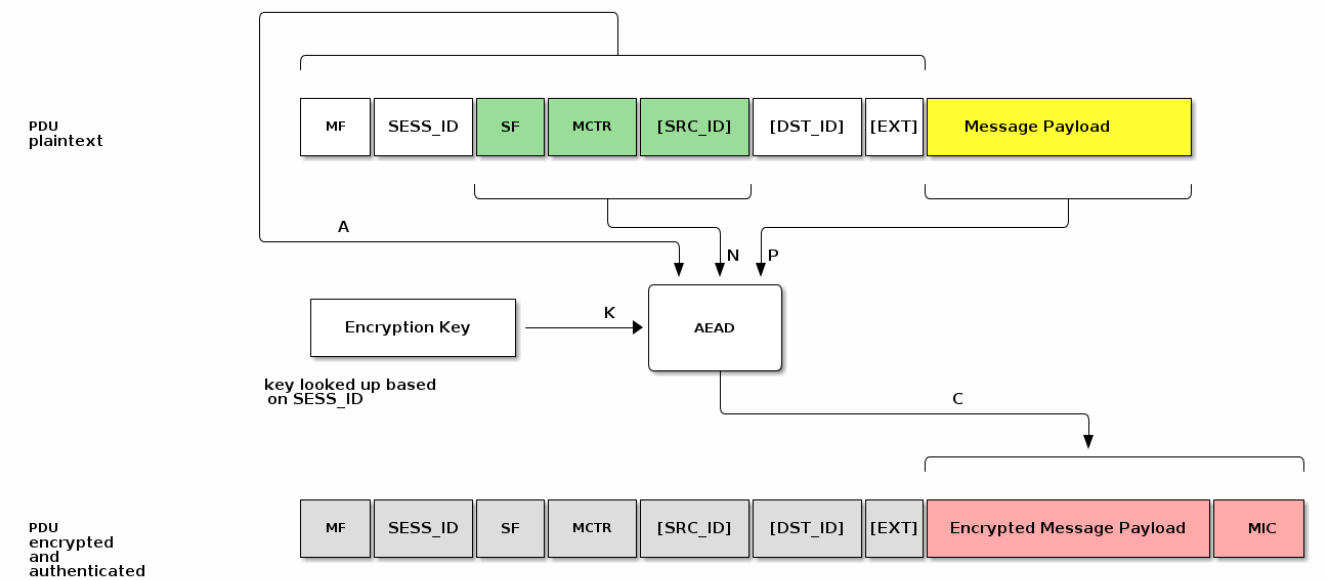


Figure 8. Matter Message Encryption

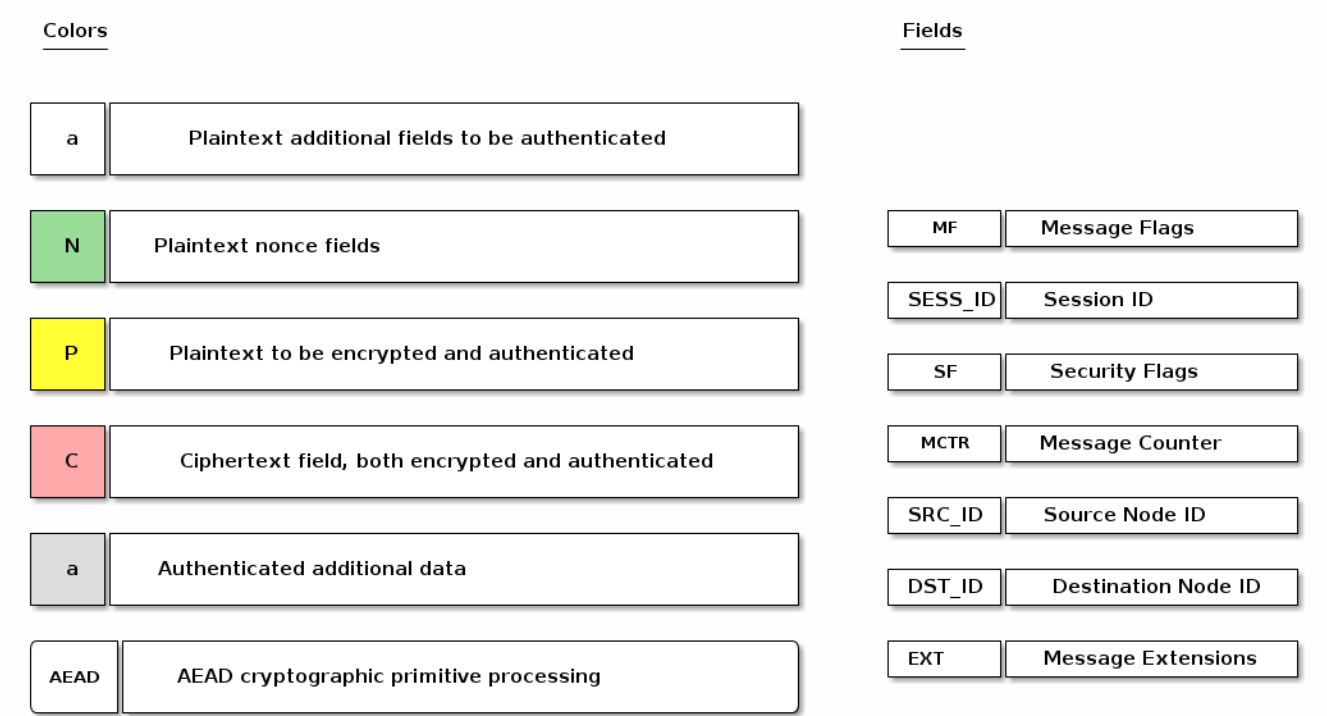


Figure 9. Matter Message Encryption Legend

To prepare a secure message for transmission with a given Session ID, Destination Node ID (which may be a [group node id](#) or an [operational node id](#)) and Security Flags, the Node SHALL perform the following steps:

1. Obtain the Encryption Key associated with the Session ID and Destination Node ID and the Session Type associated with the Destination Node ID:
 - a. If no key is found for the given Session ID, security processing SHALL fail and no further security processing SHALL be done on this message.
2. Obtain the outgoing message counter of the sending Node as per [Section 4.6.6, “Counter Process-](#)