

- c. The Session Context SHALL be set to the Session on which the message was received.

A node SHOULD limit itself to a maximum of 5 concurrent exchanges over a unicast session. This is to prevent a node from exhausting the message counter window of the peer node.

4.10.5.3. Closing an Exchange

An Exchange MAY be closed by the application layer or a fatal connection error from the lower message layer. The process of closing an Exchange follows:

1. Any pending acknowledgements associated with the Exchange SHALL be flushed. If there is a pending acknowledgment in the *acknowledgement table* for the Exchange and it has **Stand-aloneAckSent** set to false:
 - a. Immediately send a *standalone acknowledgement* for the pending acknowledgement.
 - b. Remove the *acknowledgement table* entry for the pending acknowledgement.
2. Wait for all pending retransmissions associated with the Exchange to complete.
 - a. If the retransmission list for the Exchange is empty, remove the Exchange.
 - b. Otherwise, leave the Exchange open and only close it once the retransmission list is empty.

These steps are depicted in [Figure 11, “Exchange close flow”](#).

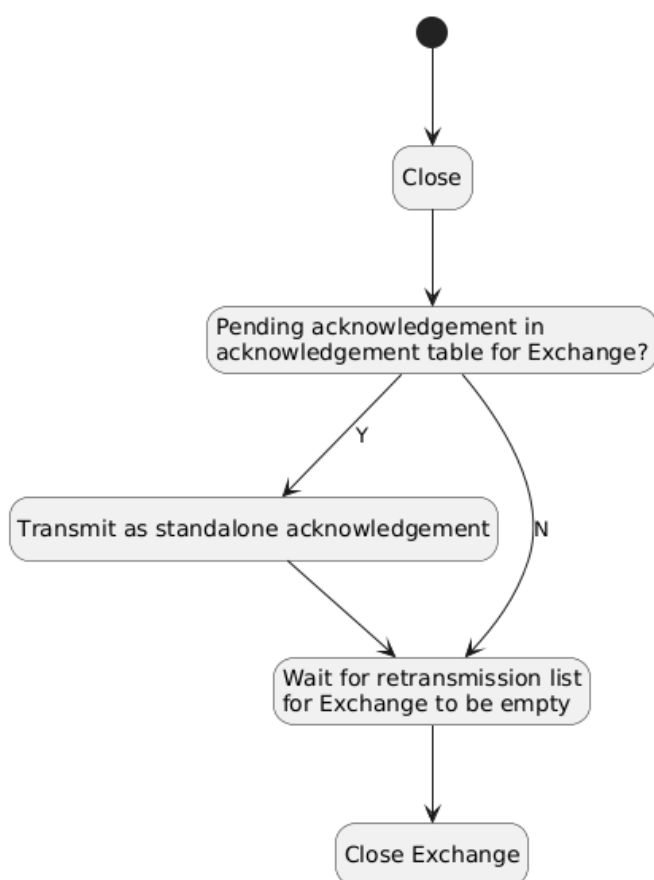


Figure 11. Exchange close flow