

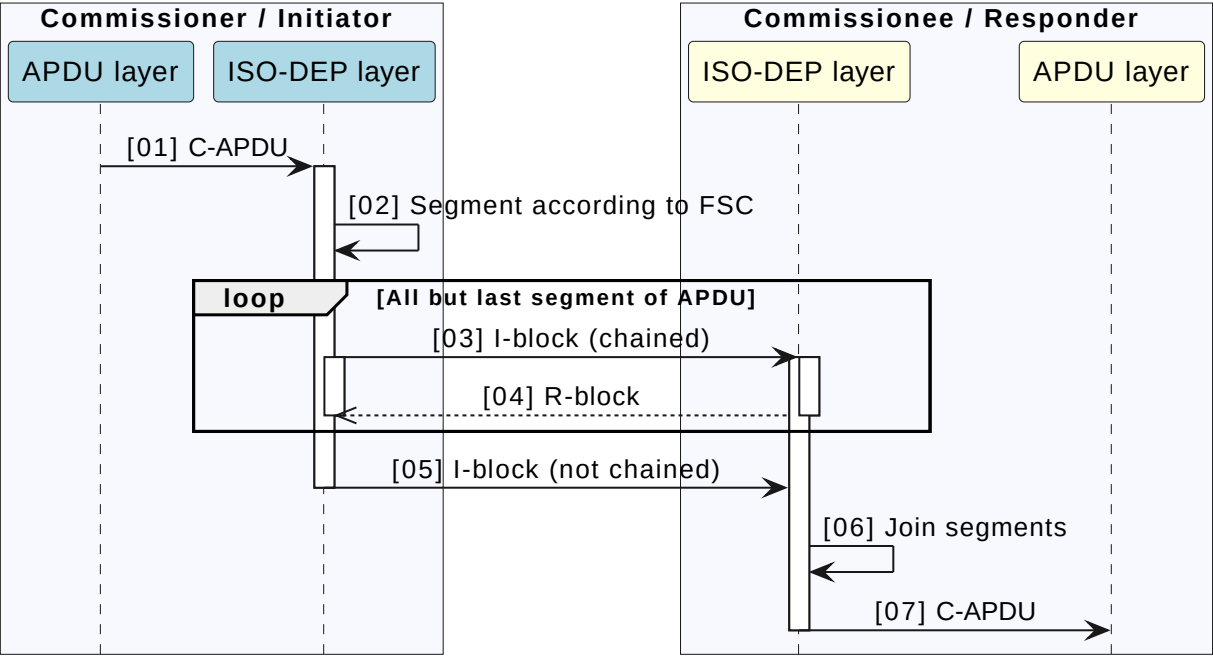


Figure 38. ISO-DEP chaining from initiator to responder

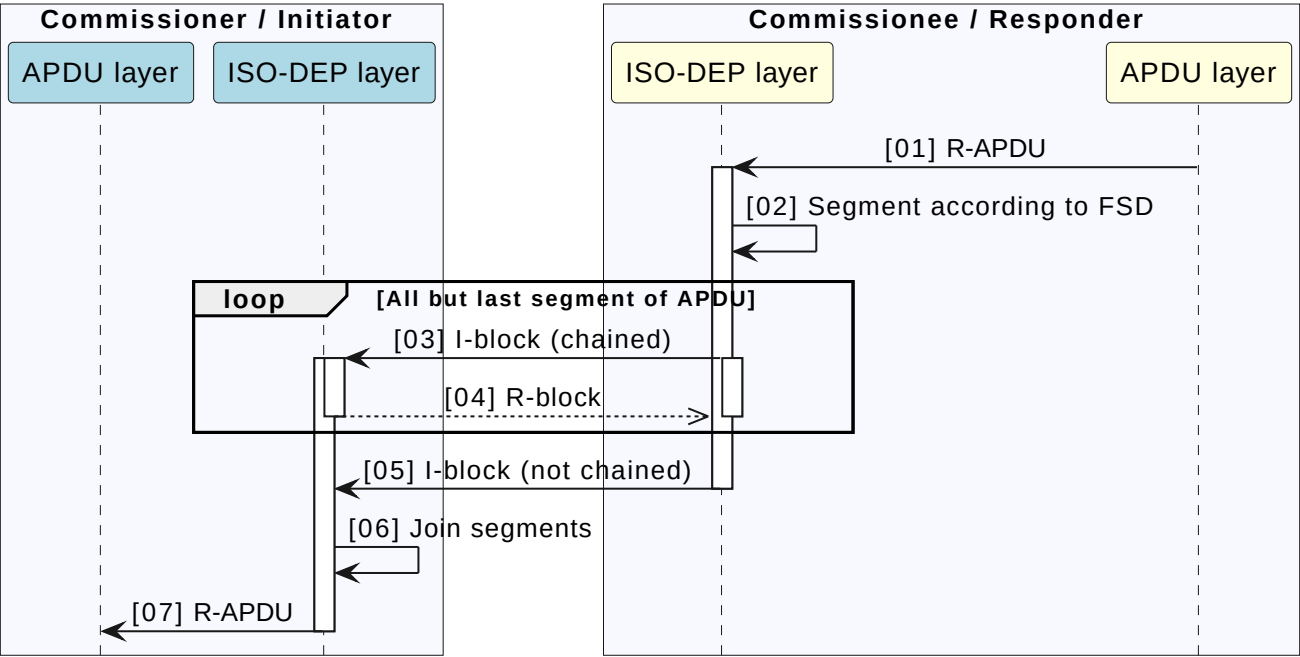


Figure 39. ISO-DEP chaining from responder to initiator

A default maximum response timing is announced by the responder in the RATS frame, but when the responder requires more time to respond, it can extend the initiator waiting time by sending appropriate S-block as shown in [ISO-DEP Waiting time extension](#)