

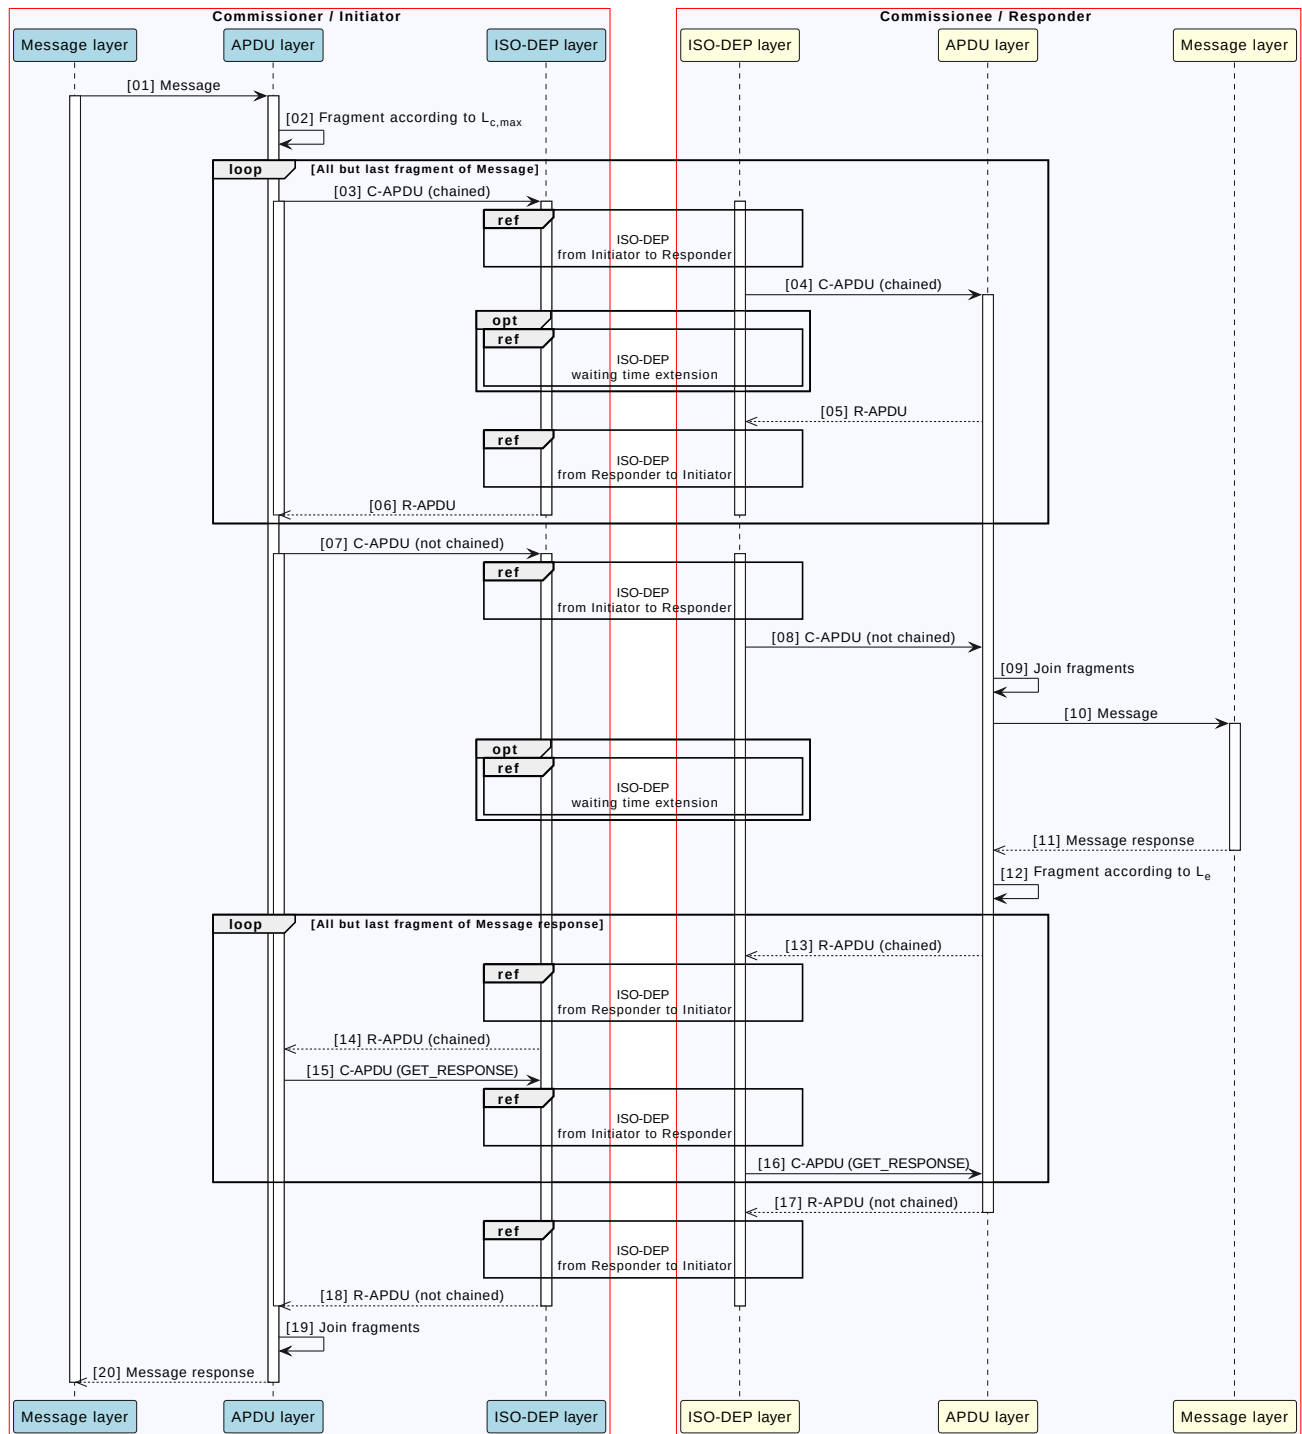


Figure 41. NTL APDU sequence diagram

4.22. Check-In Protocol

The goal of the Check-In Protocol is to provide a way for a server to notify a client of an event or state outside of a secure session in a private and secure fashion.

Some of the events or states to be shared with a client are defined by different Check-in Protocol Use Cases. The current list includes:

- An **ICD** is available for communication.

The Check-In Protocol is a set of requirements and processes that can be re-used by multiple Check-In Protocol use cases. Multiple Check-In Protocol use cases can coexist on a single device. The