

```
https://commissioner.domain.example/cb?token=mAsJ6_vqbr-
vjDiG_w%3D%3D&MTrop=MT%3A-MOA5.GB00V68T62010
```

Note that the **MTcu** key/value pair was initially provided URL-encoded within the **ExpandedCommissioningCustomFlow** URL and the **MTrop=_** key/value pair placeholder now contains a substituted returned onboarding payload.

- Invalid URL, due to **MTza=79** key/value pair in reserved **MT**-prefixed keys reserved for future use:
 - https://company.domain.example/matter/custom/flows?vid=FFF1&pid=1234&MTop=_&MTza=79

5.7.3.4. Example Custom Commissioning Flow

An example of this flow is illustrated below. The "DCL info" concept denotes that the Commissioner SHALL collect the information from the DCL via some mechanism, such as a network resource accessible to the Commissioner containing a replicated set of the DCL's content.

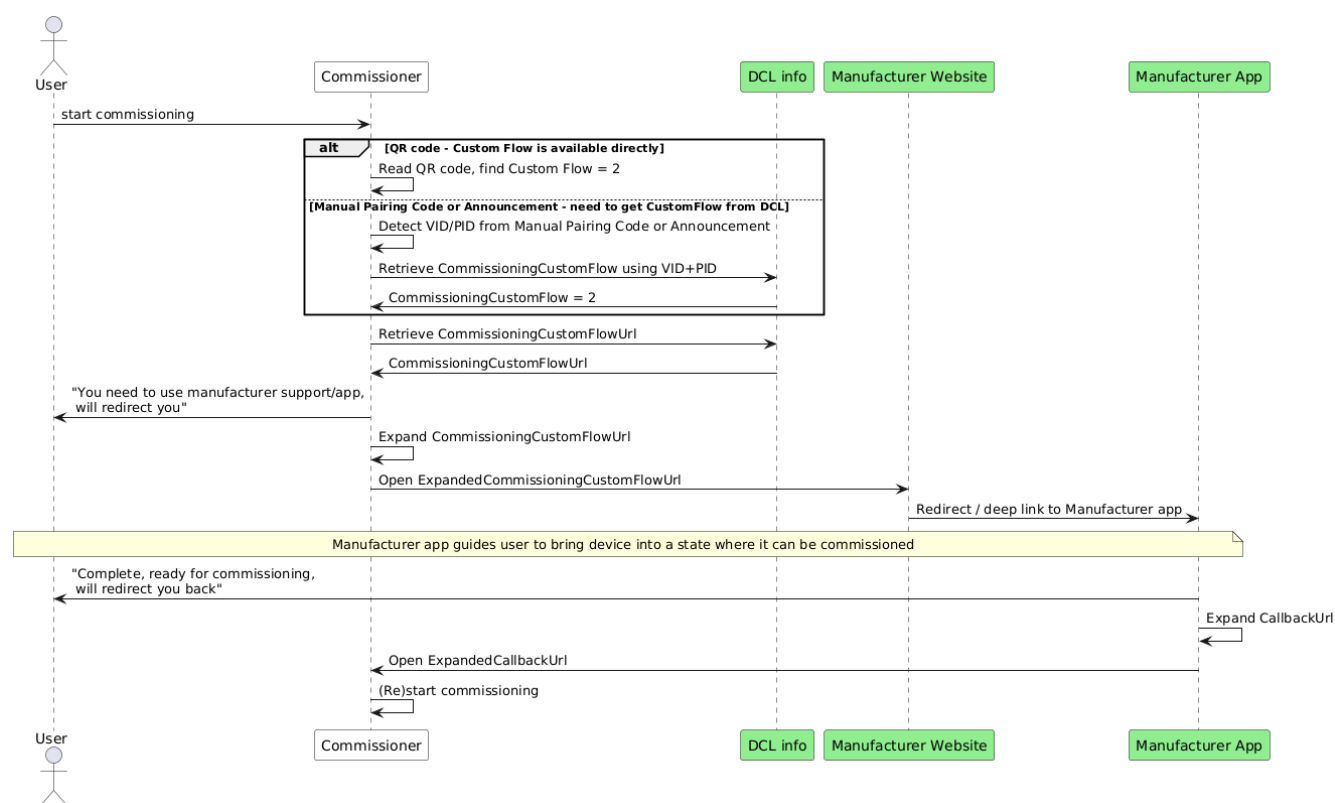


Figure 47. Custom Commissioning Flow sequence diagram

In the flow above:

- In the final steps, the User might have to perform the trigger to the first Commissioner, so that it can start or continue the commissioning process.
- If possible, a Commissioner MAY continue to scan for announcements from the device in the background while any manufacturer-specific app is configuring the device to be available for commissioning. The Commissioner might need a new OnboardingPayload provided to the User by the Manufacturer Website or App.
- In order to simplify the flow, the Commissioner MAY: