

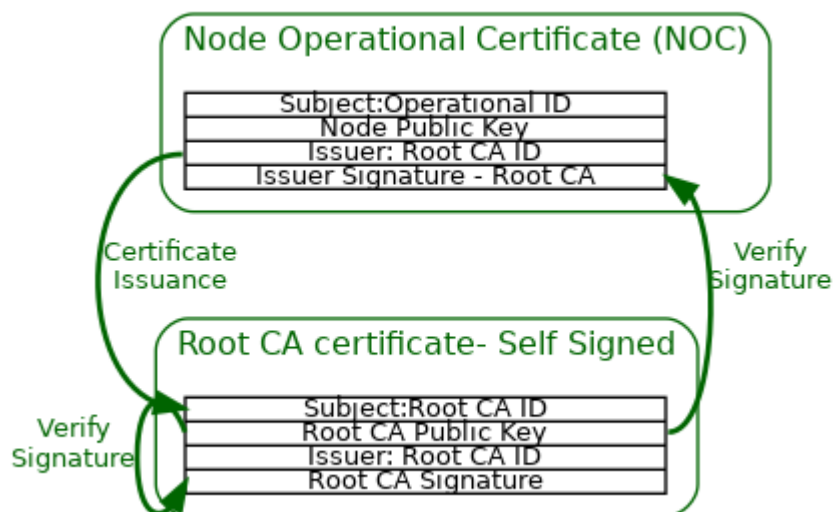


Figure 55. Node Operational Certificate PKI hierarchy without optional ICAC

6.4.5.4. Vendor ID Verification Signer Certificate (VVSC)

The [Fabric Table Vendor ID Verification Procedure](#) MAY rely on a Vendor Verification Signer Certificate (VVSC) in some cases.

These certificates appear in the [Operational Trust Anchors Schema](#) of the [Distributed Compliance Ledger](#).

The VVSC allows a fabric operator to cryptographically associate its Vendor ID with a fabric, even if the root of trust of the fabric is locally unique, and not shared with anyone else outside the premises or operational network on which it operates.

6.4.6. Node Operational Credentials Procedure

The following procedure is used by a Node to obtain an Operational Credential. This procedure is part of [Commissioning](#).

6.4.6.1. Node Operational Certificate Signing Request (NOCSR) Procedure

After the Commissioner validates Device Attestation Information, the following procedure is used to generate a Node Operational Key Pair and obtain the NOCSR.

1. The Commissioner SHALL generate a random 32 byte nonce named **CSRNonce** using **Crypto_DRBG()**.
2. The Commissioner SHALL send the CSRNonce to the Node and request NOCSR Information using the [CSRRequest Command](#).
 - a. The Node SHALL create a new candidate Node Operational Key Pair, using **Crypto_GenerateKeyPair()**, valid for the duration of the [Fail-Safe Context](#) currently in progress.
 - b. The Node SHOULD verify that the newly generated candidate Node Operational Key Pair does not match any other existing Node Operational Key Pair on the device. If such a key collision was to be found, it would indicate a key pair that was not properly randomly generated. The procedure SHALL fail if such a collision is detected. See [Section 11.18.6.5](#), “[CSRRe-](#)