

#### 6.4.10.2. Generation of the VIDVerificationStatement message

The **VIDVerificationStatement** message allows a globally trusted signer whose public certificate chains back to entities in the **Operational Trust Anchors Schema** under the expected **VendorID** to authenticate the association of a given VendorID with a fabric reference.

This allows verifying a large number of fabrics, with a large associated number of RCAC with a small number of vendor-bound signers, thus reducing the number of RCAC to store in the Distributed Compliance Ledger associated with each manufacturer or vendor.

The **VIDVerificationStatement** is computed as follows:

1. Locally generate the `vid_verification_statement_tbs` message using the procedure in [Section 6.4.10.3](#), “Generation of the `vid_verification_statement_tbs` message”.
2. Select an issuer (signer) for the `VIDVerificationStatement`. Store the 20-octet SubjectKeyID extension value of the associated issuer public certificate as `vid_verification_signer_skid`.
  - The certificate chain for the issuer SHALL chain back to elements in the [Operational Trust Anchors Schema](#) under the expected `VendorID` that was used to generate `vid_verification_statement_tbs`.
3. Generate `vid_verification_statement_signature` := `Crypto_Sign(signer.private_key, vid_verification_statement_tbs)`.
  - Only the [Cryptographic Primitives](#) in force in this specification SHALL be used for signing.
4. Generate `VIDVerificationStatement` := `statement_version || vid_verification_signer_skid || vid_verification_statement_signature`.
  - The `statement_version` SHALL be the same as the one used in the `vid_verification_statement_tbs`.

The **VIDVerificationStatement** message value can now be installed on a device using the **SetVIDVerificationStatement** command of the Operational Credentials Cluster.

The construction of this payload is illustrated below:

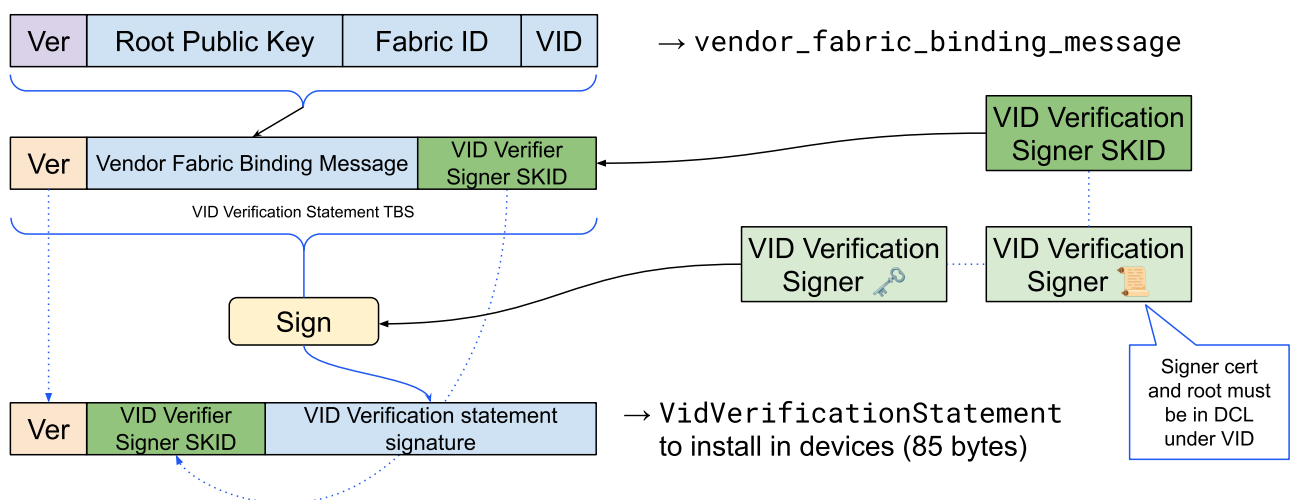


Figure 58. Construction of `VIDVerificationStatement`