

9.12.2.1. Topology or logical grouping

A Bridge typically has information on topology or logical grouping of the Bridged Devices, which can be of use to Nodes on the Matter Fabric.

- For example, consider a Bridge with 50 lights. If this exposure of grouping, and their naming, would not be present, the user would just see a list of 50 lights on their controller and would not know which of those physical lights would be in which location/group.

If a Bridge has such information on topology or logical grouping, it SHOULD expose such information in the EndpointLists attribute of an **Actions** cluster (the ActionLists of which MAY be empty if no actions are exposed). A Bridge MAY make it possible (e.g., through a Bridge Manufacturer's app) for its users to restrict whether all or some of such information is exposed to the Fabric. The Node on the Fabric using the Bridged Devices which is interested in using such topology or logical grouping (e.g. to show the grouping of lights per room in an overview to the user), SHOULD derive such grouping (and associated naming) from this EndpointLists attribute.

In the example below, the devices are split over two rooms, as exposed in the EndpointLists attribute. This example also illustrates a compound endpoint for a compound Bridged Device, in this case a lighting device (Bridged Device at EP 24,25,26) which has an up- and downlighter which can be controlled separately, and which have their own set of lighting-related clusters on an individual endpoint (EP 25,26). Note that the **Bridged Device Basic Information** cluster is at the top of the hierarchy for this compound device (EP 24), while the application device types and application clusters are at the leaf endpoints (EP 25,26).

Since EP 25,26 are listed in the PartsList of EP 24, they 'inherit' the Bridged Node device type and information in the **Bridged Device Basic Information** cluster of EP 24.

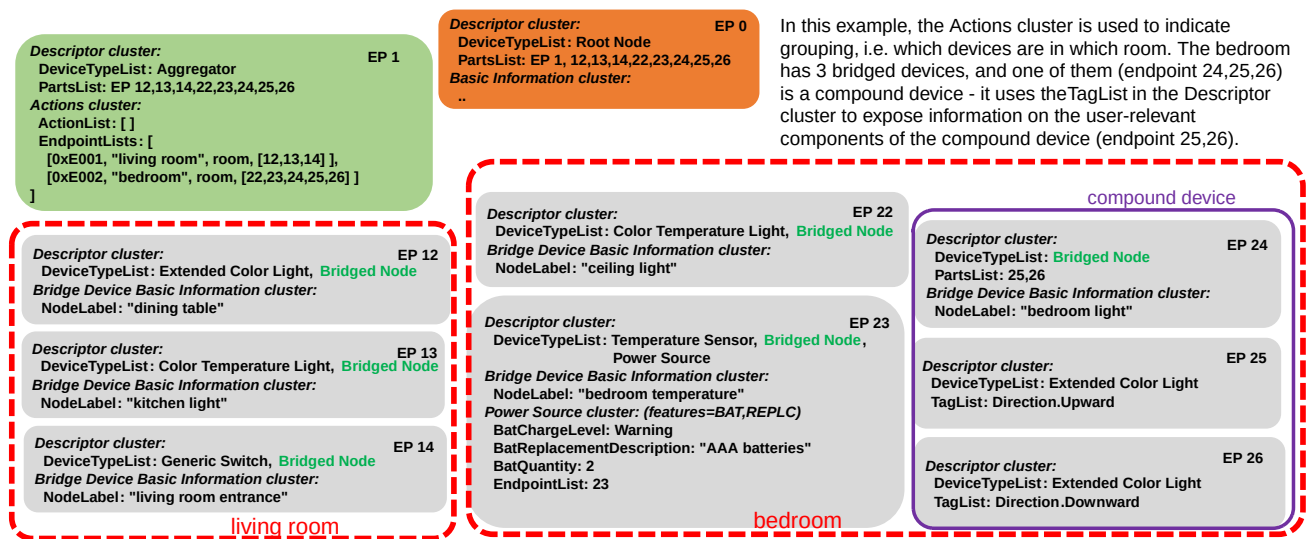


Figure 66. example of endpoints representing Bridged Devices using grouping