

trigger the server to activate that scene on those lights.

When a slow fade-in is preferred, the `InstantActionWithTransition` can be used, with a `Transition-Time` parameter of e.g. 50 (denoting 5 s).

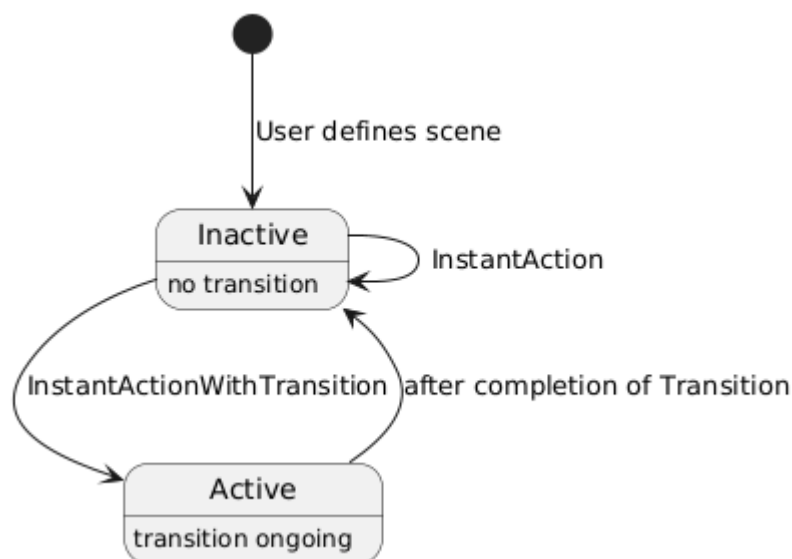


Figure 71. State diagram for example 'scene recall'

9.14.8.2. Example 2: Set dynamic light effect

User has defined a scene on a number of lights. The corresponding action would have these data fields describing it:

- Name="sunset"
- Type=Scene
- EndpointListID references a struct referencing the set of involved endpoints (same as in Example 1)
- SupportedCommands: StartAction, StartActionWithDuration, StopAction

The `StartActionWithDuration` command (e.g. triggered by a voice command "play sunset in living room for 1 hour") will trigger the server to activate a dynamic pattern with colors inspired by sunset on the associated lights. At any time, the `StopAction` can be used to stop the effect.

Please note that the most of the data fields in the `ActionStruct` for this example are identical to those in example 1 - except for the `SupportedCommands`. The different sets of supported commands indicate whether it is an instant scene recall (example 1) vs. a long-term dynamic effort (example 2). A server could expose this action also as a single action with the combined set of supported commands.