

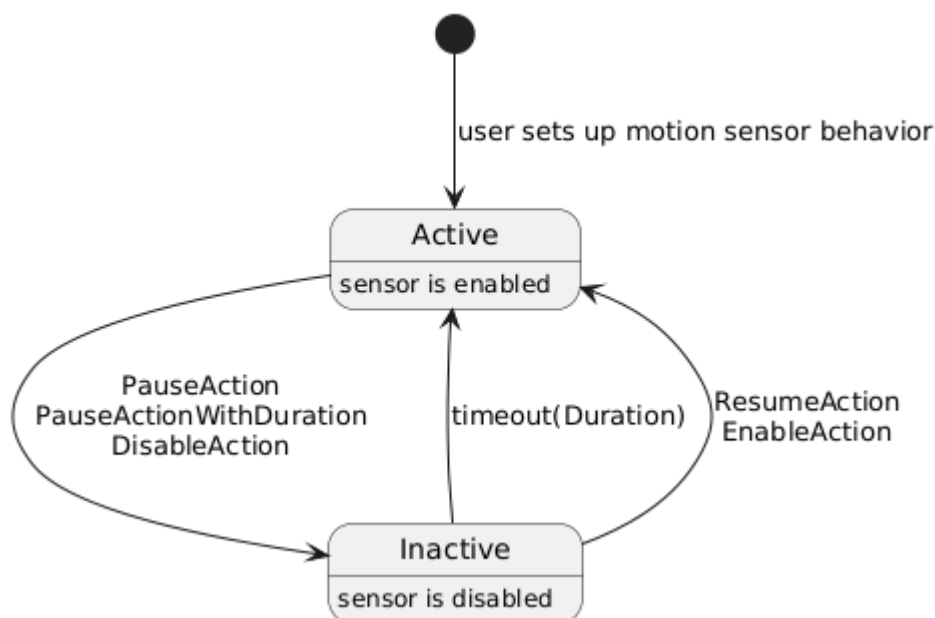


Figure 73. State diagram for example 'pause sensor automation'

#### 9.14.8.4. Example 4: Wake-up routine

User has defined a wake-up routine: the lights in the bedroom will gradually become brighter and change in color temperature to simulate a sunrise. The sequence lasts for e.g. 30 minutes. Near the end of the sequence, the window coverings would be (partially) opened as well.

The corresponding action would have these data fields describing it:

- Name="wakeup"
- Type=Sequence
- EndpointListID references a struct referencing the set of involved endpoints (lights and window coverings in the bedroom)
- SupportedCommands: EnableAction, DisableAction, DisableActionWithDuration, PauseAction, PauseActionWithDuration

When the user wants to snooze some more, he can use a voice command to trigger the PauseAction command (which could automatically timeout after e.g. 10 minutes). The StopAction command could similarly be used to cancel the remainder of the whole sequence. The DisableActionWithDuration (with parameter 172,800 = 2\*24\*60\*60 s) can be used on Friday evening to disable the sequence for the weekend.

When such action has been defined, a Matter node which is aware of the user's calendar for the day, can use the StartAction command to trigger this sequence of events.