

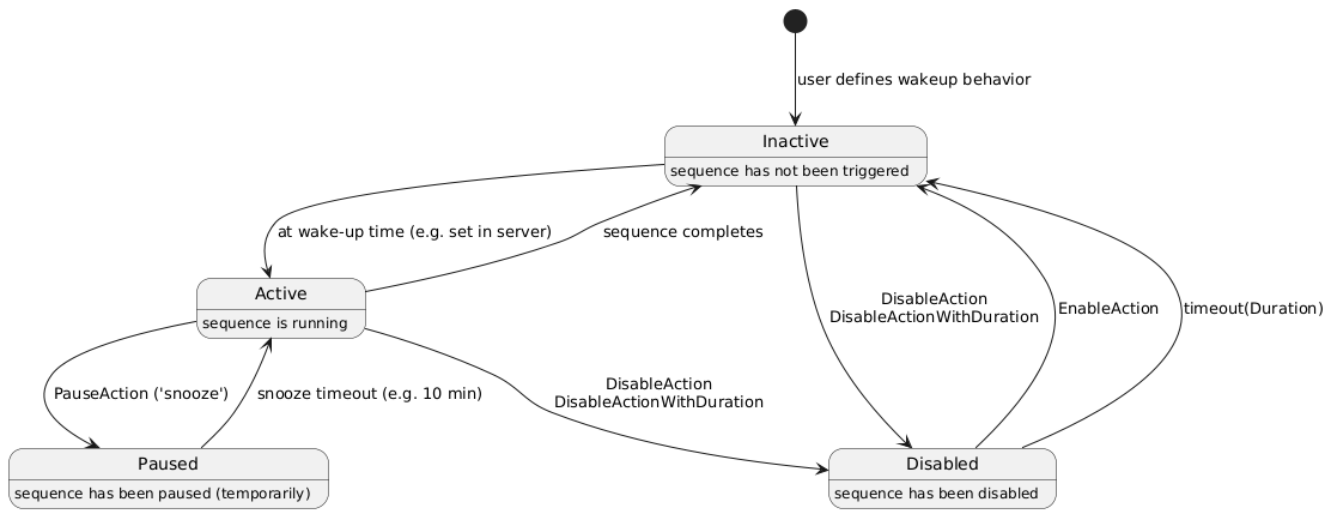


Figure 74. State diagram for example 'wake-up experience'

9.14.8.5. Example 5: Scheduled scene recall

User has setup a scene to be recalled at a certain time of day (e.g. colorful garden lighting to switch on around sunset) and switching off those lights (e.g. at midnight). The server's automation system takes care of this. On certain occasions (e.g. garden party), the user wants to override this behavior (i.e. the scene should not be recalled at sunset because another scene has been set for the party).

The corresponding action would have these data fields describing it:

- Name="colorful evening garden"
- Type=Automation
- EndpointListID references a struct referencing the set of involved endpoints (lights in the garden)
- SupportedCommands: EnableAction, DisableAction, DisableActionWithDuration

After installation, this action is in Inactive state. At the scheduled "on" time, the colorful garden lighting scene is activated and the action's state changes to the Active state. At the scheduled "off" time, the lights are switched off, and the action's state changes to the Inactive state. Using the DisableAction, the user can prevent these automated steps to occur - the action's state changes to the Disabled state. Using the DisableActionWithDuration, the user can do similarly, but also indicate an automatic re-enabling after the specified time period. Using the EnableAction, the user can re-enable the automation.