

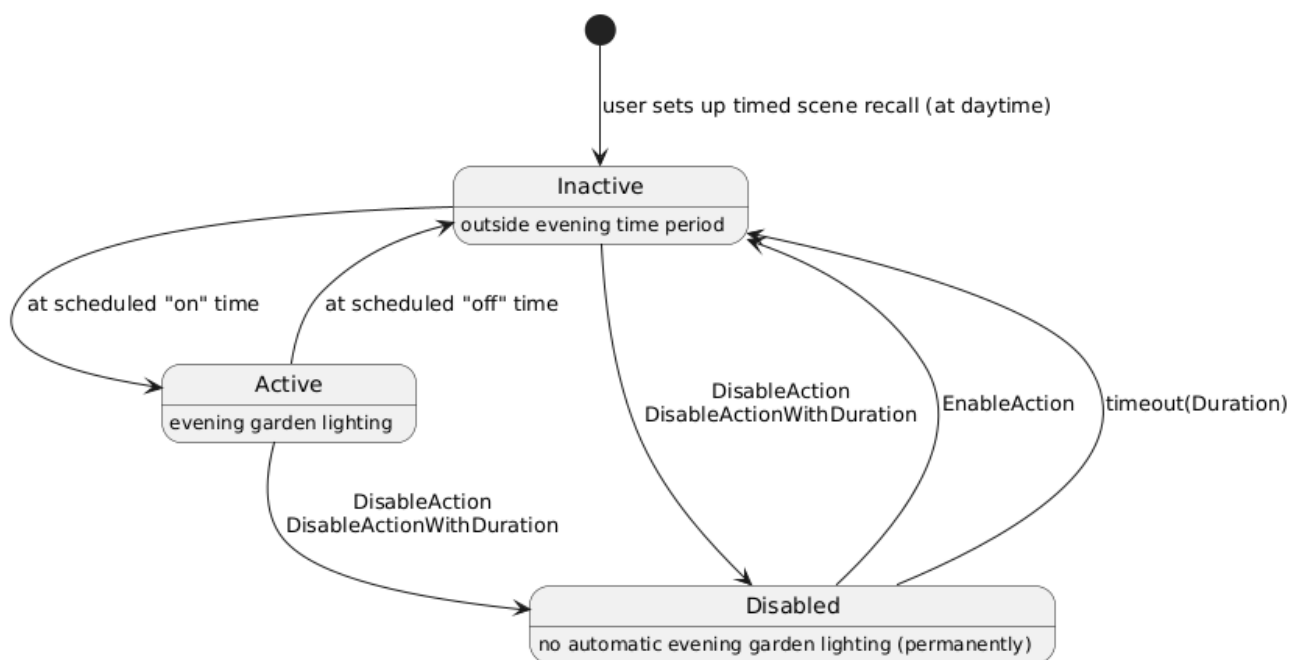


Figure 75. State diagram for example 'scheduled scene recall'

9.14.8.6. Example 6: Alarm system

User has an alarm system which exposes this cluster, with an action that allows to arm/disarm the system by voice commands from a Matter node which is a client to this cluster.

The corresponding action would have these data fields describing it:

- Name="alarm system"
- Type=Automation
- EndpointListID references a struct referencing the set of involved endpoints (elements of the alarm system)
- SupportedCommands: EnableAction, DisableAction, DisableActionWithDuration

After installation, this action could be in Inactive state (assume user is at home installing so system is not armed). Using the EnableAction, the alarm system would be armed. Using the DisableAction, the alarm system would be disarmed (or disarmed for a period with DisableWithDuration).