

The ICD stays active a minimum amount of time each active mode period, and that time can be extended based on received network activity from registered clients. A graphical depiction of ICD behavior when in ACTIVE mode is shown in [Figure 79, “ICD Active Mode Behavior Diagram”](#). The **ActiveModeDuration** starts immediately upon transitioning out of IDLE mode into ACTIVE mode. The **ActiveModeThreshold** starts immediately upon sending the Check-In message or any other transmission. The Exchange Context ends upon receipt of a response acknowledgement or timeout. Receipt of a response acknowledgement starts a new **ActiveModeThreshold** and keeps the ICD ACTIVE for longer. If further messages are received during the **ActiveModeThreshold**, a new Exchange can be created to keep the ICD ACTIVE for even longer.

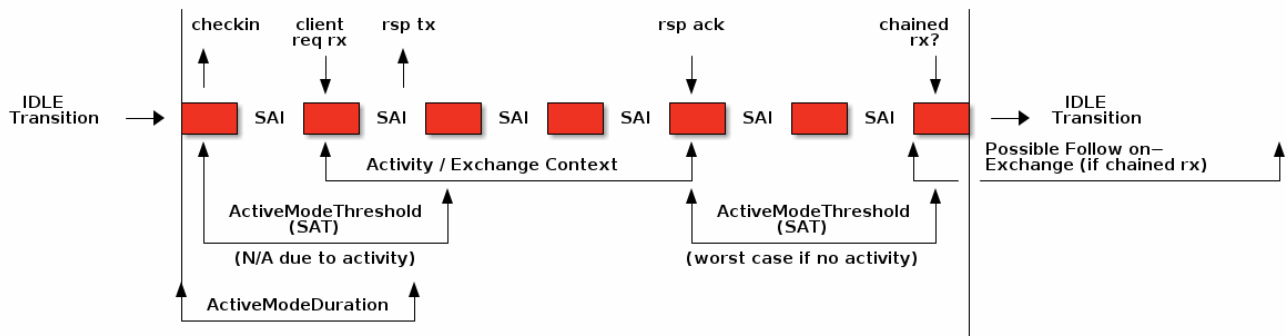


Figure 79. ICD Active Mode Behavior Diagram

Requirements

The device SHALL indicate it is a LIT ICD by setting the **LongIdleTime** feature to 1 in the **ICD Management cluster**. When the device is operating as a LIT ICD, it SHALL advertise 1 with the **ICD discovery TXT key**. This informs clients that they SHOULD wait for a notification from the LIT ICD before sending any messages to the device. When the device is operating as a SIT ICD, it SHALL advertise 0 with the **ICD discovery TXT key**. This informs clients that they SHOULD NOT wait for a notification from the LIT ICD before sending any messages to the device. It SHALL also advertise its **SESSION_ACTIVE_INTERVAL** per **SAI**. A LIT ICD SHOULD NOT advertise its **SESSION_IDLE_INTERVAL** with **SII**. The device SHALL support the **ICD Check-In use case** requirements. The device SHALL have a **user action** that triggers the ICD to transition to Active mode. The **Fast Polling** interval SHALL be smaller than the **Active Mode Duration**. The **ActiveModeThreshold** SHALL NOT be smaller than 5 seconds.

Client Registration Requirement

For LIT ICDs to be fully functional, they require clients to support the ICD client behavior. The main client requirements are the client registration process with the **ICD Management cluster**, and the processing of incoming Check-In messages received from the ICD. A LIT ICD SHALL operate as a **SIT ICD** if it doesn't have at least one registration with any client on any fabric in the **ICD Management cluster**. A LIT ICD MAY operate as a LIT ICD when at least one client has successfully registered.

When operating as a **SIT ICD**, a LIT ICD:

1. SHALL NOT set its Slow Polling Interval to a value higher than the **Short Idle Time ICD** maximum.
2. SHALL advertise its **SESSION_IDLE_INTERVAL** using the **SII discovery TXT key**.