

- After detecting the LIT capability, the client SHOULD interact with the ICD and initiate the registration process within the ICD Management cluster. This enables the client to receive Check-In messages and other notifications from the LIT ICD.
- An ephemeral client SHOULD NOT register itself in the ICD Management cluster. If it does, it SHOULD register as an **ephemeral** client in the ICD Management client. A stationary controller in the network SHOULD be registered instead.

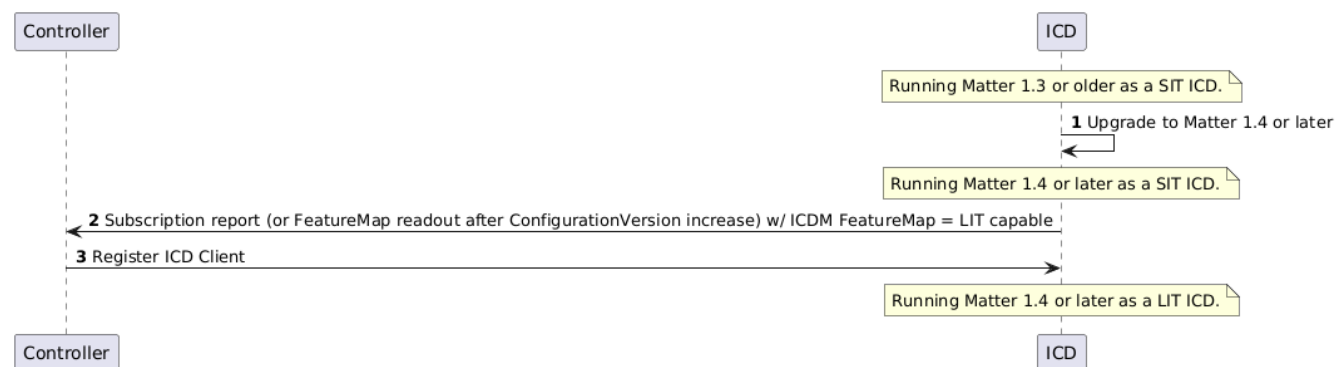


Figure 85. In field upgrade of ICD functionality

9.15.2.3. Unregistration Process

When a commissioner or client wants to unregister itself, it can send an **UnregisterClient** command to the ICD. When a registered client is about to permanently leave the network, it SHOULD send an **UnregisterClient** command to free its slot for another client.

When an ICD receives the **RemoveFabric** command, all registrations associated with the fabric SHALL be removed during the fabric removal process.

9.15.2.4. Post-Commissioning Process

In addition to registering a client with the ICD, the commissioner or client SHOULD ensure that some node that matches the registered **subject-id** establishes and maintains a subscription with the ICD. A client is not required to establish and maintain a subscription with the ICD. In such case, it can rely on Check-In messages as a heartbeat to provide an indication when it can communicate with an ICD.

9.15.2.5. Client and ICD Relationship

This section describes how a client and a LIT ICD arrange to communicate with each other. Because **SIT ICDs** are reachable on the network without special action by clients, clients need not register with SIT ICDs.

Communication with an ICD

LIT ICDs have two operating modes. They can either be operating as LIT or as **SIT ICD**. If the ICD is operating as a **SIT ICD**, it SHALL advertise this by setting the **ICD discovery TXT key** to 0. When the **LIT ICD** is operating as a **SIT ICD**, clients can send their message to the ICD without prior notification. If the ICD is operating as a **LIT ICD**, it SHALL advertise this by setting the **ICD discovery TXT key** to 1. If the ICD is operating as a **LIT ICD**, it will be unreachable for extended periods of time. **Permanent** clients need to wait for prior notification before sending a message to the ICD. Prior