

NOTE

The DeviceDirectory and LocationDirectory attributes are Fabric Scoped with Fabric Sensitive fields. The user can direct an ecosystem to disable sharing of user generated data with specific fabrics in the DeviceDirectory and LocationDirectory attributes. This can result in a client ecosystem receiving a list of entries scoped only to other fabrics (with only the fabric index visible since all other fields are fabric sensitive) if the user has disabled sharing of user generated data with specific fabrics.

9.17.5.1. DeviceDirectory Attribute

This attribute SHALL contain the list of logical devices represented by a Bridged Node. Most of the time this will contain a single entry, but may grow with more complex device compositions (e.g. another bridge.)

An empty list indicates that the information is not available.

9.17.5.2. LocationDirectory Attribute

This attribute SHALL contain the list of rooms, areas and groups associated with the DeviceDirectory entries, and SHALL NOT contain locations which are dynamically generated and removed by an ecosystem. (E.g. a location that is generated and removed based on the user being home is not permitted. However, an initially generated location name that does not quickly change is acceptable.)

An empty list indicates that the information is not available.

LocationDirectory entries SHALL be removed if there is no DeviceDirectory that references it.

9.17.6. Examples

9.17.6.1. Bridged Node with One Device and Two Locations

In the example below, there is a single ecosystem representation of a device for the Bridged Node. The user has configured the name "Dimmable Light" for that device and configured it into two locations in the ecosystem (the "Living Room" is on the "First Floor" so the device can be in two locations).

This example demonstrates the relationship between DeviceDirectory and LocationDirectory, synchronization data is omitted for clarity.

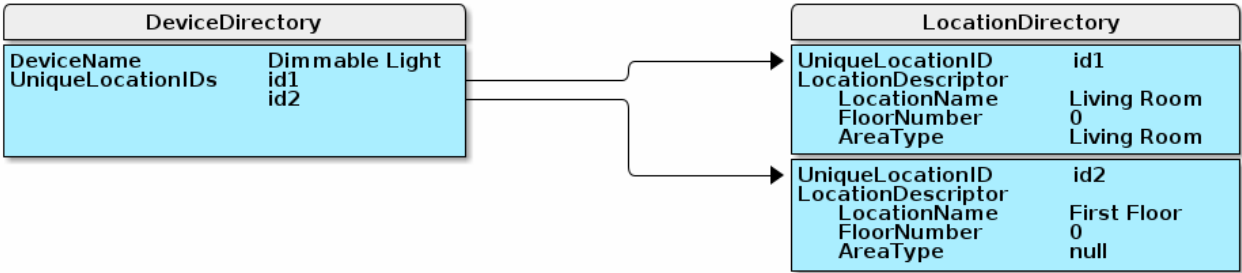


Figure 86. Ecosystem Information Cluster Examples - One Device, Two Locations